

4


3

2



1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

REV. NO.		REVISIONS		DATE	BY	APP'D
GP	00	H	REVISED PER ECO-06-007327	27JAN2009	ZMR	WLM

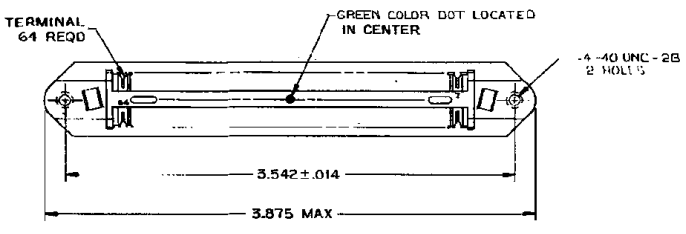

1. THE CONTACT SURFACES OF THE TERMINALS ARE COATED WITH LUBRICANT.
 2. ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY UNLESS OTHERWISE SPECIFIED.
 3. MATERIAL:
 HOUSING - THERMOPLASTIC (BLACK)
 TERMINALS - HIGH STRENGTH COPPER ALLOY PLATED WITH EITHER .000030 MIN GOLD OR GOLD FLASH OVER PALLADIUM NICKEL .000030 MIN TOTAL ON CONTACT MATING SURFACE. .000050 MIN NICKEL UNDERPLATE OVER ENTIRE TERMINAL.
 4. WIRE SIZE: 22 AWG SOLID OR 22 AWG 7 STRANDS OF COPPER CONDUCTORS. MAX INSULATION DIAMETER OF .045 IS ACCEPTABLE FOR MOST APPLICATIONS.
- NOTE: CORING MAY OR MAY NOT APPEAR AND IS AT THE DISCRETION OF TYCO ELECTRONICS.

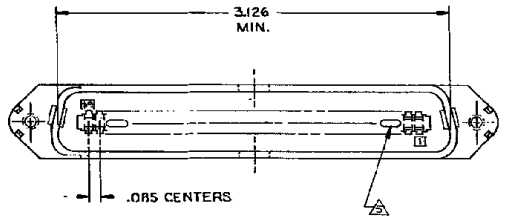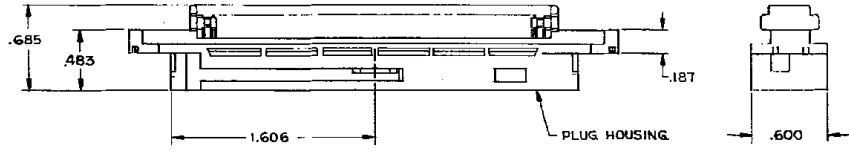

AS SHOWN	552303-1
DESCRIPTION	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		ENR G. BOWMAN 12-27-79	12-27-79	Tyco Electronics Tyco Electronics Corporation Harrisburg, PA 17105-3608
		DRW M.D. FRIEL 12-28-79	12-28-79	
		APP'D B.G. WARD 12-28-79	12-28-79	PLUG ASSY, 64 POSITIONS, C SLOT W/ 4-40 TAPPED HOLES, CHAMP-LOK
		PRODUCT SPEC		
		APPLICATION SPEC		SIZE A2
		WEIGHT		DATE CODE 00779
		CUSTOMER DRAWING		DRAWING NO 552303
		SCALE	NTS	SHEET 1 of 1
				REV H

AMP 1471-B REV 31AMP000

552303

A