THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION SEP, 1994.
© COPYRIGHT 1994 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST
J	—

REVISIONS

P	LTR	DESCRIPTION 変更	DATE	DWN	APVD
	A	REVISED ECR-05-017946	14DEC05	L.Z	I.E

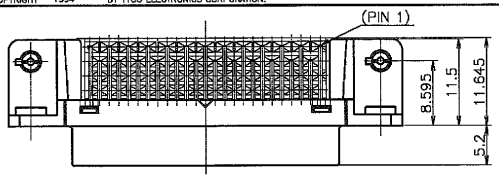

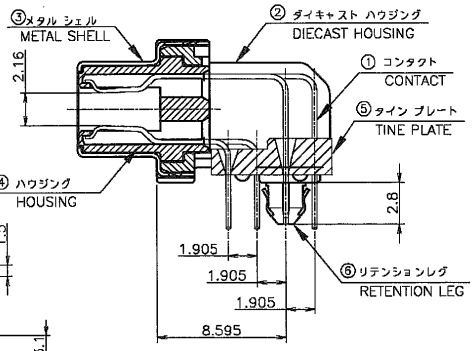

項目 ITEM	材料及び仕上 MATERIAL & FINISH
①	COPPER ALLOY NICKEL UNDER PLATE ALL OVER, CONTACT AREA:Au PLATING SOLDER TINE AREA, TIN PLATE
②	ZINC NICKEL PLATING
③	STEEL 0.25 NICKEL PLATE OVER COPPER UNDERPLATE
④ ⑤	THERMO-PLASTIC COLOR:BLACK (UL:94V-0)
⑥	COPPER ALLOY TIN PLATE OVER NICKEL UNDERPLATE

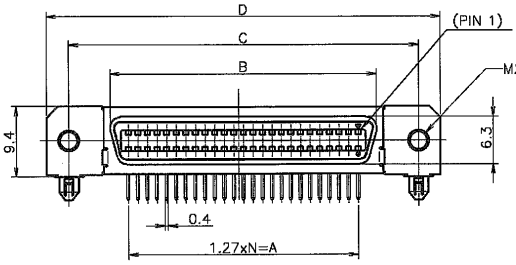



⚠1 RECOMMENDED SCREW SIZE: M2.6 LOCK SCREW (P/N:179715-1).
2. RECOMMENDED P.C.BOARD THICKNESS; 1.6mm (REF.)
3. CONNECTOR TO BE MATED;175677
4. INSERTION FORCE OF RETENTION LEG TO P.C.B.:2.2kg MAX./CONNECTOR.
5. RETENTIVITY OF RETENTION LEG TO P.C.B.:0.5kg MIN/CONNECTOR.
⚠6 POST/HOLE PATTERN AS SHOWN ON THIS END FOR ALL POSITION.

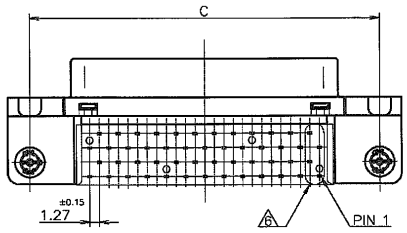

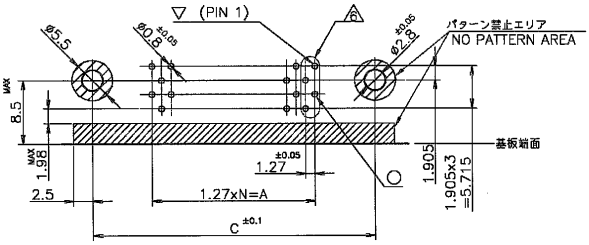

推奨基板穴あけ寸法
RECOMMENDED PC BOARD MOUNTING DIMMENSION
コネクタ取付面
COMPONENT SIDE

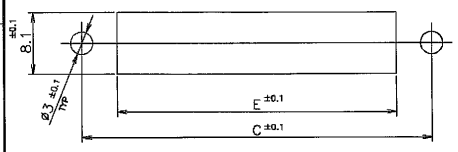

推奨パネルカット寸法
RECOMENDED PANEL CUTOUT
（厚さ 2mm 最大）
THK;2mm MAX

49	68.85	84.15	78.25	67.23	62.23	0.1μ	100	1-5179717-9
39	56.15	71.45	65.55	54.53	49.53	0.1μ	80	1-5179717-0
N	E	D	C	B	A	Au PL.	POS.	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: 単位：粍 MM
TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差
0 PLC ± 0.3
1 PLC ± 0.3
2 PLC ± 0.3
3 PLC ± 0.3
4 PLC ± 0.3
ANGLES ±3°

MATERIAL 材料 SEE NOTE
FINISH 仕上 SEE NOTE

DWN LEO ZHOU 28SEP04
CHK STEVEN YAO 28SEP04
APVD I.ENOMOTO 28SEP04
PRODUCT SPEC 製品規格 108-60043
APPLICATION SPEC 取付適用規格
WEIGHT
CUSTOMER DRAWING

Tyco Electronics AMP K.K. Kawasaki,Japan

NAME 名称
RECEPTACLE HDR ASSY (3.1mm)
RETENTION LEG TYPE
STANDARD CHAMP.050 SERIES (II)

SIZE	CAGE CODE	DRAWING NO 番号	RESTRICTED TO
A3	00779	C- 5179717	—

SCALE 尺度 2:1 SHEET 1 OF 1 REV A

AMP 1470-19 REV 31MAR2000
22NOV01 — FB001325
S:\AMP-KawasakiEC\CC_CE\EN22_CadData\AutoCAD\fj038124\c-179717.dwg

Downloaded from Elcodis.com electronic components distributor