
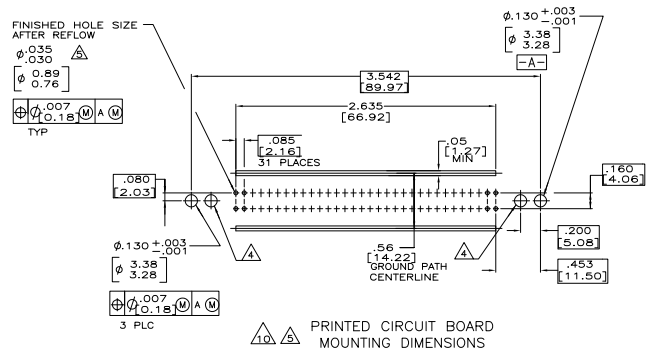
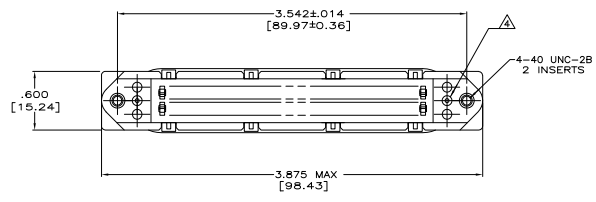

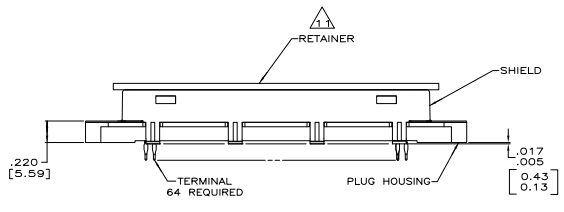


REV	DATE	DESCRIPTION	BY	CHK	APP
GP 00	J	REVISED PER ECO-04-02845			



- △ ALL DIMENSIONS SHOWN ARE MAXIMUM UNLESS OTHERWISE SPECIFIED.
- △ MATERIAL: HOUSING - POLYPHENYLENE OXIDE, BLACK.  
SHIELD - CARBON STEEL PLATED WITH .000200 [5.08µm] MINIMUM NICKEL.  
TERMINALS - PHOSPHOR BRONZE PLATED WITH .000030 [0.76µm] MINIMUM GOLD PLATE IN LOCALIZED PLATE AREA OVER .000050 [1.27µm] MINIMUM ELECTROLESS NICKEL.  
RETAINER - POLYETHYLENE, NATURAL  
INSERTS - BRASS, PLATED WITH .000100 [2.54µm] MINIMUM BRIGHT ZINC.  
556622-2 PLATED WITH MATTE TIN-LEAD 93-7% .000100-.000180 [2.54µm-4.57µm] THICK ON ACTION PIN AREA.
- 3. THE CONTACT SURFACES OF THE TERMINALS ARE COATED WITH LUBRICANT.
- △ OPTIONAL MOUNTING HOLE FOR SELF-TAPPING SCREW.
- △ ALL PLATED-THRU HOLES SHALL BE PER AMP SPEC 115-6072.
- 6. FOR NON-PANEL MOUNT APPLICATIONS USE BAIL LOCK HARDWARE KIT NO. 556614-1.
- 7. CENTER-TO-CENTER SPACING OF TERMINALS IS .085 NOMINAL.
- 8. DIMENSIONS IN [ ] ARE MILLIMETERS.
- △ GROUND TABS (B) PLACES.
- △ 50 LBS MINIMUM FORCE REQUIRED TO UNSEAT CONNECTOR FROM PRINTED CIRCUIT BOARD WITHOUT USE OF HARDWARE.
- △ RETAINER MUST REMAIN INSTALLED UNTIL AFTER CONNECTOR HAS BEEN INSERTED INTO PCB HOLES.
- △ OBSOLETE

PRINTED CIRCUIT BOARD MOUNTING DIMENSIONS

THIS DRAWING IS A CONTROLLED DOCUMENT.		DATE: 10-17-88	REVISED BY: J. NELSON	DATE: 12-19-88	REVISED BY: J. NELSON
DESIGNED BY: J. NELSON		DATE: 10-17-88	DATE: 10-17-88	DATE: 10-17-88	DATE: 10-17-88
CHECKED BY: J. NELSON		DATE: 10-17-88	DATE: 10-17-88	DATE: 10-17-88	DATE: 10-17-88
APPROVED BY: J. NELSON		DATE: 10-17-88	DATE: 10-17-88	DATE: 10-17-88	DATE: 10-17-88
PART NUMBER: 556622-1		PART NUMBER: 556622-1		PART NUMBER: 556622-1	
CUSTOMER DRAWING		CUSTOMER DRAWING		CUSTOMER DRAWING	