



LOC		DIST		REVISIONS			
GP		00		DESCRIPTION	DATE	BY	APPD
O		O		RELEASED PER EC 0513-0556-04	08-01-05	JA	JG

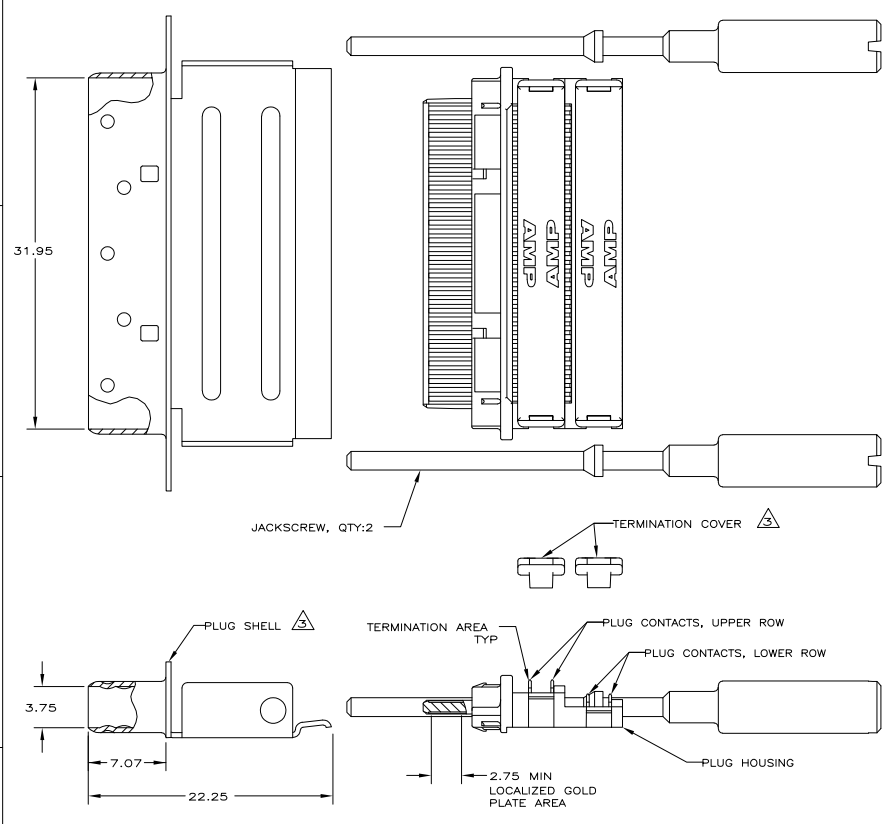

- ⚠ MATERIAL:
 PLUG CONTACTS - PHOSPHOR BRONZE.
 JACKSCREWS - STAINLESS STEEL.
 JACKSCREW HEADS - POLYESTER, PBT, BLACK.
 PLUG SHELL - CARBON STEEL.
 PLUG HOUSING - LCP, NATURAL, RATED UL 94V-0.
 TERMINATION COVERS - LCP, BLACK, RATED UL 94V-0.
- ⚠ PLATING:
 PLUG CONTACTS - 0.76μm MINIMUM GOLD PLATE IN LOCALIZED GOLD PLATE AREA, 1.27μm MINIMUM TIN PLATE IN TERMINATION AREA, ALL OVER 1.27μm MINIMUM NICKEL.
 PLUG SHELL - 5.08μm MINIMUM NICKEL OVER 1.27μm MINIMUM COPPER.
 JACKSCREWS - PASSIVATED PER ASTM A 380.
- ⚠ TERMINATION COVERS AND PLUG SHELL ARE PACKAGED UNASSEMBLED.
4. RECOMMENDED WIRE: 30 AWG WITH A 0.56-0.64 INSULATION DIAMETER, WIRE MUST BE APPROVED BY TYCO ELECTRONICS ENGINEERING.

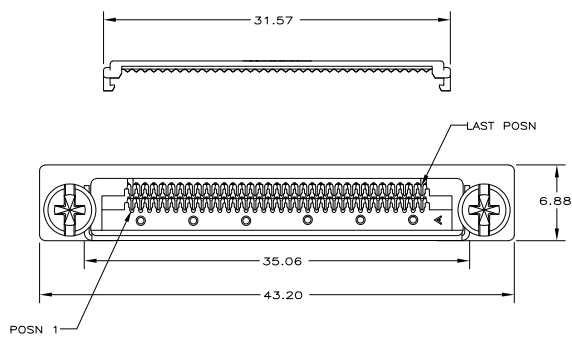

**COPYRIGHT 2005
 TYCO ELECTRONICS CORP
 ALL RIGHTS RESERVED**

THIS DRAWING IS A CONTROLLED DOCUMENT.				5787801-1 PART NO	
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		Tyco Electronics Corporation Harriestburg, PA 17105-3608	
mm		0.13		PLUG KIT, UNASSEMBLED, 68 POSN, CHAMP 0.8MM OFFSET CABLE CONNECTOR	