

This document is the property of Amphenol Corporation and is delivered to the recipient condition "AS IS" with no warranty, representation or claim in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without the prior consent, and shall no rights be granted to disclose or to use any information in this document.

REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
A	HK#	PRELIMINARY RELEASE	3/26/03	Y.M.LEE
B	HK#	ADD CHOP OF ROHS	8/2/06	IP

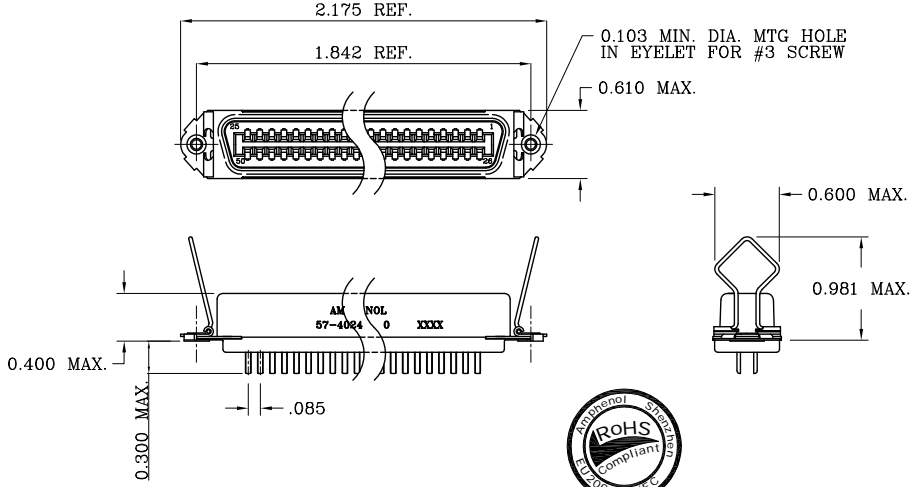


TABLE 1

CONNECTOR SIZES	AVERAGE MATING FORCE (POUNDS)
14	5
24	8
36	12
50	15
64	19

SPECIFICATIONS:

- 1) SOLDER CONTACT: SOLDER CUP CONTACT TO ACCOMMODATE 22-30 AWG SOLID & 24-30 STRANDED CONNECTOR WIRES.
- 2) DIELECTRIC: DIALYL-PHTHALATE PER MIL-M-14F TYPE MDG UL-94V0
- 3) CONTACT MATERIAL: COPPER ALLOY
- 4) CONTACT: 20 MICRO-INCHES MIN. GOLD MATING AREA, GOLD FLASH ON TAIL. 50 MICRO-INCHES MIN. NICKEL UNDERPLATING ALL OVER.
- 5) SHELL MATERIAL: ZINC PLATED STEEL WITH CLEAR CHROMATE COATING
- 6) CURRENT CAPACITY: 5 AMPS/CONTACT
- 7) VOLTAGE RATING: 700 VOLTS D.C. AT SEA LEVEL
200 VOLTS D.C. AT 70,000 FEET
- 8) INSULATION RESISTANCE: >5000 M OHM
- 9) DIELECTRIC WITHSTANDING VOLTAGE: 1200 VAC (RMS) AT SEA LEVEL
- 10) CONNECTOR MATING FORCE: REFER TO TABLE 1.

- 11) CONTACT RETENTION FORCE: 2 LBS MAX.
- 12) DURABILITY: 250 CYCLES MIN.
- 13) VIBRATION: NO INTERRUPTIONS < 1u SEC.
- 14) OPERATING TEMPERATURE: -55°C TO +105°C
(-67°F TO +221°F)
- 15) MATERIAL SHOULD FULFILLED AMPHENOL SPEC.# S5N001

CUSTOMER INFORMATION DRAWING

ITEM NO	PART OR IDENTIFICATION NO	NOMENCLATURE OR DESCRIPTION	QTY REQ'D
PARTS LIST			
UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVAL DATE	Amphenol
U.S. METRIC		DRAWN: EG.GUO 8/2/06	
I +/- 0.20		CHECKED:	TITLE 24 CONTACT RECEPTACLE ASS'Y MINIATURE RIBBON, SPRING LATCH
II +/- 0.10		CHECKED:	
III +/- 0.05		DRAWING FILE:	
FRACTIONS +/- 1"		/DRAWING/07/03740240.DWG	
REMOVE SHARP EDGES		ANGLE OF PROJECTION	REV. B
DIMENSIONS			SCALE NONE
U.S. INCHES			SHEET 1 OF 1
-(NONE)-			