

0201x2, Resistor Network (Lead / Halogen Free)

1. Scope

This specification applies to 0.6mm x 0.8mm size resistor network (4P2R) with 2 isolated resistor for use in electronic equipment.

2. Type Designation

RS062R — □□□□ — □ 2 NH

(1) (2) (3) (4) (5)

Where

(1) Series No:

0.6mm x 0.8mm Size & 4 Pins 2 Resistors

(2) Nominal resistance value :

For example –

00R0 = Jumper (0Ω)

56R0 = 56Ω

1001 = 1kΩ

(3) Resistance tolerance:

X = Jumper (Below 50mΩ)

F = ± 1.0%

J = ± 5.0%

(4) Outline type:

2 = Flat type

(5) NH = Sn plating (Lead free / Halogen free)

3. Electrical Specifications

Table 1. :

Power Rating*	31mW/each element
Resistance Values	10 to 1MΩ in E-24 series
Resistance Tolerance	± 1.0% (F) 、 ± 5.0% (J)
T.C.R. (Temperature Coefficient of Resistance)	± 200ppm/°C
Operating Temperature Range	-55°C to 125°C
Maximum Operating Voltage**	12.5V

Note: \*Package Power Temperature Derating Curve

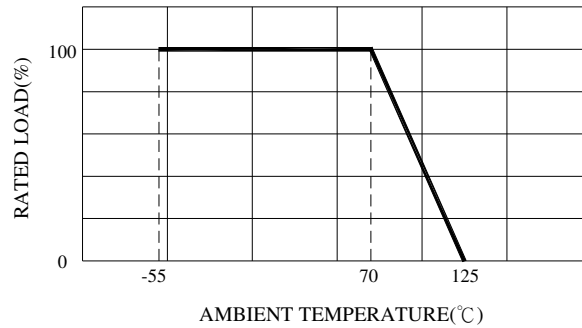


Figure 1. : Power Temperature Derating Cure

Note: \*\*Resistors shall have a rated DC or AC(rms.) continuous operating voltage corresponding to the power rating, as calculated from the following formula

$$V = \sqrt{P \times R}$$

Where V : Rated voltage (V)

P : Rated power (W)


R : Nominal resistance ( $\Omega$ )

If the voltage so obtained exceeds the maximum operating voltage, this maximum voltage shall be the rated voltage.

Table 2. : Jumper:

Resistance Tolerance	Below 50 m $\Omega$
Rated current	1A
Operating Temperature Range	-55°C to 125°C

#### 4. Outline dimensions

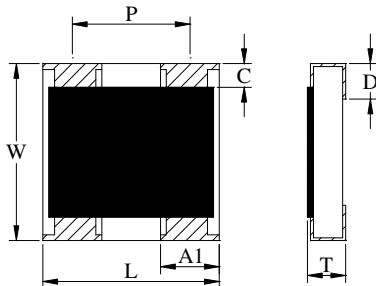


L	0.80 ± 0.10	P	0.50 typical
W	0.60 ± 0.10	C	0.15 ± 0.10
A1	0.30 ± 0.10	D	0.15 ± 0.10
T	0.35 ± 0.10		


Unit: mm

5. Schematics

5-1 Resistor

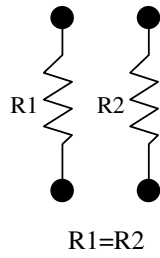

5-2 Jumper



6. Life test

6-1 Electrical

Item	Specification and Requirement		Test Method (Refer to JIS C 5201)
	Resistor	Jumper	
Short Time Overload	$\Delta R: \pm (2.0\% + 0.1)\Omega$ Without damage by flashover, spark, arcing, burning or breakdown	Max. 50m $\Omega$	(1) Applied voltage : 2.5 x rated voltage or 2 x maximum operating voltage which ever is less (2) Test time : 5 seconds
Insulation Resistance	Over 100 M $\Omega$ on Overcoat layer face up Over 1,000 M $\Omega$ on Substrate side face up		(1) Setup as figure 2 (2) Test voltage : 100 V <sub>DC</sub> (3) Test time : 60 + 10 / -0 seconds
Voltage Proof	$\Delta R: \pm (1.0\% + 0.05)\Omega$ Without damage by flashover, spark, arcing, burning or breakdown	Max. 50m $\Omega$	(1) Setup as figure 2 (2) Test voltage : 100 V <sub>AC</sub> (rms.) (3) Test time: 60 + 10 / -0 seconds

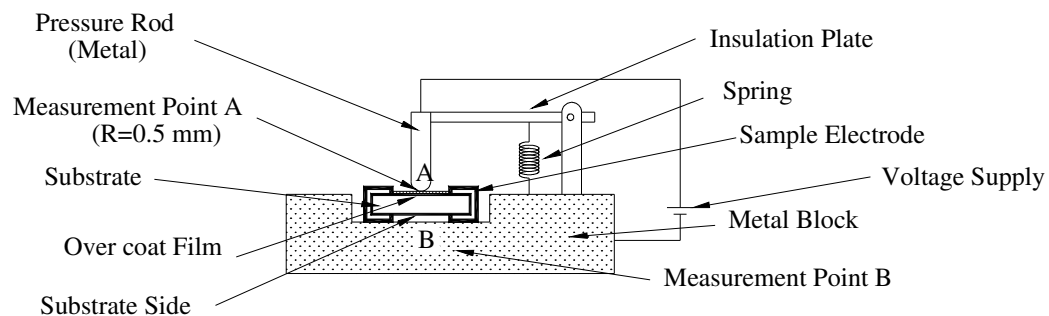


Figure 2 : Measurment Setup


6-2 Mechanical

Item	Specification and Requirement		Test Method (Refer to JIS C 5201)
	Resistor	Jumper	
Solderability	The surface of terminal immersed shall be minimum of 95% covered with a new coating of solder		Solder bath : After immersing in flux, dip in $245 \pm 5^{\circ}\text{C}$ molten solder bath for $2 \pm 0.5$ seconds
Resistance to Solder Heat	$\Delta R: \pm (1.0\% + 0.05) \Omega$ Without distinct deformation in appearance	Max. $50\text{m}\Omega$	(1) Pre-heat : $100\sim 110^{\circ}\text{C}$ for 30 seconds (2) Immersed at solder bath of $270 \pm 5^{\circ}\text{C}$ for $10 \pm 1$ seconds (3) Measuring resistance 1 hour after test
Vibration	$\Delta R: \pm (0.5\% + 0.05)\Omega$ Without mechanical damage such as break		(1) Vibration frequency : ( 10Hz to 55Hz to 10Hz ) in 60 seconds as a period (2) Vibration time : period cycled for 2 hours in each of 3 mutual perpendicular directions (3) Amplitude : 1.5mm
Shock	$\Delta R: \pm (0.25\% + 0.05)\Omega$ Without mechanical damage such as break		(1) Peak value : 490N (2) Duration of pulse : 11ms (3) 3 times in each positive and negative direction of 3 mutual perpendicular directions
Bending Test	$\Delta R: \pm (1.0\% + 0.05)\Omega$ Without mechanical damage such as break		Bending value : 3 mm for $30 \pm 1$ seconds

6-3 Endurance

Item	Specification and Requirement		Test Method (Refer to JIS C 5201)
	Resistor	Jumper	
Thermal Shock	$\Delta R: \pm (1.0\% + 0.05)\Omega$ Without distinct damage in appearance	Max. 50m $\Omega$	(1) Repeat 5 cycle as follow : (-55 $\pm$ 3 $^{\circ}$ C, 30minutes) →(Room temperature, 2~3 minutes) →(+125 $\pm$ 2 $^{\circ}$ C, 30minutes) →(Room temperature, 2~3 minutes) (2) Measuring resistance 1 hour after test
Moisture with Load	$\Delta R: \pm (3.0\% + 0.1)\Omega$ Without distinct damage in appearance Marking should be legible	Max. 50m $\Omega$	(1) Environment condition : 40 $\pm$ 2 $^{\circ}$ C, 90~95% RH (2) Applied Voltage : Rated voltage (3) Test period : (1.5 hour ON) →(0.5 hour OFF) cycled for total 1,000 + 48 / - 0 hours (4) Measuring resistance 1 hour after test
Load Life	$\Delta R: \pm (3.0\% + 0.1)\Omega$ Without distinct damage in appearance	Max. 100m $\Omega$	(1) Test temperature : 70 $\pm$ 2 $^{\circ}$ C (2) Applied Voltage : rated voltage (3) Test period : (1.5 hour ON) →(0.5 hour OFF) cycled for total 1,000 + 48 / - 0 hours (4) Measuring resistance 1 hour after test
Low Temperature Store	$\Delta R: \pm (3.0\% + 0.1)\Omega$ Without distinct damage in appearance	Max. 100m $\Omega$	(1) Store temperature : -55 $\pm$ 3 $^{\circ}$ C for total 1,000 + 48 / - 0 hours (2) Measuring resistance 1 hour after test
High Temperature Store	$\Delta R: \pm (3.0\% + 0.1)\Omega$ Without distinct damage in appearance	Max. 100m $\Omega$	(1) Store temperature : +125 $\pm$ 2 $^{\circ}$ C for total 1,000 + 48 / - 0 hours (2) Measuring resistance 1 hour after test

7. Recommend Land Pattern Dimensions

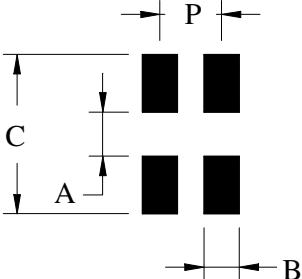


A	0.30
B	0.30
P	0.50
C	0.9

Unit : mm

8. Packaging


8-1 Dimensions

8-1-1 Tape packaging dimensions

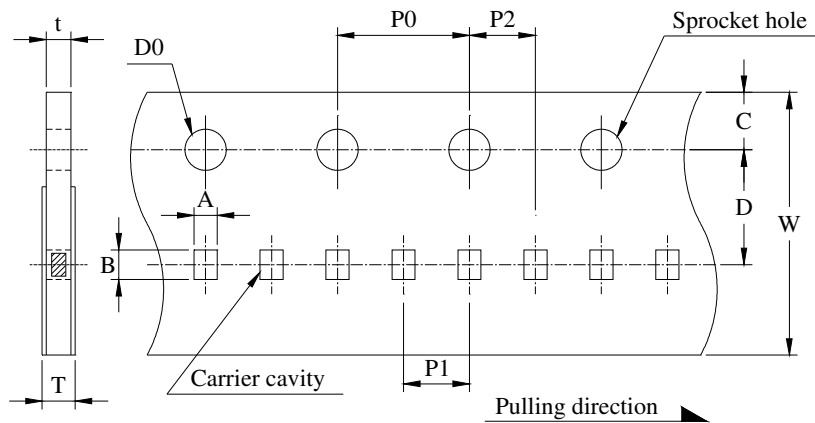

Code	Dimensions (mm)
A	$0.70 \pm 0.10$
B	$0.90 \pm 0.10$
W	$8.0 \pm 0.3$
C	$1.75 \pm 0.1$
D	$3.5 \pm 0.05$
P0	$4.0 \pm 0.1$
P1	$2.0 \pm 0.05$
P2	$2.0 \pm 0.05$
T	$0.5 \pm 0.1$
$t$	$0.43 \pm 0.05$
D0	$\phi 1.5_{-0.0}^{+0.1}$

8-1-2 Reel dimensions

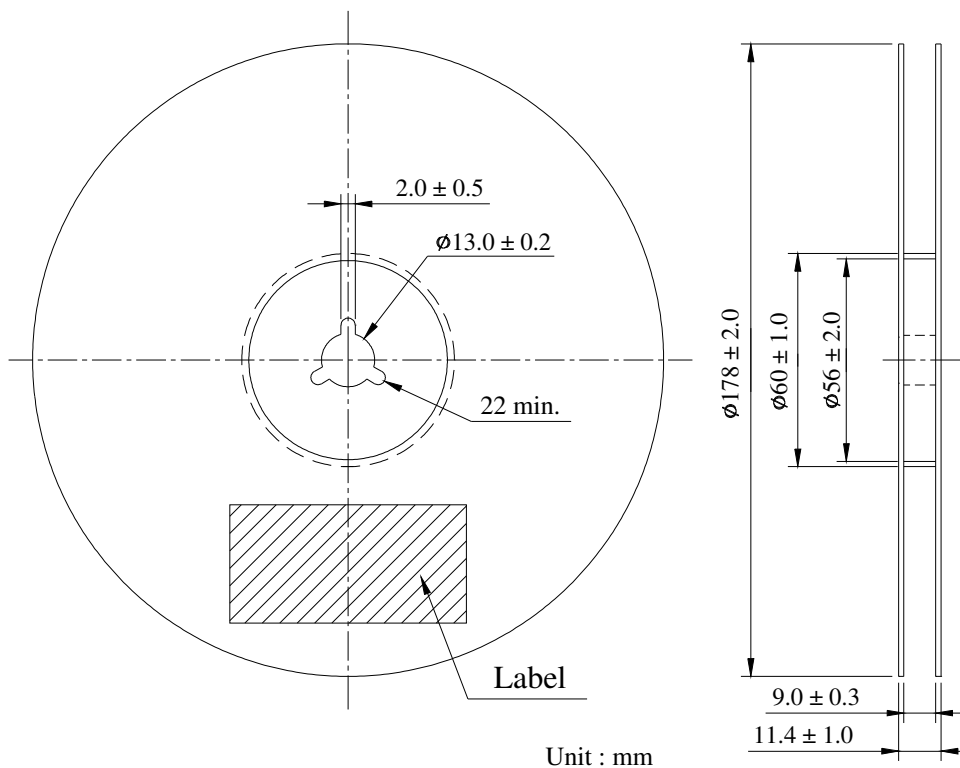


Unit : mm



8-2 Peel force of top cover tape

The peel speed shall be about 300 mm/minute

The peel force of top cover tape shall be between 0.1 to 0.7 N

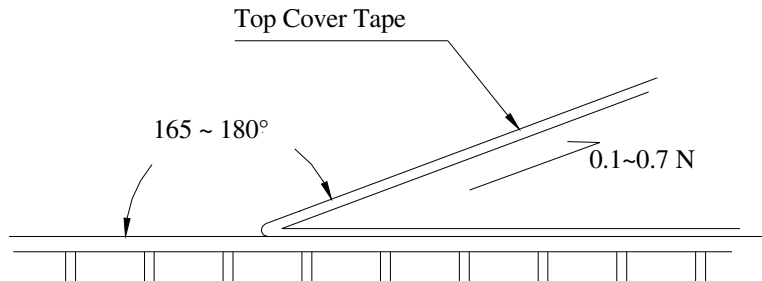

8-3 Numbers of taping

10,000 pieces/reel

8-4 Label marking

The following items shall be marked on the production and shipping Label on the reel.

8-4-1 Production Label

- (1) Part No.
- (2) Description
- (3) Quantity
- (4) Taping No.

8-4-2 Shipping Label

- (1) \*Customer's name
- (2) \*Customer's part No.
- (3) Manufacturer's part No.
- (4) Manufacturer's name
- (5) Manufacturer's country

\*Note : Item (1) and (2) are listed by request

9. Care note

9-1 Care note for storage

- (1) Resistor network shall be stored in a room where temperature and humidity must be controlled. (temperature 5 to 35°C, humidity 45 to 85% RH) However, a humidity keep it low, as it is possible.
- (2) Resistor network shall be stored as direct sunshine doesn't hit on it.
- (3) Resistor network shall be stored with no moisture, dust, a material that will make solderability inferior, and a harmful gas (Chloridation hydrogen, sulfurous acid gas, and sulfuration hydrogen)

9-2 Care note for operating and handling

- (1) It is necessary to protect the edge and protection coat of resistors from mechanical stress.
- (2) Handle with care when printing circuit board (PCB) is divided or fixed on support body, because bending of printing circuit board (PCB) mounting will make mechanical stress for resistors.
- (3) Resistors shall be used with in rated range shown in specification. Especially, if voltage more than specified value will be loaded to resistor, there is a case it will make damage for machine because of temperature rise depending on generating of heat, and increase resistance value or breaks.
- (4) In case that resistor is loaded a rated voltage, it is necessary to confirms temperature of a resistor and to reduce a load power according to load reduction curve, because a temperature rise of a resistor depends on influence of heat from mounting density and neighboring element.
- (5) Observe Limiting element voltage and maximum overload voltage specified in each specification
- (6) If there is possibility that a large voltage (pulse voltage, shock voltage) charge to resistor, it is necessary that operating condition shall be set up before use.