

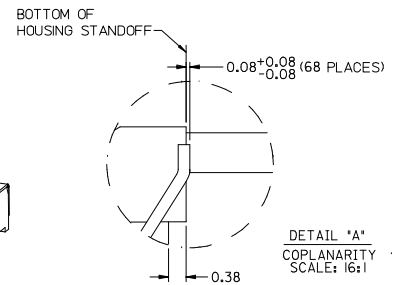
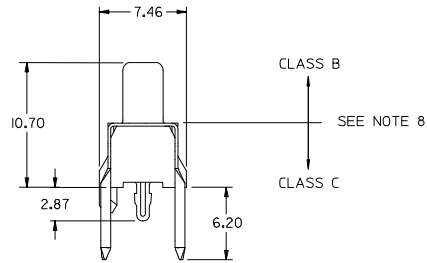



13 12 11 10 9 8 7 6 5 4 3 2 1

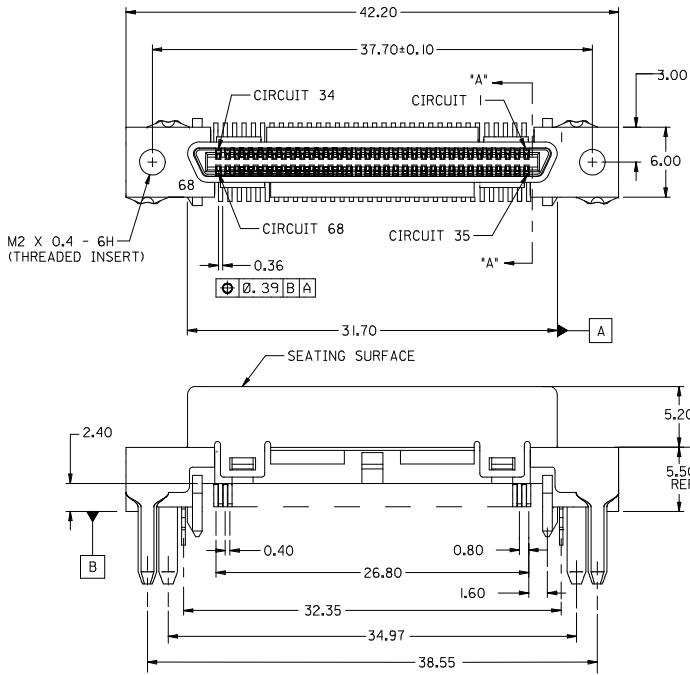

NOTES:

1. MATERIALS:
HOUSING: HIGH TEMP THERMOPLASTIC, COLOR: BLACK, UL 94V-0.
TERMINAL: PHOSPHOR BRONZE
SHIELD: STEEL
THREADED INSERT: BRASS
SCREWLOCK: STEEL
2. FINISH:
TERMINAL: 0.05-0.25 MICROMETER GOLD FLASH IN OVER 0.75 MICROMETER MINIMUM PALLADIUM NICKEL IN CONTACT AREA;
1.87 MICROMETER MINIMUM TIN IN TAIL AREA;
ALL OVER 1.25 MICROMETER MINIMUM NICKEL;
SHIELD: 3.81 MICROMETERS MINIMUM BRIGHT TIN OVER 1.27 MICROMETERS MINIMUM NICKEL OVER COPPER FLASH (OPTIONAL).
THREADED INSERT: NICKEL
SCREWLOCK: NICKEL
3. APPLICABLE PRODUCT SPEC: PS-71425-9999.
4. PACKAGING: TUBE PACK PER PK-70873-0824.
5. APPLICABLE STANDARDS: EIA-3652.
6. MATING ASSEMBLY: 71425-0001 PLUG.
7. DATE CODE: YEAR AND WEEK PER EIA -476-A.
8. PRODUCT COMPLIES WITH COSMETIC SPECIFICATION PS-45499-002. SEE FIGURE ABOVE FOR SURFACE CLASSIFICATIONS.

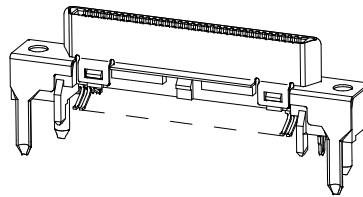

CLOSE OFF ENDS EC NO. LCP2010-0048 DRAWN BY: DRW:BARBER 2009/09/10 CHECKED BY: CHK:DRINGMAN 2009/09/10 APPROVED BY: APPR:SHILLER 2009/09/10	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
		mm	INCH	mm	INCH	INCH	INCH	
REV	DESCRIPTION	4 PLACES ±	±	DRAWN BY	DATE	TITLE SALES ASSY VHDCI 0.8MM PITCH 68 CKT VERTICAL SMT RECEPTACLE		
		3 PLACES ±	±	DBOWEN	1997/04/11			
REV	DESCRIPTION	2 PLACES ±	±	CHECKED BY	DATE	MOLEX INCORPORATED		
		1 PLACE ±	±	SSAMPSON	1997/04/11			
REV	DESCRIPTION	ANGULAR ±1/2°		APPROVED BY	DATE	DOCUMENT NO. SD-73776-002		
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		DBOWEN	1997/04/11			
SIZE		SEE TABLE		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			SHEET NO. 1 OF 2	

12 11 10 9 8 7 6 5 4 3 2 1

