


DESCRIPTION: FEMALE CENTRONICS BACKSHELL KIT

BACKSHELL KIT INCLUDES:

- (1) SOLDER CUP CONNECTOR
- (1) BACKSHELL WITH STRAIN RELIEF, (2) SCREWS
- (2) ASSEMBLY SCREWS
- (2) SPRING LATCHES
- (1) RUBBER GROMMET

110-XXX-203-001


- SERIES** _____
- POSITIONS** _____
- 014 _____
- 024 _____
- 036 _____
- 050 _____
- GENDER** _____
- 1 = MALE _____
- 2 = FEMALE _____
- TERMINATION:** _____
- 0 = SOLDER CUP _____
- SHELL PLATING** _____
- 3 = NICKEL _____
- HARDWARE OPTIONS:** _____
- 00 = NOT AVAILABLE _____
- PLATING OPTIONS** _____
- 1 = GOLD FLASH _____

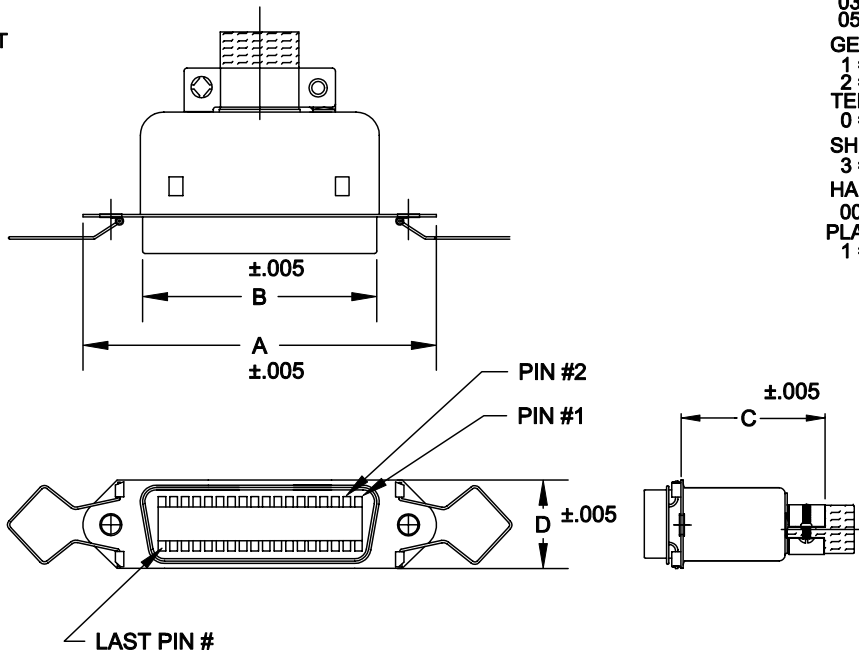

	A	B	C	D
14	1.729	.992	1.252	.622
	43.92	25.20	31.79	15.80
24	2.167	1.417	1.225	.622
	55.05	36.00	31.11	15.80
36	2.669	1.925	1.295	.622
	67.80	48.90	32.90	15.80
50	3.260	2.519	1.407	.622
	82.80	64.00	35.75	15.80

MATERIALS:

INSULATOR: GLASS-FILLED THERMOPLASTIC
 UL RATED 94V-0
 CONTACTS: COPPER ALLOY
ELECTRICALS:
 CONTACT CURRENT RATING: 5 AMPS
 DIELECTRIC WITHSTANDING VOLTAGE: AC 1200 R.M.S.
 INSULATION RESISTANCE: 1000 mohms MINIMUM AT 500V DC
 CONTACT RESISTANCE: 30 mOHMS MAXIMUM
 OPERATING TEMPERATURE: -55°C TO +125°C

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		DRAWN: WAYNE ROBBINS	DATE: 9-17-98
			CHECKED:	DATE:
<h1>NorComp</h1>		SCALE: 1:1	SHEET 1 OF 1	REV 2
		DWG NO. 110-XXX-203-001		