
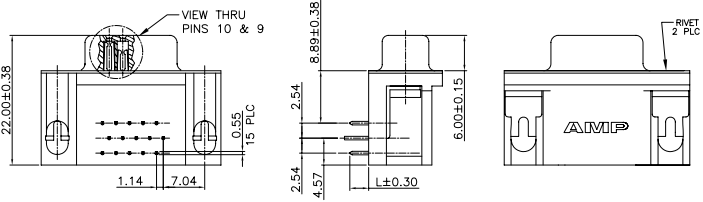


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION AUG. 2006.  
 COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.


LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD		
B		REVISED (ECR-09-002821)	11FEB09	B.W	S.C		

- NOTES:
- MATERIAL:
    - HOUSING: UL94V-0; COLOR: SEE TABLE.
      - NYST, THERMOPLASTIC, HIGH TEMP.
      - PBT, THERMOPLASTIC.
    - CONTACTS: PHOSPHOR BRONZE
    - SHELL: SPCC
    - BOARDLOCK: BRASS
    - RIVET: BRASS
  - FINISH:
    - CONTACT:
      - GOLD PLATING ON CONTACT AREA, 100µ" MIN. MATTE TIN PLATING ON SOLDERTAIL, 50µ" MIN. NICKEL UNDERPLATED OVERALL.
    - BOARDLOCK:
      - 100µ" MIN. TIN PLATING
      - 50µ" MIN. NICKEL UNDERPLATED OVERALL.
    - SHELL: 50µ" MIN. NICKEL UNDERPLATED OVERALL.
    - RIVET: NICKEL PLATING OVERALL.
  - RECOMMENDED PCB THICKNESS: 1.6mm
  - WAVE SOLDER CAPABLE TO 265°C PER TE SPEC. 109-202, CONDITION B.

RECOMMENDED P.C. BOARD LAYOUT

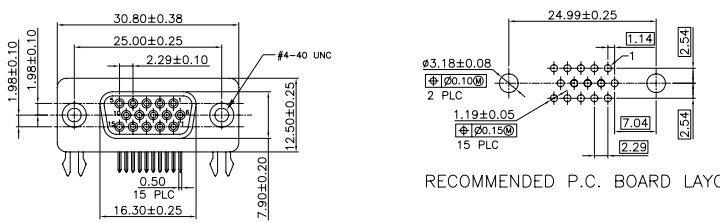

DETAIL Z (W/SCREWLOCKS OPTION)

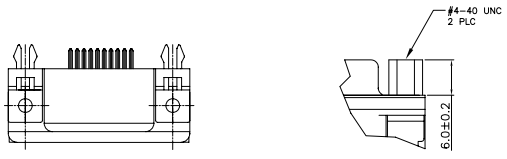

OBsolete	3000 BLUE	3.20	TRAY	10µ"	RIVET, THREADED W/O SCREW	5-1734344-3
	3000 BLUE <td>3.70</td> <td>TRAY <td>30µ" <td>RIVET, THREADED W/O SCREW <td>2-1734344-4</td> </td></td></td>	3.70	TRAY <td>30µ" <td>RIVET, THREADED W/O SCREW <td>2-1734344-4</td> </td></td>	30µ" <td>RIVET, THREADED W/O SCREW <td>2-1734344-4</td> </td>	RIVET, THREADED W/O SCREW <td>2-1734344-4</td>	2-1734344-4
	3000 BLUE <td>3.20</td> <td>TRAY <td>30µ" <td>RIVET, THREADED W/O SCREW <td>2-1734344-3</td> </td></td></td>	3.20	TRAY <td>30µ" <td>RIVET, THREADED W/O SCREW <td>2-1734344-3</td> </td></td>	30µ" <td>RIVET, THREADED W/O SCREW <td>2-1734344-3</td> </td>	RIVET, THREADED W/O SCREW <td>2-1734344-3</td>	2-1734344-3
	661C BLUE <td>2.67</td> <td>TRAY <td>30µ" <td>RIVET, THREADED W/O SCREW <td>2-1734344-2</td> </td></td></td>	2.67	TRAY <td>30µ" <td>RIVET, THREADED W/O SCREW <td>2-1734344-2</td> </td></td>	30µ" <td>RIVET, THREADED W/O SCREW <td>2-1734344-2</td> </td>	RIVET, THREADED W/O SCREW <td>2-1734344-2</td>	2-1734344-2
	661C BLUE <td>2.67</td> <td>TRAY <td>G/F <td>W/FEMALE SCREWLOCKS (DETAIL Z) <td>1-1734344-2</td> </td></td></td>	2.67	TRAY <td>G/F <td>W/FEMALE SCREWLOCKS (DETAIL Z) <td>1-1734344-2</td> </td></td>	G/F <td>W/FEMALE SCREWLOCKS (DETAIL Z) <td>1-1734344-2</td> </td>	W/FEMALE SCREWLOCKS (DETAIL Z) <td>1-1734344-2</td>	1-1734344-2
	3000 BLUE <td>3.20</td> <td>TRAY <td>G/F <td>W/FEMALE SCREWLOCKS (DETAIL Z) <td>1-1734344-1</td> </td></td></td>	3.20	TRAY <td>G/F <td>W/FEMALE SCREWLOCKS (DETAIL Z) <td>1-1734344-1</td> </td></td>	G/F <td>W/FEMALE SCREWLOCKS (DETAIL Z) <td>1-1734344-1</td> </td>	W/FEMALE SCREWLOCKS (DETAIL Z) <td>1-1734344-1</td>	1-1734344-1
	BLACK <td>2.67</td> <td>TUBE <td>15µ" <td>W/FEMALE SCREWLOCKS (DETAIL Z) <td>1734344-5</td> </td></td></td>	2.67	TUBE <td>15µ" <td>W/FEMALE SCREWLOCKS (DETAIL Z) <td>1734344-5</td> </td></td>	15µ" <td>W/FEMALE SCREWLOCKS (DETAIL Z) <td>1734344-5</td> </td>	W/FEMALE SCREWLOCKS (DETAIL Z) <td>1734344-5</td>	1734344-5
	3000 BLUE <td>3.20</td> <td>TUBE <td>10µ" <td>RIVET, THREADED W/O SCREW <td>1734344-4</td> </td></td></td>	3.20	TUBE <td>10µ" <td>RIVET, THREADED W/O SCREW <td>1734344-4</td> </td></td>	10µ" <td>RIVET, THREADED W/O SCREW <td>1734344-4</td> </td>	RIVET, THREADED W/O SCREW <td>1734344-4</td>	1734344-4
	3000 BLUE <td>3.20</td> <td>TRAY <td>10µ" <td>RIVET, THREADED W/O SCREW <td>1734344-3</td> </td></td></td>	3.20	TRAY <td>10µ" <td>RIVET, THREADED W/O SCREW <td>1734344-3</td> </td></td>	10µ" <td>RIVET, THREADED W/O SCREW <td>1734344-3</td> </td>	RIVET, THREADED W/O SCREW <td>1734344-3</td>	1734344-3
	661C BLUE <td>2.67</td> <td>TRAY <td>G/F <td>RIVET, THREADED W/O SCREW <td>1734344-2</td> </td></td></td>	2.67	TRAY <td>G/F <td>RIVET, THREADED W/O SCREW <td>1734344-2</td> </td></td>	G/F <td>RIVET, THREADED W/O SCREW <td>1734344-2</td> </td>	RIVET, THREADED W/O SCREW <td>1734344-2</td>	1734344-2
	3000 BLUE <td>3.20</td> <td>TRAY <td>G/F <td>RIVET, THREADED W/O SCREW <td>1734344-1</td> </td></td></td>	3.20	TRAY <td>G/F <td>RIVET, THREADED W/O SCREW <td>1734344-1</td> </td></td>	G/F <td>RIVET, THREADED W/O SCREW <td>1734344-1</td> </td>	RIVET, THREADED W/O SCREW <td>1734344-1</td>	1734344-1
HSG RESIN	PANTONE COLOR	'L'	PACKAGING	GOLD PLATING	FASTENER OPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	J. LEE	16JAN2006	Tyco Electronics Corporation Taipei, Taiwan	
CHK	S. HOU	16JAN2006	Tyco Electronics	
APVD	W. KE	16JAN2006	RCPT ASM, SZ 1, 15 POSN, RT ANG, FRONT METAL, SHELL AMPLIMITE HD-22	
PRODUCT SPEC	108-57541		SIZE	CAGE CODE
QUALIFICATION TEST REPORT	501-57623		DRAWING NO	RESTRICTED TO
MATERIAL	SEE NOTE	FINISH	SEE NOTE	SCALE
WEIGHT	9.0g/PCS(W/ SCREW) 11.1g/PCS(W/O SCREW)	SIZE	A300779	C=1734344
CUSTOMER DRAWING	SHEET		1 of 3	REV B

4

3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION AUG, 2006.  
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD		
		SEE SHEET 1.					

URETHANE CUSHION  
(2 PLACES)

TAPE  
(4 PLACES)



AIR CAP SHEET  
(4 PLACES)

COVER

TRAY

NOTES:






1. MATERIAL:
  - 1.1 TRAY: PVC
  - 1.2 SHIPPING CARTON: CORRUGATED FIBERBOARD
2. DIMENSION:
  - 2.1 TRAY: L=320, W=230, H=18.9
  - 2.2 SHIPPING CARTON: L=361, W=245, H=272
3. QUANTITY:
  - 3.1 PRIMARY PACKING: 100 PCS/TRAY
  - 3.2 SECONDARY PACKING: 10 TRAY/CARTON(1000PCS)
4. CARTON WEIGHT:
  - 4.1 W/O SCREWLOCK  
NET WEIGHT: 8.24 Kg  
GROSS WEIGHT: 9.24 Kg
  - 4.2 WITH SCREWLOCK  
NET WEIGHT: 10.24 Kg  
GROSS WEIGHT: 11.24 Kg

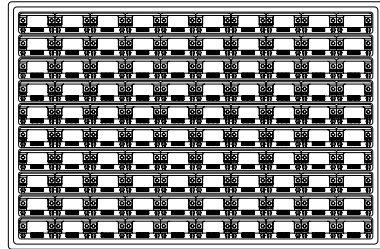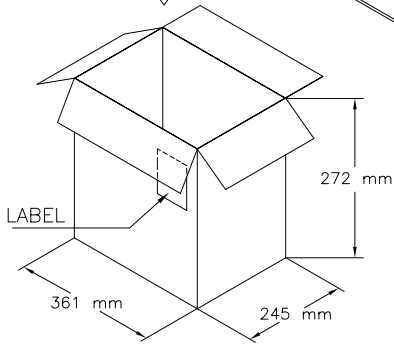

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	Tyco Electronics Corporation Taipei, Taiwan	
DIMENSIONS: MM		CHK	Tyco Electronics	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	NAME	
0 PLC ± -		PRODUCT SPEC	RCPT ASM, SZ 1, 15 POSN, RT ANG, FRONT METAL, SHELL AMPLIMITE HD-22	
1 PLC ± -		APPLICATION SPEC	SIZE	RESTRICTED TO
2 PLC ± -		WEIGHT	A3	00779
3 PLC ± -		CUSTOMER DRAWING	CAGE CODE	C=1734344
4 PLC ± -			DRAWING NO	2 of 3
4 R/C ANGLES ± -			SCALE	REV B
FINISH			SHEET	

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION AUG. 2006.  
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
DW		P	LTR	DESCRIPTION	DATE	DWN	APVD
				SEE SHEET 1.			

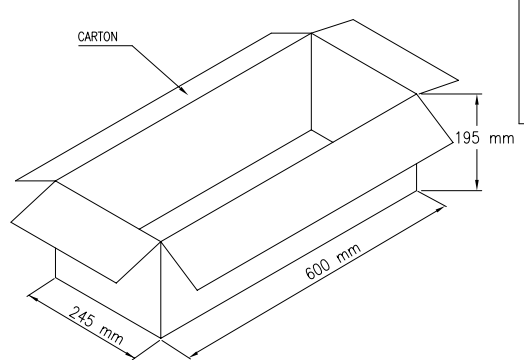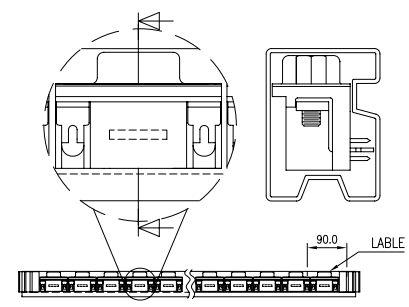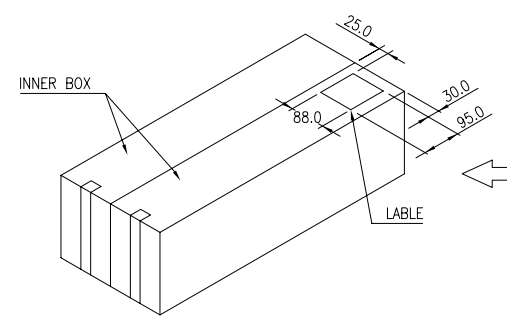

- NOTES:
- MATERIAL:
    - 1.1 TRAY: PVC
    - 1.2 SHIPPING CARTON: CORRUGATED FIBERBOARD
  - DIMENSION:
    - 2.1 TRAY: L=560, W=17.8, H=27.4
    - 2.2 SHIPPING CARTON: L=600, W=245, H=195
  - QUANTITY:
    - 3.1 PRIMARY PACKING: 17 PCS/TUBE
    - 3.2 SECONDARY PACKING: 25 TUPE/BOX
    - 3.3 THIRD PACKING: 2 BOX/CARTON(850PCS)
  - CARTON WEIGHT:
    - 4.1 W/O SCREWLOCK  
NET WEIGHT: 8.24 Kg  
GROSS WEIGHT: 9.24 Kg
    - 4.2 WITH SCREWLOCK  
NET WEIGHT: 10 Kg  
GROSS WEIGHT: 11 Kg

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	Tyco Electronics Corporation Taipei, Taiwan	
DIMENSIONS: MM		CHK	NAME	
		APVD	RCPT ASM, SZ 1, 15 POSN, RT ANG, FRONT METAL, SHELL AMPLIMITE HD-22	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC	SIZE	CAGE CODE
0 PLC	±	APPLICATION SPEC	A3	00779
1 PLC	±	WEIGHT	DRAWING NO	
2 PLC	±		C=1734344	
3 PLC	±		SCALE	SHEET
4 PLC	±			3 of 3
ANGLES	±			REV B
MATERIAL	FINISH	CUSTOMER DRAWING		