

Sound Processor Series for BOOM BOX / Mini-component Stereo

Sound Processor Built-in 3-band Equalizer

BD3403FV, BD3861FS, BD3883FS



•Description

The Sound Processor has a built-in 3 Band Equalizer and can be controlled with a 2-wire serial. It is suited for a sound quality design which incorporates various functions, ranging from source selectors, such as BOOM BOX, Mini-audio systems and Micro-audio systems to preamplifiers at the front stage of the power amp.

•Features

- 1) High S/N, achieved by implementing 2-stage configuration of Front Volume and Rear Volume.
- 2) Provides surround and rear volume with Soft-switch to reduce a shock sound during switching functions(BD3883FS).
- 3) Volume and tone implemented with the resistance ladder circuit (to achieve high performance with low noise and low distortion).
- 4) Uses the BiCMOS process that achieves low-consumption current, which contributes to an energy-saving design. Using the BiCMOS process, has the advantage in quality over the scaling down of the internal regulators and heat controls.
- 5) SSOP-A32 and SSOP-B40 are used for the packages. Input pins and output pins are organized and separately laid out so as to keep the signal flows in one direction which consequently, simplify pattern layout of the set board and decrease the board dimensions.

•Applications

BOOM BOX, mini-audio systems, and micro-audio systems.

•Product lineup

Parameter	BD3403FV	BD3861FS	BD3883FS
Operating Voltage Range	6.5 to 9.5V	6.5 to 9.5V	6.5 to 9.5V
Equalizer	3 band (BASS, MIDDLE, TREBLE)	3 band (BASS, MIDDLE, TREBLE)	3 band (BASS, MIDDLE, TREBLE)
Front Volume	0 to -30dB/2dB step	0 to -50dB/2dB step -50 to -70dB/4dB step, -∞dB	0 to -87dB/1dB step, -∞dB
Rear Volume	0 to -59dB/1dB step, -∞dB	0 to -59dB/1dB step, -∞dB	0, -10dB
Input Gain	0 to 26dB/2dB step	0 to 26dB/2dB step	0, 6, 12, 16, 20, 23, 26, 29dB
Microphone Input	○	○	-
Surround	○	-	○
Package	SSOP-B40	SSOP-A32	SSOP-A32

•Absolute maximum ratings (Ta=25°C)

Item	Symbol	Limits		Unit
		BD3403FV	BD3861FS,BD3883FS	
Power Supply Voltage	Vcc	10	10	V
Power Dissipation	Pd	900 ¹	950 ²	mW
Input Voltage Range	Vin	GND-0.3 to VCC+0.3	GND-0.3 to VCC+0.3	V
Operating Temperature Range	Topr	-25 to +75	-25 to +75	°C
Storage Temperature Range	Tstg	-55 to +125	-55 to +125	°C

¹ Reduced by 9.0 mW/°C over 25°C, when installed on the standard board (size: 70×70×1.6mm) for (BD3403FV).

² Reduced by 9.5 mW/°C over 25°C, when installed on the standard board (size: 70×70×1.6mm) for (BD3861FS,BD3883FS).

•Operating voltage range

Device Name	Symbol	Range	Unit
BD3403FV	Vcc	6.5 to 9.5	V
BD3861FS			
BD3883FS			

•Electrical characteristics

◎BD3403FV

V_{CC}=9V, f=1KHz, VIN=1Vrms, R_g=600Ω, R_L=10kΩ, Ta=25°C, Input Gain=0dB, VOL=0dB,

Bass, Middle, Treble=0dB, Surround=OFF, unless otherwise noted.

	Item	Symbol	Limits			Unit	Condition
			Min.	Typ.	Max.		
TOTAL	Circuit Current	IQ	-	16.0	30.0	mA	At no signal
	Output Voltage Gain	GV	-1.5	0.0	1.5	dB	GV=20log(VOUT/VIN)
	Total Harmonic Distortion ratio	THD	-	0.02	0.08	%	400 to 30kHz BPF
	Maximum Output Voltage	VOM	2.0	2.5	-	Vrms	THD=1%
	Output Noise Voltage	VNO	-	1.8	6.0	µVrms	R _g =0kΩ, IHF-A
	Cross-talk between Channels	CT	-	3.0	9.0	µVrms	R _g =0kΩ, IHF-A
INPUT	6dB SW Gain	GV6	5	6	7	dB	VIN=200mVrms GV6=20log(VOUT/VIN)
	Input Voltage Gain 1	GvmaxI1	-1	³	+1	dB	VIN=200mVrms From 0 to 10dB GvmaxI1=20log(VOUT/VIN)
	Input Voltage Gain 2	GvmaxI2	-1.5	³	+1.5	dB	VIN=200mVrms From 12 to 26dB GvmaxI2=20log(VOUT/VIN)
	Input Gain Switching Step	GvmaxIst	-	2	-	dB	From 0 to 26dB
	Input Total Harmonic Distortion ratio	THDI	-	0.02	0.08	%	400 to 30kHz BPF
	Input Maximum Output Voltage	VOMI	2.0	2.5	-	dB	THD=1%
	Cross-talk between Selectors	CS	-	-80.0	-70.0	dB	R _g =0kΩ, IHF-A CS=20log(VOUT/VIN)
	Input Impedance	RI	35.0	50.0	65.0	kΩ	RI=51k×VOUT/(VIN-VOUT)
	E Input SW Attenuation	GRE	-	-20.0	-15.0	dB	GRE=20log(VOUT/VIN)
INPUT VOLUME	Input Volume 1	GIV1	-2	³	+2	dB	From 0 to -30dB GIV1=20log(VOUT/VIN)
	Volume Switching Step 1	GIVst1	-	2	-	dB	From 0 to -30dB

³ Typ. is set to the value described in condition.

Min. and Max. mean the error.

	Item	Symbol	Limits			Unit	Condition
			Min.	Typ.	Max.		
OUTPUT VOLUME	Output Volume	GOV	-1	[*] 1	+1	dB	From 0 to -59dB Gov=20log(VOUT/VIN)
	Output Switching Step	GOVst	-	1	-	dB	From 0 to -59dB
	Maximum attenuation	GminO	-	-	-90.0	dB	IHF-A GminO=20log(VOUT/VIN)
SURROUND	Surround Gain CH1→CH2	Gsur1	5	7	9	dB	V _{IN} =200mVrms f=1kHz
	Surround Gain CH2→CH1	Gsur2	5	7	9	dB	V _{IN} =200Vrms f=1kHz
BASS	Bass Boost Gain	GBB	-2	[*] 1	+2	dB	V _{IN} =200mVrms, f=90Hz, From 0 to 14dB GBB=20log(VOUT/VIN)
	Bass Cut Gain	GBC	-2	[*] 1	+2	dB	V _{IN} =200mVrms, f=90Hz, From -14 to 0dB GBC=20log(VOUT/VIN)
	Bass Switching Step	GBST	-	2	-	dB	V _{IN} =200mVrms, f=90Hz
MIDDLE	Middle Boost Gain	GMB	-2	[*] 1	+2	dB	V _{IN} =200mVrms, From 0 to 12dB GMB=20log(VOUT/VIN)
	Middle Cut Gain	GMC	-2	[*] 1	+2	dB	V _{IN} =200mVrms, From -12 to 0dB GMC=20log(VOUT/VIN)
	Middle Switching Step	GMST	-	2	-	dB	V _{IN} =200mVrms
TREBLE	Treble Boost Gain	GTB	-2	[*] 1	+2	dB	V _{IN} =200mVrms, f=10kHz From 0 to 12dB GTB=20log(VOUT/VIN)
	Treble Cut Gain	GTC	-2	[*] 1	+2	dB	V _{IN} =200mVrms, f=10kHz From -12 to 0dB GTC=20log(VOUT/VIN)
	Treble Switching Step	GTST	-	2	-	dB	V _{IN} =200mVrms, f=10kHz
MIC	Microphone Voltage Gain	GMIC	4.5	6.0	7.5	dB	V _{IN} =200mVrms GMIC=20log(VOUT/VIN)

^{*}1 Typ. is set to the value described in condition.

Min. and Max. mean the error.

◎BD3861FS

VCC=9V, f=1KHz, VIN=1Vrms, Rg=600Ω, RL=10kΩ, Ta=25°C, Input Gain=0dB, VOL=0dB,

Bass, Middle, Treble=0dB, unless otherwise noted.

	Item	Symbol	Limits			Unit	Condition
			Min.	Typ.	Max.		
TOTAL	Circuit Current	IQ	-	13.0	26.0	mA	At no signal
	Output Voltage Gain	GV	-1.5	0.0	1.5	dB	GV=20log(VOUT/V _{IN})
	Total Harmonic Distortion	THD	-	0.02	0.08	%	400 to 30kHz BPF
	Maximum Output Voltage	VOM	2.0	2.5	-	Vrms	THD=1%
	Output Noise Voltage	VNO	-	8.0	15.0	µVrms	Rg=0kΩ, IHF-A
	Cross-talk between Channels	CT	-	-80	-70	dB	Rg=0kΩ, IHF-A
INPUT	6dB SW Gain	GV6	5	6	7	dB	V _{IN} =200mVrms GV6=20log(VOUT/VIN)

	Item	Symbol	Limits			Unit	Condition
			Min.	Typ.	Max.		
INPUT	Input Voltage Gain 1	GvmaxI ₁	-1	* ¹	+1	dB	V _{IN} =200mVrms From 0 to 10dB GvmaxI ₁ =20log(VOUT/V _{IN})
	Input Voltage Gain 2	GvmaxI ₂	-1.5	* ¹	+1.5	dB	V _{IN} =200mVrms From 12 to 26dB GvmaxI ₂ =20log(VOUT/V _{IN})
	Input Gain Switching Step	GvmaxI _{st}	-	2	-	dB	From 0 to 26dB
	Input Total Harmonic Distortion	THDI	-	0.02	0.08	%	400 to 30kHz BPF
	Input Maximum Output Voltage	VOMI	2.0	2.5	-	dB	THD=1%
	Cross-talk between Selectors	CS	-	-80.0	-70.0	dB	Rg=0kΩ, IHF-A CS=20log(VOUT/V _{IN})
	Input Impedance	RI	35.0	50.0	65.0	kΩ	RI=51k×VOUT/ (V _{IN} -VOUT)
	E Input SW Attenuation	GRE	-	-20.0	-15.0	dB	GRE=20log(VOUT/V _{IN})
INPUT VOLUME	Input Volume 1	GIV1	-2	* ¹	+2	dB	From 0 to -50dB GIV1=20log(VOUT/V _{IN})
	Input Volume 2	GIV2	-3		+3	dB	From -54 to -70dB GIV2=20log(VOUT/V _{IN})
	Volume Switching Step 1	GIVst1	-	2	-	dB	From 0 to -50dB
	Volume Switching Step 2	GIVst2	-	4	-	dB	From -54 to -70dB
	Maximum attenuation	GminI	-	-	-90.0	dB	IHF-A GminI=20log(VOUT/V _{IN})
OUTPUT VOLUME	Output Volume	GOV	-1	* ¹	+1	dB	From 0 to -59dB Gov=20log(VOUT/V _{IN})
	Output Switching Step	GOVst	-	1	-	dB	From 0 to -59dB
	Maximum attenuation	GminO	-	-	-90.0	dB	IHF-A GminO=20log(VOUT/V _{IN})
BASS	Bass Boost Gain	GBB	-2	* ¹	+2	dB	V _{IN} =200mVrms, f=90Hz, From 0 to 14dB GBB=20log(VOUT/V _{IN})
	Bass Cut Gain	GBC	-2	* ¹	+2	dB	V _{IN} =200mVrms, f=90Hz, From -14 to 0dB GBC=20log(VOUT/V _{IN})
	Bass Switching Step	GBST	-	2	-	dB	V _{IN} =200mVrms, f=90Hz
MIDDLE	Middle Boost Gain	GMB	-2	* ¹	+2	dB	V _{IN} =200mVrms, From 0 to 12dB GMB=20log(VOUT/V _{IN})
	Middle Cut Gain	GMC	-2	* ¹	+2	dB	V _{IN} =200mVrms, From -12 to 0dB GMC=20log(VOUT/V _{IN})
	Middle Switching Step	GMST	-	2	-	dB	V _{IN} =200mVrms
TREBLE	Treble Boost Gain	GTB	-2	* ¹	+2	dB	V _{IN} =200mVrms, f=10kHz From 0 to 12dB GTB=20log(VOUT/V _{IN})
	Treble Cut Gain	GTC	-2	* ¹	+2	dB	V _{IN} =200mVrms, f=10kHz From -12 to 0dB GTC=20log(VOUT/V _{IN})
	Treble Switching Step	GTST	-	2	-	dB	V _{IN} =200mVrms, f=10kHz
MI C	Microphone Voltage Gain	GMIC	4.5	6.0	7.5	dB	V _{IN} =200mVrms GMIC=20log(VOUT/V _{IN})

*¹ Typ. is set to the value described in condition.
Min. and Max. mean the error.

◎BD3883FS

Ta=25°C, VCC=8V, f=1kHz, Vi=200mVrms, RL=10kΩ, Rg=600Ω,

Input Selector=Ach, Input Gain=0dB, Volume=0dB, Bass=0dB, Middle=0dB, Treble=0dB,
Surround=OFF, RECOUT=OFF, unless otherwise noted.

	Item	Symbol	Limits			Unit	Condition
			Min.	Typ.	Max.		
TOTAL	Circuit Current	IQ	-	8	21	mA	At no signal
	Total Output Voltage Gain	Gv	-2	0	2	dB	
	Total Harmonic Distortion	THDO	-	0.01	0.1	%	BW=400 to 30kHz
	Maximum Output Voltage	Vomaxo	1.6	2.1	-	Vrms	THD=1% BW=400 to 30kHz
	Total Residual Noise Voltage	Vno	-	2	10	µVrms	Rg=0Ω, Vol=-∞dB BW=IHF-A, REAR ATT=-10dB
	Total Output Noise Voltage	Vmno	-	4	15	µVrms	Rg=0Ω, Vol=0dB BW=IHF-A
	Cross-talk between Channels	CTC12	-	-80	-70	dB	Rg=0Ω, BW=IHF-A VOUT=1Vrms
	Input Impedance	Rin	70	100	130	kΩ	
	Output Impedance	Rout	-	-	50	Ω	
INPUT	Cross-talk between Selectors	CTS1	-	-80	-70	dB	VOUT=1Vrms Rg=0Ω, BW=IHF-A
VOLUME	Volume Control Range	VRI	-90	-87	-84	dB	BW=IHF-A , Vout=1Vrms
	Volume Setting Error 1	VEI1	-2	0	2	dB	0 to -53dB, BW=IHF-A VOUT=1Vrms
	Volume Setting Error 2	VEI2	-3	0	3	dB	-54 to -87dB, BW=IHF-A VOUT=1Vrms
	Maximum Attenuation	Vmin	-	-	-90	dB	BW=IHF-A VOUT=1Vrms
	Volume Input Impedance	Rvin	39	56	73	kΩ	
BASS	Bass Gain	Gb	-17.5 to +17.5			dB	
	Bass Gain Setting Error	BE	-2.5	0	-2.5	dB	
MIDDLE	Middle Gain	Gm	-14 to +14			dB	
	Middle Gain Setting Error	ME	-2	0	-2	dB	
TREBLE	Treble Gain	Gt	-14 to +14			dB	
	Treble Gain Setting Error	TE	-2	0	2	dB	
SURROUND	Surround In-phase Gain	Vsur1	-2	0	2	dB	
	Surround Single-phase Gain	Vsur2	4.3	6.3	8.3	dB	AC-grounding
	Opposite-phase Gain	Vsur3	8	10	12	dB	

• This IC is not designed to be radiation-resistant.

•Control signal specifications

1. Signal Timing Conditions

- Data is read on the rising edge of the clock.
- Latch is read on the falling edge of the clock.
- Latch signal must terminate with the LOW state.
- To avoid malfunctions, clock and data signals must terminate with the LOW state.

1byte=8bit

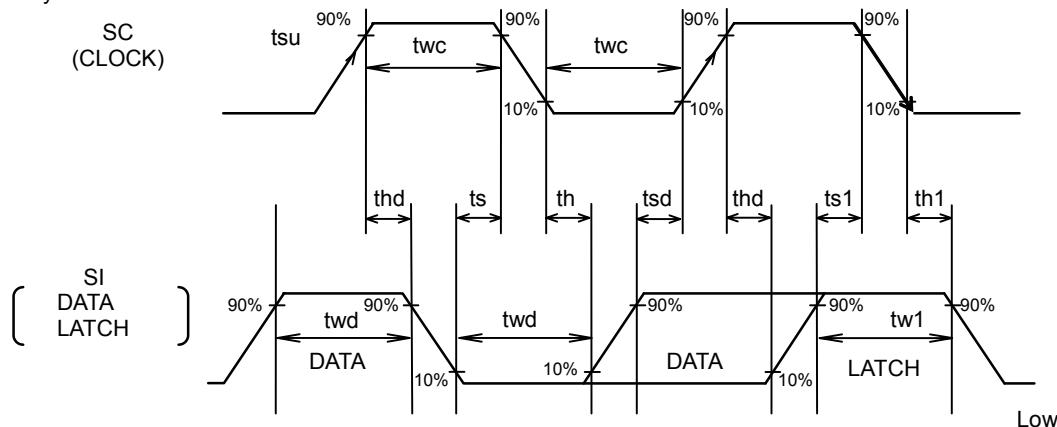


Fig.1

Item	Symbol	Limits			Unit
		Min.	Typ.	Max.	
Minimum Clock Width	t _{WC}	2.0	-	-	μS
Minimum Data Width	t _{WD}	2.0	-	-	μS
Minimum Latch Width	t _{W1}	2.0	-	-	μS
Data Set-up Time (DATA→CLK)	T _{SD}	1.0	-	-	μS
Data Hold Time (CLK→DATA)	T _{HD}	1.0	-	-	μS
Latch Set-up Time (CLK→LATCH)	t _{S1}	1.0	-	-	μS
Latch Hold Time (DATA→LATCH)	t _{H1}	1.0	-	-	μS
Latch Low Set-up Time	t _S	1.0	-	-	μS
Latch Low Hold Time	t _H	1.0	-	-	μS

2. Voltage Conditions for Control Signals (BD3403FV, BD3861FS)

Item	Condition	Limits			Unit
		Min.	Typ.	Max.	
"H" Input Voltage	V _{CC} =6.5 to 9.5V	2.6	-	5.5	V
"L" Input Voltage	V _{CC} =6.5 to 9.5V	0	-	1.1	V

3. Voltage Conditions for Control Signals (BD3883FS)

Item	Condition	Limits			Unit
		Min.	Typ.	Max.	
"H" Input Voltage	V _{CC} =6.5 to 9.5V	2.2	-	5.5	V
"L" Input Voltage	V _{CC} =6.5 to 9.5V	0	-	1.0	V

•Control data format list

(BD3403FV)							
Address 1							
D10	D11	D12	D13	D14	D15	D16	D17
OUTPUT Volume 1		OUTPUT Volume 2				Function Select 0 0	

Address 2							
D20	D21	D22	D23	D24	D25	D26	D27
INPUT Volume				Surround 0:OFF 1:ON	Function Select 0 1 0		

Address 3							
D30	D31	D32	D33	D34	D35	D36	D37
Input Selector			6dB SW 0: 0dB 1: +6dB	IN E MUTE 0:OFF 1:ON	Function Select 0 0 1		

Address 4							
D40	D41	D42	D43	D44	D45	D46	D47
Input Gain/Bass				0: Input Gain 1: Bass	Function Select 1 0 1		

Address 5							
D50	D51	D52	D53	D54	D55	D56	D57
Middle/Treble				0: Middle 1: Treble	Function Select 0 1 1		

(BD3861FS)							
Address 1							
D10	D11	D12	D13	D14	D15	D16	D17
OUTPUT Volume		OUTPUT Volume 2				Function Select 0 0	

Address 2							
D20	D21	D22	D23	D24	D25	D26	D27
INPUT Volume				Function Select 0 1 0			

Address 3							
D30	D31	D32	D33	D34	D35	D36	D37
Input Selector			6dBSW 0: 0dB 1: +6dB	IN E MUTE 0:OFF 1:ON	Function Select 0 0 1		

Address 4							
D40	D41	D42	D43	D44	D45	D46	D47
Input Gain/Bass				0: Input Gain 1: Bass	Function Select 1 0 1		

Address 5							
D50	D51	D52	D53	D54	D55	D56	D57
Middle/Treble				0: Middle 1: Treble	Function Select 0 1 1		

(BD3883FS)

- Basic Configuration of Control Data Format

← Data input direction

	MSB	D9	D8	D7	D6	D5	D4	D3	D2	D1	LSB D0
Data	Data										Select Address

- Control Data Formats

← Data input direction

	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0
Data(1)	Input Gain			Input Selector			Treble fc		0	0
	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0
Data(2)	Front Volume A				Front Volume B			*	0	1
	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0
Data(3)	Bass Gain				Treble Gain				1	0
	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0
Data(4)	Middle Gain				Time Constant Select	REC OUT	Surround	Rear Volume	1	1
	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0

* indicates 0 or 1.

- By changing the setting of Select Address, four different control formats are selectable. (BD3883FS)
- At power-on sequence, initialize all data.

Example:

← Data input direction

MSB	LSB	MSB	LSB	MSB	LSB	MSB	LSB
Data(1)	L	Data(2)	L	Data(3)	L	Data(4)	L

"L" means a "latch."

- After power-on, for the second and subsequent times, only the necessary data can be selected for setting.

Example: When changing the volume:

← Data input direction


MSB	LSB
Data(2)	L

"L" means a "latch."

- RECOUT, Surround and Rear Volume in Data(4) are Soft-switched using time constants. (BD3883FS)

•Block diagram, application circuit, pin assignment

(BD3403FV)

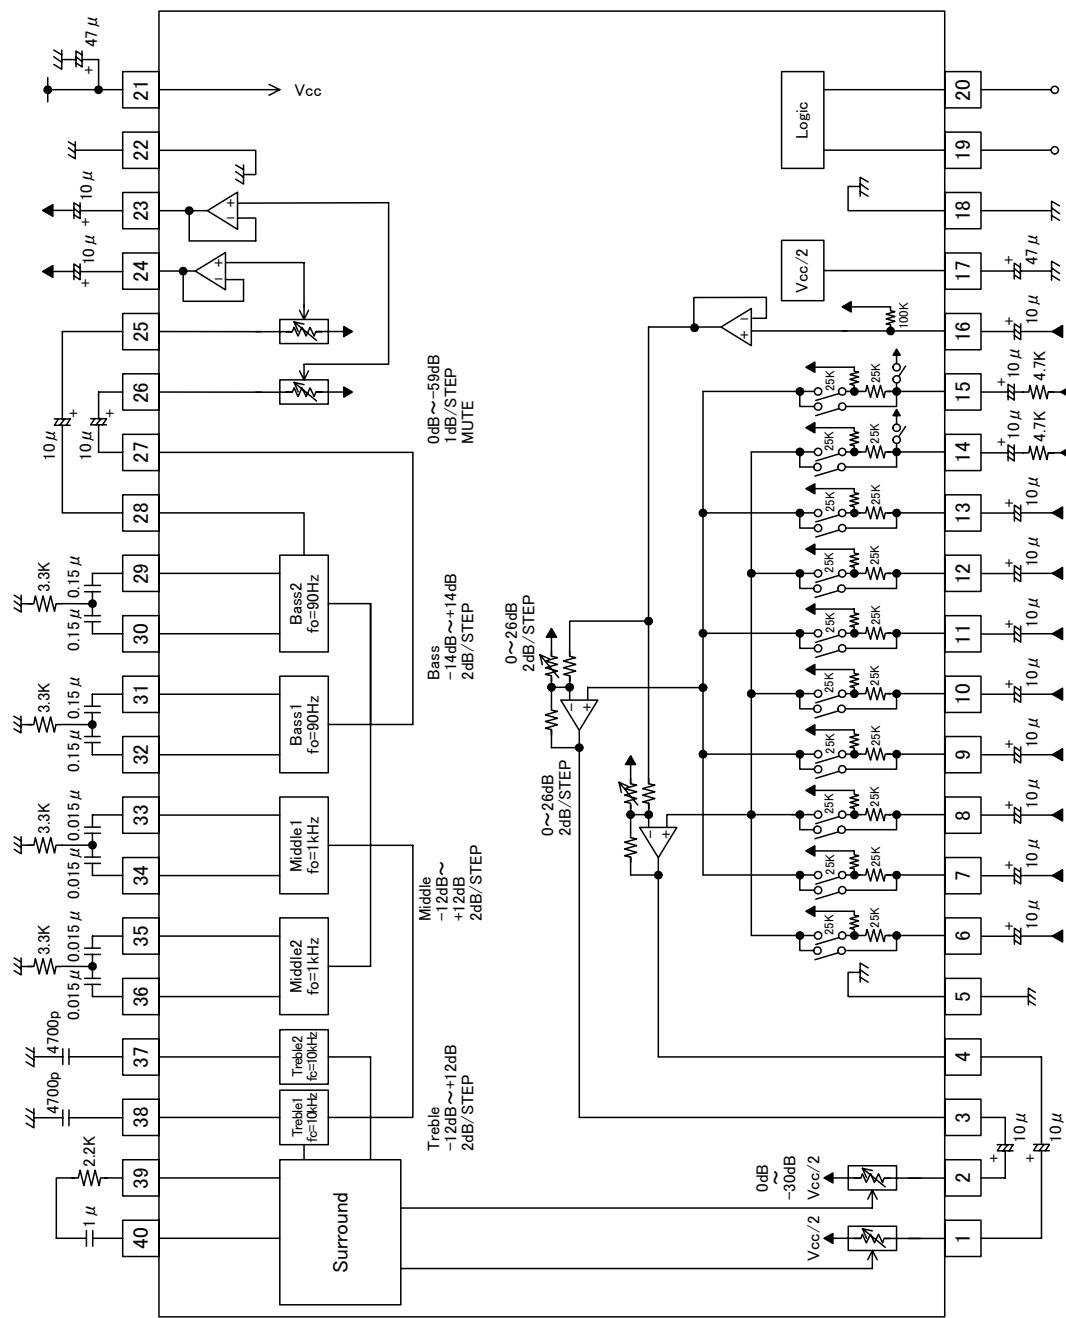

UNIT RESISTANCE : Ω
CAPACITANCE : F

Fig.2

(BD3861FS)


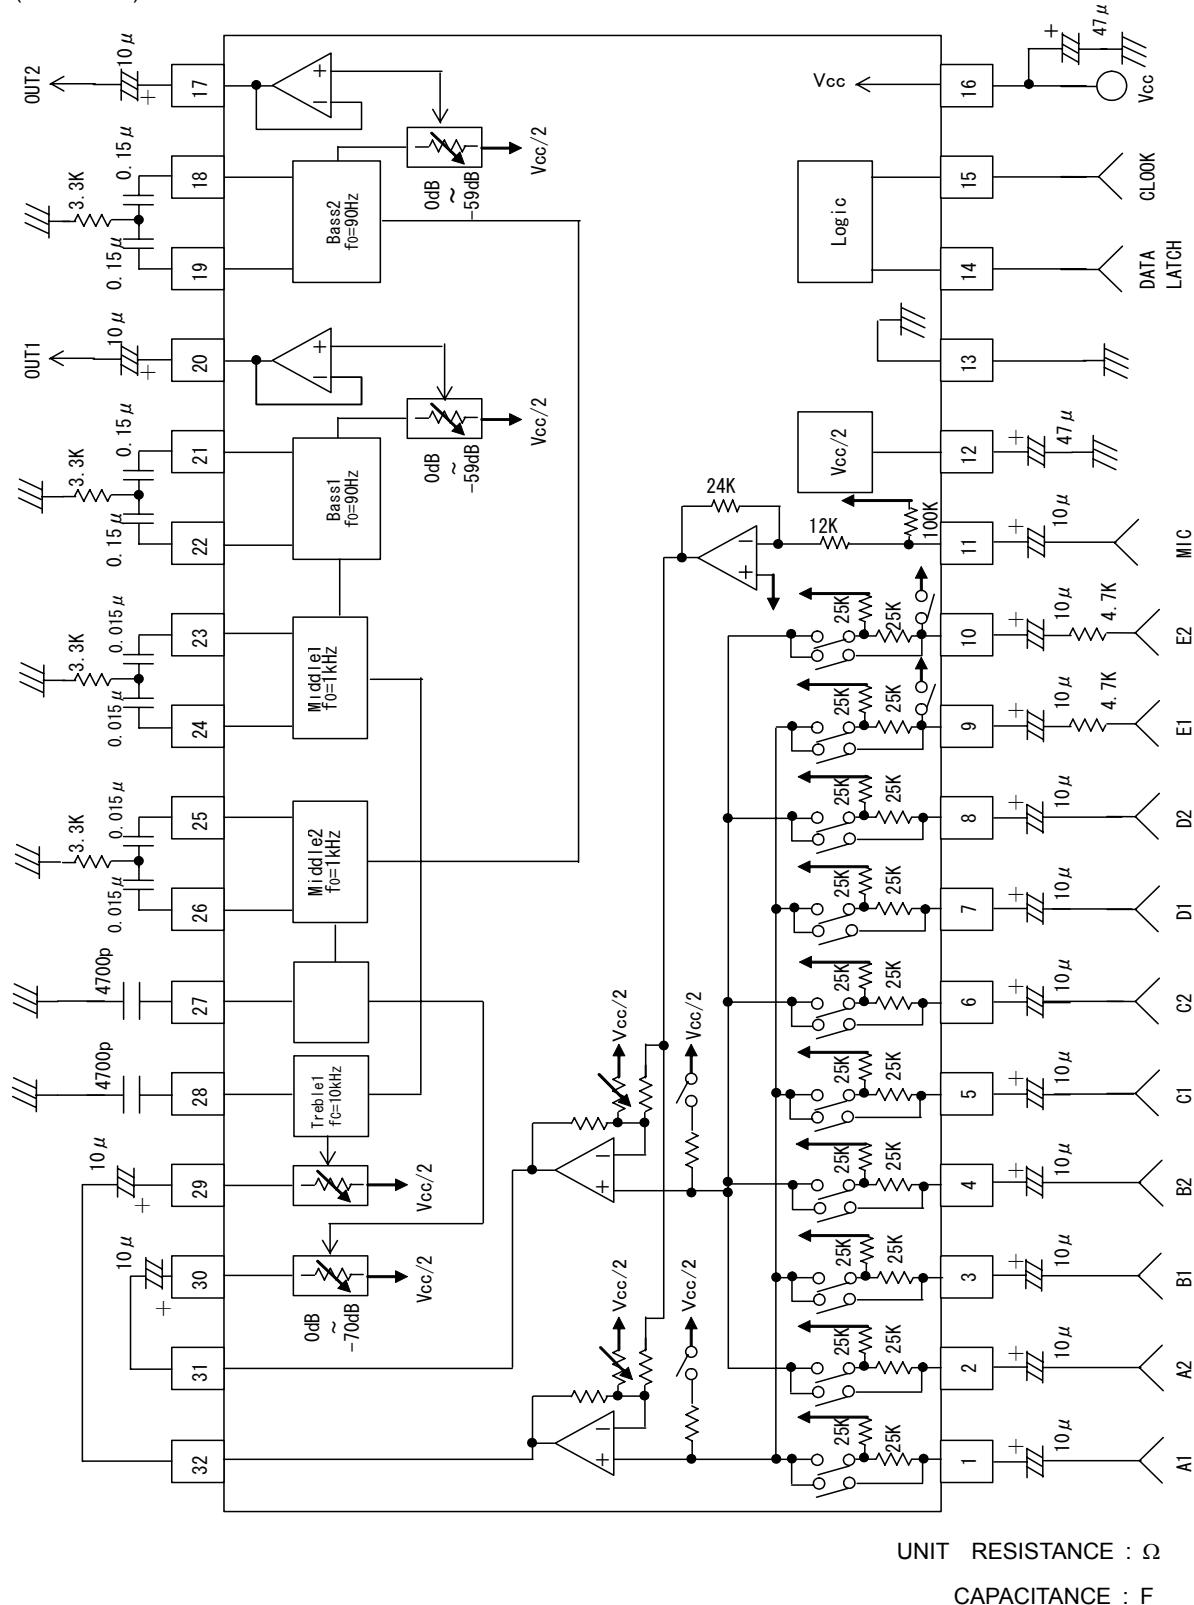


Fig.3

(BD3883FS)

When using RECOUT:

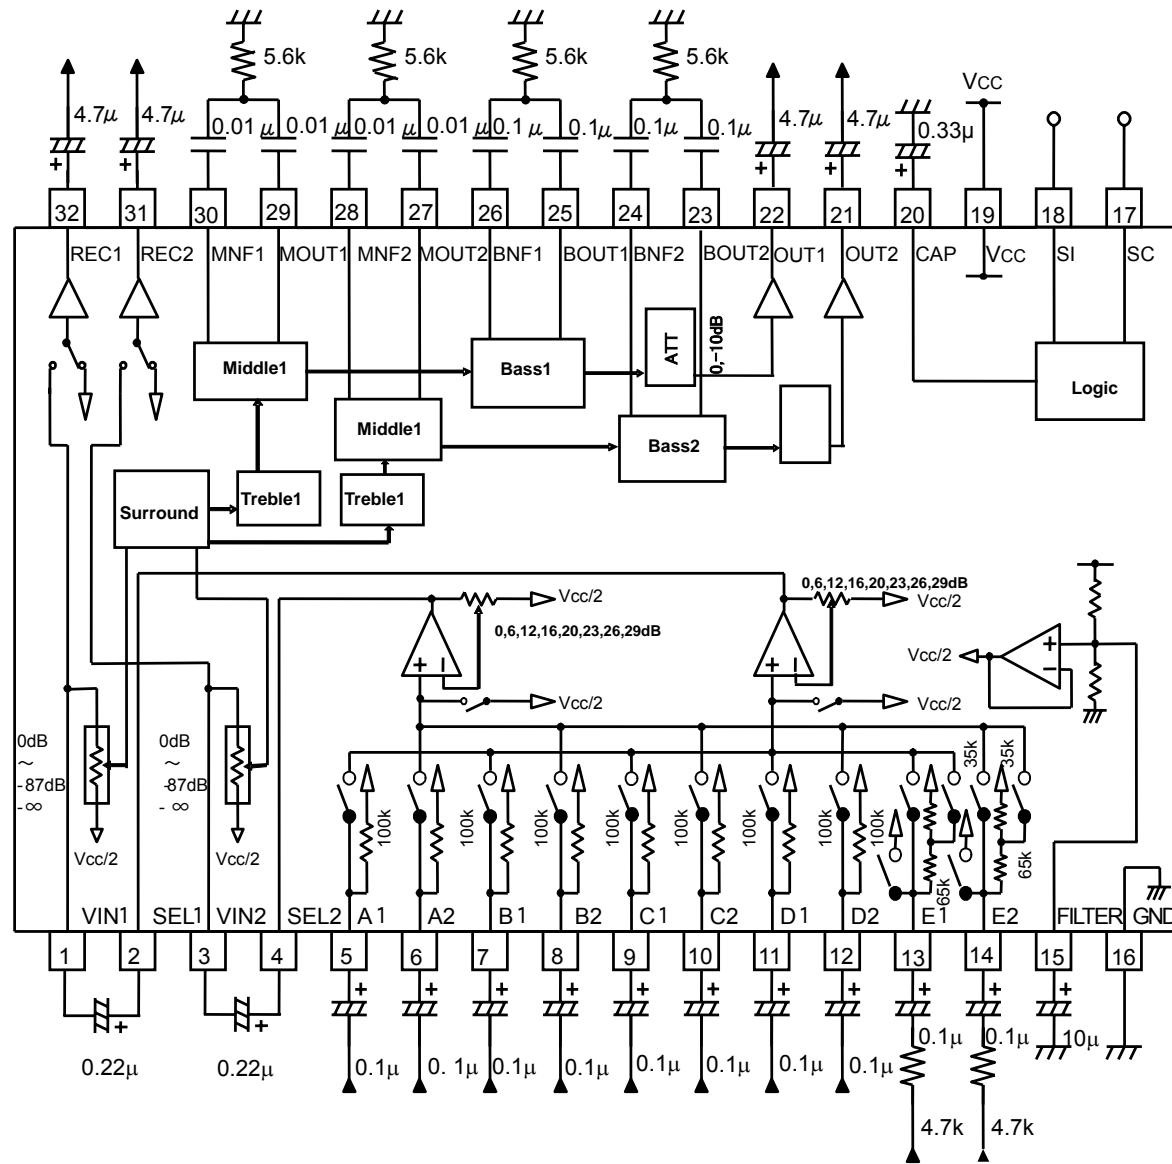


UNIT
RESISTANCE: Ω
CAPACITOR: F

Fig.4

(BD3883FS)

When using 2ndHPF:

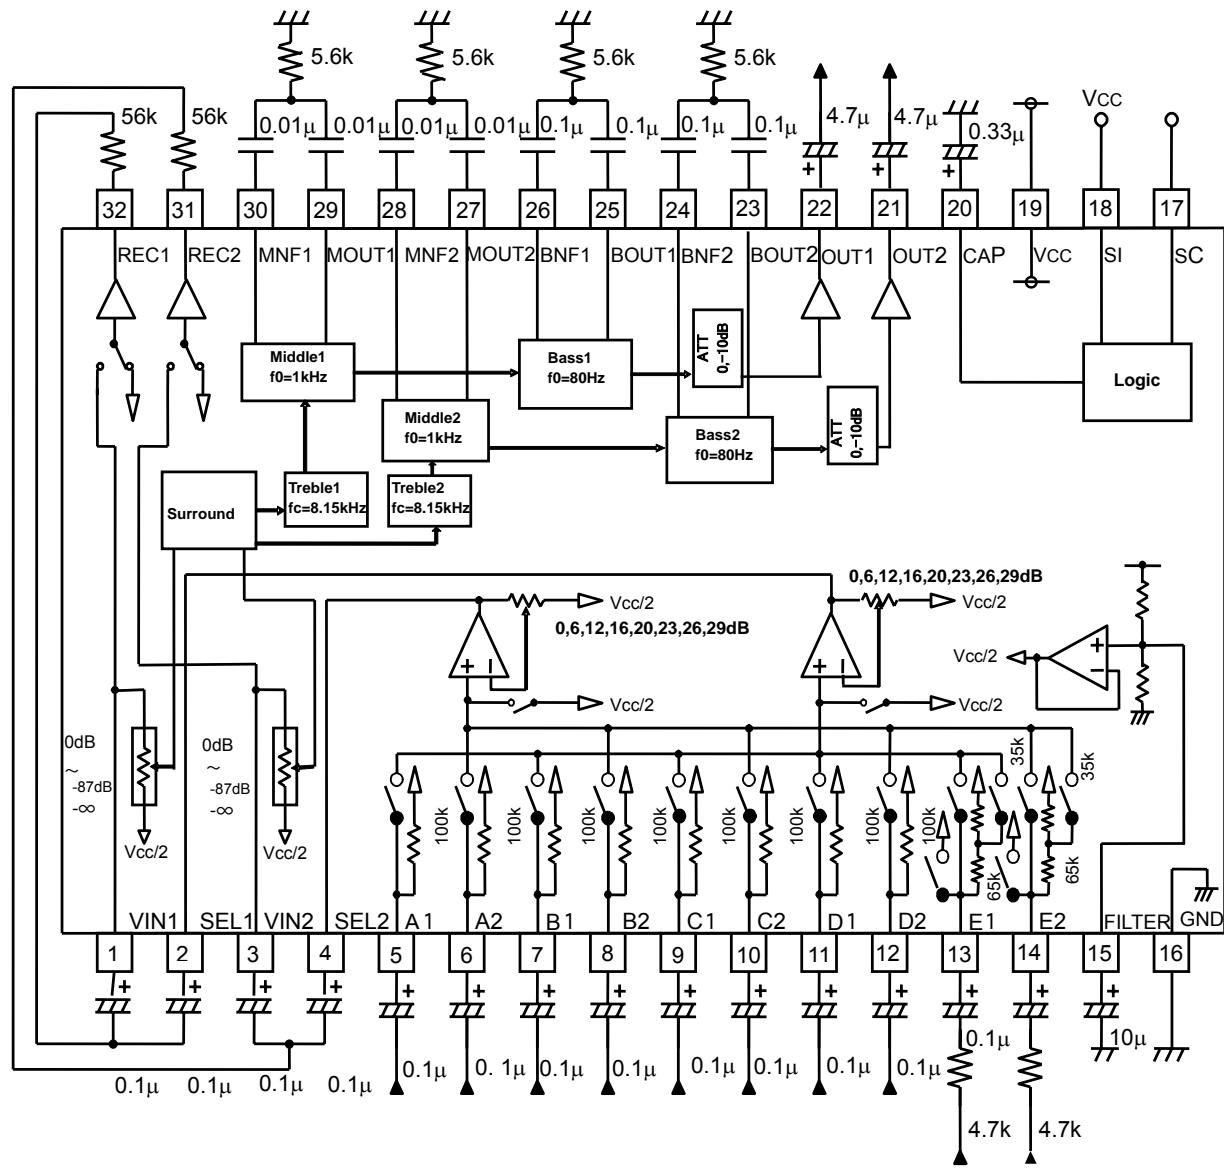

UNIT
RESISTANCE:Ω
CAPACITOR:F

Fig.5

•Reference data




Fig.6 Circuit Current – Supply Voltage
(BD3403FV)




Fig.7 Circuit Current – Supply Voltage
(BD3883FS)




Fig.8 Voltage Gain - Frequency




Fig.9 Output Voltage - Input Voltage




Fig.10 Total Harmonic Distortion ratio -
Output Voltage (BD3403FV, BD3861FS)




Fig.11 Total Harmonic Distortion ratio -
Output Voltage (BD3883FS)




Fig.12 Bass Gain - Frequency
(BD3403FV, BD3861FS)




Fig.13 Middle Gain - Frequency
(BD3403FV, BD3861FS)




Fig.14 Treble Gain - Frequency
(BD3403FV, BD3861FS)




Fig.15 Variable Treble Cut-off
Frequency (BD3883FS)




Fig.16 2ndHPF - Frequency
(BD3883FS)

●Cautions on use

1. Numbers and data in entries are representative design values and are not guaranteed values of the items.
2. Although ROHM is confident that the example application circuit reflects the best possible recommendations, be sure to verify circuit characteristics for your particular application. Modification of constants for other externally connected circuits may cause variations in both static and transient characteristics for external components as well as this Rohm IC. Allow for sufficient margins when determining circuit constants.
3. Absolute maximum ratings
Use of the IC in excess of absolute maximum ratings, such as the applied voltage or operating temperature range (T_{opr}), may result in IC damage. Assumptions should not be made regarding the state of the IC (short mode or open mode) when such damage is suffered. A physical safety measure, such as a fuse, should be implemented when using the IC at times where the absolute maximum ratings may be exceeded.
4. GND potential
Ensure a minimum GND pin potential in all operating conditions. Make sure that no pins are at a voltage below the GND at any time, regardless of whether it is a transient signal or not.
5. Thermal design
Perform thermal design, in which there are adequate margins, by taking into account the permissible dissipation (P_d) in actual states of use.
6. Short circuit between terminals and erroneous mounting
Pay attention to the assembly direction of the ICs. Wrong mounting direction or shorts between terminals, GND, or other components on the circuits, can damage the IC.
7. Operation in strong electromagnetic field
Using the ICs in a strong electromagnetic field can cause operation malfunction.
8. 2-wire serial control
Because SC and SI terminals are designed for inputting high-frequency digital signals, wiring and layout patterns should be routed as not to cause interference with the analog-signal-related lines.
9. E Input external resistance (BD3883FS)
To avoid a sudden noise into E Input, external resistance ($4.7k\Omega$) should be connected as close as possible to the IC terminal.
10. Function switching
Action to absorb shock sounds is taken when switching between the Volume, Treble, Middle and Bass functions.
11. Power-ON Reset (BD3883FS)
A built-in circuit for performing initialization inside the IC at Power-ON is provided. Specifically, the initial states are set as described in the table below. In the case of the setting design, however, to be on the safe side, it is recommended that data shall be sent to all the addresses as initial data at power-ON and, until this sending operation is completed, MUTE shall be applied. To avoid malfunctions, serial data signals must be set to the Low state at power-ON/OFF.

Function	Initial State
Input Selector	MUTE
Input Gain	0 dB
RECOUT	OFF
Volume	$-\infty$ dB
Surround	OFF
Treble	0 dB
Middle	0 dB
Bass	0 dB
Rear Volume	0dB

12. Step switching noise (BD3883FS)

For Surround and Rear Volume, an external capacitor C is attached to the CAP pin to control the switching step noise. In the application circuit, a constant value, as an example, is shown by the CAP pin.

The time constant for charge/discharge of the capacitor C (varying between VBE to 5VBE (2.65V)) controls the slow switching operation.

The switching time constant T is calculated as the follows:

$$T=2.55 \times 10^5 \times C$$

VBE has temperature characteristics and may affect the value of the time constant T.

13. Input Selector and Input Gain

When changing Input Selector or Input Gain, the Soft-switching is not applied. Therefore, it is recommended to implement the MUTE function.

◎MUTE setting example

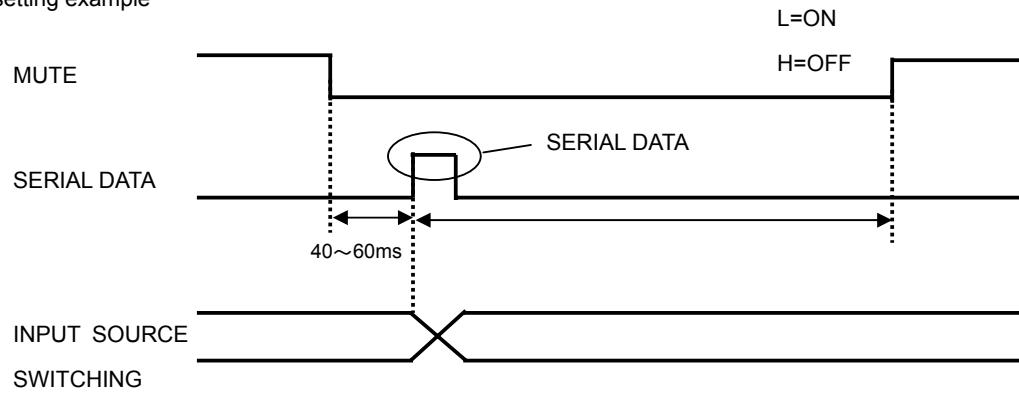


Fig.17

14. Constraints of serial control (BD3883FS)

On Soft-switching of the RECOUNT, Surround, and Rear Volume functions, data must not be sent serially to the functions before the switching operation is completed.

If the function for Soft-switch should serially send the data (Data(4)) on the same Select Address, the time interval between the send operations must be set to 500 -600msec.

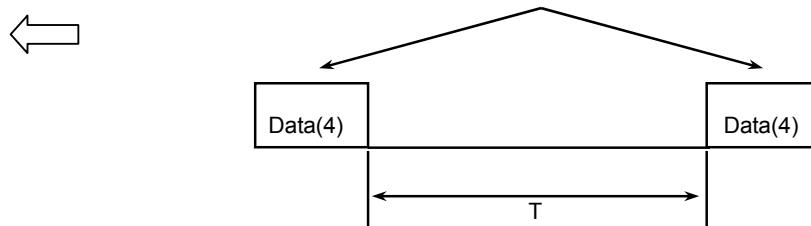


Fig.18

15. Function setting while muting Volume (BD3883FS)

While muting Volume, to avoid increasing residual noise, set Bass, Middle and Treble to 0dB, Surround to OFF, and Rear Volume to -10dB.

•Order type selection

B	D	3	4	0	3	F	V	-	E	2
---	---	---	---	---	---	---	---	---	---	---


Part No. BD3403FV

Package and forming specification

BD3861FS
BD3883FS

SSOP-B40


<Dimension>



(Unit:mm)

<Tape and Reel information>


Tape	Embossed carrier tape
Quantity	2000pcs
Direction of feed	E2 (Correct direction: 1pin of product should be at the upper left when you hold reel on the left hand, and you pull out the tape on the right hand)

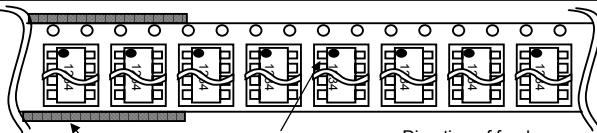

※Orders are available in complete units only.

SSOP-A32


<Dimension>



(Unit:mm)

<Tape and Reel information>

Tape	Embossed carrier tape
Quantity	2000pcs
Direction of feed	E2 (Correct direction: 1pin of product should be at the upper left when you hold reel on the left hand, and you pull out the tape on the right hand)

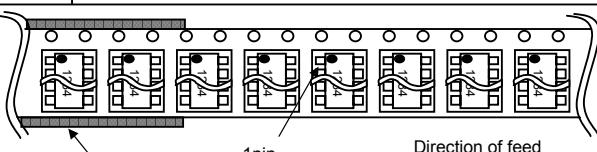

※Orders are available in complete units only.

- The contents described herein are correct as of October, 2005.
- The contents described herein are subject to change without notice. For updates of the latest information, please contact and confirm with ROHM CO., LTD.
- Any part of this application note must not be duplicated or copied without our permission.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard use and operation. Please pay careful attention to the peripheral conditions when designing circuits and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams and information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO., LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or otherwise dispose of the same, implied right or license to practice or commercially exploit any intellectual property rights or other proprietary rights owned or controlled by ROHM CO., LTD. is granted to any such buyer.
- The products described herein utilize silicon as the main material.
- The products described herein are not designed to be X ray proof.

The products listed in this catalog are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).

Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

Excellence in Electronics

ROHM

ROHM CO., LTD.

21, Sain Mizosaki-cho, Ukyo-ku, Kyoto
615-8585, Japan
TEL: (075)311-2121 FAX: (075)315-0172
URL: http://www.rohm.com

Published by
Application Engineering Group

Contact us for further information about the products.

Atlanta U.S.A. / ROHM ELECTRONICS ATLANTA SALES OFFICE
(DIVISION OF ROHM ELE.USA.,LLC)
TEL: +1(770)754-5972 FAX: +1(770)754-0691
Dallas U.S.A. / ROHM ELECTRONICS DALLAS SALES OFFICE
(DIVISION OF ROHM ELE.USA.,LLC)
TEL: +1(972)237-3018 FAX: +1(972)237-3019
San Diego U.S.A. / ROHM ELECTRONICS SAN DIEGO SALES OFFICE
(DIVISION OF ROHM ELE.USA.,LLC)
TEL: +1(858)625-3630 FAX: +1(858)625-3670
Germany / ROHM ELECTRONICS GMBH (GERMANY)
TEL: +49(2154)9210 FAX: +49(2154)921400
United Kingdom / ROHM ELECTRONICS GMBH (UK)
TEL: +44(0)1908-306700 FAX: +44(0)1908-235788
France / ROHM ELECTRONICS GMBH (FRANCE)
TEL: +33(0)145 30 60 00 FAX: +33(0)15 30 80
Hong Kong China / ROHM ELECTRONICS (HK) CO., LTD.
TEL: +852(2)7406262 FAX: +852(2)3754971
Shanghai China / ROHM ELECTRONICS (SHANGHAI) CO., LTD.
TEL: +86(21)6279-2727 FAX: +86(21)6247-2066
Dalian China / ROHM ELECTRONICS TRADING (DALIAN) CO., LTD.
TEL: +86(411)8230-8549 FAX: +86(411)8230-8537

Beijing China / BEIJING REPRESENTATIVE OFFICE
TEL: +86(10)8525-2483 FAX: +86(10)8525-2489
Taiwan / ROHM ELECTRONICS TAIWAN CO., LTD.
TEL: +886(2)25004556 FAX: +886(2)5052-2669
Korea / ROHM ELECTRONICS KOREA CORPORATION
TEL: +82(2)8182-700 FAX: +82(2)8155-7176
Singapore / ROHM ELECTRONICS ASIA PTE LTD. (RES/REI)
TEL: +65-6332-2322 FAX: +65-6332-5682
Malaysia / ROHM ELECTRONICS (MALAYSIA) SDN. BHD.
TEL: +60(3)958-6355 FAX: +60(3)958-8377
Philippines / ROHM ELECTRONICS (PHILIPPINES) SALES CORPORATION
TEL: +63(2)807-6872 FAX: +63(2)809-1422
Thailand / ROHM ELECTRONICS (THAILAND) CO., LTD.
TEL: +66(2)254-4890 FAX: +66(2)256-6334

Catalog No.05T353Be '05.10 ROHM© 1000 TSU

Appendix

ご 注意

本資料の一部または全部をロームの許可なく、転載・複写することを堅くお断りします。
本資料の記載内容は改良などのため予告なく変更することがあります。
本資料に記載されている内容は製品のご紹介資料です。ご使用にあたりましては、別途仕様書を必ずご請求のうえ、ご確認ください。
本資料に記載されております応用回路例やその定数などの情報につきましては、本製品の標準的な動作や使い方を説明するものです。したがいまして、量産設計をされる場合には、外部諸条件を考慮していただきますようお願いいたします。
本資料に記載されております製品の使用に関する応用回路例・情報・諸データは、あくまで一例を示すものであり、これらの使用に起因する工場所有権に関する諸問題につきましては、ロームは一切その責任を負いかねますのでご了承ください。
本資料に記載されております製品の販売に関し、その製品自体の使用・販売、その他の処分以外にはロームの所有または管理している工業所有権など知的財産権またはその他のあらゆる権利について明示的にも黙視的にも、その実施または利用を買主に許諾するものではありません。
本資料に記載されております製品および技術のうち「外国為替及び外国貿易法」に該当する製品または技術を輸出する場合、または国外に提供する場合には、同法に基づく許可が必要です。
本製品は「耐放射線設計」はなされておりません。

本資料に掲載されております製品は、一般的な電子機器（AV機器、OA機器、通信機器、家電製品、アミューズメント機器など）への使用を意図しています。
極めて高度な信頼性が要求され、その製品の故障や誤動作が直接受命に関わるような機器・装置（医療機器、輸送機器、航空宇宙機、原子力制御、燃料制御、各種安全装置など）へのご使用を検討される際は、事前にローム営業窓口までご相談願います。
ロームは常に品質・信頼性の向上に取り組んでおりますが、種々の要因で故障することもあり得ます。ローム製品は故障した際、その影響により人身事故、火災損害等が起こらないようご使用機器でのディレーティング、冗長設計、延焼防止、フェイルセーフ等の安全確保をお願いします。定格を越えたご使用や使用上の注意書きが守られていない場合、いかなる損害もロームは責任を負うものではありません。

ローム製品のご検討ありがとうございます。より詳しい資料やカタログなどご用意しておりますので、お問合せください。

ROHM Customer Support System

日本 / アジア / ヨーロッパ / アメリカ

www.rohm.co.jp

その他、お問合せ先 webmaster@rohm.co.jp

Appendix

Notes

- No technical content pages of this document may be reproduced in any form or transmitted by any means without prior permission of ROHM CO.,LTD.
- The contents described herein are subject to change without notice. The specifications for the product described in this document are for reference only. Upon actual use, therefore, please request that specifications to be separately delivered.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard use and operation. Please pay careful attention to the peripheral conditions when designing circuits and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or otherwise dispose of the same, no express or implied right or license to practice or commercially exploit any intellectual property rights or other proprietary rights owned or controlled by
- ROHM CO., LTD. is granted to any such buyer.
- Products listed in this document are no antiradiation design.

The products listed in this document are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).

Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

It is our top priority to supply products with the utmost quality and reliability. However, there is always a chance of failure due to unexpected factors. Therefore, please take into account the derating characteristics and allow for sufficient safety features, such as extra margin, anti-flammability, and fail-safe measures when designing in order to prevent possible accidents that may result in bodily harm or fire caused by component failure. ROHM cannot be held responsible for any damages arising from the use of the products under conditions out of the range of the specifications or due to non-compliance with the NOTES specified in this catalog.

Thank you for your accessing to ROHM product informations.

More detail product informations and catalogs are available, please contact your nearest sales office.

ROHM Customer Support System

THE AMERICAS / EUROPE / ASIA / JAPAN

www.rohm.com

Contact us : webmaster@rohm.co.jp

Copyright © 2008 ROHM CO.,LTD.

ROHM CO., LTD.

21 Saiin Mizosaki-cho, Ukyo-ku, Kyoto 615-8585, Japan

TEL : +81-75-311-2121

FAX : +81-75-315-0172

ROHM

Appendix1-Rev2.0