THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -.-.-
© COPYRIGHT - 8y -. ALL RIGHTS RESERVED.

UOC	DIST
GP	00

REVISIONS

P	LTR	DESCRIPTION	DATE	DRN	APVD
	A1	REVISED PER ECO-11-004835	11MAR11	RK	HMR

1. HOUSING: FLAME RETARDANT, 94V-0 RATED, THERMOPLASTIC; COLOR: BLACK.
   SHELL: CARBON STEEL.
   CONTACTS: PHOS BRONZE.
   INSERT BOARDLOCKS: BRASS.
2. SHELL: .000200 MIN TIN OVER .000100 MIN COPPER.
   CONTACTS: .000030 MIN GOLD FOR LENGTH OF .100 MIN FROM MATING END, .000100 MIN TIN ON TERMINATION END, ALL OVER .000050 MIN NICKEL ON ENTIRE CONTACT.
   INSERT BOARDLOCKS: .000150 MIN TIN OVER .000100 MIN COPPER.
3. DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
4. .110 MAX IN SHELL TAB CLINCH AREAS.

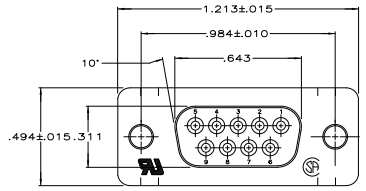

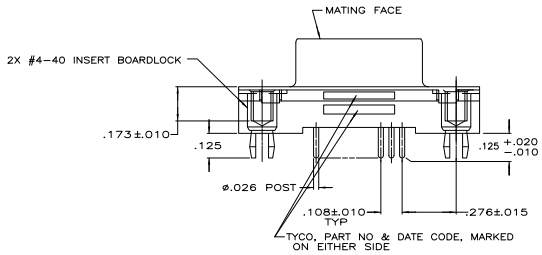



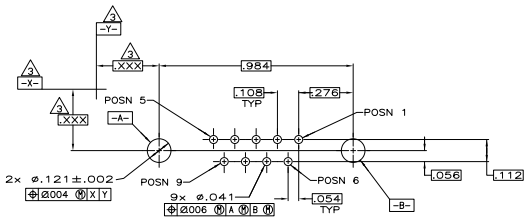

PC BOARD MOUNTING DIMENSIONS
CONNECTOR SIDE OF BOARD
.062 PC BOARD THICKNESS

COPYRIGHT 2005
TE CONNECTIVITY CORP
ALL RIGHTS RESERVED

2-5747706-0
PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.	TITLE B. LATTUCA 20SEP05	TE Connectivity
DIMENSIONS: INCHES	DR S. BOLASH 20SEP05	NAME RECPTACLE ASSEMBLY, SIZE 1, 9 POS., VERTICAL, .026 DIA. POSTS, FRONT METAL SHELL, RETENTION INSERTS, AMPLIMITE HD-20
TOLERANCE UNLESS OTHERWISE SPECIFIED: 0 PLC ± - ; 1 PLC ± - ; 2 PLC ± - ; 3 PLC ± .005 ; 4 PLC ± - ; ANGLES ± -	APVD M. WALMSLEY 20SEP05	PRODUCT SPEC 108-40025
		APPLICATION SPEC 114-40023
MATERIAL 1	FINISH 2	WEIGHT -
		SIZE A1 CAGE CODE 00779 DRAWING NO C-5747706 RESTRICTED TO -
		CUSTOMER DRAWING SCALE 4:1 SHEET 1 OF 1 REV A1

4MOS (3/11)

Downloaded from Elcodis.com electronic components distributor