
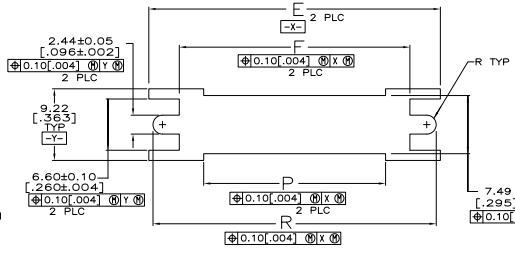
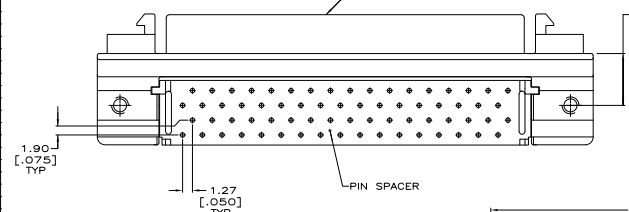
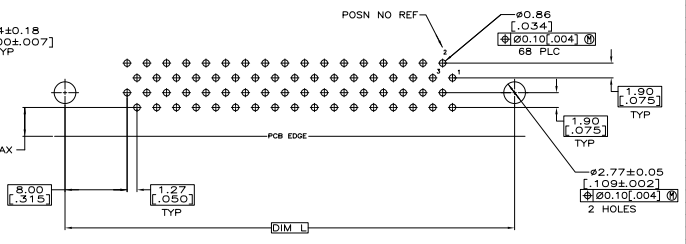
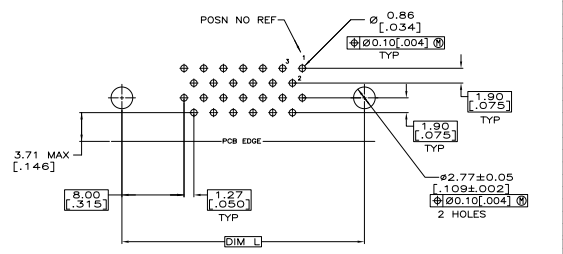
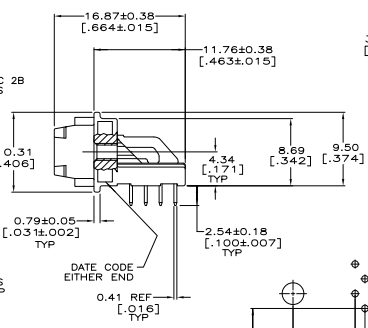



| REV   | DATE | DESCRIPTION               | BY | CHK | APP |
|-------|------|---------------------------|----|-----|-----|
| GP 00 |      |                           |    |     |     |
| B1    |      | REVISED PER EDD-11-004835 |    |     |     |

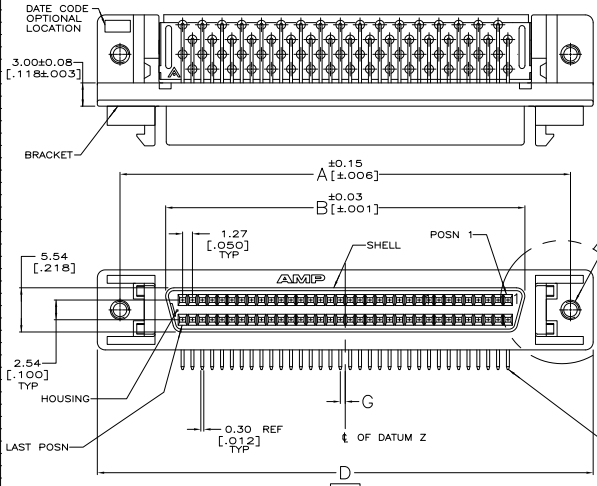

▲ CONTACTS: PHOSPHOR BRONZE  
 HOUSING & PIN SPACER: UL 94V-0 RATED,  
 THERMOPLASTIC, BLACK  
 BRACKET: ZINC  
 SHELL: CARBON STEEL

▲ CONTACTS: EITHER 0.76µm [.000030] MIN GOLD  
 PLATE FOR A LENGTH OF 0.64 [.025] MAX, 0.13  
 [.005] MIN FROM MATING END OR GOLD FLASH OVER  
 PALLADIUM NICKEL PLATE, 0.76µm [.000030] MIN  
 TOTAL FOR A LENGTH OF 0.64 [.025] MAX, 0.13  
 [.005] MIN FROM MATING END, 3.81µm [.000150] MIN  
 TIN ON OPPOSITE END FOR A LENGTH OF 2.72 [.107]  
 MIN, BOTH OVER 1.27µm [.000050] MIN NICKEL.  
 SHELL: 5.08µm [.000200] MIN NICKEL OVER 1.27µm  
 [.000050] MIN COPPER.  
 BRACKET: 2.54µm [.000100] MIN NICKEL OVER 5.08µm  
 [.000200] COPPER.

| PC BOARD PATTERN | R       | P       | L       | G       | F       | E       | D       | B       | A       | NO OF POSN | PART NUMBER |
|------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|------------|-------------|
| T                | 67.97   | 55.47   | 65.53   | 0.64    | 61.85   | 69.60   | 71.50   | 53.75   | 65.53   | 80         | 5787190-8   |
|                  | [2.676] | [2.184] | [2.580] | [0.025] | [2.433] | [2.740] | [2.815] | [2.116] | [2.580] |            |             |
| T                | 60.35   | 47.85   | 57.91   | 0.64    | 54.23   | 61.98   | 63.88   | 46.13   | 57.91   | 68         | 5787190-7   |
|                  | [2.376] | [1.884] | [2.280] | [0.025] | [2.135] | [2.440] | [2.515] | [1.816] | [2.280] |            |             |
| S                | 48.92   | 36.42   | 46.48   | 1.27    | 42.80   | 50.55   | 52.45   | 34.70   | 46.48   | 50         | 5787190-5   |
|                  | [1.926] | [1.434] | [1.830] | [0.050] | [1.685] | [1.990] | [2.065] | [1.366] | [1.830] |            |             |
| S                | 33.68   | 21.18   | 31.24   | 1.27    | 27.56   | 35.31   | 37.21   | 19.46   | 31.24   | 26         | 5787190-2   |
|                  | [1.326] | [.834]  | [1.230] | [0.050] | [1.085] | [1.390] | [1.465] | [.766]  | [1.230] |            |             |
| T                | 29.87   | 17.37   | 27.43   | 0.64    | 23.75   | 31.50   | 33.40   | 15.65   | 27.43   | 20         | 5787190-1   |
|                  | [1.176] | [.684]  | [1.080] | [0.025] | [.935]  | [1.240] | [1.315] | [.616]  | [1.080] |            |             |

THIS DRAWING IS A CONTROLLED DOCUMENT. ITC ATTACH - 000001

DATE: 11/11/11

REVISION: 1

114-40029

108-1228

100779

5787190

TE Connectivity

RECEPTACLE ASSEMBLY, SHIELDED, RIGHT ANGLE, WAILED, 0500 SERIES, AMPHIMATE

REVISED TO

CUSTOMER DRAWING

DATE: 4/1

REV: 1

BY: B1