
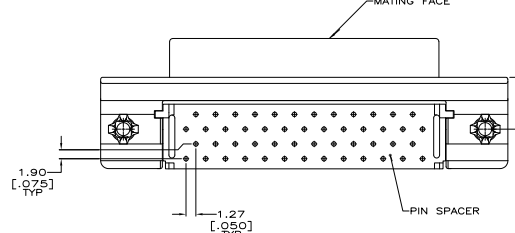
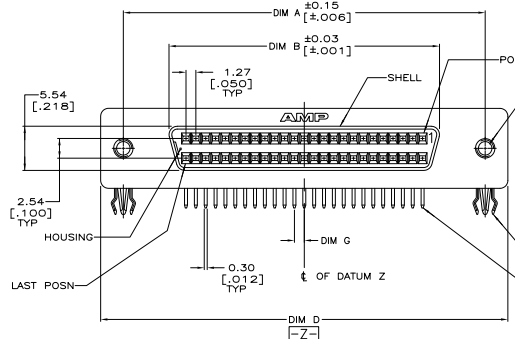






THIS DRAWING IS UNAPPROVED FOR REVISIONS
 ALL RIGHTS RESERVED

REV	DATE	DESCRIPTION	BY	CHK	APP
GP 00					
B1		REVISED PER EDD-11-004835	11MM11	RK	HMR

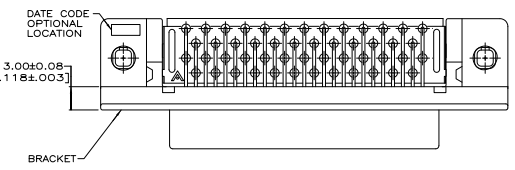

△ CONTACTS: PHOSPHOR BRONZE
 HOUSING & PIN SPACER: UL 94V-0 RATED, THERMOPLASTIC, BLACK
 BRACKET: ZINC
 SHELL: CARBON STEEL
 BOARDLOCKS: COPPER ALLOY

△ CONTACTS: EITHER 0.76µm [0.00030] MIN GOLD PLATE FOR A LENGTH OF 0.64 [0.025] MAX, 0.13 [0.005] MIN FROM MATING END OR GOLD FLASH OVER PALLADIUM NICKEL PLATE, 0.76µm [0.00030] MIN TOTAL FOR A LENGTH OF 0.64 [0.025] MAX, 0.13 [0.005] MIN FROM MATING END, 3.81µm [0.00150] MIN TIN ON OPPOSITE END FOR A LENGTH OF 2.72 [107] MIN, BOTH OVER 1.27µm [0.00050] MIN NICKEL.
 SHELL: 5.08µm [0.000200] MIN NICKEL OVER 1.27µm [0.00050] MIN COPPER.
 BRACKET: 2.54µm [0.000100] MIN NICKEL OVER 5.08µm [0.000200] COPPER.
 BOARDLOCKS: 5.08µm [0.000200] MIN TIN OVER 1.27µm [0.00050] MIN NICKEL.

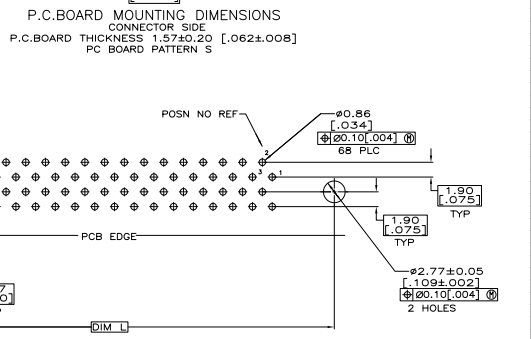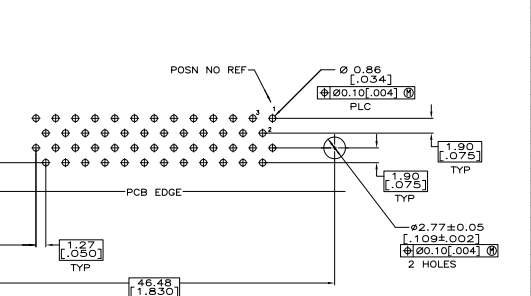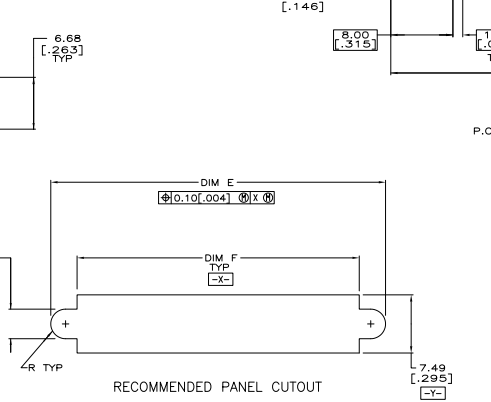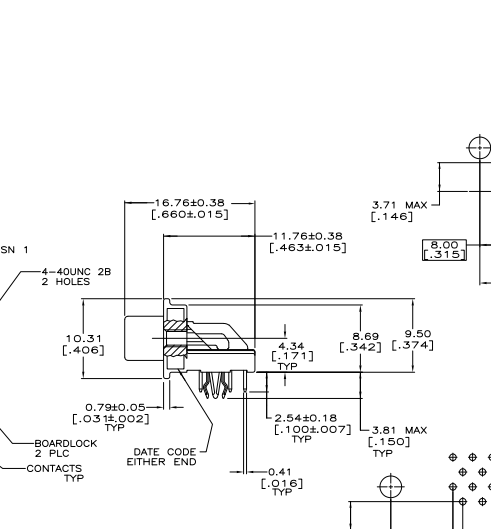

T	78.23	0.64	69.44	82.04	84.20	66.45	78.23	100	5787170-9
T	57.91	0.64	49.12	61.72	63.88	46.13	57.91	68	5787170-7
S	-	1.27	37.69	50.29	52.45	34.70	46.48	50	5787170-5
T	40.13	0.64	36.78	43.56	46.10	28.35	40.13	40	5787170-4

PC BOARD PATTERN	L	G	F	E	D	B	A	NO OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT. ATTACH TO DRAWING OR SEPARATELY TO THE DRAWING.

REVISIONS: 114-40029, 108-1228

DATE: 11-11-11

SIZE: 4.1

TE Connectivity
 RECEPTACLE ASSEMBLY, SHIELDED, RIGHT ANGLE, 450 SERIES, AMPLIMITE