
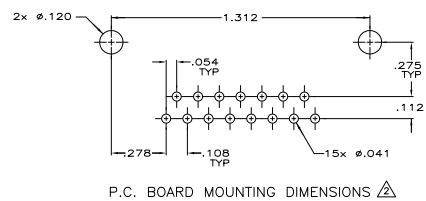
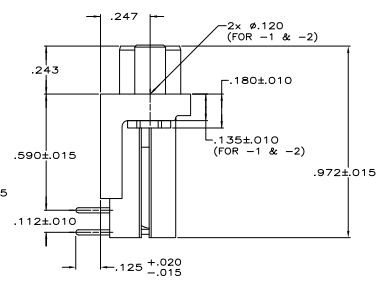
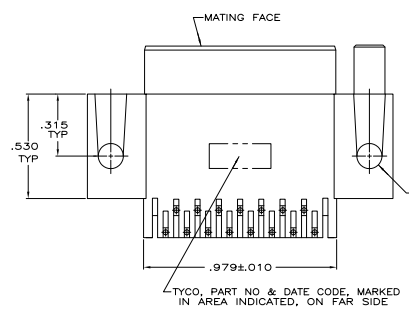


REV. NO.		REVISIONS	
GP	00	DESCRIPTION	DATE
B		REVISED FOR ECO-06-019057	25/06/06

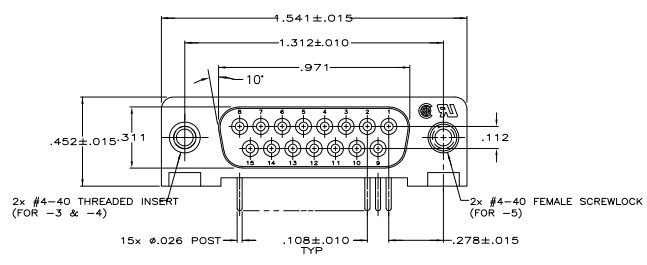

- △ HOUSING: FLAME RETARDANT, 94V-0 RATED, GLASS FILLED, NYLON OR POLYESTER, COLOR: BLACK
- △ CONTACTS: PHOS BRONZE
- △ INSERTS & SCREWLOCKS: ZINC
- △ REFER TO APPLICATION SPEC FOR RECOMMENDED P.C. BOARD MOUNTING DIMENSIONS FOR AUTOMATIC INSERTION.
- △ CONTACTS: SEE TABLE
- △ INSERTS & SCREWLOCKS: CLEAR CHROMATE COATING.
- △ PLATED WITH GOLD FLASH FOR LENGTH OF .055 MIN FROM MATING END, .000100 MIN TIN ON SOLDER END, ALL OVER .000050 MIN NICKEL ON ENTIRE CONTACT.
- △ PLATED WITH .000030 MIN GOLD FOR LENGTH OF .055 MIN FROM MATING END, .000100 MIN TIN SOLDER END, ALL OVER .000050 MIN NICKEL ON ENTIRE CONTACT.

REMARKS	FINISH	PAGE NUMBER
WITH SCREWLOCKS	△ 4	5747460-5
WITH INSERTS	△ 5	5747460-4
WITH INSERTS	△ 4	5747460-3
WITH .120 DIA HOLE	△ 4	5747460-2
WITH .120 DIA HOLE	△ 4	5747460-1

THIS DRAWING IS A CONTROLLED DOCUMENT.		TYSO ELECTRONICS CORPORATION	
DESIGNED BY	J. PETERS	DATE	06/06/06
DRAWN BY	M. BOLASH	REVISED BY	
CHECKED BY	M. BOLASH	APPROVED BY	
DATE	10/08/05	DESCRIPTION	RECEPTACLE ASSY, SIZE 2, 15 POSN, RIGHT ANGLE, 500 SERIES, .026 DIA POSTS, AMPULITE HC-20
SIZE	114-40015	REVISED TO	
ISSUE	A1	DATE	06/06/06
CUSTOMER DRAWING		REVISED TO	