

# Schottky Barrier Diodes


These Schottky barrier diodes are designed for high speed switching applications, circuit protection, and voltage clamping. Extremely low forward voltage reduces conduction loss. Miniature surface mount package is excellent for hand held and portable applications where space is limited.

- Extremely Fast Switching Speed
- Low Forward Voltage — 0.35 Volts (Typ) @  $I_F = 10$  mAdc



## BAT54RLT1

**30 VOLTS  
SILICON HOT-CARRIER  
DETECTOR AND  
SWITCHING  
DIODES**



**CASE 318-08, STYLE 8  
SOT-23 (TO-236AB)**

### DEVICE MARKING

BAT54RLT1 = LV3


### MAXIMUM RATINGS ( $T_J = 125^\circ\text{C}$ unless otherwise noted)

Rating	Symbol	Value	Unit
Reverse Voltage	$V_R$	30	Volts
Forward Power Dissipation @ $T_A = 25^\circ\text{C}$	$P_F$	200	mW
Derate above $25^\circ\text{C}$		2.0	mW/ $^\circ\text{C}$
Operating Junction Temperature Range	$T_J$	-55 to +125	$^\circ\text{C}$
Storage Temperature Range	$T_{stg}$	-55 to +150	$^\circ\text{C}$

### ELECTRICAL CHARACTERISTICS ( $T_A = 25^\circ\text{C}$ unless otherwise noted)


Characteristic	Symbol	Min	Typ	Max	Unit
Reverse Breakdown Voltage ( $I_R = 10 \mu\text{A}$ )	$V_{(BR)R}$	30	—	—	Volts
Total Capacitance ( $V_R = 1.0$ V, $f = 1.0$ MHz)	$C_T$	—	7.6	10	pF
Reverse Leakage ( $V_R = 25$ V)	$I_R$	—	0.5	2.0	$\mu\text{Adc}$
Forward Voltage ( $I_F = 0.1$ mAdc)	$V_F$	—	0.22	0.24	Vdc
Forward Voltage ( $I_F = 30$ mAdc)	$V_F$	—	0.41	0.5	Vdc
Forward Voltage ( $I_F = 100$ mAdc)	$V_F$	—	0.52	1.0	Vdc
Reverse Recovery Time ( $I_F = I_R = 10$ mAdc, $I_{R(REC)} = 1.0$ mAdc) Figure 1	$t_{rr}$	—	—	5.0	ns
Forward Voltage ( $I_F = 1.0$ mAdc)	$V_F$	—	0.29	0.32	Vdc
Forward Voltage ( $I_F = 10$ mAdc)	$V_F$	—	0.35	0.40	Vdc

# BAT54RLT1

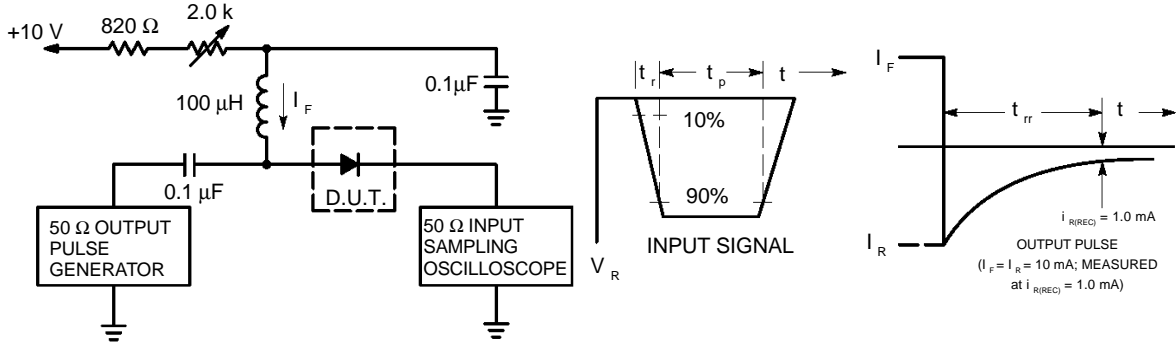


- Notes:
1. A 2.0 kΩ variable resistor adjusted for a Forward Current ( $I_F$ ) of 10mA.
  2. Input pulse is adjusted so  $I_{R(peak)}$  is equal to 10mA.
  3.  $t_p \gg t_{rr}$


**Figure 1. Recovery Time Equivalent Test Circuit**

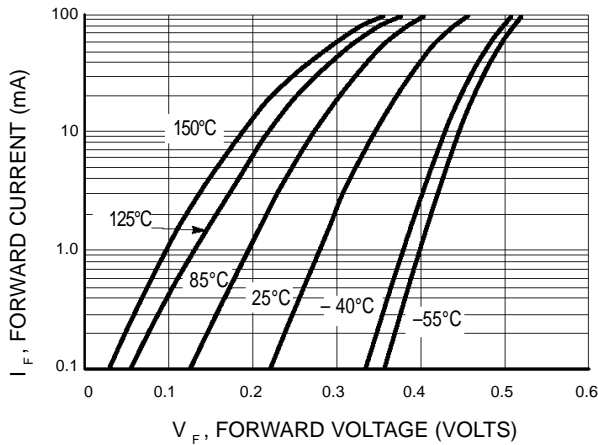

**Figure 2. Forward Voltage**

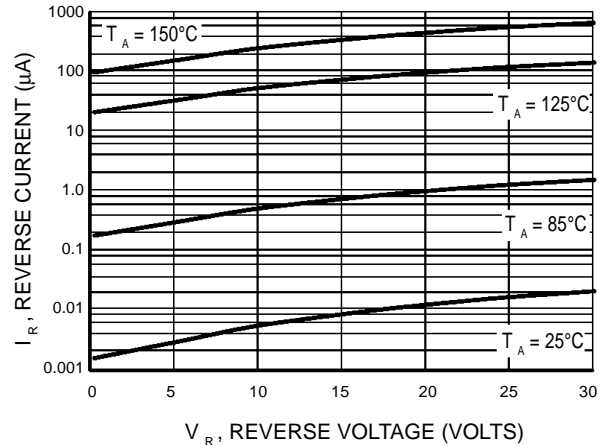

**Figure 3. Leakage Current**

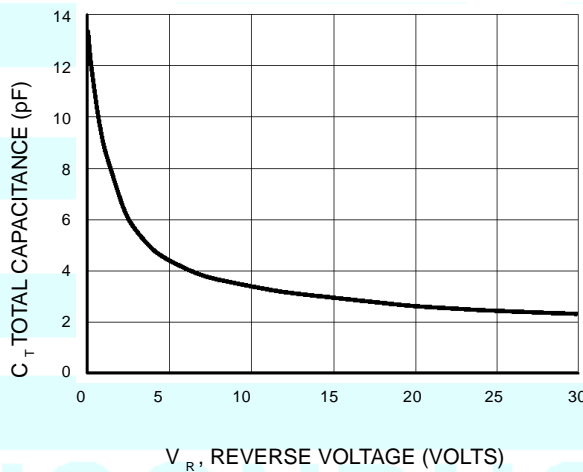

**Figure 4. Total Capacitance**