

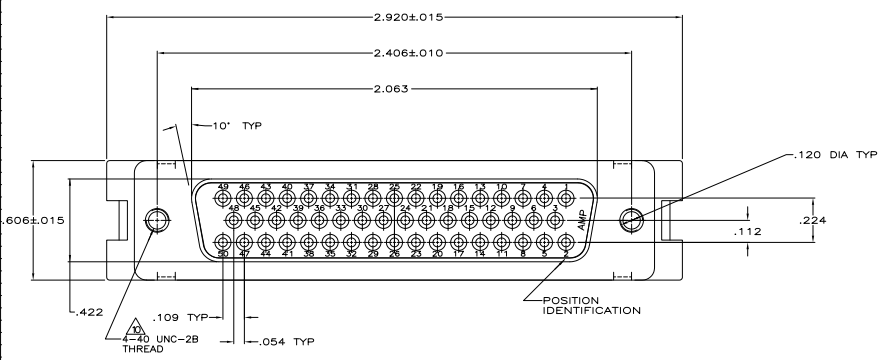
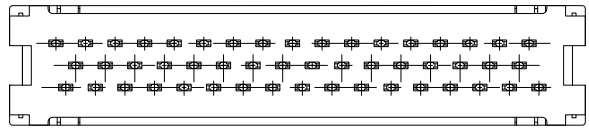
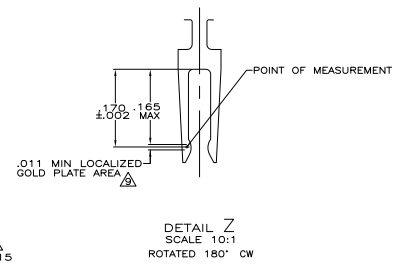


THIS DRAWING IS UNPUBLISHED
 ALL RIGHTS RESERVED

REV	DATE	DESCRIPTION	BY	CHK	APP
00					
B1		REVISED PER ECO-11-004835			



- CONNECTORS COMPLY WITH AMP SPEC 108-40012.
 - CONNECTOR DESIGNED FOR 28 AND 26 AWG STRANDED AND SOLID CONDUCTOR RIBBON CABLE ON .050 ϕ . DIMENSION APPLIES TO TERMINATED CONNECTOR.
- MOLDED PARTS: FLAME RETARDANT 94V-0 RATED THERMOPLASTIC; COLOR: BLACK.
 SHELL: STEEL PER QQ-S-698.
 CONTACTS: PH BRZ PER QQ-B-750.
 GOLD PLATING PER MIL-G-45204, TIN PLATING PER MIL-T-10727, NICKEL PLATING PER QQ-N-290.
 SHELL: BRIGHT TIN PLATED.
 CONTACTS: PLATED .000030 GOLD IN LOCALIZED GOLD PLATE AREA, .000100 - .000200 MATTE TIN ON TERMINATION END, ALL OVER .000050 NICKEL ON ENTIRE CONTACT.
 THE MAX SCREW PENETRATION INTO THE CONNECTOR = .312.
 THREADED INSERTS: ZINC PLATED .00150-.00350 THICK, CLEAR CHROMATE COATED.

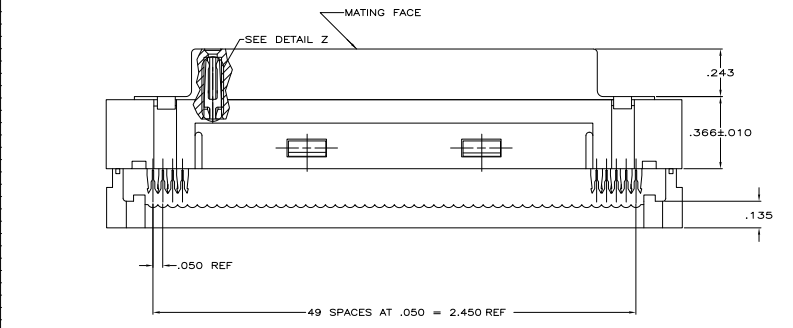

1658606-1
 PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DATE: 4/16/03	REV: 1	BY: J. BAUM	4/16/03
DESIGNED BY: M. WILMSLEY		DATE: 4/16/03	REV: 1	BY: J. BAUM	4/16/03
CHECKED BY: M. WILMSLEY		DATE: 4/16/03	REV: 1	BY: J. BAUM	4/16/03
APPROVED BY: M. WILMSLEY		DATE: 4/16/03	REV: 1	BY: J. BAUM	4/16/03
CUSTOMER DRAWING		DATE: 4/16/03	REV: 1	BY: J. BAUM	4/16/03

REPT ASSY, HOF, FRONT METAL SHELL
 LEAD-FREE, AMP-LATCH
 SIZE: A1
 DATE: 4/16/03
 DRAWING NO: 1658606
 PART NO: 1658606-1
 SHEET: 1 OF 1
 BY: B1