




Screw L=5.0 For Panel Thickness Under 1.2mm
Screw L=6.0 For Panel Thickness Between 1.2~2.0mm

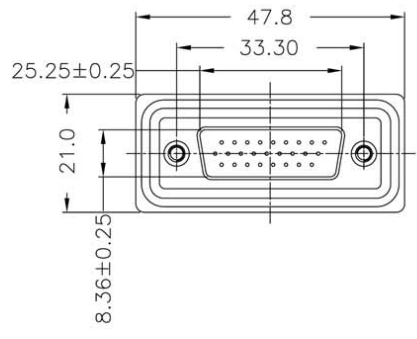

Recommended Panel Cut-Out

- Note:
- * Waterproof Rate : IP67
 - * Connector : Black,Nylon+GF
 - * Pin: Copper Alloy,Gold Plated



ITEM NO A-HDS26PP-WP
TITLE D-SUB, High Density, Male, 26 pin, 180°

ASSMANN
Electronics, Inc.

1840 W. Drake Drive, Suite 101 - Tempe, AZ 85283
Toll Free: 1-877-277-6266 Email: info@usa-assmann.com

THIS DRAWING IS UNPUBLISHED
© Copyright 2008 by Assmann Electronic Components
All International Rights Reserved