



This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale, by anyone other than Amphenol Corporation without the prior consent, & that no right is granted to disclose or to use any information in this document.



Strain Relief

Customer drawing

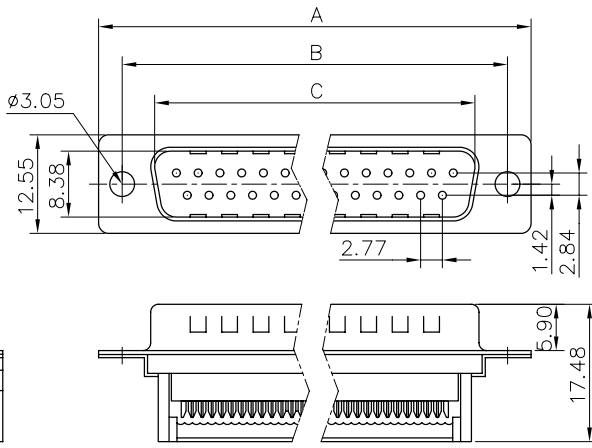

Nb OF CONTACTS	A	B	C
09	30.84	24.99	16.92
15	39.24	33.32	25.50
25	53.04	47.04	38.96
37	69.32	63.50	55.42

REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
1			04/17/08	

D-SUB TECHNICAL DATA

SHELL : Steel,100u"min tin over 50u"min nickel
 BODY : Glass filled thermoplastic.
 Flame retardant to UL94 V-0 color black
 CONTACTS : Brass, gold flash over 1.25um (50u") min nickel
 ELECTRICAL : Voltage rating : 250 V RMS at 60 Hz,
 Current rating 5A
 Insulation resistance >1000 M Ohms
 Contact resistance 20 mOhms max.
 CLIMATIC : Temperature range -55°C up to 125°C
 Damp heat 56 days(40 °C-95% HR)
 MARKING : Amphenol---(Series No.)
 Commercial reference
 Manufacturing date

PRODUCT CODE

L 17D X FR A XX P

L : RoHS Compliance

Contact type
P=Pin

17D : tinned shell for
plug and receptacle

Configuration : 09,15,25,37

Shell size : E,A,B,C

Type : A=front metal shell

Flat ribbon cable type

UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVAL		DATE
U.S.	METRIC	DRAWN	Checked	04/17/08
.X +/-	0.4			
.XX +/-	0.30			
.XXX +/-	0.20			
FRACTIONS +/-	Z			
ANGLES +/-	Z			
FOR MATERIALS AND FINISHES SEE NOTES		DRAWING FILE :		
REMOVE SHARP EDGES		ANGLE OF PROJECTION		
DIMENSIONS		SCALE		
U.S. INCHES		NONE		
METRIC MM		SHEET 1 OF 1		

Amphenol®

TITLE		
IDC Flat Cable D-Sub Series		
SIZE	DRAWING NO.	REV.
A4	C L17DXFRAXXP	1
SCALE	NONE	SHEET 1 OF 1