


μ -POWER OPERATIONAL AMPLIFIER

■ GENERAL DESCRIPTION

The NJM4250 is extremely versatile programmable monolithic operational amplifiers. A single external master bias current setting resistor programs the input bias current, input offset current, quiescent power consumption, slew rate, input noise, and the gain-bandwidth product. The device is a truly general purpose operational amplifier.

■ PACKAGE OUTLINE



NJM4250D



NJM4250M




NJM4250V

■ FEATURES


- Operating Voltage ($\pm 1V \sim \pm 18V$)
- Low Operating Current (0.1mA max.)
- Programmable monolithic OP-Amp
- Very Low Power Consumption
- Package Outline DIP8, DMP8, SSOP8
- Bipolar Technology

■ PIN CONFIGURATION

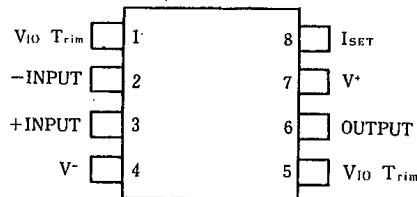

NJM4250D
NJM4250M
NJM4250V

■ EQUIVALENT CIRCUIT (1/2 shown)

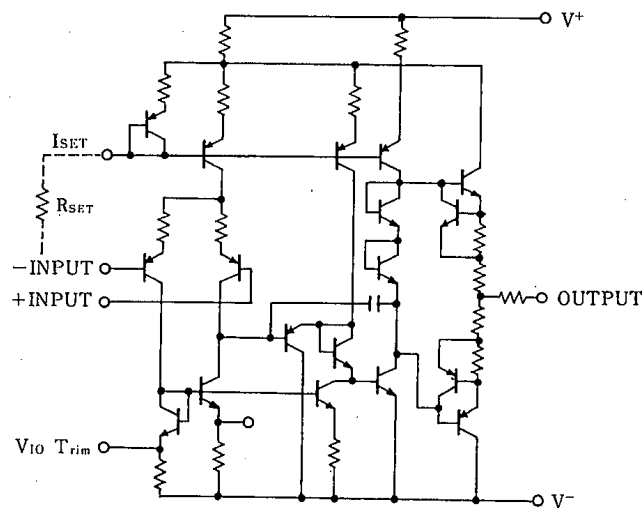

4

■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V ⁺ /V ⁻	±18	V
Differential Input Voltage	V _{ID}	±30	V
Input Voltage	V _{IC}	±15 (note)	V
Power Dissipation	P _D	(DIP8) 500	mW
		(DMP8) 300	mW
		(SSOP8) 250	mW
I _{SET} Current	I _{SET}	150	μA
Operating Temperature Range	T _{opr}	-20~+75	°C
Storage Temperature Range	T _{stg}	-40~+125	°C

(note) For supply voltage less than ±15V, the absolute maximum input voltage is equal to the supply voltage.


■ ELECTRICAL CHARACTERISTICS

(Ta=25°C, V⁺/V⁻=±15V)


PARAMETER	SYMBOL	TEST CONDITION	I _{SET} =1 μA		I _{SET} =10 μA		UNIT
			MIN.	MAX.	MIN.	MAX.	
Input Offset Voltage 1	V _{IO 1}	R _S ≤ 100kΩ	—	5	—	6	mV
Input Offset Voltage 2	V _{IO 2}	V ⁺ /V ⁻ = ±1.5V, R _S ≤ 100kΩ	—	5	—	6	mV
Input Offset Current	I _{IO}		—	6	—	20	nA
Input Bias Current 1	I _{B 1}		—	10	—	75	nA
Input Bias Current 2	I _{B 2}	V ⁺ /V ⁻ = ±1.5V	—	10	—	75	nA
Large Signal Voltage Gain 1	A _{v 1}	V _o = ±10V, R _L ≥ 100kΩ	96	—	—	—	dB
Large Signal Voltage Gain 2	A _{v 2}	V _o = ±10V, R _L ≥ 10kΩ	—	—	96	—	dB
Operating Current 1	I _{CC 1}		—	11	—	100	μA
Operating Current 2	I _{CC 2}	V ⁺ /V ⁻ = ±1.5V	—	8	—	90	μA
Input Common Mode Voltage Range 1	V _{ICM 1}		±13.5	—	±13.5	—	V
Input Common Mode Voltage Range 2	V _{ICM 2}	V ⁺ /V ⁻ = ±1.5V	±0.6	—	±0.6	—	V
Maximum Output Voltage Swing 1	V _{OM 1}	R _L ≥ 100kΩ	±12	—	—	—	V
Maximum Output Voltage Swing 2	V _{OM 2}	V ⁺ /V ⁻ = ±1.5V, R _L ≥ 100kΩ	±0.6	—	—	—	V
Maximum Output Voltage Swing 3	V _{OM 3}	R _L ≥ 10kΩ	—	—	±12	—	V
Maximum Output Voltage Swing 4	V _{OM 4}	V ⁺ /V ⁻ = ±1.5V, R _L ≥ 10kΩ	—	—	±0.6	—	V
Common Mode Rejection Ratio	CMR	R _S ≤ 10kΩ	70	—	70	—	dB
Supply Voltage Rejection Ratio	SVR	R _S ≤ 10kΩ	74	—	74	—	dB

4


■ TYPICAL APPLICATION (I_{SET}, V_{IO} Adjustment)



$$I_{SET} = \frac{V^+ + |V^-| - 0.5}{R_{SET}}$$




$$I_{SET} = \frac{V^+ - 0.5}{R_{SET}}$$




Offset Adjustment

TYPICAL CHARACTERISTICS

Input Bias Current vs. Set Current
($T_a = 25^\circ\text{C}$)

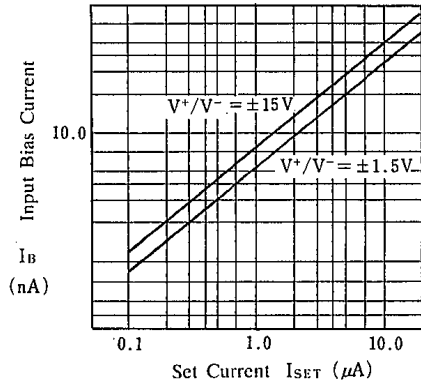


Input Bias Current vs. Temperature

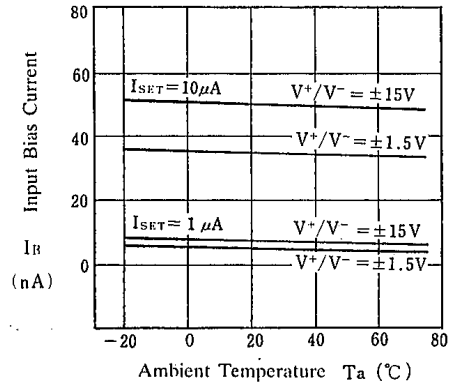


4


Input Offset Current vs. Ambient Temperature

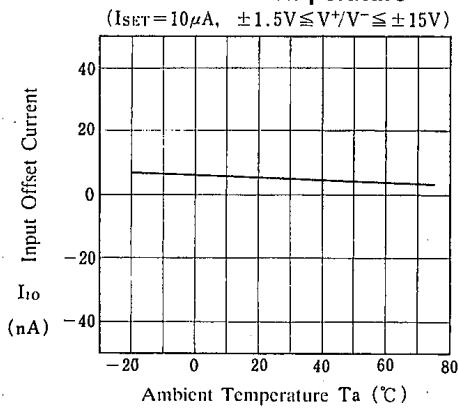


Input Offset Voltage vs. Set Current

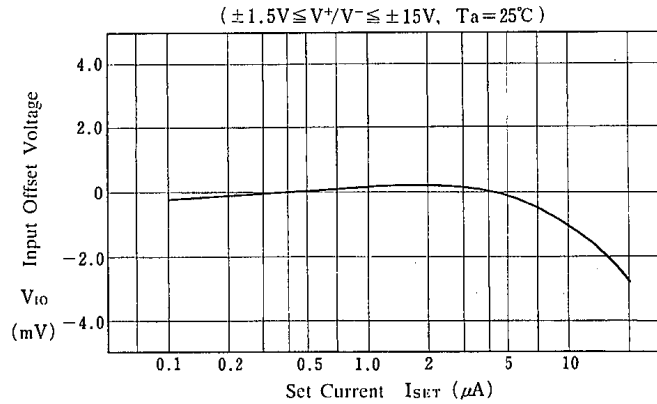

Input Offset Voltage vs. Ambient Temperature
($I_{SET} = 10\mu\text{A}$)

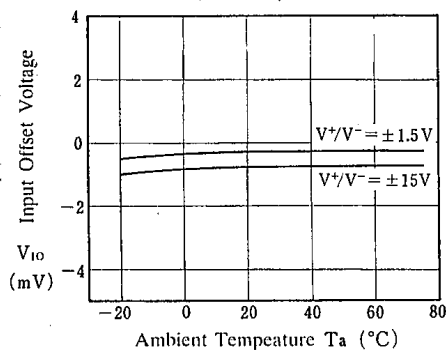


Maximum Output Voltage Swing vs. Output Current

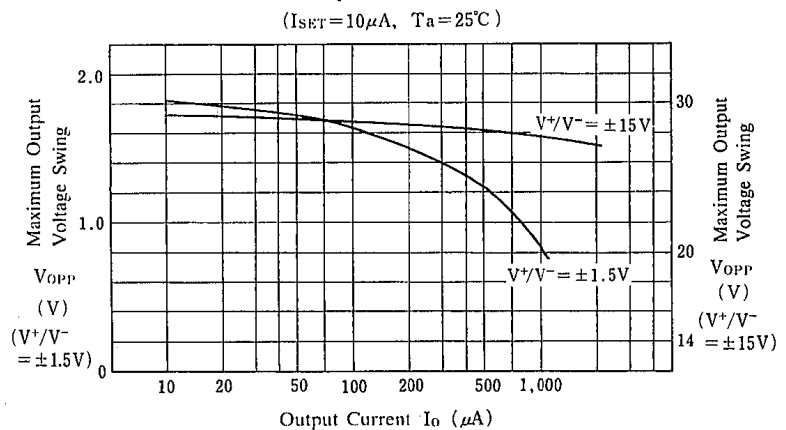


■ TYPICAL CHARACTERISTICS


Maximum Output Voltage Swing vs. Operating Voltage
 ($1\mu A \leq I_{SET} \leq 10\mu A$, $R_L = 10k\Omega$, $T_a = 25^\circ C$)

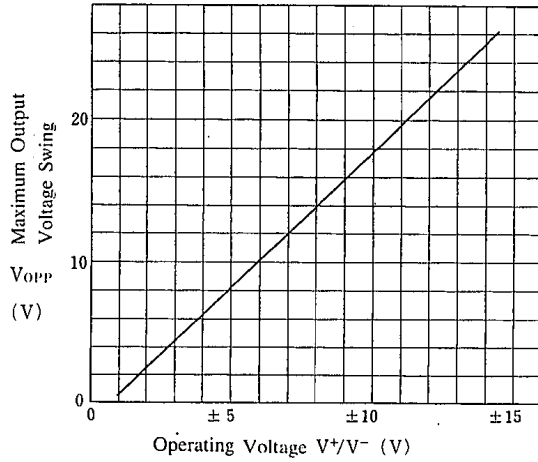


Operating Current vs. Set Current
 ($T_a = 25^\circ C$)

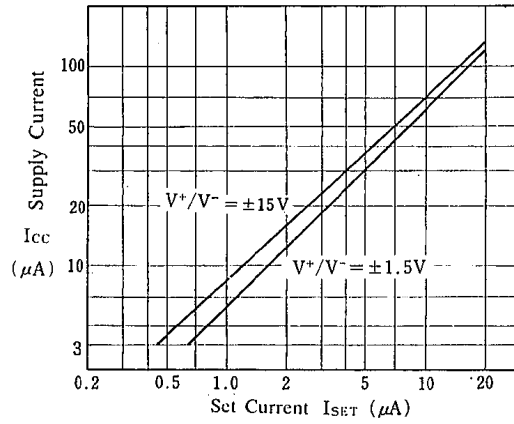

Operating Current vs. Ambient Temperature

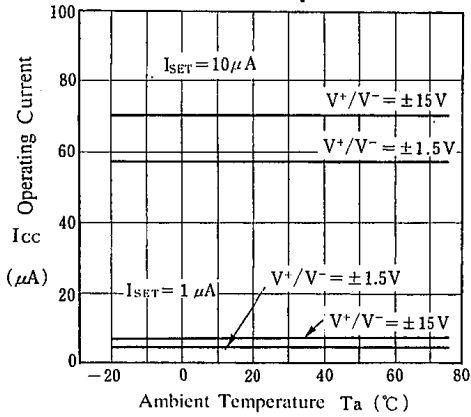


Open Loop Voltage Gain vs. Set Current
 ($R_L = 10k\Omega$, $T_a = 25^\circ C$)

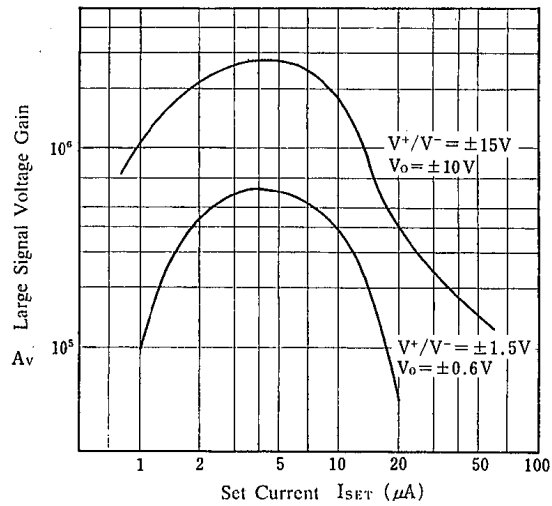


4

■ TYPICAL CHARACTERISTICS

Gain Bandwidth Product vs. Set Current
($T_a = 25^\circ\text{C}$)

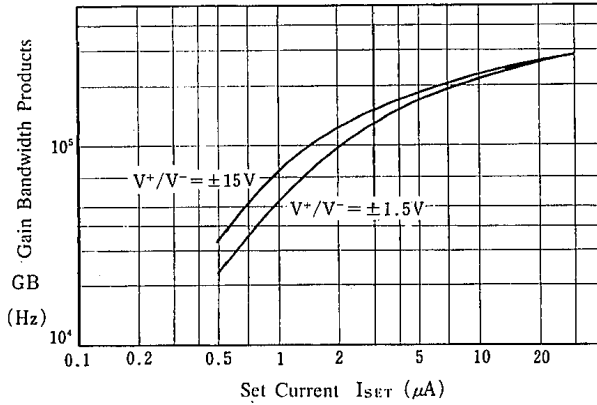


Slew Rate vs. Set Current
($R_L = 10\text{k}\Omega$, $T_a = 25^\circ\text{C}$)

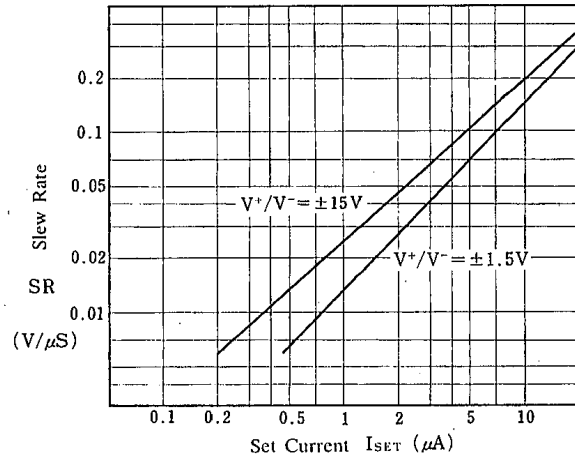


4

Phase Margin vs. Set Current

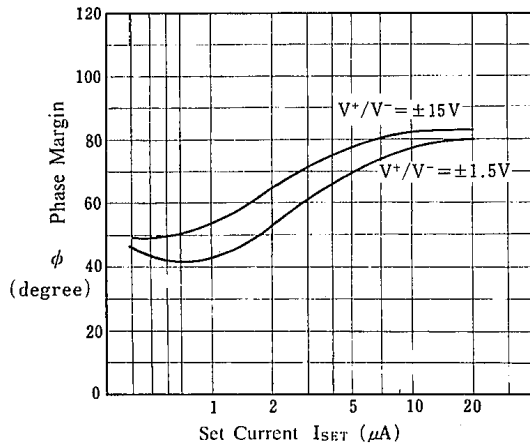

■ TYPICAL APPLICATIONS

500nW, 10times Inverting Amplifier

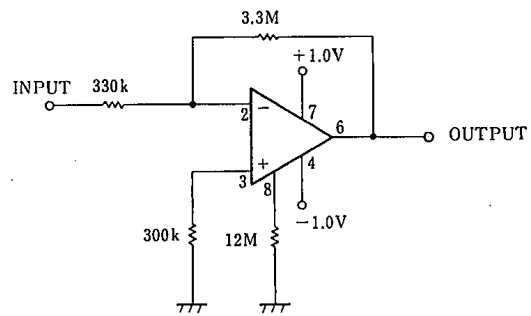

NJM4250

MEMO

[CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

New Japan Radio Co., Ltd.