
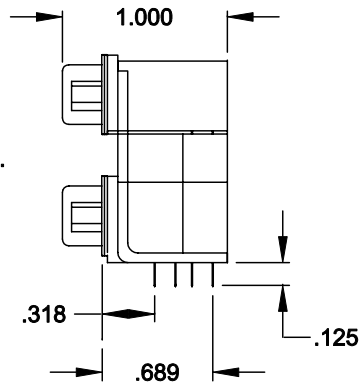


DESCRIPTION: .900 CENTER DUAL PORT D-SUB MALE/MALE

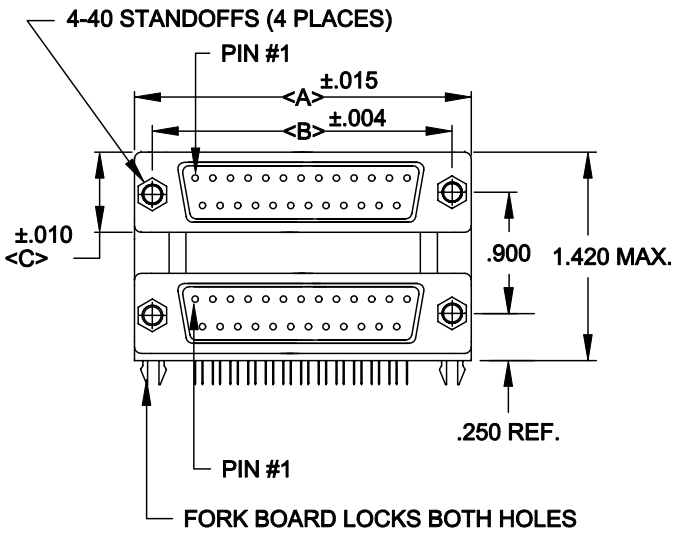

	A	B	C
9	1.204 30.6	.984 25.0	.494 12.55
15	1.535 39.0	1.312 33.3	.494 12.55
25	2.078 52.8	1.850 47.0	.494 12.55
37	2.724 69.2	2.500 63.5	.494 12.55

179-XXX-612-571

SERIES \_\_\_\_\_  
 POSITIONS \_\_\_\_\_  
 009 \_\_\_\_\_  
 015 \_\_\_\_\_  
 025 \_\_\_\_\_  
 037 \_\_\_\_\_  
 GENDER \_\_\_\_\_  
 61 = MALE OVER MALE  
 41 = MALE OVER FEMALE  
 51 = FEMALE OVER FEMALE  
 31 = FEMALE OVER MALE  
 SHELL PLATING \_\_\_\_\_  
 2 = TIN  
 HARDWARE OPTIONS \_\_\_\_\_  
 57 = 4-40 STANDOFFS/BOARD LOCKS  
 PLATING OPTIONS \_\_\_\_\_  
 01 = GOLD FLASH


**SPECIFICATIONS:**

**MATERIALS:**

SHELL: STEEL, TIN PLATED  
 INSULATOR: UL 94V-0 RATED BLACK  
 GLASS-FILLED POLYESTER  
 CONTACTS: BRASS - GOLD FLASH IN MATING AREA  
 TIN/LEAD ONSOLDER TAILS

**ELECTRICALS:**

CURRENT RATING: 5 AMPS  
 DIELECTRIC STRENGTH: 1000V AC RMS  
 INSULATOR RESISTANCE: 1000 MOHMS MIN  
 TEMPERATURE: -55°C TO +105°C

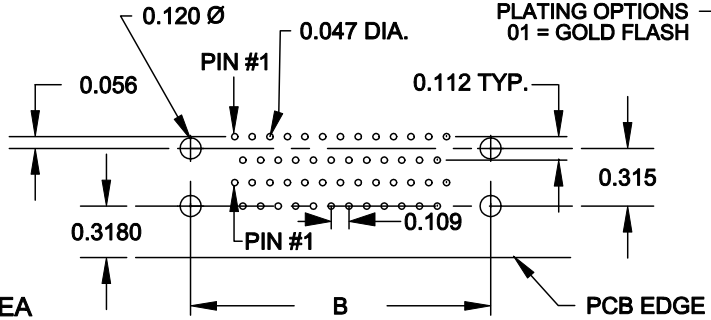

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN: PAM JENKINS  
 DATE: 9-24-98

CHECKED: \_\_\_\_\_  
 DATE: \_\_\_\_\_

**NorComp**

SCALE: 1:1 SHEET 1 OF 1 REV 8

DWG NO. 179-XXX-612-571