

## QUAD SINGLE-SUPPLY OPERATIONAL AMPLIFIER

### ■ GENERAL DESCRIPTION

The NJM2902 consists of four independent high-gain operational amplifiers that are designed for single-supply operation.


Operation from split power supplies is also possible and the low power supply drain is independent of the magnitude of the power supply voltage.

Used with a dual supply the circuit will operate over a wide range of supply voltages. However, a large amount of crossover distortion may occur with loads to ground. An external current-sinking resistor to  $-V_s$  will reduce crossover distortion. There is no crossover distortion problem in single-supply operation if the load is direct-coupled to ground.


### ■ FEATURES

- Single Supply
- Operating Voltage    (+3V ~ +30V)
- High Output Voltage    ( $V^+ - 2V$ )
- Slew Rate    (0.5V/ $\mu$ s typ.)
- Low Operating Current                                        (1mA typ.)
- Package Outline    DIP14, DMP14, SSOP14
- Bipolar Technology

### ■ PACKAGE OUTLINE



NJM2902N




NJM2902M



NJM2902V

## 4

### ■ PIN CONFIGURATION




NJM2902N  
NJM2902M  
NJM2902V

#### PIN FUNCTION

|                    |               |
|--------------------|---------------|
| 1 . A OUTPUT       | 8 . C OUTPUT  |
| 2 . A-INPUT        | 9 . C-INPUT   |
| 3 . A+INPUT        | 10 . C+INPUT  |
| 4 . V <sup>+</sup> | 11 . GND      |
| 5 . B+INPUT        | 12 . D+INPUT  |
| 6 . B-INPUT        | 13 . D-INPUT  |
| 7 . B OUTPUT       | 14 . D OUTPUT |

### ■ EQUIVALENT CIRCUIT (1/4 Shown)

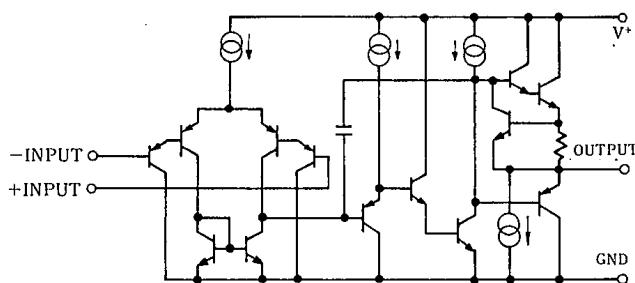

## ■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

| PARAMETER                   | SYMBOL   | RATINGS         | UNIT |
|-----------------------------|--|-----------------|------|
| Supply Voltage              | V <sup>+</sup> (V <sup>+/V<sup>-</sup></sup> ) | 32(or ±16)      | V    |
| Differential Input Voltage  | V <sub>ID</sub>                                | 32              | V    |
| Input Voltage               | V <sub>IC</sub>                                | -0.3~+32 (note) | V    |
|                             |  | (DIP14) 570     | mW   |
| Power Dissipation           | P <sub>D</sub>                                 | (DMP14) 300     | mW   |
|                             |  | (SSOP14) 300    | mW   |
| Operating Temperature Range | T <sub>opr</sub>                               | -40~+85         | °C   |
| Storage Temperature Range   | T <sub>stg</sub>                               | -50~+125        | °C   |


## ■ ELECTRICAL CHARACTERISTICS

(Ta=25°C V<sup>+</sup>=5V)


| PARAMETER                       | SYMBOL              | TEST CONDITION   | MIN.  | TYP. | MAX. | UNIT |
|---------------------------------|---------------------|--|-------|------|------|------|
| Input Offset Voltage            | V <sub>IO</sub>     | R <sub>S</sub> =0Ω   | —     | 2    | 10   | mV   |
| Input Offset Current            | I <sub>IO</sub>     | I <sub>IN</sub> <sup>+</sup> - I <sub>IN</sub> <sup>-</sup>        | —     | 5    | 50   | nA   |
| Input Bias Current              | I <sub>B</sub>      | I <sub>IN</sub> <sup>+</sup> or I <sub>IN</sub> <sup>-</sup>       | —     | 20   | 500  | nA   |
| Large Signal Voltage Gain       | A <sub>V</sub>      | R <sub>L</sub> ≥2kΩ  | —     | 100  | —    | V/mV |
| Maximum Output Voltage Swing    | V <sub>OM</sub>     | R <sub>L</sub> =2kΩ  | 3.5   | —    | —    | V    |
| Input Common Mode Voltage Range | V <sub>ICM</sub>    |  | 0~3.5 | —    | —    | V    |
| Common Mode Rejection Ratio     | CMR                 |  | —     | 85   | —    | dB   |
| Supply Voltage Rejection Ratio  | SVR                 |  | —     | 100  | —    | dB   |
| Output Source Current           | I <sub>SOURCE</sub> | V <sub>IN</sub> <sup>+</sup> =1V, V <sub>IN</sub> <sup>-</sup> =0V | 20    | 40   | —    | mA   |
| Output Sink Current             | I <sub>SINK</sub>   | V <sub>IN</sub> <sup>+</sup> =0V, V <sub>IN</sub> <sup>-</sup> =1V | 8     | 20   | —    | mA   |
| Channel Separation              | CS                  | f=1k~20kHz, Input Referred   | —     | 120  | —    | dB   |
| Operating Current               | I <sub>CC</sub>     | R <sub>L</sub> =∞  | —     | 1    | 2    | mA   |
| Slew Rate                       | SR                  | V <sup>+</sup> /V <sup>-</sup> =±15V                               | —     | 0.5  | —    | V/μs |
| Gain Bandwidth Product          | GB                  | V <sup>+</sup> /V <sup>-</sup> =±15V                               | —     | 0.5  | —    | MHz  |

## ■ TYPICAL CHARACTERISTICS

**Maximum Output Voltage Swing  
vs. Load Resistance**

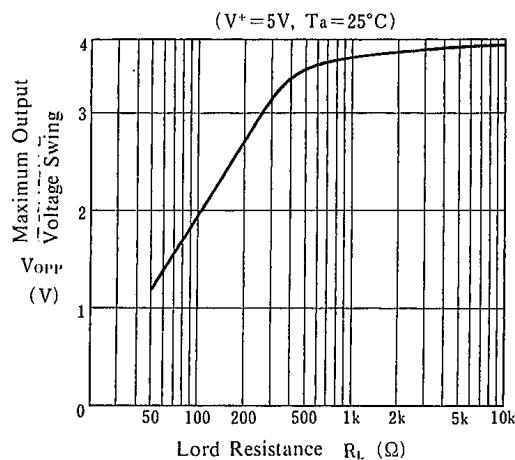


**Voltage Gain, Phase vs. Frequency**

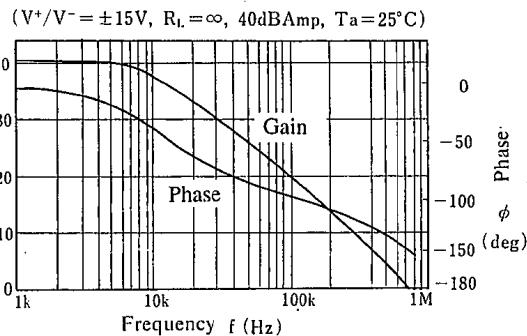


4


**Operating Current vs. Operating Voltage**

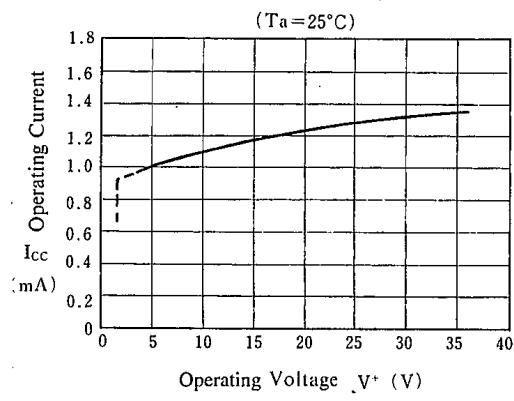


**Voltage Gain vs. Operating Voltage**

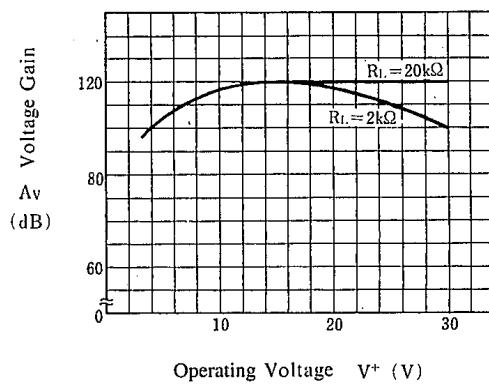






**Input Offset Voltage  
vs. Temperature**

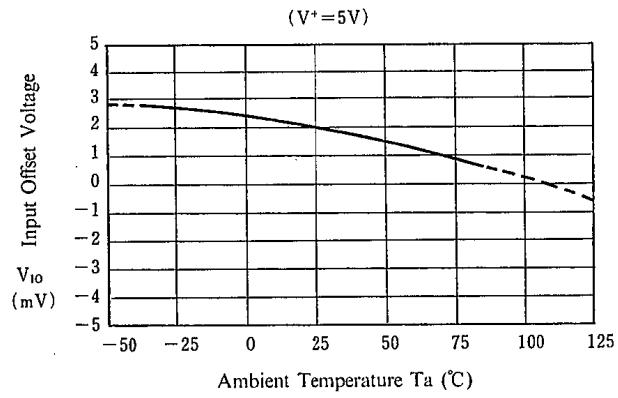

**Maximum Output Voltage  
vs. Operating Voltage**


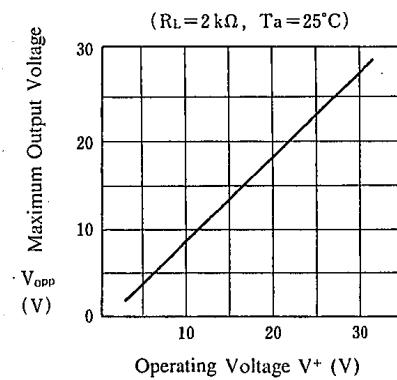


■ TYPICAL CHARACTERISTICS

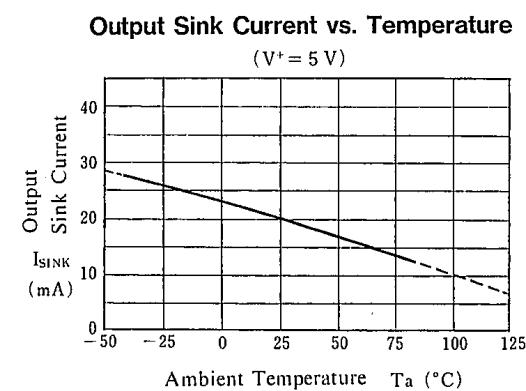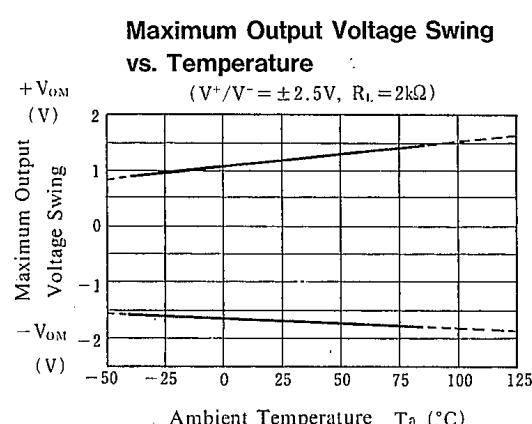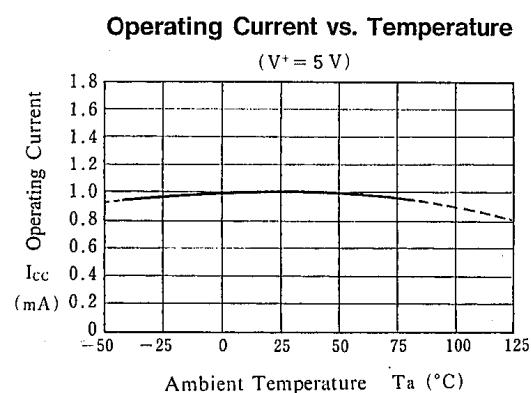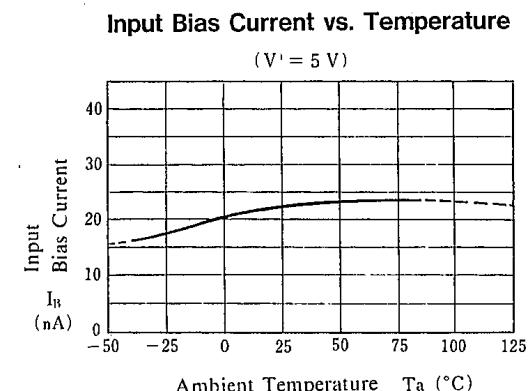
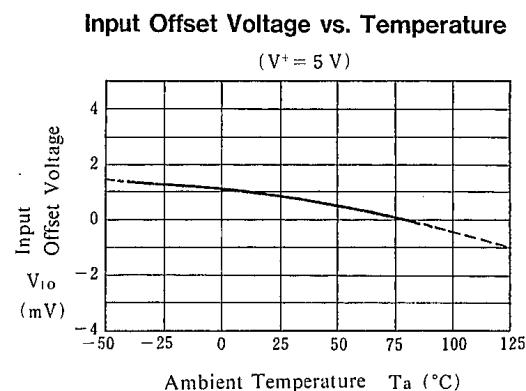


4

## ■ TYPICAL CHARACTERISTICS

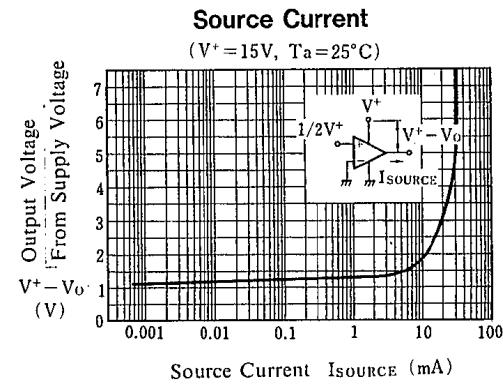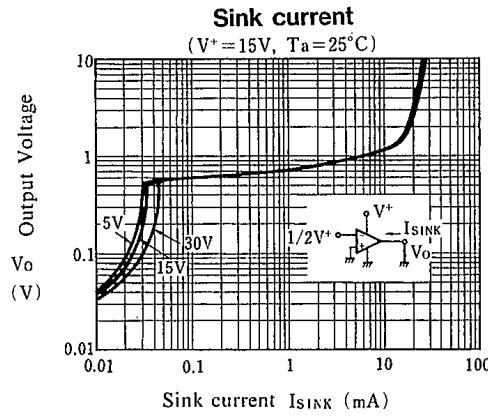


4

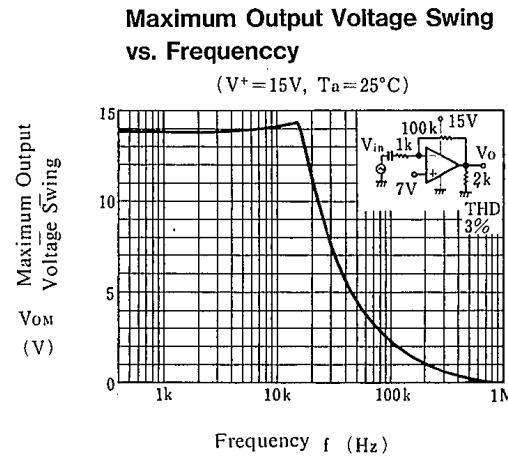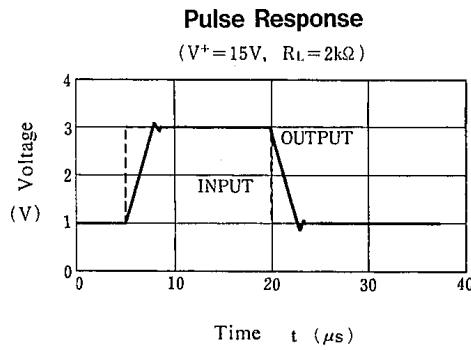

## ■ APPLICATION

Improvement of Cross-over Distortion  
Equivalent circuit at the output stage





NJM2902, in its static state (No in and output condition) when design, Q<sub>U</sub> being biassed by constant current (breakdown beam) yet, Q<sub>L</sub> stays OFF.

While using with both power source mode, the cross-over distortion might occur instantly when Q<sub>L</sub> ON.

There might be cases when application for amplifier of audio signals, not only distortion but also the apparent frequency bandwidth being narrowed remarkably.

It is advisable especially when using both power source mode, constantly to use with higher current on Q<sub>U</sub> than the load current (including feedback current), and then connect the pull-down resistor R<sub>P</sub> at the part between output and GND pins.

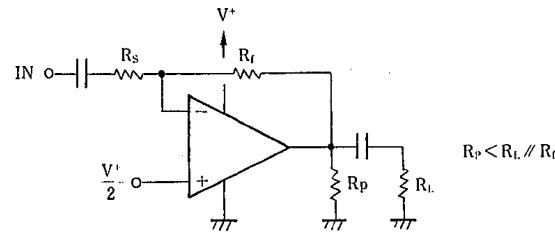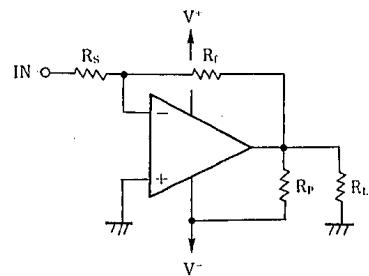

**4**

# NJM2902

---

## MEMO

[CAUTION]  
The specifications on this databook are only given for information , without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

---

*New Japan Radio Co., Ltd.*

---