
# Dual Bus Driver/Receiver with 4-to-1 Output Multiplexers

The MC10H332 is a Dual Bus Driver/Receiver with four-to-one output multiplexers. The<u>se</u> multiplexers have common selects and output enable. When disabled, (OE = high) the bus outputs go to -2.0 V. The parameters specified are with 25  $\Omega$  loading on the bus drivers and 50  $\Omega$  loads on the receivers.

- Propagation Delay, 1.5 ns Typical Data-to-Output
- Improved Noise Margin 150 mV (Over Operating Voltage and Temperature Range)
- Voltage Compensated
- MECL 10K–Compatible

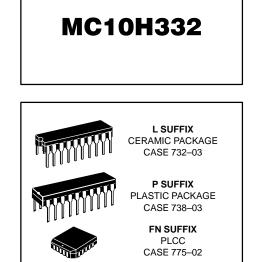

## MAXIMUM RATINGS

Characteristic	Symbol	Rating	Unit
Power Supply ( $V_{CC} = 0$ )	VEE	-8.0 to 0	Vdc
Input Voltage (V <sub>CC</sub> = 0)	VI	0 to V <sub>EE</sub>	Vdc
Output Current — Continuous — Surge	lout	50 100	mA
Operating Temperature Range	Т <sub>А</sub>	0 to +75	°C
Storage Temperature Range — Plastic — Ceramic	T <sub>stg</sub>	–55 to +150 –55 to +165	°C ℃

## ELECTRICAL CHARACTERISTICS (VFF = -5.2 V ±5%) (See Note)

		<b>0</b> °		25°		75°		
Characteristic	Symbol	Min	Max	Min	Мах	Min	Max	Unit
Power Supply Current	١E		115		110		115	mA
Input Current High Pins 3,4,5,6,14,	linH		0.07					μA
15,16,17 Pins 7,8 Pins 13, 18			667 437 456		417 273 285		417 273 285	
Input Current Low	l <sub>inL</sub>	0.5	-	0.5	—	0.3	—	μΑ
High Output Voltage	Vон	-1.02	-0.84	-0.98	-0.81	-0.92	-0.735	Vdc
Low Output Voltage	VOL	-1.95	-1.63	-1.95	-1.63	-1.95	-1.60	Vdc
High Input Voltage	VIH	-1.17	-0.84	-1.13	-0.81	-1.07	-0.735	Vdc
Low Input Voltage	VIL	-1.95	-1.48	-1.95	-1.48	-1.95	-1.45	Vdc

### **AC PARAMETERS**

Propagation Delay	t <sub>pd</sub>							ns
Data-to-Bus Output		0.8	3.0	0.8	3.0	0.8	3.2	
Select-to-Bus								
_Output		0.8	3.4	0.8	3.4	0.8	3.8	
OE-to-Bus Output		0.8	2.4	0.8	2.4	0.8	2.6	
Bus-to-Receiver		0.8	2.1	0.8	2.1	0.8	2.4	
Select-to-Receiver		1.8	4.5	1.8	4.5	1.8	5.0	
RE-to-Receiver		0.8	2.2	0.8	2.2	0.8	2.5	
Data-to-Receiver		1.3	4.0	1.3	4.0	1.3	4.5	
Rise Time	tr	0.5	2.0	0.5	2.0	0.5	2.1	ns
Fall Time	t <sub>f</sub>	0.5	2.0	0.5	2.0	0.5	2.1	ns

3/93


© Motorola, Inc. 1996

Downloaded from Elcodis.com electronic components distributor

## REV 5





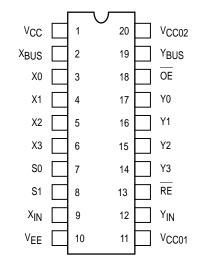

Pin assignment is for Dual–in–Line Package. For PLCC pin assignment, see the Pin Conversion Tables on page 6–11 of the Motorola MECL Data Book (DL122/D).

#### NOTE:

Each MECL 10H series circuit has been designed to meet the dc specifications shown in the test table, after thermal equilibrium has been established. The circuit is in a test socket or mounted on a printed circuit board and transverse air flow greater than 500 lfpm is maintained. Receiver outputs are terminated through a 50–ohm resistor to -2.0 volts dc. Bus outputs are terminated through a 25–ohm resistor to -2.0 volts dc.


OE **S**1 S0 X<sub>Bus</sub> Y<sub>Bus</sub> Н Х Х –2.0V -2.0V L L L X0 Y0 Y1 L L Н X1 L X2 Y2 Н L Н Н Х3 Y3 L

**MULTIPLEXER TRUTH TABLE** 


## RECEIVER TRUTH TABLE

RE	X <sub>in</sub>	Yin		
Н	L	L		
L	X <sub>Bus</sub>	YBus		


LOGIC DIAGRAM

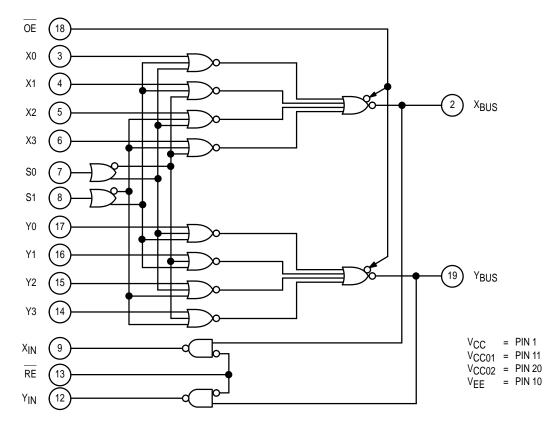

## **OUTLINE DIMENSIONS**

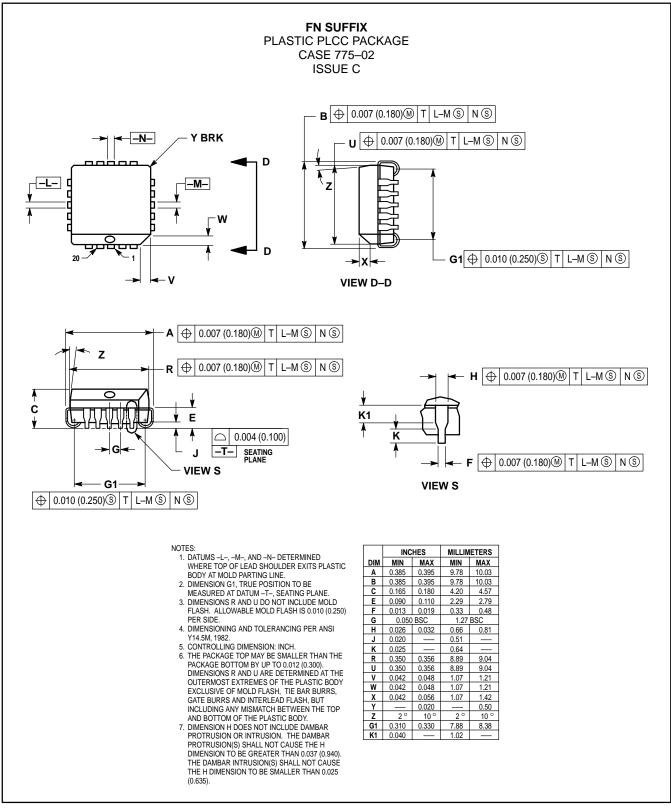

# **OUTLINE DIMENSIONS**

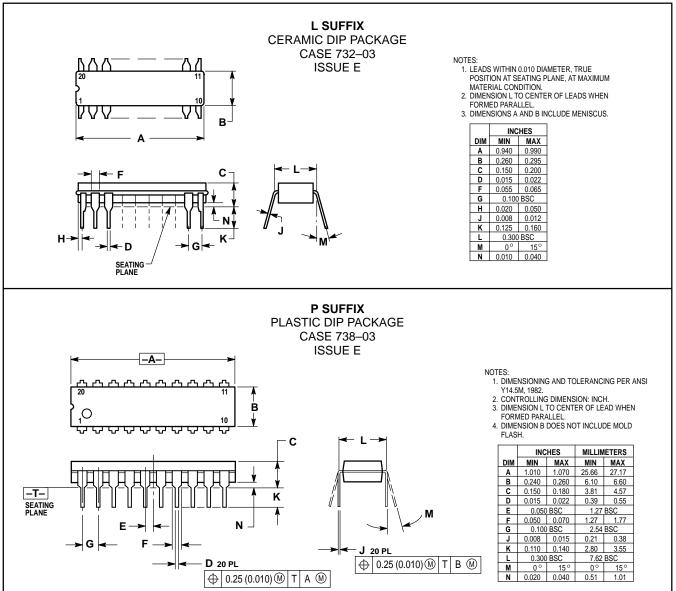

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters which may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and **()** are registered trademarks of Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

#### How to reach us:

USA/EUROPE/Locations Not Listed: Motorola Literature Distribution; P.O. Box 5405; Denver, Colorado 80217. 1–800–441–2447

MFAX: RMFAX0@email.sps.mot.com - TOUCHTONE 602-244-6609 INTERNET: http://Design-NET.com

 $\Diamond$ 

JAPAN: Nippon Motorola Ltd.; Tatsumi–SPD–JLDC, 6F Seibu–Butsuryu–Center, 3–14–2 Tatsumi Koto–Ku, Tokyo 135, Japan. 81–3–3521–8315

ASIA/PACIFIC: Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park, 51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852–26629298

