


DESCRIPTION: FEMALE - HIGH DENSITY - MACHINED CONTACTS - VERTICAL

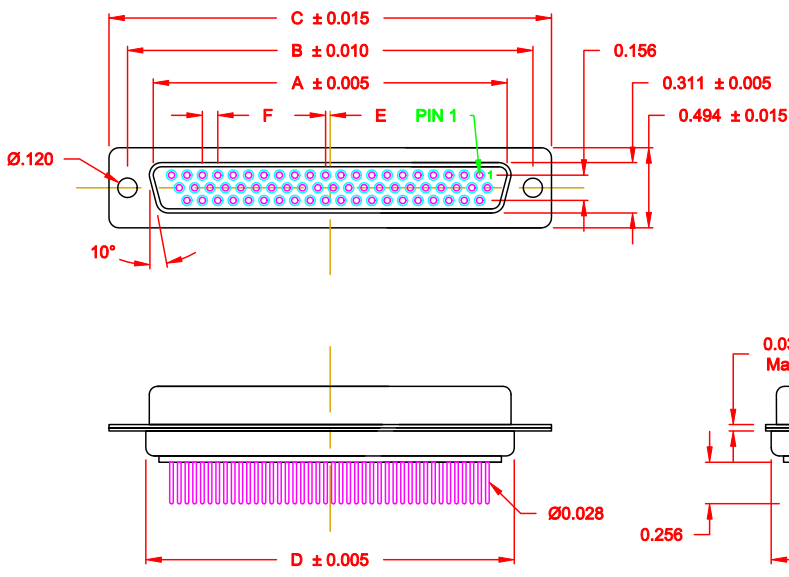


MATERIALS AND FINISH:

SHELL: STEEL MATERIAL, NICKEL FINISH
 INSULATOR: PA6T = 260°C, UL 94V-0 RATED, BLACK
 CONTACT MATERIAL: BRASS
 CONTACT FINISH: FULL GOLD FLASH
 SEAL MATERIAL: F04 FLEXIBLE ADHESIVE

ELECTRICAL:

CONTACT CURRENT RATING: 5 AMPS
 CONTACT RESISTANCE: 30 MILLIOHMS Max.
 DIELECTRIC WITHSTANDING VOLTAGE: 1,00VAC Min.
 INSULATION RESISTANCE: 5,000 MegOHMS Min.
 TEMPERATURE RATING: -55° ~ +105° C

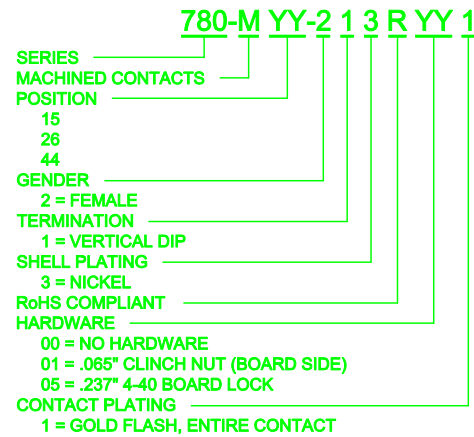


MEETS IP67 STANDARDS

| DIMENSIONS (IN.) | | | | | | |
|------------------|-------|-------|-------|-------|-------|-------|
| No. OF PINS | A | B | C | D | E | F |
| 15 | 0.643 | 0.984 | 1.213 | 0.759 | 0.010 | 0.090 |
| 26 | 0.971 | 1.312 | 1.541 | 1.083 | 0.020 | 0.090 |
| 44 | 1.511 | 1.852 | 2.088 | 1.625 | 0.020 | 0.090 |

DO NOT SCALE FROM DRAWING




RoHS COMPLIANT

| | | |
|--|---------------------------------------|-------------------------|
|  <p>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.</p> | DRAWN: P. JENKINS CHECKED: | DATE: 03-16-07 DATE: |
| | SCALE: 1:1 DWG NO. 780-MYY-213RYY1 | SHEET 1 OF 5 |

NorComp

780-MYY-213RYY1


DESCRIPTION: HIGH DENSITY - MACHINED CONTACTS - VERTICAL

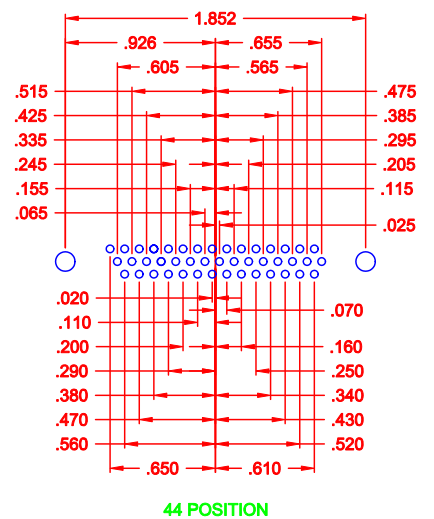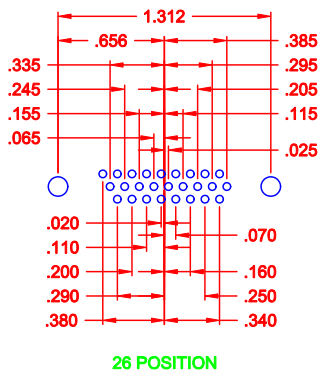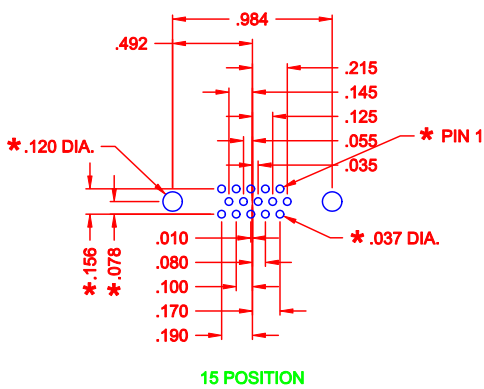



* TYP. ON ALL SIZES

DO NOT SCALE FROM DRAWING

RoHS COMPLIANT

| | | | | |
|---|---|--|-----------------------------|--------------------------|
|  | THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION. | | DRAWN: P. JENKINS | DATE: 06-24-09 |
| | <h1>NorComp</h1> | | | CHECKED: |
| SCALE: 1 : 1 | | | | SHEET 2 |
| DWG NO. 780-MYY-213RYY1 | | | | |


DESCRIPTION: IP67 - FEMALE - HIGH DENSITY - DIP SOLDER - MACHINED - SEALING PROCESS

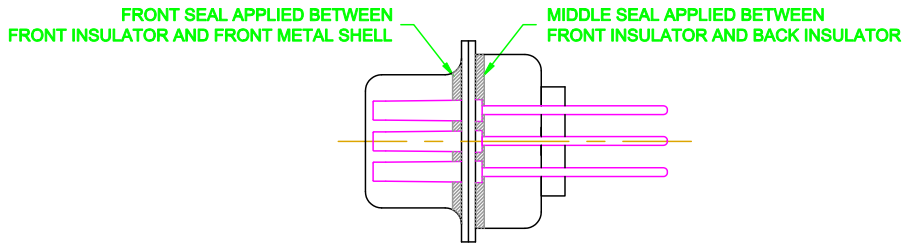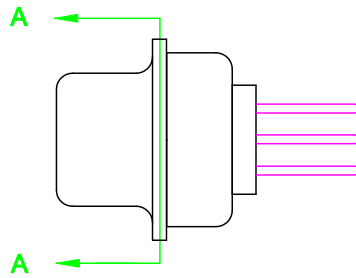

DETAIL A-A

DO NOT SCALE FROM DRAWING


RoHS COMPLIANT

| | | | |
|---|---|-----------------|----------------|
|  | THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION. | DRAWN: C. SMITH | DATE: 03-26-09 |
| | | CHECKED: | DATE: |
| NorComp | SCALE: 2.5 : 1 | SHEET 3 OF 5 | REV 2 |
| | DWG NO. 780-MYY-213RYY1 | | |


DESCRIPTION: IP67 - FEMALE - HIGH DENSITY - DIP SOLDER - MACHINED - HARDWARE

HARDWARE OPTIONS

01X 0.065" (BOARD SIDE) - CN1




05X 0.237" (BOARD SIDE) - CN10

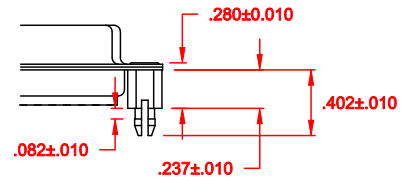


DO NOT SCALE FROM DRAWING

RoHS COMPLIANT


| | | | | | |
|---|---|----------------------------|--------------|-----------------------|--|
|  | THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION. | DRAWN: M. SIGMON | | DATE: 01-21-11 | |
| | | CHECKED: | | DATE: | |
| NorComp | SCALE: N.T.S. | SHEET 4 OF 5 | REV 2 | | |
| | DWG NO. 780-MYY-213RYY1 | | | | |

DESCRIPTION: IP67 - FEMALE - HIGH DENSITY - DIP SOLDER - MACHINED - PANEL CUTOUT


PANEL THICKNESS = .050 MAX

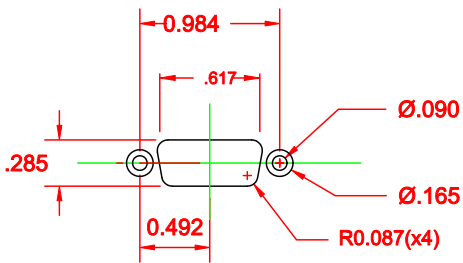

15 POSITION

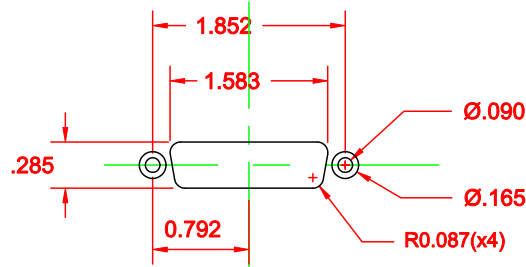


44 POSITION

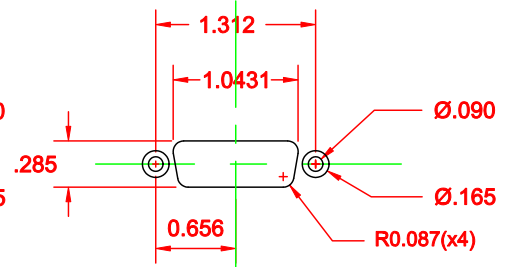

26 POSITION

DO NOT SCALE FROM DRAWING

RoHS COMPLIANT

| | | | | |
|---|---|--------------------------------|----------------------------|-----------------------|
|  | THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION. | | DRAWN: M. SIGMON | DATE: 01-21-11 |
| | | | | CHECKED: |
| NorComp | | SCALE: N.T.S. | SHEET 5 OF 5 | REV 2 |
| | | DWG NO. 780-MYY-213RYY1 | | |