


**STEREO CASSETTE PLAYER AND
MOTOR SPEED CONTROLLER**

- WIDE OPERATING SUPPLY VOLTAGE (1.8V to 6V)
- HIGH OUTPUT POWER (30mW/32Ω/3V)
- LOW DISTORTION DC VOLUME CONTROL
- NO BOUCHEROT CELL
- LOW QUIESCENT CURRENT (15mA)
- NO INPUT CAPACITORS FOR PREAMPLIFIERS
- LOW MOTOR REFERENCE VOLTAGE (200mV)

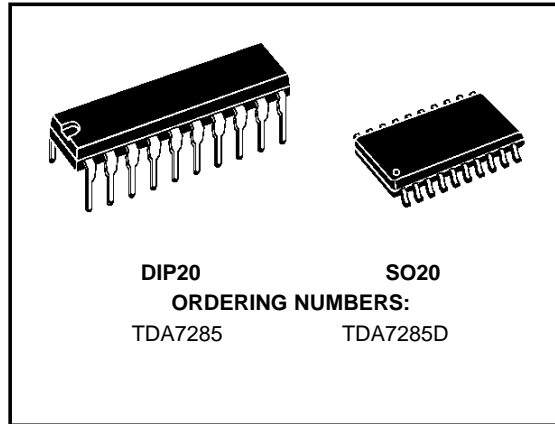


DESCRIPTION

The TDA7285 is a monolithic integrated circuit designed for the portable players market and assembled in a plastic DIP20 and SO20. The internal functions are: preamplifier, DC volume control, headphone driver and motor speed controller.


ontrol, headphone driver and motor speed controller.

BLOCK DIAGRAM

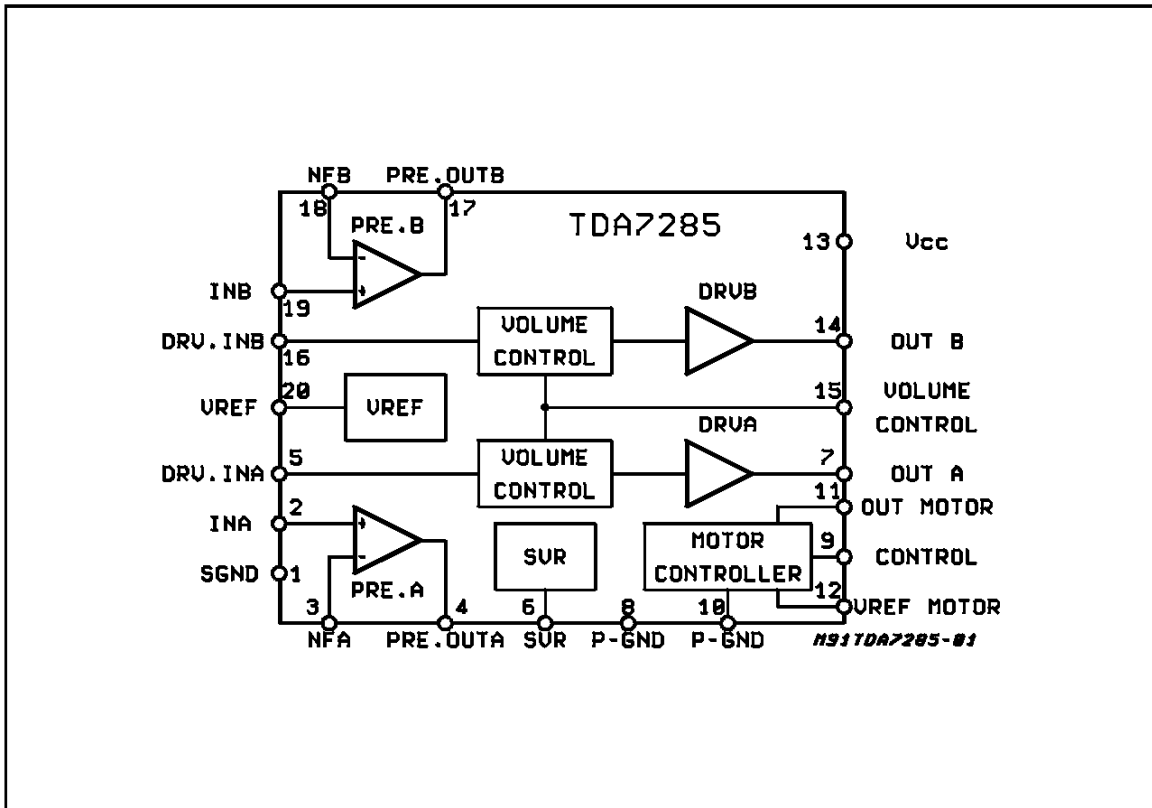

TDA7285

PIN CONNECTION (Top view)

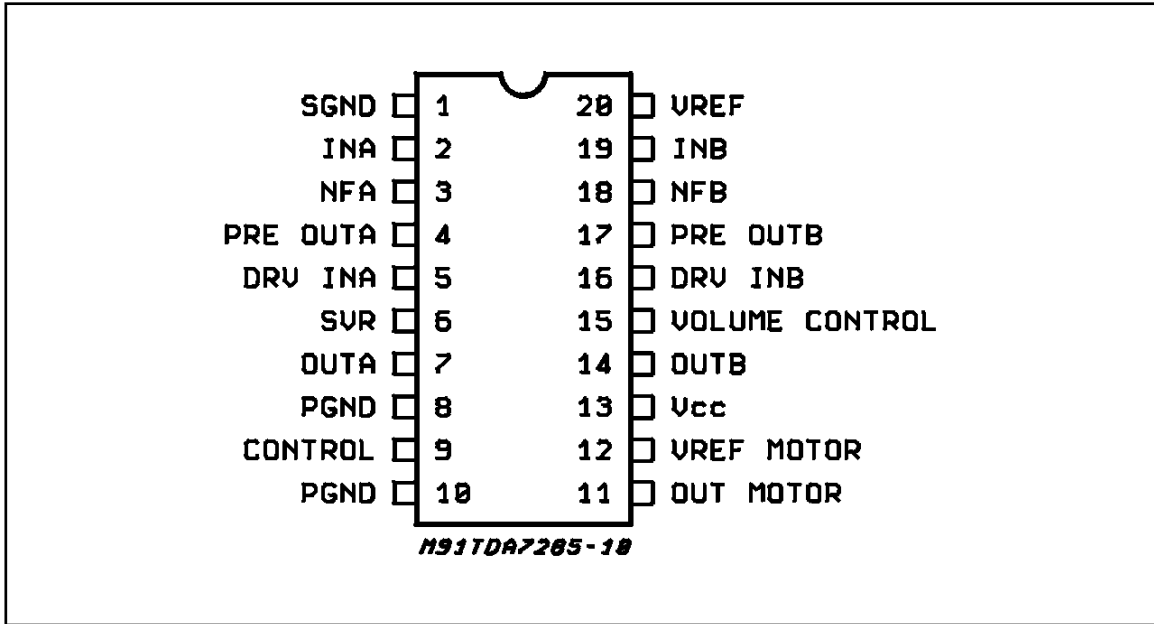

ABSOLUTE MAXIMUM RATINGS

| Symbol | Parameter | Value | Unit |
|----------------|--|------------|------------------|
| V_S | Supply Voltage | 8 | V |
| I_{Omax} | Maximum Output Current | 70 | mA |
| $I_{m\ max}$ | Maximum Motor Current | 700 | mA |
| P_{tot} | Total Power Dissipation $T_{amb} = 90^\circ\text{C}$ | 0.9 | W |
| T_{op} | Operating Temperature | -20 to +70 | $^\circ\text{C}$ |
| T_{stg}, T_j | Storage and Junction Temperature | -40 to 150 | $^\circ\text{C}$ |

THERMAL DATA

| Symbol | Description | SO20 | DIP20 | Unit |
|-----------------|-------------------------------------|------|-------|--------------------|
| $R_{th\ j-amb}$ | Thermal Resistance Junction-ambient | 150 | 100 | $^\circ\text{C/W}$ |

DC CHARACTERISTICS ($T_{amb} = 25^\circ\text{C}$; $V_S = 3\text{V}$; $R_L = 32\Omega$ (Headphone) and $R_L = 10\text{K}\Omega$ (Preamplifier); $V_i = 0$; VOL. Control = V_{ref}).

| Terminal No | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 |
|-----------------|---|-----|-----|-----|-----|-----|-----|---|-----|----|-----|----|----|-----|-----|-----|-----|-----|-----|-----|
| Term. Volt. (V) | 0 | 1.5 | 1.5 | 1.5 | 1.5 | 2.7 | 1.4 | 0 | 2.8 | 0 | 1.6 | 3 | 3 | 1.4 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 |

ELECTRICAL CHARACTERISTICS ($V_S = 3V$; $R_L = 32\Omega$, Vol. Control = $2/3 V_{ref}$ (pin 20); $T_{amb} = 25^\circ C$; $f = 1KHz$; unless otherwise specified)

| Symbol | Parameter | Test Condition | Min. | Typ. | Max. | Unit |
|--------|-------------------------------|----------------|------|------|------|------|
| V_S | Supply Range | | 1.8 | | 6 | V |
| I_d | Total Quiescent Drain Current | | | 15 | 22 | mA |

PLAYBACK AMPLIFIER

| | | | | | | |
|----------|---------------------------|--|-----|------|------|---------|
| G_{vo} | Open Loop Gain | | | 70 | | dB |
| G_v | Close Loop Gain | | | 33 | | dB |
| V_O | Output Voltage | THD = 1% | 600 | 750 | | mV |
| THD | Total Harmonic Distortion | $V_O = 330mV_{rms}$ | | 0.05 | 0.25 | % |
| I_b | Bias Current | | | 3 | | μA |
| C_t | Cross Talk | $R_S = 2.2K\Omega$; $V_O = 330mV_{rms}$ | | 74 | | dB |
| e_n | Total Input Noise | $R_S = 2.2K\Omega$; B = 22Hz to 22KHz | | 1.2 | | μV |
| SVR1 | Ripple Rejection | $R_S = 2.2K\Omega$; $V_r = 100mV_{rms}$ $f = 100Hz$; $C_{SVR} = 100\mu F$ | | 50 | | dB |

HEADPHONE DRIVER

| | | | | | | |
|----------|---------------------------|---|----|-----|---|----|
| V_{DC} | Output DC Voltage | | | 1.4 | | V |
| P_O | Output Power | THD = 10% | 20 | 30 | | mW |
| P_{O1} | Transient Output Power | THD = 10% $R_L = 16\Omega$ | | 50 | | mW |
| G_v | Close Loop Gain | $P_O = 5mW$ | | 31 | | dB |
| | Volume Control range | | 66 | 75 | | dB |
| THD | Total Harmonic Distortion | $P_O = 5mW$ | | 0.3 | 1 | % |
| C_t | Cross Talk | $P_O = 5mW$; $R_S = 10K\Omega$ | | 50 | | dB |
| SVR2 | Ripple Rejection | $R_S = 600\Omega$; $V_r = 100mV$ $f = 100Hz$; $C_{SVR} = 100\mu F$ | | 47 | | dB |

MOTOR SPEED CONTROL

| | | | | | | |
|---|--|---|------|-------|------|------|
| V_{ref} | Motor Reference Voltage (pin 12) | | 0.18 | 0.20 | 0.22 | V |
| K | Shunt Ratio | $I_m = 100mA$ | 45 | 50 | 55 | - |
| V_{sat} | Residual Voltage | $I_m = 100mA$ | | 0.13 | 0.30 | V |
| $\frac{\Delta V_{ref}}{V_{ref}} / \Delta V_S$ | Line Regulation | $I_m = 100mA$; $V_S = 1.8$ to $6V$ | | 0.20 | 0.8 | %/V |
| $\frac{\Delta K}{K} / \Delta V_S$ | Voltage Characteristics of Shunt Ratio | $I_m = 100mA$; $V_S = 1.8$ to $6V$ | | 0.80 | 3 | %/V |
| $\frac{\Delta V_{ref}}{V_{ref}} / \Delta I_m$ | Load Regulation | $I_m = 30$ to $200mA$ | | 0.015 | 0.08 | %/mA |
| $\frac{\Delta R}{K} / \Delta I_m$ | Current Characteristics of Shunt Ratio | $I_m = 30$ to $200mA$ | | 0.03 | 0.1 | %/mA |
| $\frac{\Delta V_{ref}}{V_{ref}} / \Delta T_{amb}$ | Temperature Characteristics of Reference Voltage | $I_m = 100mA$ $T_{amb} = -20$ to $+60^\circ C$ | | 0.04 | | %/°C |
| $\frac{\Delta K}{K} / \Delta T_{amb}$ | Temperature Characteristics of Shunt Ratio | $I_m = 100mA$ $T_{amb} = -20$ to $+60^\circ C$ | | 0.02 | | %/°C |

TDA7285

Figure 1: Test and Application Circuit

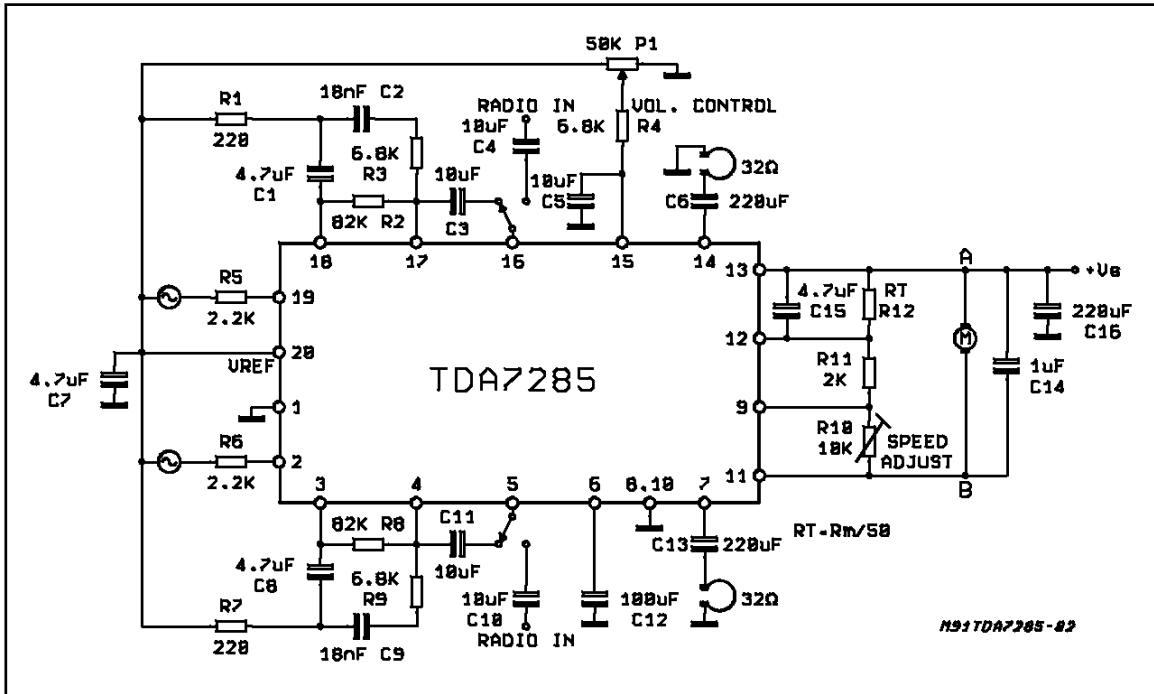


Figure 2: P.C. Board and Component Layout of the Circuit of Figure 2 (1:1 scale)

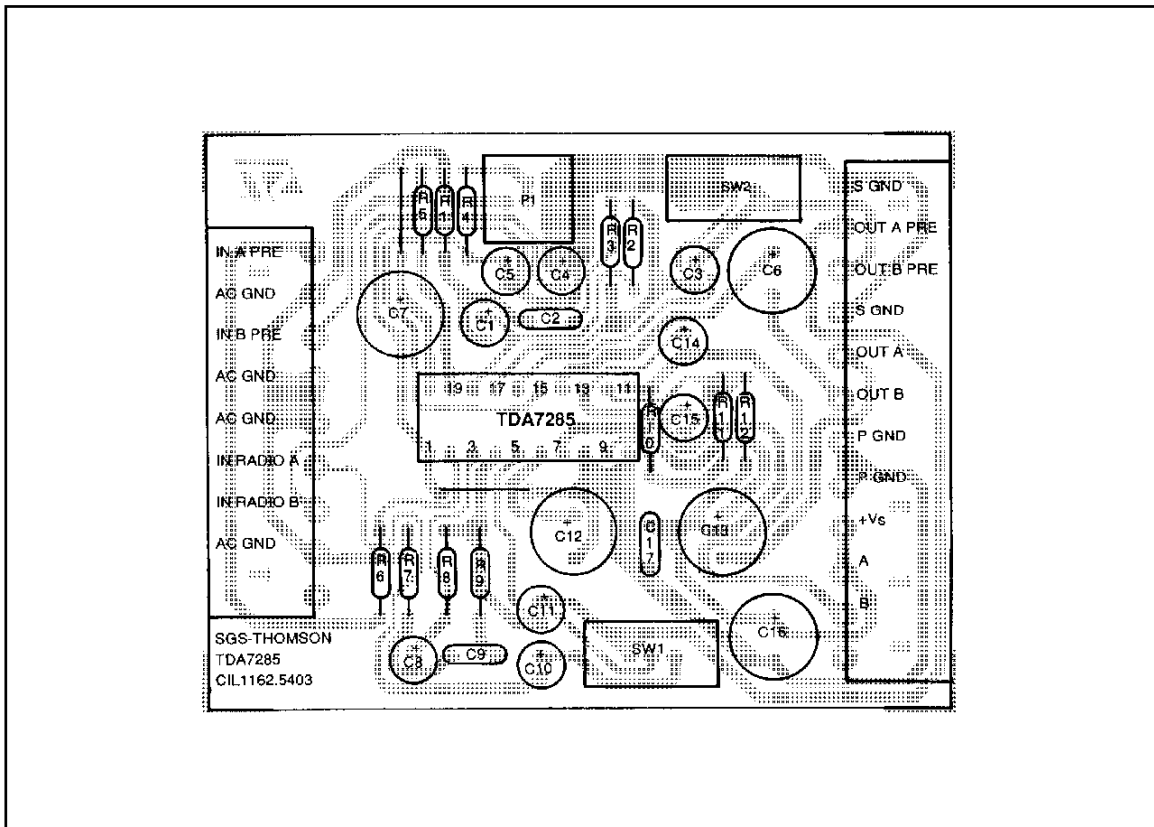


Figure 3: Quiescent Drain Current vs. Supply Voltage

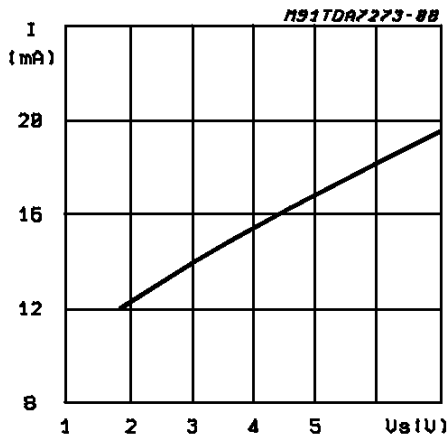


Figure 4: Reference voltage $V_s/2$ (pin 20) vs. Supply Voltage

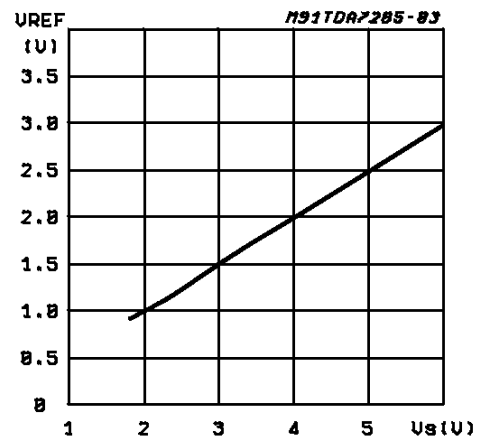


Figure 5: Closed Loop Gain vs. Frequency (PREAMPLIFIER)

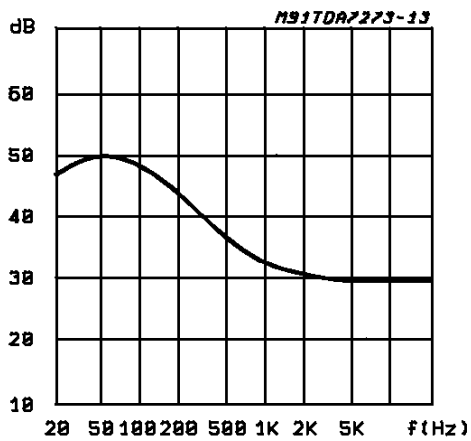


Figure 6: Distortion vs. Frequency (PREAMPLIFIER)

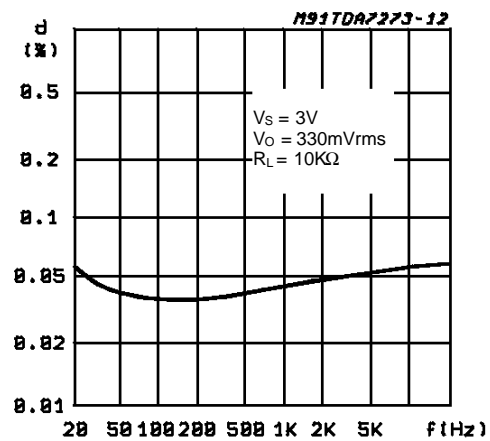


Figure 7: Supply Voltage Rejection vs. Frequency (PREAMPLIFIER)

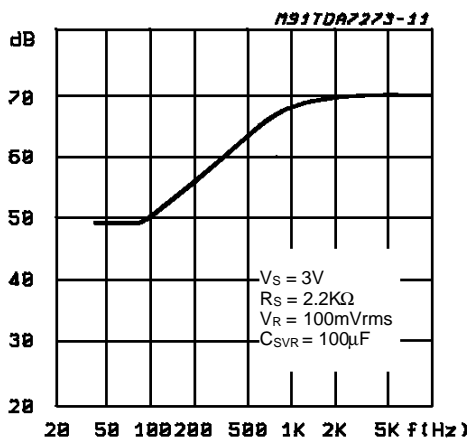


Figure 8: Quiescent Output Voltage vs. Supply Voltage (DRIVER)

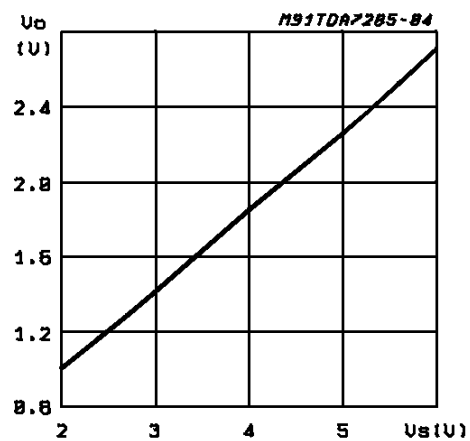


Figure 9: Closed Loop Gain vs. Frequency (DRIVER)

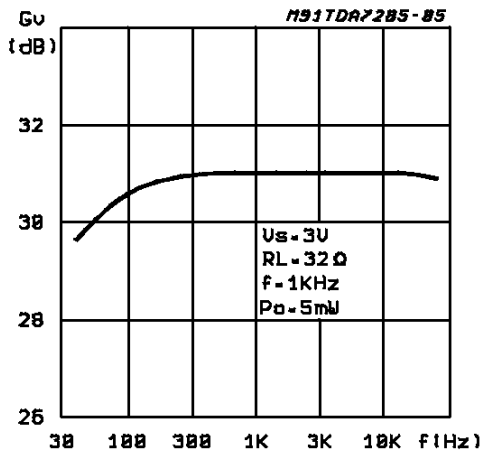


Figure 10: Output Power vs. Supply Voltage (DRIVER)

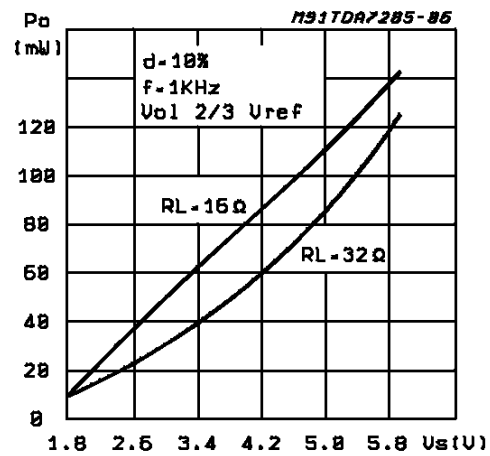


Figure 11: Distortion vs. Output Power (DRIVER)

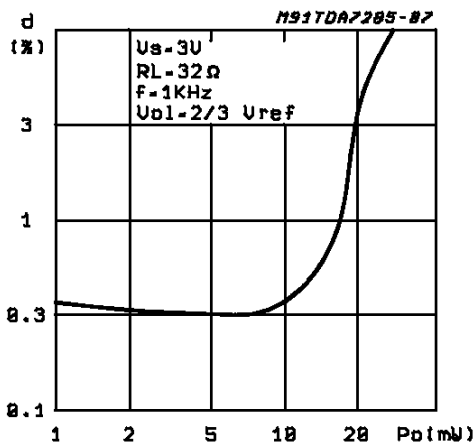


Figure 12: Distortion vs. Frequency (DRIVER)

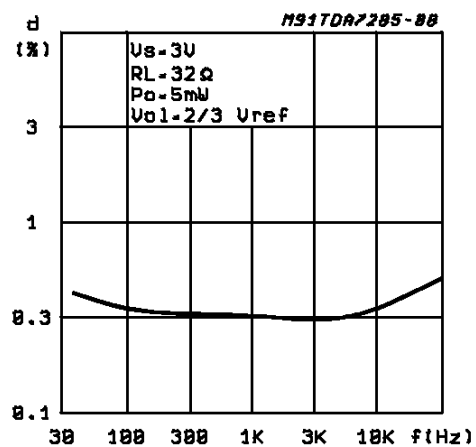


Figure 13: Supply Voltage Rejection vs. Frequency (DRIVER)

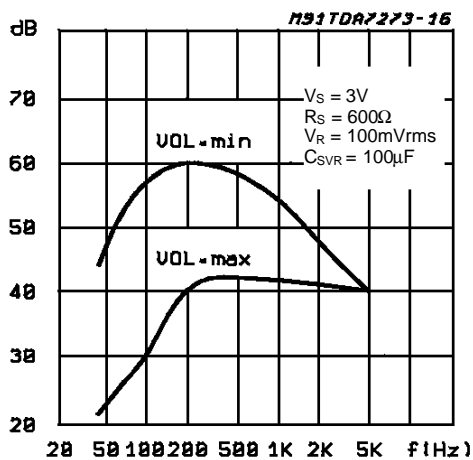


Figure 14: Volume Control (0dB = 10mW; VS = 3V; RVOL = 50KΩ; RL = 32Ω; f = 1KHz) (DRIVER)

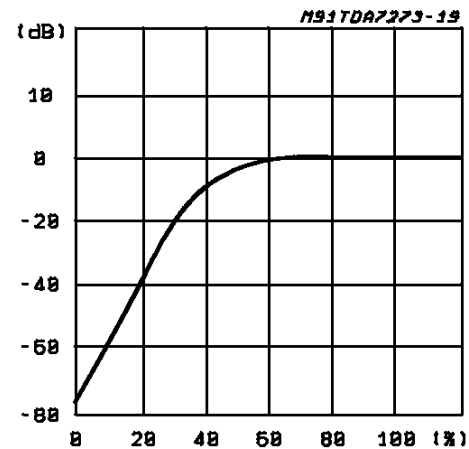


Figure 15: Reference Voltage (Pin 12) vs. Supply Voltage (MOTOR)

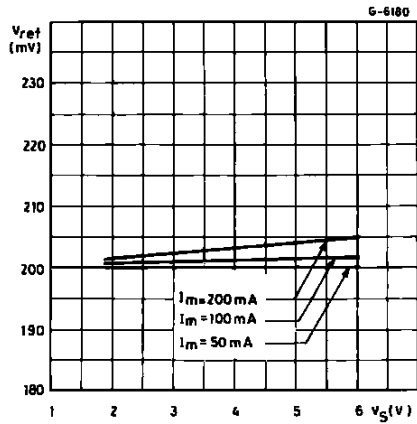


Figure 16: Shunt Ratio vs. Supply Voltage (MOTOR)

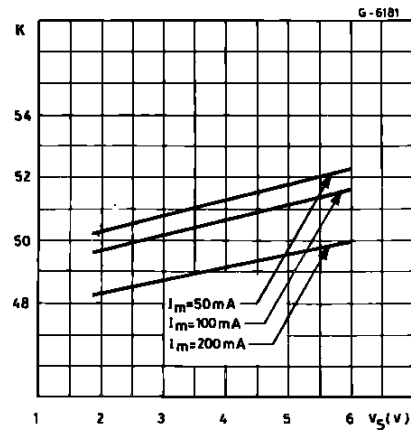


Figure 17: Shunt Ratio vs. Load Current (MOTOR)

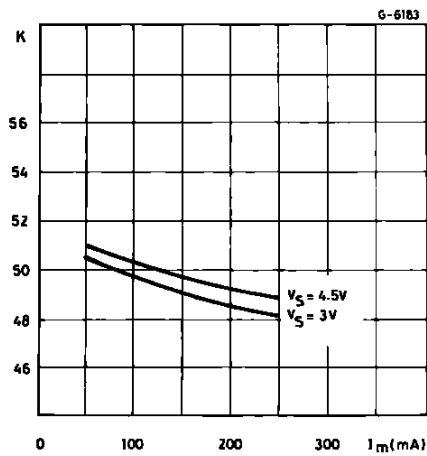


Figure 18: Saturation Voltage vs. Load Current (MOTOR)

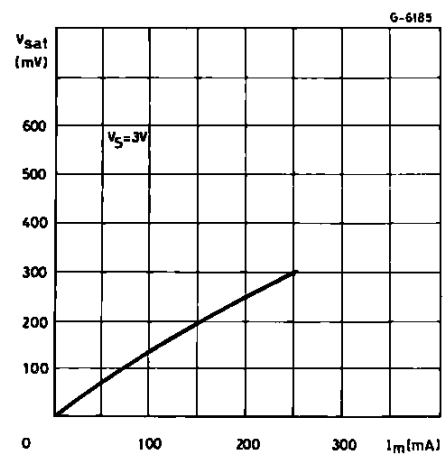


Figure 19: Speed Variations vs. Supply Voltage (MOTOR)



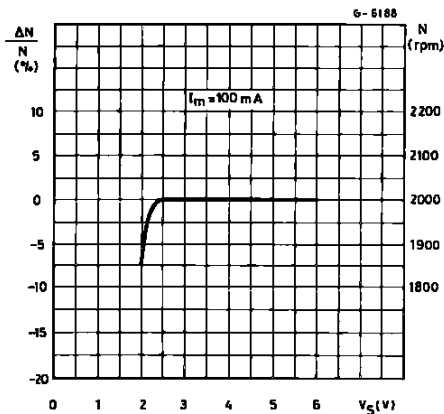


Figure 20: Speed Variations vs. Motor Current (MOTOR)

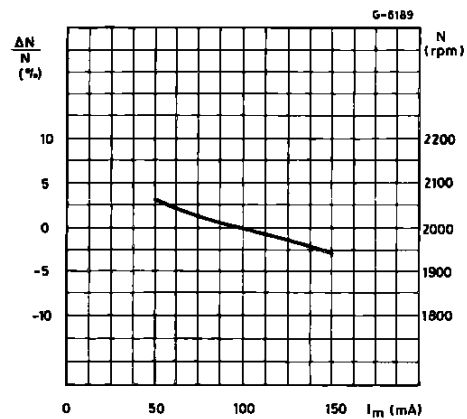

APPLICATION INFORMATION

Figure 21.

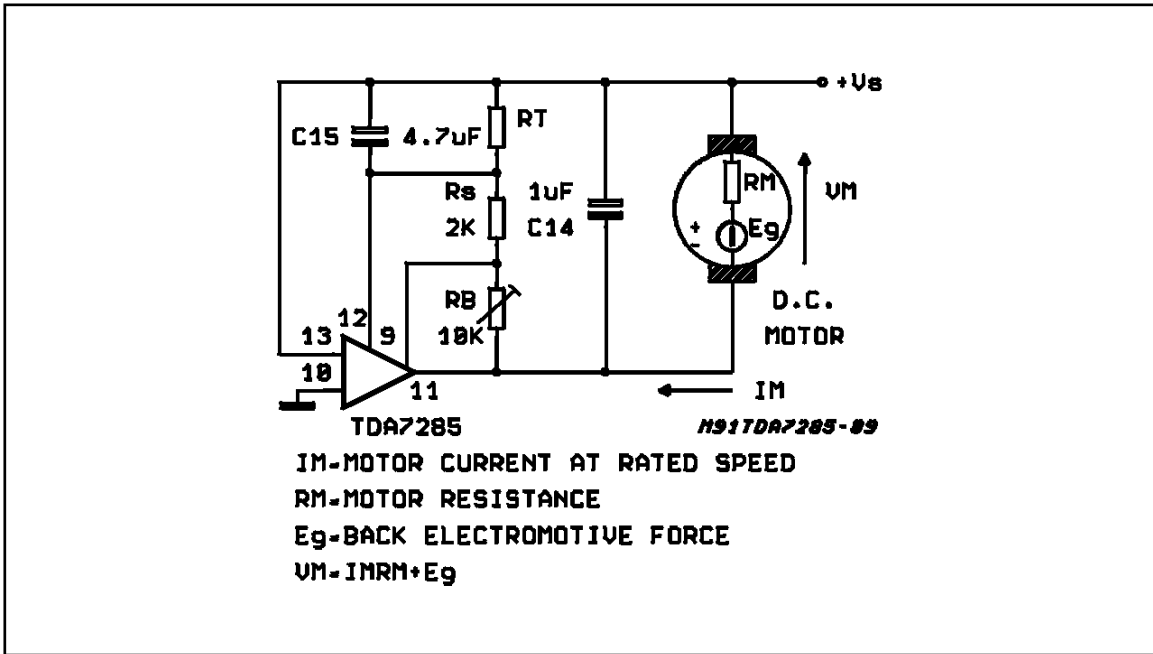


$$E_g = R_T I_d + I_M \left(\frac{R_T}{K} - R_M \right) + V_{ref} \left[1 + \frac{R_b}{R_s} + \frac{R_T}{R_s} \left(1 + \frac{1}{K} \right) \right]$$

R_s has to be adjusted so that the applied voltage V_M is suitable for a given motor, the speed is then linearly adjustable varying R_b .

The value R_T is calculated so that $R_{T(max.)} > K_{(min.)} * R_{M(min.)}$
 if $R_{T(max.)} > K * R_M$, instability may occur.
 The values of C_{15} ($4.7\mu F$ typ.) and C_{14} ($1\mu F$ typ.) depend on the type of motor used. C_{15} adjusts WOW and flutter of the system. C_{14} suppresses motor spikes.

SO20 PACKAGE MECHANICAL DATA


| DIM. | mm | | | inch | | |
|------|-----------|-------|-------|-------|-------|-------|
| | MIN. | TYP. | MAX. | MIN. | TYP. | MAX. |
| A | | | 2.65 | | | 0.104 |
| a1 | 0.1 | | 0.3 | 0.004 | | 0.012 |
| a2 | | | 2.45 | | | 0.096 |
| b | 0.35 | | 0.49 | 0.014 | | 0.019 |
| b1 | 0.23 | | 0.32 | 0.009 | | 0.013 |
| C | | 0.5 | | | 0.020 | |
| c1 | 45 (typ.) | | | | | |
| D | 12.6 | | 13.0 | 0.496 | | 0.512 |
| E | 10 | | 10.65 | 0.394 | | 0.419 |
| e | | 1.27 | | | 0.050 | |
| e3 | | 11.43 | | | 0.450 | |
| F | 7.4 | | 7.6 | 0.291 | | 0.299 |
| L | 0.5 | | 1.27 | 0.020 | | 0.050 |
| M | | | 0.75 | | | 0.030 |
| S | 8 (max.) | | | | | |

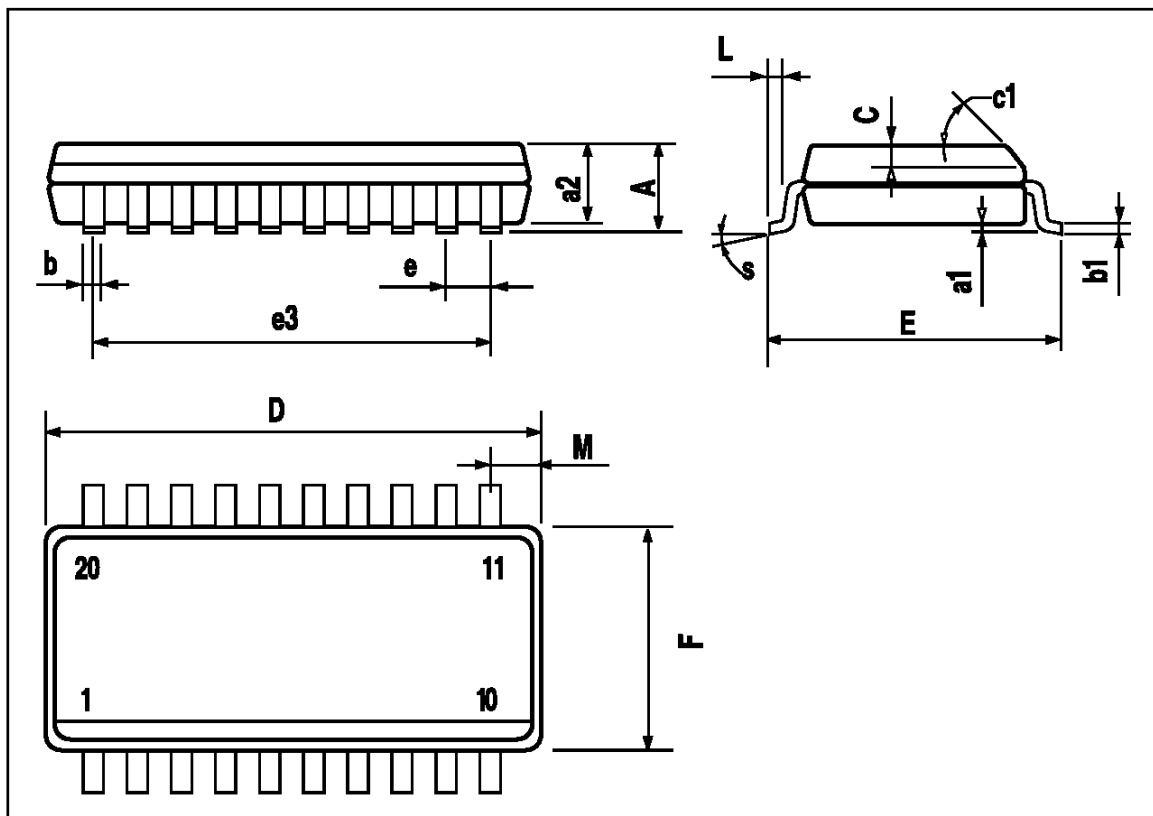

TDA7285

DIP20 PACKAGE MECHANICAL DATA

| DIM. | mm | | | inch | | |
|------|-------|-------|------|-------|-------|-------|
| | MIN. | TYP. | MAX. | MIN. | TYP. | MAX. |
| a1 | 0.254 | | | 0.010 | | |
| B | 1.39 | | 1.65 | 0.055 | | 0.065 |
| b | | 0.45 | | | 0.018 | |
| b1 | | 0.25 | | | 0.010 | |
| D | | | 25.4 | | | 1.000 |
| E | | 8.5 | | | 0.335 | |
| e | | 2.54 | | | 0.100 | |
| e3 | | 22.86 | | | 0.900 | |
| F | | | 7.1 | | | 0.280 |
| l | | | 3.93 | | | 0.155 |
| L | | 3.3 | | | 0.130 | |
| Z | | | 1.34 | | | 0.053 |

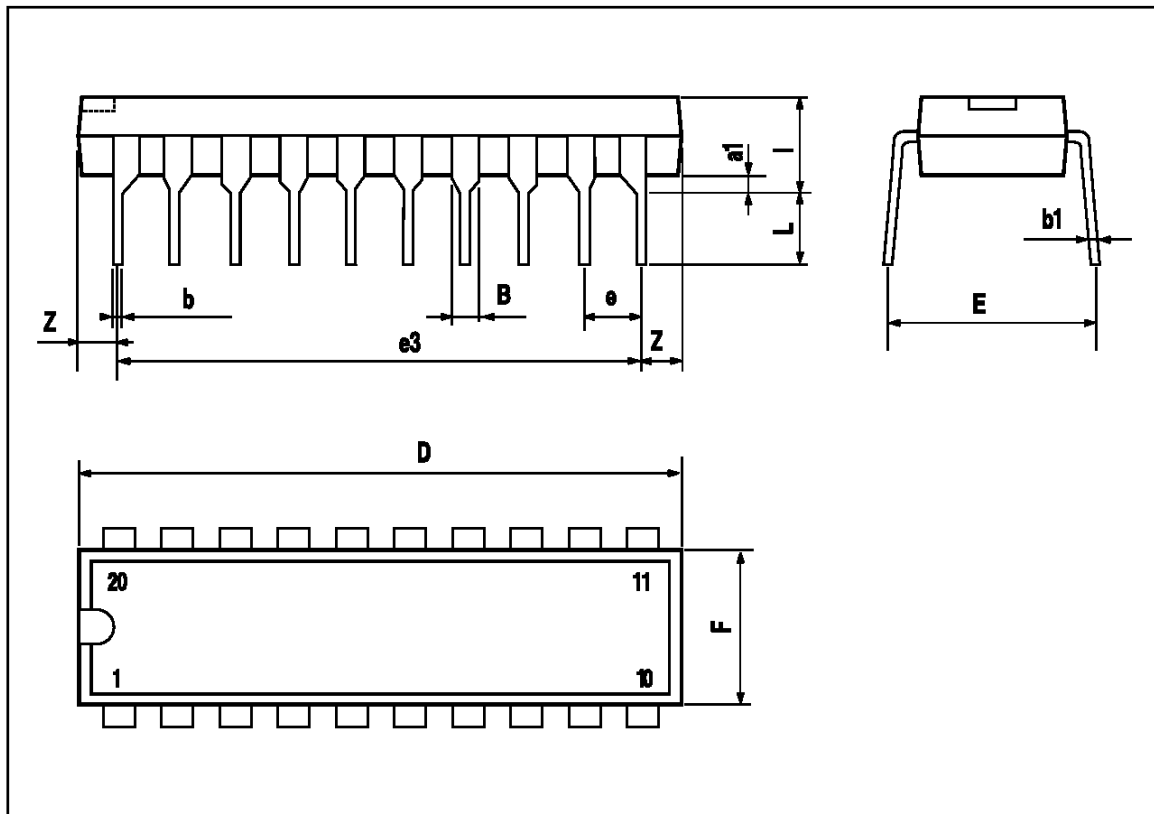

Information furnished is believed to be accurate and reliable. However, SGS-THOMSON Microelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of SGS-THOMSON Microelectronics. Specification mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. SGS-THOMSON Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of SGS-THOMSON Microelectronics.

© 1997 SGS-THOMSON Microelectronics – Printed in Italy – All Rights Reserved

SGS-THOMSON Microelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - France - Germany - Hong Kong - Italy - Japan - Korea - Malaysia - Malta - Morocco - The Netherlands - Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A.