



DESCRIPTION: **DIP SOLDER MALE/MACHINED-PREMIUM**

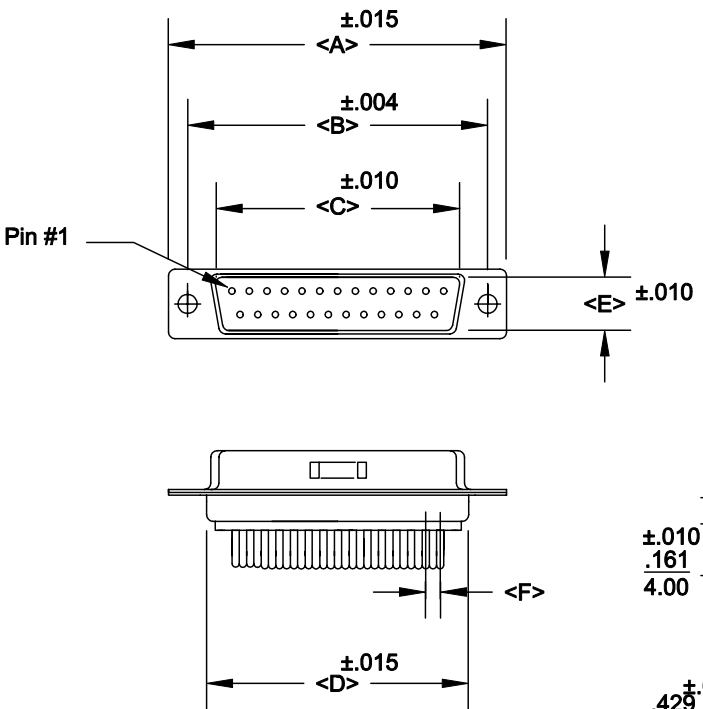

POS.	A	B	C	D	E	F	G
9	1.213	0.984	0.666	0.756	0.329	0.109	0.496
	30.80	24.99	16.92	19.20	8.36	2.77	12.60
15	1.543	1.312	0.994	1.091	0.329	0.109	0.496
	39.19	33.32	25.25	27.70	8.36	2.77	12.60
25	2.087	1.852	1.534	1.618	0.329	0.109	0.496
	53.00	47.04	38.96	41.10	8.36	2.77	12.60
37	2.732	2.500	2.181	2.256	0.329	0.109	0.496
	69.30	63.50	55.42	57.30	8.36	2.77	12.60
50	2.638	2.406	2.079	2.169	0.445	0.109	0.606
	67.00	61.00	52.80	55.10	11.30	2.77	15.39

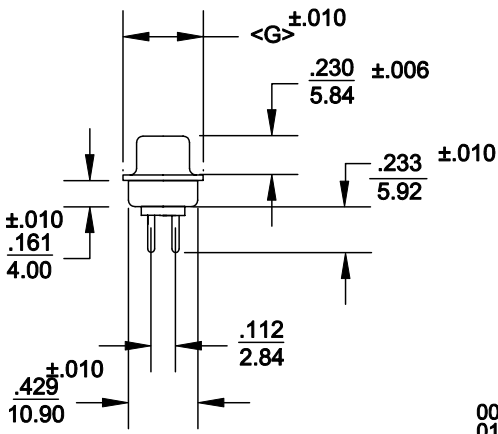

- 172-XXX-11X-XX1
- SERIES _____
 - POSITIONS _____
 - GENDER _____
 - TERMINATION _____
 - SHELL PLATING _____
 - HARDWARE OPTIONS _____
- 009
 - 015
 - 025
 - 037
 - 050
- 1 = MALE
 - 2 = FEMALE
- 1 = DIP SOLDER
- 1 = YELLOW CHROMATE
 - 2 = TIN
- 00 = NO HARDWARE
 - 01 = .065 4-40 CLINCH NUT BOARD SIDE
 - 02 = .250 4-40 CLINCH NUT BOARD SIDE
 - 03 = .250 4-40 CLINCH NUT MATING SIDE
- 1 = GOLD FLASH
 - 2 = 30 MICRO-INCH GOLD

SPECIFICATIONS:

MATERIALS:

- SHELL: STEEL, TIN OR YELLOW CHROMATE PLATED
- INSULATOR: UL 94V-0 RATED BLACK PBT
- +30% FIBER-GLASS OR NYLON-66


ELECTRICALS:

- CURRENT RATING: 5 AMPS
- CONTACT RESISTANCE: 15 mOHMS MAX
- INSULTOR RESISTANCE: 1000 MOHMS MIN
- VOLTAGE: 500V AC FOR 1 MINUTE
- TEMPERATURE: -50°C TO +100°C


	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		DRAWN: PAM JENKINS	DATE: 8-12-98
			CHECKED:	DATE:
NorComp	SCALE:	SHEET 1 OF 2	REV 4	
	DWG NO.		172-XXX-11X-XX1	

DESCRIPTION: CLINCH NUT HARDWARE


ALL CLINCH-NUTS ARE 4-40 INTERNAL THREADS




03X..... .250" (MATING SIDE) - CN8




02X250" (BOARD SIDE) - CN2




01X065" (BOARD SIDE) - CN1




91X225" (BOARD SIDE) - .197 MATING SIDE - CN10/SFS0440
NOTE: 4-40 FEMALE SCREW LOCK IS REMOVABLE

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		DRAWN: WAYNE ROBBINS	DATE: 8-23-98
			CHECKED: PAM JENKINS	DATE: 8-24-98
<h1>NorComp</h1>		SCALE:	SHEET 1 OF 1	REV 3
		DWG NO. CLINCH-NUT OPTIONS		

DESCRIPTION:

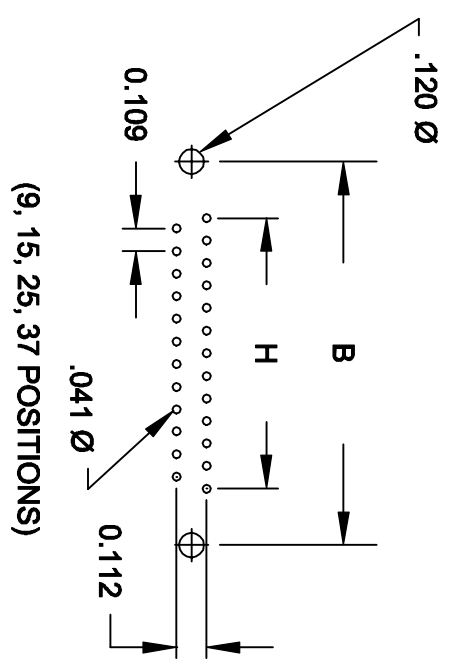

POS	H
9	$\frac{.433}{10.99}$
15	$\frac{.757}{19.23}$
25	$\frac{1.305}{33.15}$
37	$\frac{1.957}{49.71}$
50	$\frac{1.740}{44.20}$

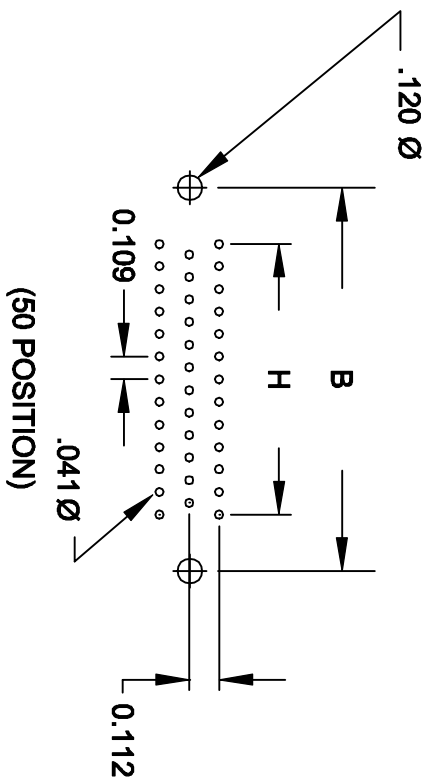

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN: PAM JENKINS
 CHECKED: DATE: 3-30-01

SCALE: SHEET 2 OF 2 REV 2

NorComp

DWG NO. DSUB VERTICAL FOOTPRINT