

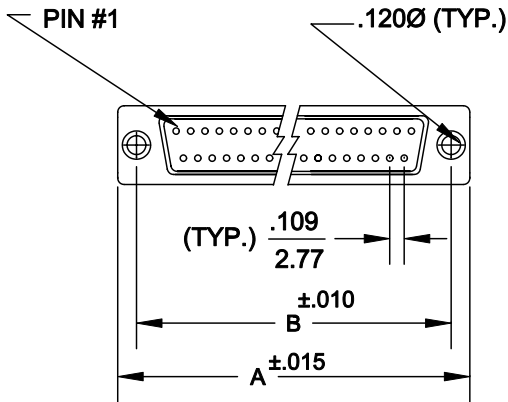


**DESCRIPTION: LOW PROFILE FLAT RIBBON CONNECTOR**

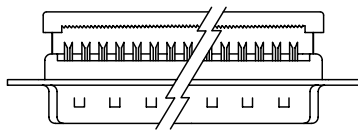

TERMINATED



	A	B	C NO S/R	C WITH S/R
9	1.213 30.81	.984 25.00	.610 15.49	.730 18.54
15	1.541 39.14	1.312 33.33	.610 15.49	.730 18.54
25	2.088 53.04	1.852 47.04	.610 15.49	.730 18.54
37	2.729 69.32	2.500 63.50	.610 15.49	.730 18.54

184-XXX-X93LXX1

SERIES \_\_\_\_\_  
 POSITIONS \_\_\_\_\_  
 009 \_\_\_\_\_  
 015 \_\_\_\_\_  
 025 \_\_\_\_\_  
 037 \_\_\_\_\_  
 050 \_\_\_\_\_  
 GENDER \_\_\_\_\_  
 1 = MALE \_\_\_\_\_  
 2 = FEMALE \_\_\_\_\_  
 TERMINATION \_\_\_\_\_  
 9 = IDC \_\_\_\_\_  
 SHELL PLATING \_\_\_\_\_  
 3 = NICKEL \_\_\_\_\_  
 HARDWARE OPTIONS \_\_\_\_\_  
 00 = NO HARDWARE \_\_\_\_\_  
 01 = .065 4-40 CLINCH NUT BOARD SIDE \_\_\_\_\_  
 02 = .250 4-40 CLINCH NUT BOARD SIDE \_\_\_\_\_  
 03 = .250 4-40 CLINCH NUT MATING SIDE \_\_\_\_\_  
 PLATING OPTIONS \_\_\_\_\_  
 1 = GOLD FLASH \_\_\_\_\_

**SPECIFICATIONS:**


**MATERIALS:**

SHELL: STEEL, NICKEL PLATED  
 INSULATOR: UL 94V-0 RATED PBT  
 230 DEGREE PROCESS TEMP.  
 CONTACTS: BRASS - GOLD PLATED  
 RoHS COMPLIANT

**ELECTRICALS:**


CURRENT RATING: 1 AMP  
 CONTACT RESISTANCE: 15 mOHMS MAX  
 INSULATOR RESISTANCE: 1000 MOHMS MIN  
 VOLTAGE: 500V AC FOR 1 MINUTE  
 TEMPERATURE: -50°C TO +105°C

**ACCEPTS: 26 & 28 AWG STRANDED .050" CENTER FLAT RIBBON CABLE**


	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN: <b>WAYNE ROBBINS</b>	DATE: 11-12-05
		CHECKED:	DATE:
NorComp		SCALE: 1:1	SHEET 1 OF 1
		DWG NO. <b>184-XXX-193LXX1</b>	
		REV <b>1</b>	

**DESCRIPTION:** CLINCH NUT HARDWARE


ALL CLINCH-NUTS ARE 4-40 INTERNAL THREADS




03X..... .250" (MATING SIDE) - CN8




02X ..... .250" (BOARD SIDE) - CN2



01X ..... .065" (BOARD SIDE) - CN1



91X ..... .225" (BOARD SIDE) - .197 MATING SIDE - CN10/SFS0440  
 NOTE: 4-40 FEMALE SCREW LOCK IS REMOVABLE

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		DRAWN: WAYNE ROBBINS	DATE: 11-12-05
	<b>NorComp</b>		CHECKED:	DATE:
SCALE:			SHEET <b>1</b> OF <b>1</b>	REV <b>1</b>
DWG NO.		CLINCH-NUT OPTIONS		