

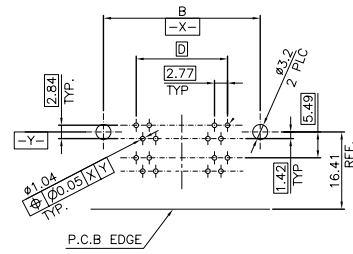
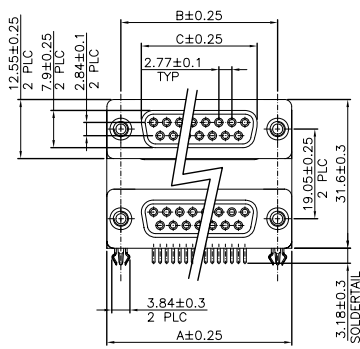



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION AUG. 2006.
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

| LOC | DIST | REVISIONS | | | | | |
|-----|------|-----------|-----|-------------------------|---------|-----|------|
| DW | | P | LTR | DESCRIPTION | DATE | DWN | APVD |
| | | B | | REVISED (ECR-11-003466) | 17FEB11 | JC | WK |



RECOMMENDED P.C.B. LAYOUT (THICKNESS: 1.2~1.6mm)
 TOLERANCE: ±0.05mm (COMPONENT SIDE)



- NOTES:
- MATERIAL:
 - HOUSING/BACK COVER: THERMOPLASTIC, UL94V-0; COLOR: SEE TABLE.
 - CONTACTS: COPPER ALLOY
 - BOARDLOCK: COPPER ALLOY
 - BRACKET: ZINC ALLOY
 - SHELL: STEEL
 - FINISH:
 - CONTACT:
 - GOLD PLATING (SEE TABLE) ON CONTACT AREA.
 - 2.54um [100u"] MIN. MATTE TIN PLATING ON SOLDER TAIL AREA.
 - 1.27um [50u"] MIN. NICKEL UNDERPLATING OVERALL.
 - BOARDLOCK:
 - 1.52um [60u"] MIN. TIN PLATING OVERALL.
 - 1.27um [50u"] MIN. NICKEL UNDERPLATING OVERALL.
 - SHELL:
 - 60u" MIN. TIN PLATING OVERALL.
 - WAVE SOLDER CAPABLE TO 265°C PER TE SPEC. 109-202, CONDITION B.
- * CHOOSE PRE-FIX FROM LEFT TABLE AND SUFFIX FROM RIGHT TABLE FOR DESIRED PART NUMBER COMBINATION.
- ⚠️ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

| | | | |
|-------------|--------------|-------------------|---------------|
| X-1734285-6 | 30 u" | PC99/ACTUAL COLOR | 37-37 |
| X-1734285-5 | 10 u" | PC99/ACTUAL COLOR | NOT AVAILABLE |
| X-1734285-4 | GOLD FLASH | PC99/ACTUAL COLOR | |
| X-1734285-3 | 30 u" | BLACK | |
| X-1734285-2 | 10 u" | BLACK | |
| X-1734285-1 | GOLD FLASH | BLACK | |
| PART NO. | GOLD PLATING | HSG COLOR | |

| | | | | | | |
|-------------|-------|-----------------|-------|-------|-------|-------|
| 9-1734285-X | 37-37 | M3 X 0.5 | 69.34 | 63.50 | 54.80 | 49.86 |
| 8-1734285-X | 9-9 | M3 X 0.5 | 30.95 | 24.99 | 16.20 | 11.08 |
| 3-1734285-X | 37-37 | #4-40 UNC | 69.34 | 63.50 | 54.80 | 49.86 |
| 2-1734285-X | 25-25 | #4-40 UNC | 53.10 | 47.04 | 38.30 | 33.24 |
| 1-1734285-X | 15-15 | #4-40 UNC | 39.30 | 33.30 | 24.60 | 19.39 |
| 1734285-X | 9-9 | #4-40 UNC | 30.95 | 24.99 | 16.20 | 11.08 |
| PART NO. | PINS | THREADED INSERT | A | B | C | D |

| | |
|-------------|--|
| 2-1734285-6 | |
| 2-1734285-5 | |
| 2-1734285-4 | |
| 1-1734285-6 | |
| 1-1734285-5 | |
| 1-1734285-4 | |
| 1-1734285-2 | |
| 1-1734285-1 | |
| 1734285-6 | |
| 1734285-5 | |

OBSOLETE P/N

THIS DRAWING IS A CONTROLLED DOCUMENT.

| | | | | |
|-------------------|--|---------------------------|---------------------------|---|
| DIMENSIONS: MM | TOLERANCES UNLESS OTHERWISE SPECIFIED: | DWN S. CHIEN 18MAY2009 | 18MAY2009 | Tyco Electronics Corporation Taipi, Taiwan |
| 0 PLC ± - | 1 PLC ± 0.3 | CHK S. CHIEN 18MAY2009 | 18MAY2009 | |
| 2 PLC ± 0.2 | 3 PLC ± - | APVD W. KODAMA 18MAY2009 | 18MAY2009 | NAME D-SUB STACKED CONNECTOR, RCPT OVER RCPT, THREAD INSERTS, R/A TYPE |
| 4 PLC ± - | ANGLES ± 3° | PRODUCT SPEC 108-57517 | QUALIFICATION TEST REPORT | |
| MATERIAL SEE NOTE | FINISH SEE NOTE | 501-57590 | WEIGHT SEE SHEET 3 | SIZE CAGE CODE DRAWING NO A3 00779 C=1734285 |
| CUSTOMER DRAWING | | | RESTRICTED TO | SCALE SHEET 1 of 3 REV B |

4


3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION AUG. 2006.
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.




| LOC | DIST | REVISIONS | | | |
|-----|------|--------------|------|-----|------|
| P | LTR | DESCRIPTION | DATE | DWN | APVD |
| | | SEE SHEET 1. | | | |



| 7-1734285-X | 37-37 | #4-40 UNC | 69.34 | 63.50 | 54.80 | 49.86 |
|-------------|-------|-----------------|-------|-------|-------|-------|
| 6-1734285-X | 25-25 | #4-40 UNC | 53.10 | 47.04 | 38.30 | 33.24 |
| 5-1734285-X | 15-15 | #4-40 UNC | 39.30 | 33.30 | 24.60 | 19.39 |
| 4-1734285-X | 9-9 | #4-40 UNC | 30.95 | 24.99 | 16.20 | 11.08 |
| PART NO. | PINS | THREADED INSERT | A | B | C | D |

| X-1734285-6 | 30 u" | PC99/ACTUAL COLOR | 37-37 NOT AVAILABLE |
|-------------|--------------|-------------------|---------------------|
| X-1734285-5 | 10 u" | PC99/ACTUAL COLOR | |
| X-1734285-4 | GOLD FLASH | PC99/ACTUAL COLOR | |
| X-1734285-3 | 30 u" | BLACK | |
| X-1734285-2 | 10 u" | BLACK | |
| X-1734285-1 | GOLD FLASH | BLACK | |
| PART NO. | GOLD PLATING | HSG COLOR | |

6-1734285-3
 OBSOLETE P/N



SEC. E-E




| | | | | |
|--|--|---------------------------|--|------------------------|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | DWN | Tyco Electronics Corporation Taipei, Taiwan | |
| DIMENSIONS: MM | TOLERANCES UNLESS OTHERWISE SPECIFIED: | CHK | NAME | |
| | 0 PLC ± - | APVD | D-SUB STACKED CONNECTOR, RCPT OVER RCPT, THREAD INSERTS, R/A TYPE | |
| | 1 PLC ± 0.3 | PRODUCT SPEC | SIZE | CAGE CODE DRAWING NO |
| | 2 PLC ± 0.2 | QUALIFICATION TEST REPORT | A3 | 00779 C=1734285 |
| | 3 PLC ± - | WEIGHT | RESTRICTED TO | |
| 4 PLC ± - | MATERIAL | CUSTOMER DRAWING | | SCALE |
| ANGLES ± 3° | FINISH | SHEET 2 of 3 | | REV B |
| SEE NOTE | SEE NOTE | | | |

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION AUG. 2006.
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.


| LOC | DIST | REVISIONS | | | |
|-----|------|--------------|------|-----|------|
| P | LTR | DESCRIPTION | DATE | DWN | APVD |
| | | SEE SHEET 1. | | | |

- NOTE :
- DIMENSION :
 TRAY : L=310, W=215, H=30
 CARTON : L=335, W=230, H=280
 - TRAY : PS or PET
 - QUANTITY:

| PIN NO. | 9-9 | 15-15 | 25-25 | 37-37 |
|--------------|-------|-------|-------|-------|
| PCS/TRAY | 36 | 28 | 20 | 16 |
| TRAY/CARTON | 10 | 10 | 10 | 10 |
| PCS/CARTON | 360 | 280 | 200 | 160 |
| NET WEIGHT | 10.12 | 9.73 | 9.53 | 10.10 |
| GROSS WEIGHT | 11.55 | 11.16 | 11.01 | 11.53 |

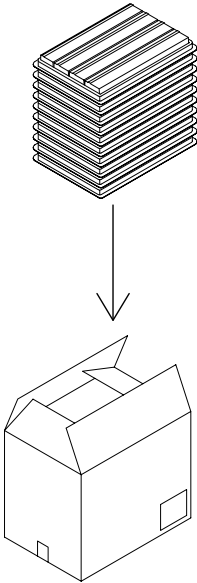

CARTON

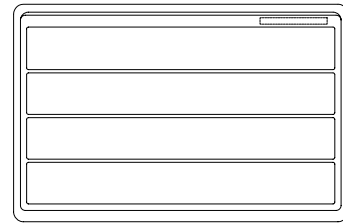

TRAY LAYOUT

| | | | | |
|--|--|---------------------------|--|--|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | DWN | Tyco Electronics Corporation Taipei, Taiwan | |
| DIMENSIONS: MM | TOLERANCES UNLESS OTHERWISE SPECIFIED: | CHK | NAME | D-SUB STACKED CONNECTOR, RCPT OVER RCPT, THREAD INSERTS, R/A TYPE |
| | 0 PLC ± - | APVD | PRODUCT SPEC | RESTRICTED TO |
| | 1 PLC ± 0.3 | QUALIFICATION TEST REPORT | SIZE | A3 |
| MATERIAL | FINISH | WEIGHT | CAGE CODE | 00779 |
| SEE NOTE | SEE NOTE | DRAWING NO | DRAWING NO | 1734285 |
| | | CUSTOMER DRAWING | SCALE | SHEET 3 of 3 |
| | | | REV | B |