

4






3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION MAR. 1988.
 © COPYRIGHT 1988 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS				
P	LTR	DESCRIPTION			DATE	DWN	APVD	
A		RELEASED			06JUL04	G.Z.	I.E.	
A1		REVISED PER ECO-09-024927			09NOV09	KK	AEG	

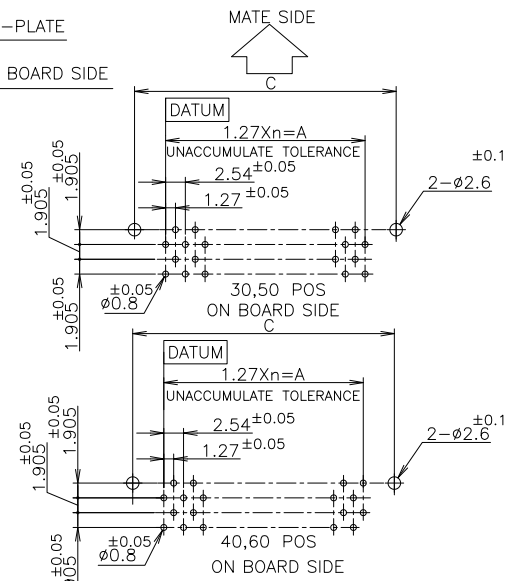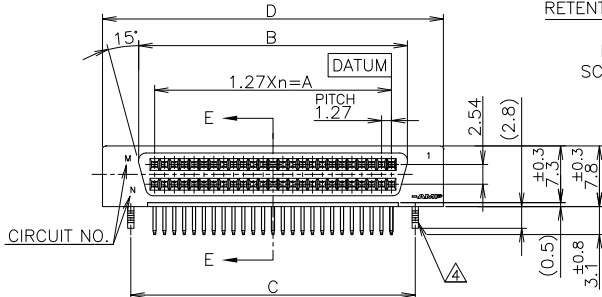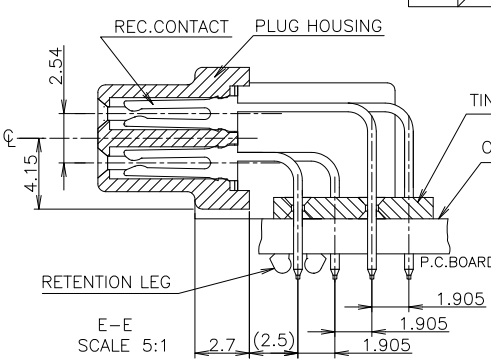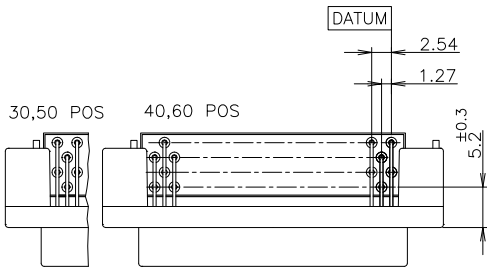

- 1 USE A P.C.B. WHOSE ARE TREATED WITH SOLDER RESIST.
 - 2 SHOW P.C.B LAYOUT FROM ON BOARD SURFACE SIDE.
 - 3 NUMBER THE CONTACT IN THE P.C.B OR CONNECTOR CONSECUTIVELY FROM "DATUM" SIDE.
- ⚠ THE RETENTION LEG IS A TEMPORARY FIX BEFORE SOLDERING
 - ⚠ HOUSING MATERIAL : P.B.T(UL94V-0) / BLACK
 - ⚠ CONTACT MATERIAL : PHO-BRONZE
 - ⚠ CONTACT FINISH : NICKEL 0.00127 MIN THK. OVERALL SELECTIVE GOLD 0.00076 MIN OR 0.0002 MIN. THK ON CONTACT AREA AND TIN 0.001 MIN THK. ON TINE AREA.
 - ⚠ RETENTION LEG FINISH:0.002 MIN TIN PL. OVER 0.001 MIN NICKEL PL.
 - ⚠ RETENTION LEG MATERIAL:BRASS
 - ⚠ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

PART NUMBER	POS	n	A	B	C	D	REMARK
6-	-4	60	29	36.83	41.00	44.23	48.14
6-	-3	50	24	30.48	34.65	37.88	41.72
6-	-2	40	19	24.13	28.30	31.53	35.44
6-	-1	30	14	17.78	21.95	25.18	29.09
	-4	60	29	36.83	41.00	44.23	48.14
	-3	50	24	30.48	34.65	37.88	41.72
	-2	40	19	24.13	28.30	31.53	35.44
5174217-1	-1	30	14	17.78	21.95	25.18	29.09

OBsolete

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: 單位: 毫米	TOLERANCES UNLESS OTHERWISE SPECIFIED: 公差
	0 PLC ± -
	1 PLC ± -
	2 PLC ± -
	3 PLC ± -
	4 PLC ± -
	ALL ANGLES ± -
MATERIAL 材料	FINISH 仕上
SEE NOTE ⚠	SEE NOTE ⚠

GENERAL TOLERANCE
一般公差

10 ≥ : ±0.2
 30 > 10: ±0.25
 100 > 30: ±0.3
 ANGLES: ±3'

DWN GAVIN ZHANG 06JUL04
 CHK T. KAWAMAE 06JUL04
 APVD I. ENOMOTO 06JUL04

Tyco Electronics Tyco Electronics AMP K.K.
 Kawasaki, Japan

NAME
 108-60036

PRODUCT SPEC
 製品規格

APPLICATION SPEC
 取付適用規格

WEIGHT

SIZE A3 CAGE CODE 00779 DRAWING NO 5174217 RESTRICTED TO

CUSTOMER DRAWING SCALE 2:1 SHEET 1 OF 1 REV A1