
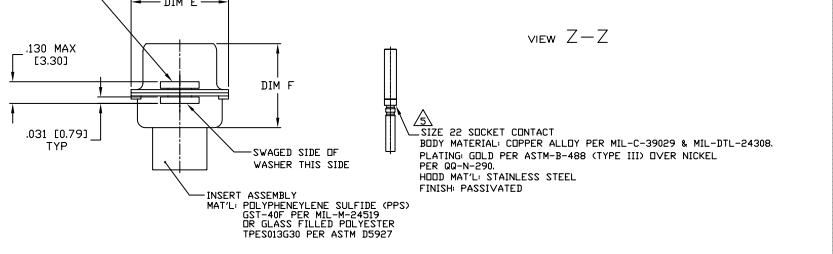


1. THE CONNECTOR DESCRIBED IN THIS DOCUMENT WILL MATE WITH ANY PLUG CONNECTOR WITH THE SAME INSERT ARRANGEMENT.
2. MARKED WITH .047-.062 [1.19-1.57] HIGH CHARACTERS. FAR SIDE REFERS TO THE WIDE SIDE OF THE KEYSTONE. NEAR SIDE REFERS TO THE NARROW SIDE OF THE KEYSTONE. WHEN SPACE IS LIMITED MARKING CAN BE SPLIT BETWEEN FRONT AND REAR SHELL.
3. UL/CSA DESIGNATION STAMPED IN THIS AREA (EXCEPT FOR SIZE 6).
4. CONNECTOR ASSEMBLY WITHOUT CONTACTS, MFG'S P/N 204351-1. MUST BE ORDERED SEPARATELY.
5. CONNECTOR ASSEMBLY SUPPLIED WITH CONTACTS, MFG'S P/N 204351-1. PACKAGED IN A SEPARATE CONTAINER. QTY = NO. OF POSN. (SEE TABLE).

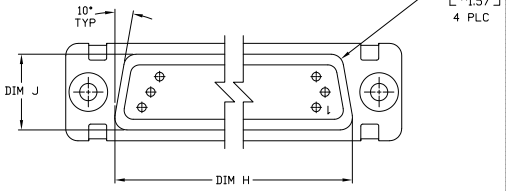

REMARKS	MILITARY P/N ON PACKAGE	MILITARY P/N ON CONNECTOR	MARKED MFG'S PART NUMBER	L	H	G	F	E	D	C	B	A	INSERT ARRANGEMENT	NO OF POSN	SHELL SIZE	PART NUMBER	
	M24308/2-33	M24308/2-33	1-1757826-2	.049 (1.24)	.606 (15.39)	2.312 (58.72)	2.48 (6.30)	.439 (11.15)	.683 (17.35)	.490 (12.45)	2.505 (63.63)	2.194 (55.73)	2.744 (69.70)	MS14004-1	104	6	1-1757826-2
	M24308/2-32	M24308/2-32	1-1757826-1	.049 (1.24)	.586 (14.88)	2.292 (58.22)	2.38 (6.02)	.419 (10.64)	.653 (16.59)	.489 (12.19)	2.495 (63.37)	2.184 (55.47)	2.714 (68.94)	MS18277-2	78	5	1-1757826-1
	M24308/2-31	M24308/2-31	1-1757826-0	.049 (1.24)	.544 (13.82)	2.198 (55.89)	2.48 (6.30)	.439 (11.15)	.650 (16.51)	.490 (12.45)	2.411 (61.24)	2.083 (52.90)	2.650 (66.91)	MS18276-2	62	4	1-1757826-0
	M24308/2-30	M24308/2-30	1757826-9	.049 (1.24)	.432 (10.97)	2.282 (57.96)	2.48 (6.30)	.439 (11.15)	.599 (15.23)	.316 (8.03)	2.505 (63.63)	2.164 (54.97)	2.744 (69.70)	MS18275-2	44	3	1757826-9
	M24308/2-29	M24308/2-29	1757826-8	.049 (1.24)	.432 (10.97)	1.635 (41.33)	2.48 (6.30)	.439 (11.15)	.599 (15.23)	.316 (8.03)	1.827 (47.17)	1.516 (38.51)	2.103 (53.42)	MS18274-2	26	2	1757826-8
	M24308/2-28	M24308/2-28	1757826-7	.049 (1.24)	.412 (10.46)	1.815 (45.82)	2.38 (6.02)	.419 (10.64)	.479 (12.17)	.306 (7.77)	1.847 (46.91)	1.506 (38.25)	2.073 (52.65)	MS18273-2	15	1	1757826-7
	M24308/2-302	M24308/2-33	1-1757826-2	.049 (1.24)	.586 (14.88)	2.292 (58.22)	2.38 (6.02)	.419 (10.64)	.653 (16.59)	.489 (12.19)	2.495 (63.37)	2.184 (55.47)	2.714 (68.94)	MS14004-1	104	6	1757826-6
	M24308/2-301	M24308/2-32	1-1757826-1	.049 (1.24)	.544 (13.82)	2.198 (55.89)	2.48 (6.30)	.439 (11.15)	.650 (16.51)	.490 (12.45)	2.411 (61.24)	2.083 (52.90)	2.650 (66.91)	MS18277-2	78	5	1757826-5
	M24308/2-300	M24308/2-31	1-1757826-0	.049 (1.24)	.432 (10.97)	2.282 (57.96)	2.48 (6.30)	.439 (11.15)	.599 (15.23)	.316 (8.03)	2.505 (63.63)	2.164 (54.97)	2.744 (69.70)	MS18276-2	62	4	1757826-4
	M24308/2-299	M24308/2-30	1757826-9	.049 (1.24)	.432 (10.97)	1.635 (41.33)	2.48 (6.30)	.439 (11.15)	.599 (15.23)	.316 (8.03)	1.827 (47.17)	1.516 (38.51)	2.103 (53.42)	MS18275-2	44	3	1757826-3
	M24308/2-298	M24308/2-29	1757826-8	.049 (1.24)	.412 (10.46)	1.815 (45.82)	2.38 (6.02)	.419 (10.64)	.479 (12.17)	.306 (7.77)	1.847 (46.91)	1.506 (38.25)	2.073 (52.65)	MS18274-2	26	2	1757826-2
	M24308/2-297	M24308/2-28	1757826-7	.049 (1.24)	.412 (10.46)	1.749 (44.28)	2.38 (6.02)	.419 (10.64)	.479 (12.17)	.306 (7.77)	.979 (24.87)	.638 (16.21)	1.198 (30.43)	MS18273-2	15	1	1757826-1

THIS DRAWING IS A CONTROLLED DOCUMENT. THE INFORMATION CONTAINED HEREIN IS UNCLASSIFIED EXCEPT WHERE SHOWN OTHERWISE.

INSTRUCTIONS: SEE CALLOUTS

REVISIONS: SEE CALLOUTS

DATE: 10/10/10

BY: 1008183

REV: 1

REVISED TO: 1757826

CUSTOMER DRAWING: 4.1