


	Page		Page
General		Diodes	
Contents	I	Gallium Arsenide & Silicon Carbide Schottky Diodes	117
QA and Environmental Management Systems	II	Schottky & Schottky Gen ² Diodes	118
Alphanumeric Index	III	HiPerDyn™ FREDs (Dual Ultrafast)	121
Symbols and Terms	XVIII	Fast Diodes (HiPerFRED™, HiPerFRED ²)	122
Nomenclature	XX	Sonic-FRDs™	124
Patents and Intellectual Property	XXII	FRED Diodes	125
CLARE		FRED & HiPerFRED™ Modules	126
Optically Isolated Solid State Relays	1	Rectifier & Avalanche Types	127
Optically Isolated AC-Power Switches	6	Thyristors	
Power Solid State Relays	7	Phase Control Types	129
Linear Optocouplers and Isolation Amplifiers	9	Rectifier Diode Modules	131
Optically Isolated Error Amplifiers	10	Thyristor / Diode Modules	133
Single and Dual Optocouplers	11	Thyristor Modules	135
Telecom Multifunction Products	12	Accessories & Design Information	139
Line Card Access Switches (LCAS)	14	Rectifier Bridges	
LITELINK™ Silicon DAA	16	1~ / 3~ PFC Modules	140
Phone Line Supervisory IC	18	MOS / IGBT AC Switches	141
ISDN DC Termination ICs	20	Rectifier Bridges with Fast Diodes	142
ADSL / VDSL DC Termination IC	21	1~ Rectifier Bridges	143
Data Access Arrangement (DAA) Modules	22	3~ Rectifier Bridges	146
Embedded Modem Modules (EMM)	23	3~ Rectifier Bridges with Brake Unit	149
Tone Signaling Products	24	AC Controller	151
High Voltage Analog Switches & Display Drivers	26	1~ / 3~ High Voltage Rectifiers	152
Optically Isolated Gate Drivers	27	Braking Rectifier Assemblies	152
FETs, N-Channel Depletion Mode	28	Protection Devices	
Solar Cell Products	29	Breakover Diodes (BOD)	153
Application Notes	30	Integrated Circuits (IC)	
MICRONIX		MOSFET & IGBT Low Side Drivers	154
Analog Mixed Signal ASIC Capabilities	31	Half Bridge Drivers	158
MwT		Evaluation Boards	160
MMIC Amplifiers	61	High Voltage Current Regulators	161
Standard GaAs FETs & PHEMTs	62	Various Types	162
Wireless Amplifiers (MPS, ULA and WPS WiMax)	64	Power Semiconductor Chips	
Hybrid Microwave Modules	66	IXOLAR™ High Efficiency Solar Cells & Solar Bits	
Standard, Military & Hi-Rel Connectorized Amplifiers	67	Direct Copper Bonded Ceramic Substrates	
IXYS Colorado		WESTCODE	
DE Linear and Switch Mode Series	68	Application Notes & Technical Information	169
Switch Mode MOSFETs (DE & F Series)	69	Rectifier Diodes	170
RF MOSFET Gate Driver IC	70	Fast Recovery Diodes	176
IXYS		Phase Control Thyristors	182
ISOPLUS™ family	71	Medium Voltage Thyristors	187
IGBTs		Fast Turn-Off Thyristors	189
CBI Modules	80	Distributed Gate Thyristors	192
Six-Packs	83	GTOs	199
Full Bridge Modules	85	Pulse Thyristors	200
Dual & Single Switches	86	High Voltage IGBT Gate Drive Units	201
Discrete XPT, NPT and NPT ³ IGBTs	88	Press Pack IGBTs	202
PT IGBTs, S-series	89	Diode & Thyristor Modules	203
PT IGBTs, G- and GenX3™-series	90	Power Semiconductor Assemblies	206
High Voltage Types (≥1600 V)	94	Outline Drawings	
BiMOSFET & Reverse Blocking IGBTs	95	WESTCODE	O-01
Power MOSFETs		MwT	O-25
Trench MOSFETs	98	IXYS Colorado	O-29
TrenchT2™ MOSFETs	100	IXYS	O-30
Polar™ MOSFETs	101	Sales Representatives and Distributors:	
Polar™ HiPerFETs™ (Fast Body Diode)	104	See "Sales Offices" at	
Legacy (Standard) MOSFETs & HiPerFETs™	108	www.ixys.com	
Q- and Q2-Class HiPerFETs™	109		
Linear MOSFETs	111		
PolarP™ & TrenchP™ P-channel MOSFETs	112		
CoolMOST™ Types	113		
MOSFET Modules	114		
Trench MOSFET Modules	115		

QA and Environmental Management Systems

Certificates



ISO 9001:2000



ISO/TS 16949:2004
(includes ISO 9001:2000)

ISO 14001:2004

OHSAS 18001:1999



ISO 9001:2000



ISO 9001:2000



BS EN 9001:2000



ISO 9001:2000



Alphanumeric Index

○ Not for new design
 ➤ New



C

- CPC1001N 11
- CPC1002N 2
- CPC1004N 2
- CPC1008N 1
- CPC1016N 1
- CPC1017N 1
- CPC1018N 1
- CPC1020N 1
- CPC1025N 1
- CPC1030N 1
- CPC1035N 1
- CPC1117N 4
- CPC1130N 4
- CPC1135N 4
- CPC1150N 4
- CPC1217Y 3
- CPC1218Y 3
- CPC1219Y 3
- CPC1225N 1
- CPC1230N 1
- CPC1231N 4
- CPC1301 11
- CPC1302 11
- CPC1303 11
- CPC1317 1
- CPC1330 1
- CPC1335P 1
- CPC1390 1
- CPC1393 1
- CPC1465D 20
- CPC1465M 20
- CPC1466D 21
- CPC1510 1
- CPC1560 1
- CPC1580 27
- CPC1590 27
- CPC1708 8
- CPC1709 8
- CPC1718 8
- CPC1727 8
- CPC1777 8
- CPC1779 8
- CPC1786 8
- CPC1788 8
- CPC1822 29
- CPC1824 29
- CPC1831 29
- CPC1832 29
- CPC1906 7
- CPC1908 7
- CPC1909 7
- CPC1916Y 7
- CPC1918 7
- CPC1926Y 7
- CPC1927 7
- CPC1943G 6
- CPC1945G 6
- CPC1945Y 6
- CPC1961G 6
- CPC1963G 6
- CPC1965G 6
- CPC1965Y 6
- CPC1967 7
- CPC1972G 6
- CPC1973Y 7
- CPC1976Y 6
- CPC1977 7
- CPC1978 7
- CPC1979 7
- CPC1981Y 7
- CPC1986 7
- CPC1988 7
- CPC3703 28
- CPC3710 28
- CPC3714 28
- CPC3720 28
- CPC3730 28
- CPC5601 16
- CPC5602 28
- CPC5603 28
- CPC5604 16
- CPC5608 16
- CPC5610 16
- CPC5611 16
- CPC5620 16
- CPC5621 16
- CPC5622 16
- CPC5710 19

- CPC5712 18
- CPC6826 26
- CPC7220 26
- CPC7221 26
- CPC7581xA 14
- CPC7581xB 14
- CPC7581xC 14
- CPC7582xA 14
- CPC7582xB 14
- CPC7582xC 14
- CPC7583xA 14
- CPC7583xB 14
- CPC7583xC 14
- CPC7583xD 14
- CPC7591Mx 15
- CPC7591xA 14
- CPC7591xB 14
- CPC7592Mx 15
- CPC7592xA 14
- CPC7592xB 14
- CPC7592xC 14
- CPC7593Mx 15
- CPC7593xA 14
- CPC7593xB 14
- CPC7593xC 14
- CPC7593xD 14
- CPC7594Mx 15
- CPC7594xA 14
- CPC7594xB 14
- CPC7594xC 14
- CPC7595Mx 15
- CPC7595xA 14
- CPC7595xB 14
- CPC7595xC 14
- CYG2000 22
- CYG2001 22
- CYG2010 22
- CYG2011 22
- CYG2020 22
- CYG2021 22
- CYG2030 22
- CYG2031 22
- CYG2100 22
- CYG2110 22
- CYG2111 22
- CYG2120 22
- CYG2217 22
- CYG2218 22
- CYG2300 22
- CYG2320 22
- CYG2911 22
- F**
- FDA215 27
- I**
- IAA110P 12
- IAA170P 12
- IAB110P 12
- IAD110P 12
- IAD170P 12
- IBB110P 12
- ITC117P 13
- ITC117PL 13
- ITC135P 13
- ITC137P 13
- L**
- LAA100 3
- LAA100L 3
- LAA110 3
- LAA110L 3
- LAA120 3
- LAA120L 3
- LAA125 3
- LAA125L 3
- LAA126 3
- LAA126L 3
- LAA127 3
- LAA127L 3
- LAA170 3
- LBA110 5
- LBA110L 5
- LBA120 5
- LBA120L 5
- LBA126 5
- LBA126L 5
- LBA127 5
- LBA127L 5
- LBB110 4
- LBB120 4
- LBB126 4
- LBB127 4
- LCA100 1

- LCA100L 1
- LCA110 1
- LCA110L 1
- LCA120 1
- LCA120L 1
- LCA125 1
- LCA125L 1
- LCA126 2
- LCA127 2
- LCA127L 2
- LCA129 2
- LCA182 2
- LCA210 4
- LCA210L 4
- LCA211 4
- LCA220 4
- LCA710 2
- LCA712 2
- LCA715 2
- LCA717 2
- LCB110 4
- LCB111 4
- LCB120 4
- LCB126 4
- LCB127 4
- LCC110 5
- LCC120 5
- LDA100 11
- LDA101 11
- LDA102 11
- LDA110 11
- LDA111 11
- LDA200 11
- LDA201 11
- LDA202 11
- LDA203 11
- LDA210 11
- LDA211 11
- LDA212 11
- LDA213 11
- LIA100 9
- LIA101 9
- LIA120 10
- LIA130 10
- LOC110 9
- LOC111 9
- LOC112 9
- LOC117 9
- LOC210P 9
- LOC211P 9
- M**
- M-980-02 24
- M-982-02 24
- M-985-01 24
- M-986-2A1P 25
- M-986-2R2P 25
- M-991 24
- M-993 25
- O
- OAA160 3
- OMA160 2
- P**
- PAA110 3
- PAA110L 3
- PAA132 3
- PAA140 3
- PAA140L 3
- PAA150 3
- PAA190 3
- PAA191 3
- PBA150 5
- PBB150 4
- PD1201 6
- PD2401 6
- PD2601 6
- PLA110 2
- PLA110L 2
- PLA132 2
- PLA134 2
- PLA140 2
- PLA140L 2
- PLA143 2
- PLA150 2
- PLA160 2
- PLA170 2
- PLA190 2
- PLA191 2
- PLA192 2
- PLA193 2
- PLB150 4

- PM1204 6
- PM1205 6
- PM1206 6
- PS1201 6
- PS2401 6
- PS2601 6
- T**
- TS112N 12
- TS117 12
- TS117L 12
- TS118 12
- TS120 12
- TS120L 12
- TS122 12
- TS190 12
- TS190L 12
- X**
- XAA170 3
- XBA170 5
- XBB170 4
- XCA170 2
- XS170 12



- M**
- MX6895BE 47
- MX6895BETR 47
- MX840AB 32
- MX840BB 32
- MX841BE 33
- MX841BETR 33
- MX844R 34
- MX844RTR 34
- MX846B 35
- MX846BTR 35
- MX856B 48
- MX856BTR 48
- MX857B 48
- MX857BTR 48
- MX860TC 36
- MX860WB 36
- MX860XB 36
- MX8681R 49
- MX8681RTR 49
- MX8682R 50
- MX8682RTR 50
- MX8683R 51
- MX8683RTR 51
- MX868R 37
- MX868RTR 37
- MX8771R 52
- MX8771RTR 52
- MX877R 38
- MX877RTR 38
- MX878R 39
- MX878RTR 39
- MX879R 40
- MX879RTR 40
- MX881R 41
- MX881RTR 41
- MX8830B 53
- MX8830BTR 53
- MX8830R10 53
- MX8830R10TR 53
- MX8830X 53
- MX884HTTR 42
- MX8871DHTTRT 54
- MX8871PHTTR 55
- MX887DHTTRT 43
- MX887PHTTRT 44
- MX895B 45
- MX895BTR 45
- MXEI1480TC 46
- MXEI1480WB 46
- MXEI1480XB 46
- MXEI2240WB 56
- MXEI2240XB 56
- MXEI2300WB 57
- MXEI2300XB 57
- MXHV9910BE 58
- MXHV9910BETR 58
- MXHV9911BE 59
- MXHV9911BETR 59
- MXJDJ822B 60
- MXJDJ822BTR 60

Alphanumeric Index

○ Not for new design

➤ New



A

AL26501	67
AL618801	67
AN12201N	67
AN1415301N	67
AN1718401N	67
AN23201N	67
AN45201N	67
AN78201N	67
AN910201N	67
AP1011401	67
AP1415401	67
AP1718501	67
AP1819701	67
AP1819801	67
AP45401	67
AP67402	67
AP78401	67
AP910401	67
AT26301	67
AT26401	67
AT618401	67
AT618501	67
AW052202N	67
AW052203	67
AW054201N	67
AW054203	67
AW1218301N	67
AW1218504	67
AW12201N	67
AW12203	67
AW218201N	67
AW218301	67
AW218301N	67
AW26201N	67
AW26204	67
AW28201N	67
AW28302	67
AW612301N	67
AW612304	67
AW618301N	67
AW618302	67
AW618404	67
AW818301N	67
AW818504	67
M	
➤ MMA-021015	61
➤ MMA-022028	61
➤ MMA-053223-Q3	61
➤ MMA-206024-Q3	61
➤ MMA-232730-Q4	61
➤ MMA-232733-Q5	61
➤ MMA-333737-Q10	61
➤ MMA-333830-Q4	61
➤ MMA-333833-Q5	61
➤ MMA-343737-Q10	61
➤ MMA-495930-Q4	61
➤ MMA-495933-Q5	61
➤ MPS-002701-XX	65
MPS-003001-XX	65
➤ MPS-0030H16-XX	64
MPS-013001-XX	65
➤ MPS-0325A9D-XX	64
➤ MPS-032701A-XX	65
➤ MPS-0425A9D-XX	65
MPS-080817N-XX	64
MPS-080817P-XX	64
MPS-0808A9-XX	64
MPS-080917N-XX	64
MPS-080917P-XX	64
MPS-0809A9-XX	64
MPS-081017N-XX	64
MPS-081017P-XX	64
MPS-081017-XX	64
MPS-0810A9D-XX	64
MPS-0810A9-XX	64
MPS-0820A9D-XX	64
MPS-082508-XX	65
MPS-090917N-XX	64
MPS-090917P-XX	64
MPS-0909A9-XX	64
MPS-093011-XX	64
MPS-1718A9-XX	64
MPS-1720A9-XX	64
MPS-172208-XX	64
MPS-173011-XX	64
MPS-1820A9D-XX	64
MPS-1820A9-XX	64
MPS-182117-XX	64

MPS-182217-XX	64
MPS-2125A9D-XX	64
MPS-213011-XX	64
MPS-242520-XX	64
MPS-242717-XX	64
MPS-252730-XX	64
MPS-253011-XX	64
MPS-302201-XX	65
MPS-343517-XX	64
MPS-3435A9D-XX	64
MPS-343617-XX	64
MPS-343717-XX	64
MPS-343717-XX	64
MPS-363817-XX	64
MwT 0206-11P2	66
MwT 0206-1G1	66
MwT 0206-1G2	66
MwT 0206-2P2	66
MwT 0206-7G2	66
MwT 0206-9P2	66
MwT 0206-A9G1	66
➤ MwT 0206-A9N2	66
MwT 0206-TCM	66
MwT 0206-VRM	66
MwT 0218-4N1	66
MwT 0218-4N2	66
MwT 0218-H4N1	66
MwT 0218-H4N2	66
MwT 0218-H4N2	66
MwT 0618-12P2	66
MwT 0618-2P1	66
MwT 0618-2P2	66
MwT 0618-3P1	66
MwT 0618-3P2	66
MwT 0618-4N1	66
MwT 0618-4N2	66
MwT 0618-5G1	66
MwT 0618-5G2	66
MwT 0618-7G2	66
MwT 0618-H15P2	66
MwT 0618-H15P3	66
MwT 0618-H16P3	66
MwT 0618-H4N2	66
➤ MwT 0618-H5G2	66
MwT 0618-H7P2	66
MwT 0618-TCM	66
MwT 0618-VRM	66
MwT 0820-3P1	66
MwT 0820-3P2	66
MwT 0820-4N1	66
MwT 0820-4N2	66
MwT 0820-5G1	66
MwT-1	62
MwT-1	63
MwT-10	62
MwT-10	63
➤ MwT-11	62
➤ MwT-11	63
MwT-16	62
MwT-16	63
MwT-17	62
MwT-17	63
MwT-17	63
MwT-1789HL	62
MwT-1789HL	63
MwT-1789LN	62
MwT-1789LN	63
MwT-1789SB	62
MwT-1789SB	63
➤ MwT-17Q3	62
➤ MwT-17Q3	63
MwT-2	62
MwT-2	63
MwT-22	62
MwT-22	63
➤ MwT-22Q4	62
➤ MwT-22Q4	63
➤ MwT-25	62
➤ MwT-25	63
MwT-3	62
MwT-3	63
MwT-4	62
MwT-4	63
MwT-5	62
MwT-5	63
MwT-7	62
MwT-7	63
MwT-8	62
MwT-8	63
MwT-A9	62
MwT-A9	63
MwT-A989	62
MwT-A989	63
➤ MwT-A989SB	62

➤ MwT-A989SB	63
MwT-LP7	63
MwT-LP7	62
MwT-PH11	62
MwT-PH11	63
➤ MwT-PH15	62
➤ MwT-PH15	63
➤ MwT-PH15QACSB	62
➤ MwT-PH15QACSB	63
➤ MwT-PH16	62
➤ MwT-PH16	63
➤ MwT-PH16A	62
➤ MwT-PH16A	63
➤ MwT-PH5	62
➤ MwT-PH5	63
MwT-PH7	62
MwT-PH7	63
➤ MwT-PH8	62
➤ MwT-PH8	63
MwT-PH9	62
MwT-PH9	63
U	
ULA 808-XX	64
ULA 818-XX	64
W	
WPS-242717-XX	65
WPS-252717-XX	65
WPS-252724-XX	65
➤ WPS-303322-XX	65
WPS-343617-XX	65
WPS-343717-XX	65
WPS-343722-XX	65
WPS-343724-XX	65
WPS-363817-XX	65
➤ WPS-444922-XX	65
➤ WPS-445122-XX	65
➤ WPS-495122-XX	65
WPS-495917-XX	65
WPS-495922-XX	65
➤ WPS-545922-XX	65



D	
DE 150-101N09A	69
DE 150-102N02A	69
DE 150-201N09A	69
DE 150-501N04A	69
DE 275-101N30A	69
DE 275-102N06A	69
DE 275-201N25A	69
DE 275-501N16A	69
DE 275X2-102N06A	69
DE 275X2-501N16A	69
DE 375-102N10A	69
DE 375-102N12A	69
DE 375-501N21A	69
DE 475-102N20A	69
DE 475-102N21A	69
DE 475-501N44A	69
DEIC 420	70
DEIC 421	70
DEIC 515	70
E	
EVDD 415	70
EVIC 420A	70
EVIC 420B	70
I	
IXDD 415SI	70
IXFH 6N100F	69
IXFH 12N100F	69
IXFH 12N50F	69
IXFH 21N50F	69
IXFH 28N50F	69
IXFH 60N20F	69
IXFK 21N100F	69
IXFK 24N100F	69
IXFK 44N50F	69
IXFK 55N50F	69
IXFN 24N100F	69
IXFN 55N50F	69
IXFR 12N100F	69
IXFT 6N100F	69
IXFT 12N100F	69
IXFT 12N50F	69
IXFT 21N50F	69
IXFT 28N50F	69
IXFT 60N20F	69
IXFX 21N100F	69
IXFX 24N100F	69
IXFX 44N50F	69

IXFX 55N50F	69
IXLD 02SI	70
➤ IXZ 4DF08N120	70
➤ IXZ 4DF12N100	70
➤ IXZ 4DF18N50	70
IXZ 1221050L-754	68
IXZ 215N12L	68
IXZ 308N120	68
IXZ 316N60	68
IXZ 318N50	68
IXZ 2210N50L	68
IXZ 2211N50	68
IXZH 08N120	68
IXZH 10N50LA	68
IXZH 10N50LB	68
IXZH 16N60	68
IXZH 18N50	68
IXZR 08N120	68
IXZR 08N120A	68
IXZR 08N120B	68
IXZR 16N60	68
IXZR 16N60A	68
IXZR 16N60B	68
IXZR 18N50	68
IXZR 18N50A	68
IXZR 18N50B	68



C	
➤ CLA 50E1200HB	129
➤ CLA 50E1200TC	129
➤ CMA 30E1600PB	129
➤ CMA 30E1600PN	129
➤ CMA 30P1600FC	75, 129
➤ CMA 50P1600FC	75, 129
CS 8-08 io2	129
CS 8-12 io2	129
CS 19-08 ho1	129
CS 19-08 ho1C	72, 129
CS 19-08 ho1S	129
CS 19-12 ho1	129
CS 19-12 ho1C	72, 129
CS 19-12 ho1S	129
CS 20-12 io1	129
CS 20-14 io1	129
CS 20-16 io1	129
CS 20-22 moF1	75, 129
➤ CS 20-25 mo1F	75, 129
CS 22-08 io1M	129
CS 22-12 io1M	129
CS 23-08 io2	129
CS 23-12 io2	129
CS 23-16 io2	129
CS 29-08 io1C	72, 129
CS 29-12 io1C	72, 129
CS 30-12 io1	129
CS 30-14 io1	129
CS 30-16 io1	129
CS 35-08 io4	129
CS 35-12 io4	129
CS 35-14 io4	129
CS 45-08 io1	129
CS 45-12 io1	129
CS 45-16 io1	129
CS 45-16 io1R	73, 129
CS 60-12 io1	129
CS 60-14 io1	129
CS 60-16 io1	129
D	
DCB	168
➤ DFE 10I600PM	125
○ DGS 3-018AS	117
○ DGS 3-030AS	117
○ DGS 10-025A	117
○ DGS 17-03CS	117
○ DGS 20-018AS	117
○ DGS 20-025A	117
○ DGS 20-025AS	117
○ DGSK 20-018A	117
○ DGSK 28-025CS	117
○ DGSK 36-03CS	117
○ DGSK 40-025A	117
○ DGSK 40-025CS	117
○ DGSS 10-06CC	72, 117
○ DGSS 20-06CC	72, 117
DH 20-18A	124
DH 2x61-18A	124
DH 40-18A	124
DH 60-14A	124
DH 60-16A	124

Alphanumeric Index

○ Not for new design

➤ New

DH 60-18A	124	DS 35-08A	128	DSEC 29-06AC	72, 122	○ DSEP 2x101-04A	122
➤ DHG 5I600PA	124	DS 35-12A	128	DSEC 30-06A	122	➤ DSEP 30-03AS	122
➤ DHG 5I600PM	124	DS 75-08B	128	DSEC 30-06B	122	DSEP 30-06A	122
➤ DHG 10C600PB	124	DS 75-12B	128	DSEC 30-12A	122	DSEP 30-06B	122
➤ DHG 10I1200PA	124	DSA 1-12D	127	DSEC 59-06BC	72, 122	DSEP 30-06BR	73, 122
➤ DHG 10I1200PM	124	DSA 1-16D	127	DSEC 60-06A	122	DSEP 30-12A	122
DHG 10I600PA	124	DSA 1-18D	127	DSEC 60-06B	122	DSEP 30-12AR	73, 122
DHG 10I600PM	124	DSA 11100SA	120	DSEC 60-12A	122	DSEP 30-12CR	73, 121
➤ DHG 20C1200PB	124	DSA 2-12A	127	DSEC 120-12AK	122	➤ DSEP 40-03AS	122
➤ DHG 20C600PB	124	DSA 2-16A	127	○ DSEC 240-04A	122	DSEP 60-06A	122
DHG 20C600QB	124	DSA 2-18A	127	DSEC 240-06A	122	DSEP 60-06AT	122
➤ DHG 20I1200HA	124	DSA 2I100SB	120	○ DSEE 8-08CC	121	DSEP 60-12A	122
➤ DHG 20I1200PA	124	DSA 9-12F	128	DSEE 15-12CC	72, 121	DSEP 60-12AR	73, 122
➤ DHG 20I600HA	124	DSA 9-16F	128	DSEE 29-12CC	72, 121	DSI 17-08A	128
➤ DHG 20I600PA	124	DSA 9-18F	128	DSEE 30-12A	121	DSI 17-12A	128
DHG 30I1200HA	124	➤ DSA 10I100PM	120	DSEE 55-24N1F	75, 121	DSI 2x55-12A	127
DHG 30I600HA	124	DSA 15I45PA	120	DSEI 8-06A	125	DSI 2x55-16A	127
DHG 30I600PA	124	DSA 15IM45IB	120	DSEI 8-06AS	125	DSI 30-08A	127
➤ DHG 30IM600PC	124	DSA 17-12A	128	DSEI 12-06A	125	DSI 30-08AC	72, 127
➤ DHG 40C1200HB	124	DSA 17-16A	128	DSEI 12-10A	125	DSI 30-08AS	127
➤ DHG 40C600HB	124	DSA 17-18A	128	DSEI 12-12A	125	DSI 30-12A	127
➤ DHG 40C600PB	124	DSA 20C100PB	120	DSEI 19-06AS	125	DSI 30-12AC	72, 127
➤ DHG 50X1200NA	124	DSA 20C100PN	120	DSEI 20-12A	125	DSI 30-12AS	127
➤ DHG 50X600NA	124	DSA 20C150PB	120	DSEI 2x30-04C	125	DSI 30-16A	127
DHG 60C600HB	124	DSA 20C150PN	120	DSEI 2x30-06C	125	DSI 30-16AS	127
➤ DHG 60I1200HA	124	DSA 20C45PB	120	DSEI 2x30-10B	125	DSI 35-08A	128
➤ DHG 60I600HA	124	DSA 20C60PN	120	DSEI 2x30-12B	125	DSI 35-12A	128
➤ DHG 100X1200NA	124	➤ DSA 30C100HB	120	DSEI 2x31-04C	125	DSI 45-08A	127
➤ DHG 100X600NA	124	DSA 30C100PB	120	DSEI 2x31-06C	125	DSI 45-12A	127
DHH 55-36N1F	75, 124	DSA 30C100PN	120	DSEI 2x31-06P	125	DSI 45-16A	127
➤ DLA 10IM800UC	127	DSA 30C100QB	120	DSEI 2x31-10B	125	DSI 45-16AR	73, 127
➤ DLA 20IM800PC	127	➤ DSA 30C150HB	120	DSEI 2x31-10P	125	DSI 75-08B	128
➤ DPF 60C200HB	123	DSA 30C150PB	120	DSEI 2x31-12B	125	DSI 75-12B	128
➤ DPF 60I200HA	123	➤ DSA 30C200PB	120	DSEI 2x31-12P	125	DSIK 45-16AR	73, 127
➤ DPF 60IM400HB	123	DSA 30C45HB	120	DSEI 2x61-02A	125	DSP 8-08A	127
➤ DPF 60XA400NA	123	DSA 30C45PB	120	DSEI 2x61-04C	125	DSP 8-08AS	127
➤ DPF 120X200NA	123	DSA 30C60PB	120	DSEI 2x61-06C	125	DSP 8-08S	127
➤ DPF 120X400NA	123	➤ DSA 30I100PA	120	DSEI 2x61-06P	125	DSP 8-12A	127
➤ DPF 240X200NA	123	➤ DSA 30I150PA	120	DSEI 2x61-10B	125	DSP 8-12AC	72, 127
➤ DPF 240X400NA	123	DSA 35-12A	128	DSEI 2x61-10P	125	DSP 8-12AS	127
➤ DPF 400C400NB	123	DSA 35-16A	128	DSEI 2x61-12B	125	DSP 8-12S	127
DPG 10I200PA	123	DSA 35-18A	128	DSEI 2x61-12P	125	DSP 25-12A	127
DPG 10I200PM	123	DSA 50C100HB	120	DSEI 2x101-06A	125	DSP 25-12AT	127
DPG 10I300PA	123	DSA 50C100QB	120	DSEI 2x101-06P	125	DSP 25-16A	127
DPG 10I400PA	123	DSA 50C150HB	120	DSEI 2x101-12A	125	DSP 25-16AR	73, 127
DPG 10I400PM	123	DSA 60C100PB	120	DSEI 2x101-12P	125	DSP 25-16AT	127
➤ DPG 10IM300UC	123	DSA 60C45HB	120	DSEI 2x121-02A	125	DSP 45-12A	127
➤ DPG 10P400PJ	72, 121, 123	DSA 60C45PB	120	DSEI 2x161-02P	125	DSP 45-16A	127
DPG 15I200PA	123	DSA 60C60HB	120	DSEI 2x161-06P	125	DSP 45-16AR	73, 127
DPG 15I300PA	123	DSA 60C60PB	120	DSEI 2x161-12P	125	DSS 6-0025BS	118
➤ DPG 15I400PM	123	DSA 70C100HB	120	DSEI 30-06A	125	DSS 6-0045AS	118
DPG 20C200PB	123	DSA 70C150HB	120	DSEI 30-10A	125	DSS 6-015AS	119
DPG 20C200PN	123	DSA 75-12B	128	DSEI 30-10AR	73, 125	DSS 10-0045B	118
DPG 20C300PB	123	DSA 75-16B	128	DSEI 30-12A	125	DSS 10-006A	118
DPG 20C300PN	123	DSA 75-18B	128	DSEI 36-06AS	125	DSS 10-01A	119
DPG 20C400PB	123	DSA 80C100PB	120	DSEI 60-02A	125	DSS 10-01AS	119
➤ DPG 20C400PN	123	DSA 80C45HB	120	DSEI 60-06A	125	DSS 16-0045A	118
DPG 30C200HB	123	DSA 90C200HB	120	DSEI 60-10A	125	DSS 16-0045AS	118
DPG 30C200PB	123	DSA 120C150QB	120	DSEI 60-12A	125	DSS 16-01A	119
➤ DPG 30C200PC	123	DSAI 17-12A	128	DSEI 120-06A	125	DSS 16-01AS	119
DPG 30C400HB	123	DSAI 17-16A	128	DSEI 120-12A	125	DSS 17-06CR	73
➤ DPG 30C400PB	123	DSAI 17-18A	128	DSEK 60-02A	125	DSS 17-06CR	121
DPG 30C300PC	123	DSAI 35-12A	128	DSEK 60-02AR	73, 125	DSS 20-0015B	118
DPG 30C400HB	123	DSAI 35-16A	128	DSEK 60-06A	125	DSS 20-01AC	72, 119
➤ DPG 30C400PB	123	DSAI 35-18A	128	DSEK 60-12A	125	DSS 25-0025B	118
➤ DPG 30I300HA	123	DSAI 75-12B	128	DSEP 6-06AS	122	DSS 25-0045A	118
➤ DPG 30I300PA	123	DSAI 75-16B	128	➤ DSEP 6-06BS	122	DSS 2x41-01A	119
➤ DPG 30I400HA	123	DSAI 75-18B	128	○ DSEP 8-03AS	122	DSS 2x61-0045A	118
➤ DPG 30P300PJ	72, 121, 123	DSB 1140SA	120	DSEP 8-06A	122	DSS 2x61-01A	119
➤ DPG 60C200HB	123	DSB 1160SA	120	DSEP 8-06B	122	DSS 2x81-0045B	118
DPG 60C200QB	123	DSB 2140SB	120	DSEP 8-12A	122	DSS 2x101-015A	119
DPG 60C300HB	123	DSB 2160SB	120	DSEP 12-12A	122	DSS 2x101-02A	119
➤ DPG 60C300HJ	73, 123	DSB 10I45PM	120	DSEP 12-12B	122	DSS 2x111-008A	119
➤ DPG 60C300PC	123	DSB 15IM45IB	120	DSEP 15-06A	122	DSS 2x121-0045B	118
DPG 60C300QB	123	DSB 20C60PN	120	DSEP 15-06B	122	DSS 2x160-0045A	118
➤ DPG 60C400HB	123	DSB 20I15PA	120	DSEP 15-12CR	73, 121	DSS 2x160-01A	119
DPG 60C400QB	123	DSB 30C30PB	120	DSEP 29-06A	122	DSS 2x200-0008D	118
➤ DPG 60I300HA	123	DSB 30C45HB	120	DSEP 29-06AS	122	DSS 40-0008D	118
DPG 60I400HA	123	DSB 30C45PB	120	DSEP 29-06B	122	DSS 60-0045B	118
DPG 60IM300PC	123	DSB 30C60PB	120	DSEP 29-12A	122	DSSK 10-018A	119
DPG 60IM400QB	123	DSB 40C15PB	120	DSEP 2x25-12 C	121	DSSK 16-01A	119
➤ DPG 80C300HB	123	DSB 60C30HB	120	○ DSEP 2x31-03A	122	DSSK 16-01AS	119
➤ DPG 80C400HB	123	➤ DSB 60C30PB	120	○ DSEP 2x31-04A	122	DSSK 18-0025BS	118
DPG 120C300QB	123	DSB 60C45HB	120	DSEP 2x31-06A	122	DSSK 20-0045AM	118
➤ DPH 30IS600HI	73, 121, 123	DSB 60C45PB	120	DSEP 2x31-06B	122	DSSK 20-0045B	118
DS 1-12D	127	DSB 60C60HB	120	DSEP 2x31-12A	122	DSSK 20-015A	119
DS 2-08A	127	DSB 60C60PB	120	DSEP 2x60-12A	122	DSSK 28-0045BS	118
DS 2-12A	127	DSB 80C45HB	120	○ DSEP 2x61-03A	122	DSSK 28-006BS	118
DS 9-08F	128	DSEC 16-06A	122	DSEP 2x61-06A	122	DSSK 28-01A	119
DS 9-12F	128	DSEC 16-06AC	72, 122	DSEP 2x61-12A	122	DSSK 28-01AS	119
DS 17-08A	128	DSEC 16-12A	122	○ DSEP 2x91-03A	122	DSSK 30-018A	119
DS 17-12A	128	➤ DSEC 16-12AS	122	DSEP 2x91-06A	122	DSSK 30-01A	119

Alphanumeric Index

○ Not for new design

➤ New

DSSK 38-0025B	118	GDBD4410	82	IXBOD 1-23 R	153	➤ IXDF 504SIA	155
DSSK 38-0025BS	118	➤ GMM 3x120-0075X2	77, 115	IXBOD 1-23 RD	153	IXDH 20N120	88
DSSK 40-0015B	118	➤ GMM 3x160-0055X2	77, 115	IXBOD 1-24 R	153	IXDH 20N120D1	88
DSSK 40-006B	118	➤ GUO 40-08NO1	146	IXBOD 1-24 RD	153	IXDH 30N120	88
DSSK 40-008B	119	➤ GUO 40-12NO1	146	IXBOD 1-25 R	153	IXDH 30N120D1	88
DSSK 48-0025B	118	➤ GUO 40-16NO1	146	IXBOD 1-25 RD	153	IXDH 35N60B	88
DSSK 48-003B	118	➤ GWM 100-0085X1	77, 115	IXBOD 1-26 R	153	IXDH 35N60BD1	88
DSSK 48-003BS	118	➤ GWM 100-01X1	77, 115	IXBOD 1-26 RD	153	IXDI 402SI	154
DSSK 50-0025B	118	➤ GWM 120-0075X1	77, 115	IXBOD 1-28 R	153	IXDI 402SI-16	154
DSSK 50-015A	119	➤ GWM 160-0055X1	77, 115	IXBOD 1-28 RD	153	IXDI 402SIA-16	154
DSSK 50-01A	119	➤ GWM 220-004P3	77, 115	IXBOD 1-30 R	153	IXDI 404SI	155
DSSK 60-0045A	118	➤ GWM 220-004X1	77, 115	IXBOD 1-30 RD	153	IXDI 404SI-16	155
DSSK 60-0045B	118	I		IXBOD 1-32 R	153	IXDI 404SIA-16	155
DSSK 60-015 AR	73	➤ IPC 75PX330GD	77	IXBOD 1-32 RD	153	IXDI 409CI	155
DSSK 60-015AR	119	○ IX 2A11P1	158	IXBP 5N160G	95	IXDI 409SI	155
DSSK 60-015A	119	○ IX 2A11S1	158	IXBT 6N170	95	IXDI 409YI	155
DSSK 60-02A	119	○ IX 2B11P7	158	IXBT 10N170	95	IXDI 414CI	155
DSSK 60-02AR	73, 119	○ IX 2B11S7	158	IXBT 16N170	95	IXDI 414SI	155
DSSK 70-0015B	118	○ IX 2C11P1	158	IXBT 16N170A	95	IXDI 414YI	155
DSSK 70-003B	118	○ IX 2C11S1	158	➤ IXBT 24N170	95	IXDI 430CI	156
DSSK 70-008A	119	○ IX 2D11P7	158	➤ IXBT 24N170A	95	IXDI 430MCI	156
DSSK 70-008AR	73, 119	○ IX 2D11S7	158	➤ IXBT 28N170A	95	IXDI 430MYI	156
DSSK 80-0008D	118	○ IX 2R11P7	158	➤ IXBT 42N170	95	IXDI 430YI	156
DSSK 80-0025B	118	○ IX 2R11S3	158	IXBT 42N170A	95	➤ IXDI 502D1	154
DSSK 80-003B	118	○ IX 4R11P7	158	➤ IXB 64N250	95	➤ IXDI 502PI	154
DSSK 80-0045B	118	○ IX 4R11S3	158	○ IXC 611P1	158	➤ IXDI 502SIA	154
DSSK 80-006B	118	IX 6R11P7	158	○ IXC 611S1	158	➤ IXDI 504D1	155
DSSK 80-006BR	73, 118	IX 6R11S3	158	IXCP 02M45	161	➤ IXDI 504PI	155
DSSS 30-01AR	73, 119	IX 6R11S6	158	IXCP 10M45	161	➤ IXDI 504SIA	155
DSSS 35-008AR	73, 119	○ IX 6S11S6	158	IXCP 10M45S	161	➤ IXDI 509D1	155
E		➤ IXA12IF1200PB	88	IXCP 10M90S	161	➤ IXDI 509PI	155
EV6R 11S3	160	➤ IXA17IF1200HJ	73, 88	IXCP 20M45	161	➤ IXDI 509SIA	155
EV6R 11S7	160	➤ IXA20I1200PB	88	IXCP 40M45	161	➤ IXDI 514D1	155
EVBD 4400	160	➤ IXA37IF1200HJ	73, 88	IXCP 50M45	161	➤ IXDI 514PI	155
EVDD 404	160	➤ IXA45IF1200HB	88	IXCP 60M45	161	➤ IXDI 514SIA	155
EVDD 414	160	➤ IXA55I1200HJ	73, 88	IXCY 02M45	161	IXDN 402SI	154
EVDD 415	160	○ IXA 611P7	158	IXCY 10M45	161	IXDN 402SI-16	154
EVDD 430CI	160	○ IXA 611S3	158	IXCY 10M45S	161	IXDN 402SIA-16	154
EVDD 430MCI	160	○ IXB 611P1	158	IXCY 10M90S	161	IXDN 404SI	155
EVDD 430MYI	160	○ IXB 611S1	158	IXCY 20M45	161	IXDN 404SI-16	155
EVDD 430YI	160	IXBD 4410PI	159	IXCY 30M45	161	IXDN 404SIA-16	155
EVDI 402	160	IXBD 4410SI	159	IXCY 50M45	161	IXDN 409CI	155
EVDI 404	160	IXBD 4411PI	159	IXCY 60M45	161	IXDN 409SI	155
EVDI 409	160	IXBD 4411SI	159	○ IXD 611P1	158	IXDN 409YI	155
EVDI 414	160	IXBF 9N160G	75, 95	○ IXD 611P7	158	IXDN 414CI	155
EVDI 430CI	160	➤ IXBF 14N250	75	○ IXD 611S1	158	IXDN 414SI	156
EVDI 430MCI	160	IXBF 40N160	75, 95	○ IXD 611S7	158	IXDN 414YI	156
EVDI 430MYI	160	IXBH 5N160G	95	IXDA 20N120AS	88	IXDN 430CI	156
EVDI 430YI	160	IXBH 6N170	95	IXDD 404SI	154	IXDN 430MCI	156
EVDN 402	160	IXBH 9N160G	95	IXDD 404SI-16	154	IXDN 430MYI	156
EVDN 404	160	IXBH 10N170	95	IXDD 404SIA-16	154	IXDN 430YI	156
EVDN 409	160	IXBH 16N170	95	➤ IXDD 408CI	155	➤ IXDN 502D1	154
EVDN 414	160	IXBH 16N170A	95	➤ IXDD 408PI	155	➤ IXDN 502PI	154
EVDN 430CI	160	➤ IXBH 24N170	95	➤ IXDD 408SI	155	➤ IXDN 502SIA	154
EVDN 430MCI	160	➤ IXBH 24N170A	95	➤ IXDD 408YI	155	➤ IXDN 504D1	155
EVDN 430MYI	160	➤ IXBH 28N170A	95	IXDD 414CI	155	➤ IXDN 504PI	155
EVDN 430YI	160	IXBH 40N160	95	IXDD 414SI	155	➤ IXDN 504SIA	155
EVDS 430SI	160	IXBH 42N170	95	IXDD 414YI	155	➤ IXDN 509D1	155
EVIC 420A	160	➤ IXBH 42N170A	95	IXDD 415SI	156	➤ IXDN 509PI	155
EVIC 420B	160	➤ IXBK 64N250	95	IXDD 430CI	156	➤ IXDN 509SIA	155
F		IXBOD 1-06	153	IXDD 430MCI	156	➤ IXDN 514D1	156
FBE 22-06N1	75, 87, 142	IXBOD 1-07	153	IXDD 430MYI	156	➤ IXDN 514PI	156
FBO 16-12N	75, 87, 140, 143	IXBOD 1-08	153	IXDD 430YI	156	➤ IXDN 514SIA	156
FBO 40-12N	75, 87, 140, 143	IXBOD 1-09	153	➤ IXDD 504D2	154	IXDN 55N120D1	88
FBS 10-06SC	75, 117, 142	IXBOD 1-10	153	➤ IXDD 504PI	154	IXDN 75N120	88
FBS 16-06SC	75, 117, 142	IXBOD 1-34 R	153	➤ IXDD 504SIA	154	IXDP 20N60B	88
➤ FDM 15-06KC5	75, 113, 114	IXBOD 1-36 R	153	➤ IXDD 509D1	155	IXDP 20N60BD1	88
➤ FDM 47-06KC5	75, 113, 114	IXBOD 1-38 R	153	➤ IXDD 509PI	155	IXDP 35N60B	88
FDM 100-0045SP	75, 115	IXBOD 1-40 R	153	➤ IXDD 509SIA	155	IXDP 610PI	162
FID 60-06D	75, 87, 140	IXBOD 1-42 R	153	➤ IXDD 514D1	155	IXDP 630PI	162
➤ FII 24N17AH1	75	IXBOD 1-12 R	153	➤ IXDD 514PI	155	IXDP 631PI	162
FII 30-06D	75, 87	IXBOD 1-12 RD	153	➤ IXDD 514SIA	155	IXDR 30N120	88
FII 30-12E	75, 87	IXBOD 1-13 R	153	➤ IXDE 504D2	154	IXDR 30N120D1	88
FII 40-06D	75, 87	IXBOD 1-13 RD	153	➤ IXDE 504PI	154	IXDR 35N60BD1	88
FII 50-12E	75, 87	IXBOD 1-14 R	153	➤ IXDE 504SIA	154	➤ IXDR 502D1B	154
FIO 50-12BD	75, 141	IXBOD 1-14 RD	153	➤ IXDE 509D1	155	IXDS 430SI	156
➤ FMD 15-06KC5	75, 113, 114, 140	IXBOD 1-15 R	153	➤ IXDE 509PI	155	➤ IXDS 502D1B	154
FMD 21-05QC	75, 114, 140	IXBOD 1-15 RD	153	➤ IXDE 509SIA	155	○ IXE 611P1	158
FMD 40-06KC	75, 113, 114, 140	IXBOD 1-16 R	153	➤ IXDE 514D1	155	○ IXE 611S1	158
➤ FMD 47-06KC5	75, 113, 114, 140	IXBOD 1-16 RD	153	➤ IXDE 514PI	155	IXEH 25N120	88
FMK 75-01F	75, 114, 141	IXBOD 1-17 R	153	➤ IXDE 514SIA	155	IXEH 25N120D1	88
FMM 65-015P	75, 115	IXBOD 1-17 RD	153	IXDF 402SI	154	IXEH 40N120	88
FMM 75-01F	75, 114, 115	IXBOD 1-18 R	153	IXDF 402SI-16	154	IXEH 40N120D1	88
FMM 150-0075P	75, 115	IXBOD 1-18 RD	153	IXDF 402SIA-16	154	IXEL 40N400	94
FUE 30-12N1	75, 87, 142	IXBOD 1-19 R	153	IXDF 404SI	154	IXEN 60N120	88
FUO 22-12N	75, 87, 146	IXBOD 1-19 RD	153	IXDF 404SI-16	154	IXEN 60N120D1	88
FUO 22-16N	75, 87, 146	IXBOD 1-20 R	153	IXDF 404SIA-16	154	➤ IXER 20N120	88
FUO 50-16N	75, 87, 146	IXBOD 1-20 RD	153	➤ IXDF 502D1	154	➤ IXER 20N120D1	88
FUS 45-0045B	75, 87, 118, 142	IXBOD 1-21 R	153	➤ IXDF 502PI	154	IXER 35N120D1	88
G		IXBOD 1-21 RD	153	➤ IXDF 502SIA	154	IXER 60N120	88
GBO 25-12NO1	143	IXBOD 1-22 R	153	➤ IXDF 504D1	154	○ IXF 611P1	158
GBO 25-16NO1	143	IXBOD 1-22 RD	153	➤ IXDF 504PI	154	○ IXF 611S1	158

Alphanumeric Index

○ Not for new design

➤ New

IXFA 3N120	108	IXFH 110N10P	104	IXFN 64N60P	106	IXFT 26N50Q	109
➤ IXFA 4N100P	107	IXFH 120N15P	104	IXFN 66N50Q2	110	IXFT 26N60P	106
IXFA 4N100Q	110	IXFH 120N20P	104	IXFN 70N60Q2	110	IXFT 26N60Q	109
➤ IXFA 5N100P	107	IXFH 140N10P	104	IXFN 73N30Q	109	IXFT 30N50P	105
➤ IXFA 7N100P	107	IXFH 150N15P	104	IXFN 80N50P	105	IXFT 30N60P	106
IXFA 7N80P	106	➤ IXFH 150N17T	99	IXFN 80N50Q2	110	IXFT 32N50Q	109
IXFA 10N60P	105	IXFH 170N10P	104	IXFN 82N60P	106	IXFT 36N50P	105
IXFA 10N80P	106	IXFI 7N80P	106	IXFN 100N50P	105	IXFT 36N60P	106
IXFA 12N50P	105	IXFJ 32N50Q	109	IXFN 102N30P	104	IXFT 40N30Q	109
IXFA 14N60P	105	IXFK 15N100Q	110	IXFN 140N20P	104	IXFT 44N50P	105
IXFA 16N50P	105	IXFK 16N90Q	109	IXFN 140N30P	104	IXFT 52N30Q	109
➤ IXFB 30N120P	107	➤ IXFK 20N120P	107	IXFN 180N07	108	IXFT 58N20Q	109
IXFB 38N100Q2	110	IXFK 20N80Q	109	IXFN 180N10	108	IXFT 69N30P	104
➤ IXFB 40N110P	107	IXFK 21N100Q	110	IXFN 180N15P	104	IXFT 80N10Q	109
➤ IXFB 44N100P	107	IXFK 24N100	108	IXFN 200N10P	104	IXFT 80N20Q	109
IXFB 50N80Q2	110	IXFK 24N80P	106	IXFN 340N07	108	IXFT 96N20P	104
IXFB 60N80P	107	➤ IXFK 26N100P	107	IXFP 3N120	108	IXFT 120N15P	104
IXFB 70N60Q2	110	➤ IXFK 26N120P	107	IXFP 3N50PM	105	IXFT 140N10P	104
IXFB 80N50Q2	110	IXFK 26N60Q	109	➤ IXFP 4N100P	107	➤ IXFV 10N100P	107
IXFB 82N60P	106	IXFK 27N80Q	109	IXFP 4N100Q	110	➤ IXFV 10N100PS	107
IXFB 100N50P	105	IXFK 30N100Q2	110	➤ IXFP 5N100P	107	➤ IXFV 12N100P	107
IXFC 10N80P	72, 106	➤ IXFK 30N110P	107	IXFP 5N50PM	105	➤ IXFV 12N100PS	107
IXFC 12N80P	72, 106	➤ IXFK 32N100P	107	➤ IXFP 7N100P	107	➤ IXFV 12N120P	107
IXFC 14N60P	72, 105	IXFK 32N50Q	109	IXFP 7N80P	106	➤ IXFV 12N20PS	107
IXFC 14N80P	72, 106	IXFK 32N80P	106	IXFP 7N80PM	106	IXFV 12N80P	106
IXFC 16N50P	72, 105	IXFK 36N60P	106	IXFP 8N50PM	105	IXFV 12N80PS	106
IXFC 16N80P	72, 106	IXFK 38N80Q2	110	IXFP 10N60P	105	IXFV 14N80P	106
IXFC 20N80P	72, 106	➤ IXFK 40N50Q2	110	IXFP 10N80P	106	IXFV 14N80PS	106
IXFC 22N60P	72, 105	IXFK 44N50P	105	IXFP 12N50P	105	➤ IXFV 15N100P	107
IXFC 26N50P	72, 105	IXFK 44N60	108	IXFP 12N50PM	105	➤ IXFV 15N100PS	107
IXFC 26N50P	72, 105	IXFK 44N80P	107	IXFP 14N60P	105	IXFV 16N80P	106
IXFC 30N60P	72, 105	IXFK 48N50Q	109	IXFP 16N50P	105	IXFV 16N80PS	106
IXFC 36N50P	72, 105	IXFK 48N60P	106	IXFQ 10N80P	106	IXFV 18N60P	105
IXFC 52N30P	72, 104	IXFK 52N30Q	109	IXFQ 12N80P	106	IXFV 18N60PS	105
IXFC 74N20P	72, 104	IXFK 52N60Q2	110	IXFQ 14N80P	106	IXFV 20N80P	106
IXFC 96N15P	72, 104	IXFK 64N50P	105	IXFR 4N100Q	73, 110	IXFV 20N80PS	106
IXFC 110N10P	72, 104	IXFK 64N60P	106	➤ IXFR 12N100P	107	IXFV 22N50P	105
IXFE 48N50Q	109	IXFK 66N50Q2	110	IXFR 12N100Q	110	IXFV 22N50PS	105
IXFE 73N30Q	109	IXFK 73N30Q	109	IXFR 14N100Q2	73, 110	IXFV 22N60P	106
IXFF 24N100	75	IXFK 80N20Q	109	➤ IXFR 15N100P	107	IXFV 22N60PS	106
IXFF 80N50Q2	110	IXFK 80N50P	105	IXFR 15N80Q	109	IXFV 26N50P	105
IXFH 4N100Q	110	IXFK 88N30P	104	➤ IXFR 16N120P	107	IXFV 26N50PS	105
IXFH 6N100Q	110	IXFK 102N30P	104	➤ IXFR 20N100P	107	IXFV 26N60P	106
➤ IXFH 10N100P	107	IXFK 120N20P	104	➤ IXFR 20N120P	107	IXFV 26N60PS	106
IXFH 10N80P	106	IXFK 120N25P	104	IXFR 20N80P	73, 106	IXFV 30N50P	105
➤ IXFH 12N100P	107	IXFK 140N20P	104	IXFR 21N100Q	73, 110	IXFV 30N50PS	105
IXFH 12N100Q	110	IXFK 140N30P	104	IXFR 24N100	73	IXFV 30N60P	106
➤ IXFH 12N120P	107	IXFK 150N15P	104	IXFR 24N80P	73, 106	IXFV 30N60PS	106
IXFH 12N80P	106	IXFK 170N10P	104	IXFR 24N90Q	73	IXFV 36N50P	105
IXFH 12N90Q	109	IXFK 180N07	108	➤ IXFR 26N100P	107	IXFV 36N50PS	105
IXFH 14N100Q2	110	IXFK 180N10	108	➤ IXFR 26N120P	107	IXFV 52N30P	104
IXFH 14N60P	105	IXFK 180N15P	104	IXFR 26N50Q	109	IXFV 52N30PS	104
IXFH 14N80P	106	IXFK 200N10P	104	IXFR 26N60Q	109	IXFV 74N20P	104
➤ IXFH 15N100P	107	➤ IXFL 30N120P	107	➤ IXFR 30N110P	107	IXFV 74N20PS	104
IXFH 15N100Q	110	➤ IXFL 32N120P	107	IXFR 30N60P	73, 105	IXFV 96N15P	104
IXFH 15N80Q	109	➤ IXFL 36N110P	107	➤ IXFR 32N100P	107	IXFV 96N15PS	104
➤ IXFH 16N120P	107	➤ IXFL 38N100P	107	IXFR 32N50Q	109	IXFV 96N20P	104
IXFH 16N50P	105	IXFL 38N100Q2	73, 110	IXFR 32N80P	73, 106	IXFV 110N10P	104
IXFH 16N80P	106	➤ IXFL 40N110P	107	IXFR 36N50P	73, 105	IXFV 110N10PS	104
IXFH 16N90Q	109	➤ IXFL 44N100P	107	IXFR 36N60P	73, 105	➤ IXFX 20N120P	107
IXFH 18N60P	105	IXFL 60N80P	107	IXFR 38N80Q2	73, 110	IXFX 21N100Q	110
➤ IXFH 20N100P	107	IXFL 80N50Q2	73, 110	IXFR 40N50Q2	73, 110	IXFX 24N100	108
IXFH 20N80P	106	IXFL 82N60P	73, 106	IXFR 44N50P	73, 105	➤ IXFX 26N100P	107
IXFH 20N80Q	109	IXFL 100N50P	73, 105	IXFR 44N60	108	➤ IXFX 26N120P	107
IXFH 22N50P	105	IXFM 12N90Q	109	IXFR 44N80P	73, 106	IXFX 27N80Q	109
IXFH 22N60P	105	➤ IXFN 20N120P	107	IXFR 48N50Q	109	IXFX 30N100Q2	110
IXFH 24N80P	106	IXFN 21N100Q	110	IXFR 48N60P	73, 106	➤ IXFX 30N110P	107
IXFH 26N50P	105	IXFN 230N10	108	IXFR 58N20Q	109	➤ IXFX 32N100P	107
IXFH 26N50Q	109	IXFN 24N100	108	IXFR 64N50P	73, 105	IXFX 32N50Q	109
IXFH 26N60P	106	➤ IXFN 26N100P	107	IXFR 64N60P	73, 106	IXFX 32N80P	107
IXFH 26N60Q	109	➤ IXFN 26N120P	107	IXFR 66N50Q2	73, 110	IXFX 38N80Q2	110
IXFH 28N50Q	109	IXFN 27N80Q	109	IXFR 80N20Q	109	IXFX 44N60	108
IXFH 30N50P	105	➤ IXFN 30N110P	107	IXFR 80N50P	73, 105	IXFX 44N80P	107
IXFH 30N60P	106	➤ IXFN 30N120P	107	IXFR 102N30P	73, 104	IXFX 48N50Q	109
IXFH 32N50Q	109	➤ IXFN 32N100P	107	IXFR 140N20P	73, 104	IXFX 48N60P	106
IXFH 36N50P	105	➤ IXFN 32N120P	107	IXFR 140N30P	73, 104	IXFX 52N60Q2	110
IXFH 36N60P	106	IXFN 32N80P	106	IXFR 180N15P	73, 104	IXFX 64N50P	105
IXFH 40N30Q	109	IXFN 34N100	108	IXFR 200N10P	73, 104	IXFX 64N60P	106
IXFH 40N50Q2	110	IXFN 36N100	108	IXFT 4N100Q	110	IXFX 66N50Q2	110
IXFH 44N50P	105	➤ IXFN 36N110P	107	IXFT 6N100Q	110	IXFX 73N30Q	109
IXFH 52N30P	104	➤ IXFN 38N100P	107	IXFT 12N100Q	110	IXFX 80N50P	105
IXFH 52N30Q	109	IXFN 38N100Q2	110	IXFT 12N90Q	109	IXFX 120N25P	104
IXFH 58N20Q	109	➤ IXFN 38N80Q2	110	IXFT 14N80P	106	IXFX 140N30P	104
IXFH 69N30P	104	➤ IXFN 40N110P	107	IXFT 15N100Q	110	IXFX 180N07	108
IXFH 74N20P	104	➤ IXFN 44N100P	107	IXFT 15N80Q	109	IXFX 180N10	108
IXFH 75N10Q	109	IXFN 44N60	108	➤ IXFT 16N120P	107	IXFX 180N15P	104
IXFH 80N10Q	109	IXFN 44N80P	107	IXFT 16N80P	106	IXFX 200N10P	104
IXFH 80N20Q	109	IXFN 48N50Q	109	IXFT 16N90Q	109	○ IXG 611P1	158
IXFH 88N30P	104	IXFN 48N60P	106	➤ IXFT 20N100P	107	○ IXG 611S1	158
IXFH 96N15P	104	IXFN 50N80Q2	110	IXFT 20N80P	106	IXGA 7N60B	91
IXFH 96N20P	104	IXFN 60N80P	107	IXFT 20N80Q	109	IXGA 7N60C	91
IXFH 100N25P	104	IXFN 64N50P	105	IXFT 24N80P	106	IXGA 8N100	93

Alphanumeric Index

○ Not for new design

➤ New

➤ IXGA 12N100	93	IXGK 50N60C2D1	90	IXGT 35N120B	91	IXSH 30N60B	89
➤ IXGA 12N120A2	91	➤ IXGK 50N90B2D1	91	IXGT 40N120A2	91	IXSH 30N60B2D1	89
IXGA 15N120B2	91	IXGK 60N60B2D1	90	IXGT 40N120B2D1	91	➤ IXSH 30N60BD1	89
IXGA 16N60B2	90	IXGK 60N60C2D1	91	IXGT 40N60B2	90	IXSH 30N60C	89
IXGA 16N60B2D1	90	➤ IXGK 64N60B3D1	92	IXGT 40N60B2D1	90	IXSH 35N140A	89
IXGA 16N60C2	90	➤ IXGK 72N60B3H1	92	IXGT 40N60C2	90	IXSH 40N60B	89
IXGA 16N60C2D1	90	➤ IXGK 75N250	94	IXGT 40N60C2D1	90	IXSH 40N60B2D1	89
IXGA 20N100	93	➤ IXGK 120N60A3	92	IXGT 45N120	93	IXSH 45N120B	89
IXGA 20N120	93	IXGK 120N60C2	91	IXGT 50N60B2	90	IXSH 50N60B	89
➤ IXGA 24N120C3	93	➤ IXGK 320N60A3	92	IXGT 50N60C2	90	IXSK 80N60B	89
➤ IXGA 30N120B3	93	➤ IXGL 75N250	94	IXGT 50N90B2	91	IXSP 10N60B2D1	89
➤ IXGA 48N60B3	92	➤ IXGL 200N60B3	92	IXGT 50N90B2D1	91	➤ IXSP 20N60B2	89
➤ IXGA 48N60C3	92	IXGN 60N60	93	IXGT 60N60B2	91	IXSP 20N60B2D1	89
➤ IXGB 200N60B3	92	IXGN 60N60C2	91	IXGT 60N60C2	91	IXSP 24N60B	89
IXGC 16N60B2	72, 90	IXGN 60N60C2D1	91	IXGT 60N60C2D1	91	IXSQ 10N60B2D1	89
IXGC 16N60B2D1	72, 90	➤ IXGN 72N60A3	92	➤ IXGT 72N60A3	92	IXSQ 20N60B2D1	89
IXGC 16N60C2	72, 90	➤ IXGN 100N160A	94	➤ IXGT 72N60B3	92	IXSR 35N120BD1	73, 89
IXGC 16N60C2D1	72, 90	➤ IXGN 120N60A3	92	➤ IXGX 28N140B3H1	93	IXST 24N60B	89
➤ IXGF 25N250	94	➤ IXGN 120N60A3D1	92	IXGX 32N170AH1	94	IXST 30N60B	89
➤ IXGF 30N400	94	➤ IXGN 200N60B3	92	IXGX 32N170H1	94	IXST 30N60B2D1	89
IXGF 32N170	75, 94	IXGN 320N60A3	92	IXGX 50N60B2D1	90	IXST 35N120B	89
➤ IXGF 36N300	94	IXGN 400N30A3	92	IXGX 50N60C2D1	90	IXST 40N60B	89
IXGH 6N170	94	➤ IXGN 400N60A3	92	IXGX 60N60B2D1	91	IXST 40N60B2D1	89
IXGH 6N170A	94	IXGP 7N60B	91	IXGX 60N60C2D1	91	IXST 45N120B	89
IXGH 10N170	94	IXGP 7N60C	91	➤ IXGX 64N60B3D1	92	IXSX 35N120BD1	89
IXGH 10N170A	94	IXGP 8N100	93	➤ IXGX 72N60B3H1	92	IXSX 80N60B	89
➤ IXGH 12N100	93	➤ IXGP 12N100	93	➤ IXGX 75N250	94	IXTA 05N100	108
➤ IXGH 15N120B2D1	91	➤ IXGP 12N120A2	91	➤ IXGX 120N60A3	92	➤ IXTA 06N120P	103
IXGH 16N170	94	IXGP 15N120B2	91	IXGX 120N60C2	91	➤ IXTA 08N100P	103
IXGH 16N170A	94	IXGP 16N60B2	90	➤ IXGX 320N60A3	92	➤ IXTA 08N120P	103
IXGH 16N170AH1	94	IXGP 16N60B2D1	90	IXGX 400N30A3	92	IXTA 1N100	108
IXGH 16N60B2D1	90	IXGP 16N60C2	90	○ IXH 611P1	158	➤ IXTA 1N100P	103
IXGH 16N60C2D1	90	IXGP 16N60C2D1	90	○ IXH 611S1	158	➤ IXTA 1N120P	103
IXGH 20N100	93	IXGP 20N100	93	IXI848A51	164	IXTA 1N80	108
IXGH 20N120	93	IXGP 20N120	93	IXI848S1	164	➤ IXTA 1R4N100P	103
➤ IXGH 24N120C3	93	➤ IXGP 24N120C3	93	IXI858S1	164	➤ IXTA 1R4N120P	103
➤ IXGH 24N120C3H1	93	➤ IXGP 30N120B3	93	IXI859S1	164	➤ IXTA 2N100P	103
IXGH 24N170	94	IXGP 30N60B2	90	○ IXJ 611P1	158	IXTA 2N80	108
IXGH 24N170A	94	IXGP 30N60C2	90	○ IXJ 611S1	158	IXTA 2N80P	103
IXGH 24N170AH1	94	➤ IXGP 48N60B3	92	○ IXK 611P1	158	➤ IXTA 2R4N120P	103
IXGH 25N160	94	➤ IXGP 48N60C3	92	○ IXK 611S1	158	➤ IXTA 3N100P	103
➤ IXGH 28N140B3H1	93	IXGR 16N170AH1	94	IXKC 13N80C	72, 113	IXTA 3N120	108
➤ IXGH 28N60B3	92	➤ IXGR 24N120C3D1	93	➤ IXKC 15N60C5	72, 113	IXTA 3N50P	101
➤ IXGH 28N60B3D1	92	IXGR 32N170AH1	73, 94	➤ IXKC 19N60C5	72, 113	IXTA 3N60P	102
IXGH 30N120B3D1	93	IXGR 32N170H1	73, 94	IXKC 20N60C	72, 113	IXTA 4N60P	102
IXGH 30N60B2	90	IXGR 32N90B2D1	73, 91	➤ IXKC 23N60C5	72, 113	IXTA 4N80P	103
IXGH 30N60B2D1	90	IXGR 40N60B2	90	IXKC 25N80C	72, 113	IXTA 5N50P	102
IXGH 30N60C2	90	IXGR 40N60B2D1	90	IXKC 40N60C	72, 113	IXTA 5N60P	102
IXGH 30N60C2D1	90	IXGR 40N60C2	90	IXKF 40N60SCD1	72, 113	IXTA 6N50P	102
➤ IXGH 30N60C2D4	90	IXGR 40N60C2D1	73, 90	➤ IXKG 25N80C	73	IXTA 7N60P	102
➤ IXGH 32N120A3	93	➤ IXGR 45N120	93	➤ IXKH 20N60C5	113	IXTA 8N50P	102
IXGH 32N170	94	➤ IXGR 48N60B3	92	➤ IXKH 24N60C5	113	IXTA 10N60P	102
IXGH 32N170A	94	➤ IXGR 48N60B3D1	92	➤ IXKH 30N60C5	113	IXTA 10P50P	112
➤ IXGH 32N170AH1	94	➤ IXGR 48N60C3D1	92	IXKH 35N60C5	113	➤ IXTA 12N50P	102
IXGH 32N90B2	91	IXGR 50N60B2	90	IXKH 47N60C	113	IXTA 14N60P	102
IXGH 32N90B2D1	91	IXGR 50N60B2D1	90	IXKH 70N60C5	113	IXTA 16N50P	102
IXGH 35N120B	90	IXGR 50N60C2	90	IXKK 85N60C	113	➤ IXTA 18P10T	112
➤ IXGH 36N60A3D4	92	IXGR 50N60C2D1	73, 90	IXKL 34N100	73	➤ IXTA 24P085T	112
➤ IXGH 36N60B3D1	92	IXGR 50N90B2D1	73, 91	IXKL 60N80P	73	IXTA 26P20P	112
➤ IXGH 36N60B3D4	92	IXGR 60N60B2	91	IXKN 40N60C	113	➤ IXTA 28P065T	112
IXGH 40N120A2	91	IXGR 60N60B2D1	91	IXKN 45N80C	113	➤ IXTA 32N20T	99
IXGH 40N120B2D1	91	IXGR 60N60C2	91	IXKN 75N60C	113	➤ IXTA 32P05T	112
IXGH 40N60B2	90	IXGR 60N60C2D1	73, 91	➤ IXKP 10N60C5	113	IXTA 36N30P	101
IXGH 40N60B2D1	90	➤ IXGR 60N60C2G1	91	➤ IXKP 10N60C5M	113	IXTA 36P15P	112
IXGH 40N60C2	90	➤ IXGR 72N60A3	92	➤ IXKP 13N60C5	113	➤ IXTA 42N15T	99
IXGH 40N60C2D1	90	➤ IXGR 72N60A3U1	92	➤ IXKP 13N60C5M	113	IXTA 42N25P	101
➤ IXGH 42N30C3	92	➤ IXGR 72N60B3H1	92	➤ IXKP 20N60C5	113	➤ IXTA 48N20T	99
➤ IXGH 45N120	93	IXGR 120N60C2	91	➤ IXKP 20N60C5M	113	IXTA 50N20P	101
➤ IXGH 48N60A3	92	IXGT 6N170	94	➤ IXKP 24N60C5	113	➤ IXTA 50N25T	100
➤ IXGH 48N60A3D1	92	IXGT 6N170A	94	➤ IXKP 24N60C5M	113	IXTA 50N28T	100
➤ IXGH 48N60B3	92	IXGT 10N170	94	IXKP 35N60C5	113	IXTA 52P10P	112
➤ IXGH 48N60B3D1	92	IXGT 10N170A	94	IXKR 25N80C	73, 113	➤ IXTA 56N15T	99
➤ IXGH 48N60C3	92	IXGT 16N170	94	IXKR 40N60C	73, 113	➤ IXTA 60N10T	99
➤ IXGH 48N60C3D1	92	IXGT 16N170A	94	➤ IXKR 47N60C5	113	➤ IXTA 60N20T	99
IXGH 50N60B2	90	IXGT 16N170AH1	94	IXKT 70N60C5	113	IXTA 62N15P	101
IXGH 50N60C2	90	IXGT 20N120	93	➤ IXKU 5-505	80	➤ IXTA 70N075T2	100
IXGH 50N90B2	90	IXGT 24N170	94	IXLF 19N250A	75, 94	➤ IXTA 70N085T	98
IXGH 50N90B2D1	91	IXGT 24N170A	94	➤ IXRA 15N120	95, 141	IXTA 75N10P	101
➤ IXGH 56N60B3D1	92	IXGT 24N170AH1	94	➤ IXRB 5-506	80	➤ IXTA 76N25T	100
➤ IXGH 60N30C3	92	IXGT 25N160	94	IXRH 40N120	95, 141	IXTA 80N10T	99
IXGH 60N60B2	90	IXGT 25N250	94	IXRP 15N120	95, 141	IXTA 80N10T7	99
IXGH 60N60C2	90	IXGT 30N120B3D1	93	IXRR 40N120	95, 141	➤ IXTA 86N20T	99
➤ IXGH 60N60C3	92	IXGT 30N60B2	90	IXS839AQ2	163	IXTA 88N085T	98
➤ IXGH 72N60A3	92	IXGT 30N60B2D1	90	IXS839BQ2	163	IXTA 88N085T7	98
➤ IXGH 72N60B3	92	IXGT 30N60C2	90	IXS839S1	163	➤ IXTA 90N055T2	100
➤ IXGH 85N30C3	92	IXGT 30N60C2D1	90	IXSA 10N60B2D1	89	➤ IXTA 90N075T2	100
➤ IXGH 100N30C3	92	➤ IXGT 32N120A3	93	IXSA 20N60B2D1	89	➤ IXTA 90N15T	99
➤ IXGH 120N30B3	92	IXGT 32N170	94	IXSH 10N60B2D1	89	➤ IXTA 100N04T2	100
➤ IXGH 120N30C3	92	IXGT 32N170A	94	IXSH 15N120B	89	➤ IXTA 102N15T	99
➤ IXGK 28N140B3H1	93	➤ IXGT 32N170AH1	94	IXSH 20N60B2D1	89	IXTA 110N055P	101
IXGK 35N120B	91	IXGT 32N90B2	91	IXSH 24N60B	89	➤ IXTA110N055T2	100
IXGK 50N60B2D1	90	IXGT 32N90B2D1	91	➤ IXSH 24N60BD1	89	➤ IXTA 120N04T2	100

Alphanumeric Index

○ Not for new design

➤ New

IXTA 130N10T	99	➤ IXTH 200N075T	98	➤ IXTP 32P05T	112	➤ IXTQ 130N15T	99
IXTA 130N10T7	99	➤ IXTH 200N085T	98	IXTP 36N30P	101	IXTQ 140N10P	101
IXTA 152N085T	98	IXTH 200N10T	99	IXTP 36P15P	112	IXTQ 150N06P	101
IXTA 152N085T7	98	➤ IXTH 220N055T	98	➤ IXTP 42N15T	99	IXTQ 150N15P	101
IXTA 160N10T	99	➤ IXTH 220N075T	98	IXTP 42N25P	101	IXTQ 152N085T	98
IXTA 160N10T7	99	IXTH 230N085T	98	IXTP 44N10T	99	IXTQ 160N10T	99
➤ IXTA 170N075T2	100	➤ IXTH 240N055T	98	➤ IXTP 48N20T	99	IXTQ 170N10P	101
IXTA 180N085T	98	IXTH 250N075T	98	IXTP 50N085T	98	IXTQ 180N085T	98
IXTA 180N085T7	98	IXTH 280N055T	98	IXTP 50N20P	101	IXTQ 180N10T	99
IXTA 180N10T	99	IXTI 10N60P	102	IXTP 50N20PM	101	IXTQ 200N06P	101
IXTA 180N10T7	99	IXTI 12N50P	102	➤ IXTP 50N25T	100	IXTQ 200N075T	98
➤ IXTA 200N055T2	100	➤ IXTK 17N120L	111	IXTP 52P10P	112	IXTQ 200N085T	98
IXTA 200N075T	98	IXTK 22N100L	111	IXTP 55N075T	98	IXTQ 220N10T	99
IXTA 200N075T7	98	IXTK 32P60P	112	➤ IXTP 56N15T	99	IXTQ 220N055T	98
IXTA 200N085T	98	IXTK 40P50P	112	IXTP 60N10T	99	IXTQ 220N075T	98
IXTA 200N085T7	98	IXTK 46N50L	111	➤ IXTP 60N20T	99	IXTQ 230N085T	98
➤ IXTA 220N04T2	100	IXTK 82N25P	101	IXTP 62N15P	101	IXTQ 240N055T	98
➤ IXTA 220N04T2-7	100	IXTK 88N30P	101	IXTP 64N055T	98	IXTQ 250N075T	98
IXTA 220N055T	98	IXTK 90P20P	112	➤ IXTP 70N075T2	100	IXTQ 280N055T	98
IXTA 220N055T7	98	IXTK 100N25P	101	IXTP 70N085T	98	IXTR 40P50P	112
IXTA 220N075T	98	IXTK 102N30P	101	IXTP 75N10P	101	IXTR 90P20P	112
IXTA 220N075T7	98	IXTK 120N20P	101	➤ IXTP 76N25T	100	IXTR 200N10P	73, 101
IXTA 240N055T	98	IXTK 120N25P	101	IXTP 80N10T	99	IXTT 1N100	108
IXTA 240N055T7	98	IXTK 140N20P	101	➤ IXTP 86N20T	99	IXTT 6N120	108
IXTB 30N100L	111	IXTK 150N15P	101	IXTP 88N085T	98	IXTT 16P60P	112
IXTB 62N50L	111	IXTK 170N10P	101	➤ IXTP 90N055T2	100	IXTT 20P50P	112
IXTC 26N50P	72, 102	IXTK 170P10P	112	➤ IXTP 90N075T2	100	IXTT 26N50P	102
➤ IXTC 102N20T	72, 99	IXTK 180N15P	101	➤ IXTP 90N15T	99	IXTT 26N60P	103
➤ IXTC 110N055T	72	IXTK 200N10P	101	➤ IXTP 100N04T2	100	➤ IXTT 30N50L2	111
➤ IXTC 110N25T	72, 100	➤ IXTL 2x180N10T	73	➤ IXTP 102N15T	99	IXTT 30N50P	102
➤ IXTC 152N085T	72	➤ IXTL 2x200N085T	73	IXTP 110N055P	101	IXTT 30N60P	103
➤ IXTC 160N10T	72, 99	➤ IXTL 2x220N075T	73	➤ IXTP110N055T2	100	IXTT 36N50P	102
➤ IXTC 160N15T	72	➤ IXTL 2x240N055T	73	➤ IXTP 120N04T2	100	IXTT 48P20P	112
➤ IXTC 180N055T	72	➤ IXTN 8N150L	111	IXTP 130N10T	99	IXTT 52N30P	101
➤ IXTC 180N085T	72	➤ IXTN 17N120L	111	IXTP 152N085T	98	IXTT 64N25P	101
➤ IXTC 180N085T	98	IXTN 22N100L	111	IXTP 160N10T	99	IXTT 69N30P	101
IXTC 180N10T	72, 99	IXTN 30N100L	111	➤ IXTP 170N075T2	100	IXTT 74N20P	101
➤ IXTC 200N075T	72, 98	IXTN 32P60P	112	IXTP 180N085T	98	IXTT 82N25P	101
IXTC 200N085T	72, 98	IXTN 40P50P	112	IXTP 180N10T	99	IXTT 88N30P	101
IXTC 200N10T	72, 99	IXTN 46N50L	111	➤ IXTP 200N055T2	100	IXTT 90P10P	112
➤ IXTC 220N055T	72, 98	IXTN 62N50L	111	IXTP 200N075T	98	IXTT 96N15P	101
IXTC 220N075T	72, 98	IXTN 90P20P	112	IXTP 200N085T	98	IXTT 96N20P	101
IXTC 230N085T	72, 98	IXTN 170P10P	112	➤ IXTP 220N04T2	100	IXTT 100N25P	101
IXTC 240N055T	72, 98	➤ IXTN200N10T	99	IXTP 220N055T	98	IXTT 110N10P	101
IXTC 250N075T	72, 98	➤ IXTN 320N10T	99	IXTP 220N075T	98	IXTT 120N15P	101
IXTC 280N055T	72, 98	IXTP 05N100	108	IXTP 240N055T	98	IXTT 140N10P	101
➤ IXTF 200N10T	75, 99	➤ IXTP 06N120P	103	IXTQ 10P50P	112	IXTT 170N10P	101
➤ IXTF 230N085T	75, 98	➤ IXTP 08N100P	103	IXTQ 14N60P	102	IXTU 01N100	108
➤ IXTF 250N075T	75, 98	➤ IXTP 08N120P	103	IXTQ 16N50P	102	IXTU 1R4N60P	102
➤ IXTF 280N055T	75, 98	IXTP 1N100	108	IXTQ 18N60P	103	➤ IXTU 2N80P	103
IXTH 1N100	108	➤ IXTP 1N100P	103	IXTQ 22N50P	102	➤ IXTU 4N60P	102
➤ IXTH 2R4N120P	103	➤ IXTP 1N120P	103	➤ IXTQ 22N60P	103	➤ IXTU 5N50P	102
➤ IXTH 3N100P	103	IXTP 1N80	108	IXTQ 26N50P	102	➤ IXTU 12N06T	98
IXTH 3N120	108	➤ IXTP 1R4N100P	103	IXTQ 26N60P	103	➤ IXTV 18N60P	103
IXTH 6N120	108	➤ IXTP 1R4N120P	103	IXTQ 26P20P	112	IXTV 18N60PS	103
IXTH 10P50P	112	IXTP 1R4N60P	102	➤ IXTQ 30N50L2	111	IXTV 22N50P	102
IXTH 12N100L	111	IXTP 1R6N50P	101	IXTQ 30N50P	102	IXTV 22N50PS	102
IXTH 12N120	108	IXTP 2N100	108	IXTQ 30N60P	103	➤ IXTV 22N60P	103
IXTH 16P60P	112	➤ IXTP 2N100P	103	IXTQ 36N30P	101	IXTV 22N60PS	103
IXTH 20P50P	112	IXTP 2N60P	102	IXTQ 36N50P	102	IXTV 26N50P	102
IXTH 22N50P	102	IXTP 2N80	108	IXTQ 36P15P	112	IXTV 26N50PS	102
IXTH 24N50L	111	IXTP 2N80P	103	IXTQ 42N25P	101	IXTV 26N60P	103
IXTH 26N60P	103	➤ IXTP 2R4N120P	103	IXTQ 44N50P	102	IXTV 26N60PS	103
IXTH 26P20P	112	IXTP 2R4N50P	101	➤ IXTQ 48N20T	99	IXTV 30N50P	102
➤ IXTH 30N50L2	111	➤ IXTP 3N100P	103	IXTQ 50N20P	101	IXTV 30N50PS	102
IXTH 30N50P	102	IXTP 3N120	108	➤ IXTQ 50N25T	100	IXTV 30N60P	103
IXTH 30N60P	103	IXTP 3N50P	102	IXTQ 52N30P	101	IXTV 30N60PS	103
IXTH 36N50P	102	IXTP 3N60P	102	IXTQ 52P10P	112	IXTV 36N50P	102
➤ IXTH 48N20T	99	IXTP 4N60P	102	➤ IXTQ 60N20T	99	IXTV 36N50PS	102
IXTH 48P20P	112	IXTP 4N80P	103	IXTQ 62N15P	101	➤ IXTV 86N25T	100
➤ IXTH 50N25T	100	IXTP 5N50P	102	IXTQ 64N25P	101	➤ IXTV 96N25T	100
IXTH 52P10P	112	IXTP 5N60P	102	IXTQ 69N30P	101	➤ IXTV 102N20T	100
➤ IXTH 76N25T	100	IXTP 6N50P	102	IXTQ 74N20P	101	➤ IXTV 102N20TS	100
➤ IXTH 86N20T	99	IXTP 7N60P	102	IXTQ 75N10P	101	➤ IXTV 110N25TS	100
➤ IXTH 86N25T	100	➤ IXTP 7N60PM	102	➤ IXTQ 76N25T	100	➤ IXTV 130N15TS	99
IXTH 88N30P	101	IXTP 8N50P	102	➤ IXTQ 80N28T	100	➤ IXTV 130N20TS	100
➤ IXTH 90N15T	99	IXTP 8N50PM	102	IXTQ 82N25P	101	IXTV 200N10T	99
IXTH 90P10P	112	IXTP 10N60P	102	➤ IXTQ 86N20T	100	IXTV 200N10TS	99
IXTH 96N20P	101	IXTP 10N60PM	102	➤ IXTQ 86N25T	100	IXTV 230N085T	98
➤ IXTH 96N25T	100	IXTP 10P50P	112	IXTQ 88N30P	101	➤ IXTV 230N085TS	98
➤ IXTH 102N15T	99	IXTP 12N50P	102	➤ IXTQ 90N15T	99	IXTV 250N075T	98
➤ IXTH 102N20T	100	IXTP 12N50PM	102	IXTQ 96N15P	101	IXTV 250N075TS	98
➤ IXTH 110N25T	100	IXTP 14N60P	102	IXTQ 96N20P	101	IXTV 280N055T	98
➤ IXTH 130N10T	99	➤ IXTP 14N60PM	102	➤ IXTQ 96N25T	100	IXTV 280N055TS	98
➤ IXTH 130N15T	99	IXTP 16N50P	102	IXTQ 100N25P	101	IXTX 22N100L	111
➤ IXTH 130N20T	100	➤ IXTP 16N50PM	102	➤ IXTQ 102N15T	99	IXTX 32P60P	112
➤ IXTH 150N17T	99	➤ IXTP 18N60PM	102	➤ IXTQ 102N20T	100	IXTX 40P50P	112
➤ IXTH 152N085T	99	➤ IXTP 18P10T	112	IXTQ 110N055P	101	IXTX 46N50L	111
➤ IXTH 160N10T	99	➤ IXTP 24P085T	112	IXTQ 110N10P	101	IXTX 90P20P	112
➤ IXTH 160N15T	99	IXTP 26P20P	112	IXTQ 120N15P	101	IXTX 170P10P	112
➤ IXTH 180N085T	98	➤ IXTP 28P065T	112	IXTQ 120N20P	101	IXTY 01N100	108
➤ IXTH 180N10T	99	➤ IXTP 32N20T	99	IXTQ 130N10T	99	➤ IXTY 08N100P	103

Alphanumeric Index

○ Not for new design

➤ New

➤ IXTY 1N100P	103	MCC 162-12io1	137	MCD 95-12io1B	133	MDD 26-18N1B	131
IXTY 1N80	108	MCC 162-14io1	137	MCD 95-12io8B	133	MDD 44-08N1B	131
➤ IXTY 1R4N100P	103	MCC 162-16io1	137	MCD 95-14io1B	133	MDD 44-12N1B	131
IXTY 1R4N60P	102	MCC 162-18io1	137	MCD 95-14io8B	133	MDD 44-14N1B	131
IXTY 1R6N50P	101	MCC 200-14io1	137	MCD 95-16io1B	133	MDD 44-16N1B	131
➤ IXTY 2N100P	103	MCC 200-16io1	137	MCD 95-16io8B	133	MDD 44-18N1B	131
IXTY 2N80P	103	MCC 200-18io1	137	MCD 95-18io1B	133	MDD 56-08N1B	131
IXTY 2R4N50P	101	MCC 220-08io1	137	MCD 95-18io8B	133	MDD 56-12N1B	131
IXTY 3N50P	102	MCC 220-12io1	137	MCD 132-08io1	134	MDD 56-14N1B	131
IXTY 3N60P	102	MCC 220-14io1	137	MCD 132-12io1	134	MDD 56-16N1B	131
➤ IXTY 4N60P	102	MCC 220-16io1	137	MCD 132-14io1	134	MDD 56-18N1B	131
IXTY 5N50P	102	MCC 220-18io1	137	MCD 132-16io1	134	MDD 72-08N1B	131
➤ IXTY 12N06T	98	MCC 224-20io1	137	MCD 132-18io1	134	MDD 72-12N1B	131
IXTY 2N60P	102	MCC 224-22io1	137	MCD 161-20io1	134	MDD 72-14N1B	131
IXTY 44N10T	99	MCC 225-12io1	137	MCD 161-22io1	134	MDD 72-16N1B	131
IXTY 50N085T	98	MCC 225-14io1	137	MCD 162-08io1	134	MDD 72-18N1B	131
IXTY 55N075T	98	MCC 225-16io1	137	MCD 162-12io1	134	MDD 95-08N1B	131
IXTY 64N055T	98	MCC 225-18io1	137	MCD 162-14io1	134	MDD 95-12N1B	131
IXUN 350N10	99	MCC 250-08io1	137	MCD 162-16io1	134	MDD 95-14N1B	131
L		MCC 250-12io1	137	MCD 162-18io1	134	MDD 95-16N1B	131
➤ LKK 47-06C5	113	MCC 250-14io1	137	MCD 200-14io1	134	MDD 95-18N1B	131
M		MCC 250-16io1	137	MCD 200-16io1	134	MDD 95-20N1B	131
MCC 19-08io1B	136	MCC 250-18io1	137	MCD 200-18io1	134	MDD 95-22N1B	131
MCC 19-08io8B	136	MCC 255-12io1	137	MCD 220-08io1	134	MDD 142-08N1	131
MCC 19-12io1B	136	MCC 255-14io1	137	MCD 220-12io1	134	MDD 142-12N1	131
MCC 19-12io8B	136	MCC 255-16io1	137	MCD 220-14io1	134	MDD 142-14N1	131
MCC 19-14io1B	136	MCC 255-18io1	137	MCD 220-16io1	134	MDD 142-16N1	131
MCC 19-14io8B	136	MCC 310-08io1	137	MCD 224-20io1	134	MDD 142-18N1	131
MCC 19-16io1B	136	MCC 310-12io1	137	MCD 224-22io1	134	MDD 172-08N1	131
MCC 19-16io8B	136	MCC 310-14io1	137	MCD 225-12io1	134	MDD 172-12N1	131
MCC 21-08io8B	136	MCC 310-16io1	137	MCD 225-14io1	134	MDD 172-14N1	131
MCC 21-12io8B	136	MCC 310-18io1	137	MCD 225-16io1	134	MDD 172-16N1	131
MCC 21-14io8B	136	MCC 312-12io1	137	MCD 225-18io1	134	MDD 172-18N1	131
MCC 21-16io8B	136	MCC 312-14io1	137	MCD 250-08io1	134	➤ MDD 175-28N1	132
MCC 26-08io1B	136	MCC 312-16io1	137	MCD 250-12io1	134	➤ MDD 175-34N1	132
MCC 26-08io8B	136	MCC 312-18io1	137	MCD 250-14io1	134	MDD 200-14N1	131
MCC 26-12io1B	136	MCC 500-12io1	137	MCD 250-16io1	134	MDD 200-16N1	131
MCC 26-12io8B	136	MCC 500-14io1	137	MCD 250-18io1	134	MDD 200-18N1	131
MCC 26-14io1B	136	MCC 500-16io1	137	MCD 255-12io1	134	MDD 200-22N1	131
MCC 26-14io8B	136	MCC 500-18io1	137	MCD 255-14io1	134	MDD 220-08N1	132
MCC 26-16io1B	136	MCC 500-22io1	137	MCD 255-16io1	134	MDD 220-12N1	132
MCC 26-16io8B	136	MCC 501-12io1	137	MCD 255-18io1	134	MDD 220-14N1	132
MCC 44-08io1B	136	MCC 501-14io1	137	MCD 310-08io1	134	MDD 220-16N1	132
MCC 44-08io8B	136	MCC 501-16io1	137	MCD 310-12io1	134	MDD 220-18N1	132
MCC 44-12io1B	136	MCC 501-18io1	137	MCD 310-14io1	134	MDD 250-08N1	132
MCC 44-12io8B	136	MCC 700-12io1W	137	MCD 310-16io1	134	MDD 250-12N1	132
MCC 44-14io1B	136	MCC 700-16io1W	137	MCD 310-18io1	134	MDD 250-14N1	132
MCC 44-14io8B	136	MCC 700-18io1W	137	MCD 310-20io1	134	MDD 250-16N1	132
MCC 44-16io1B	136	MCD 26-08io1B	133	MCD 310-22io1	134	MDD 255-12N1	132
MCC 44-16io8B	136	MCD 26-08io8B	133	MCD 312-12io1	134	MDD 255-14N1	132
MCC 44-18io1B	136	MCD 26-12io1B	133	MCD 312-14io1	134	MDD 255-16N1	132
MCC 44-18io8B	136	MCD 26-12io8B	133	MCD 312-16io1	134	MDD 255-18N1	132
MCC 56-08io1B	136	MCD 26-14io1B	133	MCD 312-18io1	134	MDD 255-20N1	132
MCC 56-08io8B	136	MCD 26-14io8B	133	MCD 500-12io1	134	MDD 255-22N1	132
MCC 56-12io1B	136	MCD 26-16io1B	133	MCD 500-16io1	134	MDD 310-08N1	132
MCC 56-12io8B	136	MCD 26-16io8B	133	MCD 500-18io1	134	MDD 310-12N1	132
MCC 56-14io1B	136	MCD 40-12io6	133	MCD 500-22io1	134	MDD 310-14N1	132
MCC 56-14io8B	136	MCD 40-16io6	133	MCD 501-12io1	134	MDD 310-16N1	132
MCC 56-16io1B	136	MCD 44-08io1B	133	MCD 501-14io1	134	MDD 310-18N1	132
MCC 56-16io8B	136	MCD 44-08io8B	133	MCD 501-16io1	134	MDD 310-20N1	132
MCC 56-18io1B	136	MCD 44-12io1B	133	MCD 501-18io1	134	MDD 310-22N1	132
MCC 56-18io8B	136	MCD 44-12io8B	133	MCD 700-12io1W	134	MDD 312-12N1	132
MCC 72-08io1B	136	MCD 44-14io1B	133	MCD 700-16io1W	134	MDD 312-14N1	132
MCC 72-08io8B	136	MCD 44-14io8B	133	MCD 700-18io1W	134	MDD 312-16N1	132
MCC 72-12io1B	136	MCD 44-16io1B	133	MCO 25-12io1	138	MDD 312-18N1	132
MCC 72-12io8B	136	MCD 44-16io8B	133	MCO 25-16io1	138	MDD 312-20N1	132
MCC 72-14io1B	136	MCD 44-18io1B	133	MCO 50-12io1	138	MDD 312-22N1	132
MCC 72-14io8B	136	MCD 44-18io8B	133	MCO 50-16io1	138	MDD 600-12N1	132
MCC 72-16io1B	136	MCD 56-08io1B	133	➤ MCO 75-12io1	138	MDD 600-16N1	132
MCC 72-16io8B	136	MCD 56-08io8B	133	➤ MCO 75-16io1	138	MDD 600-18N1	132
MCC 72-18io1B	136	MCD 56-12io1B	133	MCO 100-12io1	138	MDD 600-22N1	132
MCC 72-18io8B	136	MCD 56-12io8B	133	MCO 100-16io1	138	MDD 950-12N1W	132
MCC 94-20io1B	136	MCD 56-14io1B	133	MCO 150-12io1	138	MDD 950-16N1W	132
MCC 94-22io1B	136	MCD 56-14io8B	133	MCO 150-16io1	138	MDD 950-18N1W	132
MCC 95-08io1B	136	MCD 56-16io1B	133	MCO 450-20io1	138	MDD 950-22N1W	132
MCC 95-08io8B	136	MCD 56-16io8B	133	MCO 450-22io1	138	MDI 75-12A3	86
MCC 95-12io1B	136	MCD 56-18io1B	133	MCO 500-12io1	138	MDI 100-12A3	86
MCC 95-12io8B	136	MCD 56-18io8B	133	MCO 500-14io1	138	MDI 145-12A3	86
MCC 95-14io1B	136	MCD 72-08io1B	133	MCO 500-16io1	138	MDI 150-12A4	86
MCC 95-14io8B	136	MCD 72-08io8B	133	MCO 500-18io1	138	MDI 200-12A4	86
MCC 95-16io1B	136	MCD 72-12io1B	133	MCO 600-16io1	138	MDI 300-12A4	86
MCC 95-16io8B	136	MCD 72-12io8B	133	MCO 600-18io1	138	MDI 400-12E4	86
MCC 95-18io1B	136	MCD 72-14io1B	133	MCO 600-20io1	138	MDI 550-12A4	86
MCC 95-18io8B	136	MCD 72-14io8B	133	MCO 600-22io1	138	MDO 500-12N1	132
MCC 132-08io1	137	MCD 72-16io1B	133	MCO 740-20io1	138	MDO 500-14N1	132
MCC 132-12io1	137	MCD 72-16io8B	133	MCO 740-22io1	138	MDO 500-16N1	132
MCC 132-14io1	137	MCD 72-18io1B	133	MCO 800-16io1	138	MDO 500-18N1	132
MCC 132-16io1	137	MCD 72-18io8B	133	MCO 800-18io1	138	MDO 500-20N1	132
MCC 132-18io1	137	MCD 94-20io1B	133	MDD 26-08N1B	131	MDO 500-22N1	132
MCC 161-20io1	137	MCD 94-22io1B	133	MDD 26-12N1B	131	➤ MDO 1200-20N1	132
MCC 161-22io1	137	MCD 95-08io1B	133	MDD 26-14N1B	131	➤ MDO 1200-22N1	132
MCC 162-08io1	137	MCD 95-08io8B	133	MDD 26-16N1B	131	ME A 75-12DA	126

Alphanumeric Index

○ Not for new design

➤ New

MEA 95-06DA	126	MMO 230-16io7	151	UGE 0221 AY4	152	VBO 78-08NO7	144
MEA 250-12DA	126	MMO 230-18io7	151	UGE 0421 AY4	152	VBO 78-12NO7	144
MEA 300-06DA	126	MPK 95-06DA	126	UGE 1112 AY4	152	VBO 78-14NO7	144
MEE 75-12DA	126	MUBW 10-06A6K	81	UGE 3126 AY4	152	VBO 78-16NO7	144
MEE 95-06DA	126	MUBW 10-06A7	81	V		VBO 78-18NO7	144
MEE 250-12DA	126	MUBW 10-12A7	81	VBE 17-06NO7	142	VBO 88-08NO7	144
MEE 300-06DA	126	MUBW 15-06A6K	81	VBE 17-12NO7	142	VBO 88-12NO7	144
MEK 75-12DA	126	MUBW 15-06A7	81	VBE 20-20NO1	142	VBO 88-14NO7	144
MEK 95-06DA	126	MUBW 15-12A6K	81	VBE 26-06NO7	142	VBO 88-16NO7	144
MEK 150-04DA	126	MUBW 15-12A7	81	VBE 26-12NO7	142	VBO 88-18NO7	144
MEK 250-12DA	126	MUBW 15-12T7	81	VBE 55-06NO7	142	VBO 105-08NO7	144
MEK 300-06DA	126	MUBW 20-06A6K	81	VBE 55-12NO7	142	VBO 105-12NO7	144
MEK 350-02DA	126	MUBW 20-06A7	81	VBE 60-06A	142	VBO 105-14NO7	144
MEK 600-04DA	126	MUBW 25-06A6K	81	VBE 100-06NO7	142	VBO 105-16NO7	144
MEO 450-12DA	126	MUBW 25-12A7	81	VBE 100-12NO7	142	VBO 105-18NO7	144
MEO 500-06DA	126	MUBW 25-12T7	81	VBH 40-05B	141	VBO 125-08NO7	144
MEO 550-02DA	126	MUBW 30-06A7	81	VBO 13-08NO2	143	VBO 125-12NO7	144
➤ MIAA10WB600TMH	80	MUBW 30-12A6K	81	VBO 13-12AO2	143	VBO 125-14NO7	144
➤ MIAA10WD600TMH	80	MUBW 30-12E6K	81	VBO 13-12NO2	143	VBO 125-16NO7	144
➤ MIAA10WE600TMH	80	MUBW 35-06A6K	81	VBO 13-14AO2	143	VBO 125-18NO7	144
➤ MIAA10WF600TMH	80	MUBW 35-12A7	81	VBO 13-14NO2	143	VBO 130-08NO7	144
➤ MIAA15WB600TMH	80	MUBW 35-12A8	82	VBO 13-16AO2	143	VBO 130-12NO7	144
➤ MIAA15WD600TMH	80	MUBW 35-12E7	81	VBO 13-16NO2	143	VBO 130-14NO7	144
➤ MIAA15WE600TMH	80	MUBW 40-12T7	81	○ VBO 19-08NO7	143	VBO 130-16NO7	144
➤ MIAA20WB600TMH	80	MUBW 45-12T6K	81	○ VBO 19-12NO7	143	VBO 130-18NO7	144
➤ MIAA20WD600TMH	80	MUBW 50-06A7	81	VBO 20-08NO2	143	VBO 160-08NO7	144
➤ MIAA20WE600TMH	80	MUBW 50-06A8	82	VBO 20-12AO2	143	VBO 160-12NO7	144
MID 75-12A3	86	MUBW 50-12A8	82	VBO 20-12NO2	143	VBO 160-14NO7	144
MID 100-12A3	86	MUBW 50-12E8	82	VBO 20-14AO2	143	VBO 160-16NO7	144
MID 145-12A3	86	MUBW 50-12T8	82	VBO 20-14NO2	143	VBO 160-18NO7	144
MID 150-12A4	86	➤ MUBW 50-17T8	82	VBO 20-16AO2	143	VCA 105-08io7	135
MID 200-12A4	86	MUBW 75-06A8	82	VBO 20-16NO2	143	VCA 105-12io7	135
MID 300-12A4	86	MUBW 75-12T8	82	VBO 21-08NO7	143	VCA 105-14io7	135
MID 400-12E4	86	➤ MUBW 75-17T8	82	VBO 21-12NO7	143	VCA 105-16io7	135
MID 550-12A4	86	MUBW100-06A8	82	VBO 22-08NO8	143	VCA 105-18io7	135
MII 75-12A3	86	MWI 15-12A6K	83	VBO 22-12NO8	143	VCC 2x105-12io7	135
MII 100-12A3	86	MWI 15-12A7	83	VBO 22-14NO8	143	VCC 2x105-14io7	135
MII 145-12A3	86	MWI 25-12A7	83	VBO 22-16NO8	143	VCC 2x105-16io7	135
MII 150-12A4	86	MWI 25-12A7T	83	VBO 22-18NO8	143	VCC 2x105-18io7	135
MII 200-12A4	86	MWI 25-12E7	83	VBO 25-08NO2	143	VCC 105-08io7	135
MII 300-12A4	86	MWI 30-06A7	83	VBO 25-12AO2	143	VCC 105-12io7	135
➤ MII 300-12E4	86	MWI 30-06A7T	83	VBO 25-12NO2	143	VCC 105-14io7	135
MII 400-12E4	86	MWI 30-12E6K	83	VBO 25-14AO2	143	VCC 105-16io7	135
MIO 600-65E11	86	MWI 35-12A7	83	VBO 25-14NO2	143	VCC 105-18io7	135
MIO 1200-25E10	86	MWI 35-12A7T	83	VBO 25-16AO2	143	VCC 2x105-08io7	135
MIO 1200-33E10	86	➤ MWI 35-12T7T	83	VBO 25-16NO2	143	VCD 105-08io7	135
MIO 1200-33E11	86	MWI 45-12T6K	83	VBO 30-08NO2	143	VCD 105-12io7	135
MIO 1500-25E10	86	MWI 50-06A7	83	VBO 30-12NO7	143	VCD 105-14io7	135
MIO 1800-17E10	86	MWI 50-06A7T	83	VBO 30-14NO7	143	VCD 105-16io7	135
MIO 2400-17E10	86	MWI 50-12A7	83	VBO 30-16NO7	143	VCD 105-18io7	135
➤ MITA10WB1200TMH	80	MWI 50-12A7T	83	VBO 30-18NO7	143	VCK 105-08io7	135
➤ MITA15WB1200TMH	80	MWI 50-12E6K	83	VBO 36-08NO8	143	VCK 105-12io7	135
➤ MITA30WB 600TMH	80	MWI 50-12E7	83	VBO 36-12NO8	143	VCK 105-14io7	135
➤ MITB10WB1200TMH	80	MWI 50-12T7T	83	VBO 36-14NO8	143	VCK 105-16io7	135
➤ MITB15WB1200TMH	80	MWI 60-06G6K	83	VBO 36-16NO8	143	VCK 105-18io7	135
➤ MIXA10WB1200TMH	80	MWI 60-12T6K	83	VBO 36-18NO8	143	VCO 132-08io7	135
➤ MIXA20WB1200TED	81	MWI 75-06A7	83	VBO 40-08NO6	143	VCO 132-12io7	135
➤ MIXA20WB1200TMH	80	MWI 75-06A7T	83	VBO 40-12NO6	143	VCO 132-14io7	135
➤ MIXA40W1200TED	83	MWI 75-12A8	84	VBO 40-16NO6	143	VCO 132-16io7	135
➤ MIXA40WB1200TED	81	MWI 75-12A8T	84	○ VBO 45-08NO7	143	VCO 132-18io7	135
➤ MIXA60W1200TED	83	MWI 75-12E8	84	○ VBO 45-12NO7	143	VCO 180-08io7	135
➤ MIXA60WB1200TEH	82	MWI 75-12T7T	83	○ VBO 45-14NO7	143	VCO 180-12io7	135
MKI 50-06A7	85	MWI 75-12T8T	84	○ VBO 45-16NO7	143	VCO 180-14io7	135
MKI 50-06A7T	85	MWI 80-12T6K	83	○ VBO 45-18NO7	143	VCO 180-16io7	135
MKI 50-12E7	85	MWI 100-06A8	84	VBO 50-08NO7	144	VCO 180-18io7	135
MKI 50-12F7	85	MWI 100-06A8T	84	VBO 50-12NO7	144	VGB 0124 AY7a	152
MKI 65-06A7T	85	MWI 100-12A8	84	VBO 50-14NO7	144	VGf 0136 AB	152
MKI 75-06A7	85	MWI 100-12A8T	84	VBO 50-16NO7	144	VGf 0136 AH	152
MKI 75-06A7T	85	MWI 100-12E8	84	VBO 50-18NO7	144	VGO 36-08io7	145
MKI 75-12E8	85	MWI 100-12T8T	84	VBO 52-08NO7	144	VGO 36-12io7	145
➤ MKI 80-06T6K	85	➤ MWI 100-17E8T	84	VBO 52-12NO7	144	VGO 36-14io7	145
MKI 100-12E8	85	MWI 150-06A8	84	VBO 52-14NO7	144	VGO 36-16io7	145
MKI 100-12F8	85	MWI 150-06A8T	84	VBO 52-16NO7	144	VHF 15-08io5	145
MMO 62-12io6	151	MWI 150-12T8T	84	VBO 52-18NO7	144	VHF 15-12io5	145
MMO 62-16io6	151	➤ MWI 150-17E8T	84	VBO 54-08NO7	144	VHF 15-14io5	145
MMO 74-12io6	151	MWI 200-06A8	84	VBO 54-12NO7	144	VHF 15-16io5	145
MMO 74-16io6	151	MWI 200-06A8T	84	VBO 54-14NO7	144	VHF 25-08io7	145
MMO 90-12io6	151	MWI 225-12E9	84	VBO 54-16NO7	144	VHF 25-12io7	145
MMO 90-14io6	151	MWI 225-17E9	84	○ VBO 65-08NO7	144	VHF 28-08io5	145
MMO 90-16io6	151	MWI 300-12E9	84	○ VBO 65-12NO7	144	VHF 28-12io5	145
MMO 110-08io7	151	MWI 300-17E9	84	○ VBO 65-14NO7	144	VHF 28-14io5	145
MMO 110-12io7	151	MWI 450-12E9	84	○ VBO 65-16NO7	144	VHF 28-16io5	145
MMO 110-14io7	151	➤ MWI 451-17E9	84	○ VBO 65-18NO7	144	VHF 36-08io5	145
MMO 140-08io7	151	MX841	163	VBO 68-08NO7	144	VHF 36-12io5	145
MMO 140-12io7	151	T		VBO 68-12NO7	144	VHF 36-14io5	145
MMO 140-16io7	151	TX02-4400JI	159	VBO 68-14NO7	144	VHF 36-16io5	145
MMO 175-08io7	151	TX02-4400PI	159	VBO 68-16NO7	144	VHF 55-08io7	145
MMO 175-12io7	151	U		VBO 72-08NO7	144	VHF 55-12io7	145
MMO 175-16io7	151	UGB 3132 AD	152	VBO 72-12NO7	144	VHF 55-14io7	145
MMO 230-08io7	151	UGB 6124 AG	152	VBO 72-14NO7	144	VHF 55-16io7	145
MMO 230-12io7	151	UGD 6123 AG	152	VBO 72-16NO7	144	VHF 85-12io7	145
MMO 230-14io7	151	UGD 8124 AG	152	VBO 72-18NO7	144	VHF 85-14io7	145

Alphanumeric Index

- Not for new design
- New

VHF 125-12io7	145	VUM 25-05E	140	VUO 98-08NO7	147	VWO 50-14io7	151
VHF 125-14io7	145	VUM 33-05N	140	VUO 98-12NO7	147	VWO 50-16io7	151
VHF 125-16io7	145	VUM 85-05A	140	VUO 98-14NO7	147	VWO 60-12io7	151
VHFD 16-08io1	145	VUO 16-08NO1	146	VUO 98-16NO7	147	VWO 60-14io7	151
VHFD 16-12io1	145	VUO 16-12NO1	146	○ VUO 100-08NO7	147	VWO 60-16io7	151
VHFD 16-14io1	145	VUO 16-14NO1	146	○ VUO 100-12NO7	147	VWO 80-12io7	151
VHFD 16-16io1	145	VUO 16-16NO1	146	○ VUO 100-14NO7	147	VWO 80-14io7	151
VHFD 29-08io1	145	VUO 16-18NO1	146	○ VUO 100-16NO7	147	VWO 85-12io1	151
VHFD 29-12io1	145	VUO 22-08NO1	146	VUO 105-12NO7	147	VWO 85-14io1	151
VHFD 29-14io1	145	VUO 22-12NO1	146	VUO 105-14NO7	147	VWO 85-16io1	151
VHFD 29-16io1	145	VUO 22-14NO1	146	VUO 105-16NO7	147	VWO 95-12io7	151
VHFD 37-08io1	145	VUO 22-16NO1	146	VUO 105-18NO7	147	VWO 95-14io7	151
VHFD 37-12io1	145	VUO 22-18NO1	146	VUO 110-08NO7	147	VWO 140-12io1	151
VHFD 37-14io1	145	VUO 25-08NO8	146	VUO 110-12NO7	147	VWO 140-14io1	151
VHFD 37-16io1	145	VUO 25-12NO8	146	VUO 110-14NO7	147	VWO 140-16io1	151
VHM 40-06P1	114	VUO 25-14NO8	146	VUO 110-16NO7	147	W	
○ VHO 55-08io7	145	VUO 25-16NO8	146	VUO 110-18NO7	147	Wafer,Chips	165
○ VHO 55-12io7	145	VUO 25-18NO8	146	VUO 120-12NO1	148	X	
○ VHO 55-14io7	145	○ VUO 27-08NO7	146	VUO 120-16NO1	148	➤ XOB 17-04x3	167
○ VHO 55-16io7	145	○ VUO 27-12NO7	146	VUO 121-16NO1	148	➤ XOB 17-12x1	167
○ VKF 55-08io7	145	VUO 28-08NO7	146	VUO 122-08NO7	148	XOD 17-04B	166
○ VKF 55-12io7	145	VUO 28-12NO7	146	VUO 122-12NO7	148	XOD 17-12B	166
○ VKF 55-14io7	145	VUO 30-08NO3	146	VUO 122-14NO7	148	XOD 17-34B	166
○ VKF 55-16io7	145	VUO 30-12NO3	146	VUO 122-16NO7	148	XOD 17-68B	166
VKI 50-06P1	85	VUO 30-14NO3	146	VUO 122-18NO7	148	Z	
VKI 50-12P1	85	VUO 30-16NO3	146	VUO 125-12NO7	148	ZY 180 L	139
VKI 75-06P1	85	VUO 30-18NO3	146	VUO 125-14NO7	148	ZY 180 R	139
VKM 40-06P1	114	VUO 34-08NO1	146	VUO 125-16NO7	148	ZY 200 L	139
VKM 60-01P1	114	VUO 34-12NO1	146	VUO 125-18NO7	148	ZY 200 R	139
○ VKO 55-08io7	145	VUO 34-14NO1	146	VUO 155-12NO1	148		
○ VKO 55-12io7	145	VUO 34-16NO1	146	VUO 155-16NO1	148		
○ VKO 55-14io7	145	VUO 34-18NO1	146	VUO 160-08NO7	148		
○ VKO 55-16io7	145	VUO 35-08NO7	146	VUO 160-12NO7	148		
○ VMK 90-02T2	114, 141	VUO 35-12NO7	146	VUO 160-14NO7	148		
○ VMK 165-007T	114, 141	VUO 35-14NO7	146	VUO 160-16NO7	148		
○ VMM 45-02F	114	VUO 35-16NO7	146	VUO 160-18NO7	148		
○ VMM 85-02F	114	VUO 35-18NO7	146	VUO 190-08NO7	148		
VMM 90-09F	114	VUO 36-08NO8	146	VUO 190-12NO7	148		
○ VMM 300-03F	114	VUO 36-12NO8	146	VUO 190-14NO7	148		
○ VMM 650-01F	114	VUO 36-14NO8	146	VUO 190-16NO7	148		
VMM 1000-01P	115	VUO 36-16NO8	146	VUO 190-18NO7	148		
VMM 1500-0075P	115	VUO 36-18NO8	146	VVZ 12-12io1	150		
○ VMO 60-05F	114	VUO 50-08NO3	146	VVZ 12-14io1	150		
○ VMO 550-01F	114	VUO 50-12NO3	146	VVZ 12-16io1	150		
○ VMO 580-02F	114	VUO 50-14NO3	146	VVZ 24-12io1	150		
○ VMO 650-01F	114	VUO 50-16NO3	146	VVZ 24-14io1	150		
VMO 1200-01F	114	VUO 50-18NO3	146	VVZ 24-16io1	150		
➤ VMO 1600-02P	114	VUO 52-08NO1	146	VVZ 39-08ho7	150		
VTO 39-08ho7	150	VUO 52-12NO1	146	VVZ 39-12ho7	150		
VTO 39-12ho7	150	VUO 52-14NO1	146	VVZ 40-12io1	150		
○ VTO 70-08io7	150	VUO 52-16NO1	146	VVZ 40-14io1	150		
○ VTO 70-12io7	150	VUO 52-18NO1	146	VVZ 40-16io1	150		
○ VTO 70-14io7	150	VUO 52-20NO1	146	VVZ 70-08io7	150		
○ VTO 70-16io7	150	VUO 55-12NO7	146	VVZ 70-12io7	150		
VTO 110-12io7	150	VUO 55-14NO7	146	VVZ 70-14io7	150		
VTO 110-14io7	150	VUO 55-16NO7	146	VVZ 70-16io7	150		
VTO 175-12io7	150	VUO 55-18NO7	146	VVZ 110-12io7	150		
VTO 175-14io7	150	VUO 60-12NO3	146	VVZ 110-14io7	150		
VTO 175-16io7	150	VUO 60-14NO3	146	VVZ 175-12io7	150		
○ VTOF 70-08io7	150	VUO 60-16NO3	146	VVZ 175-14io7	150		
○ VTOF 70-12io7	150	VUO 60-18NO3	146	VVZ 175-16io7	150		
○ VTOF 70-14io7	150	VUO 62-08NO7	147	VVZB 120-12io2	149		
○ VTOF 70-16io7	150	VUO 62-12NO7	147	VVZB 120-16io2	149		
VUB 50-12PO1	149	VUO 62-14NO7	147	VVZB 135-16NO1	149		
VUB 50-16PO1	149	VUO 62-16NO7	147	VVZB 170-16NO1	149		
VUB 72-12NO1	149	VUO 62-18NO7	147	VVZF 70-08io7	150		
VUB 72-16NO1	149	VUO 68-08NO7	147	VVZF 70-12io7	150		
VUB 116-16NO1	149	VUO 68-12NO7	147	VVZF 70-14io7	150		
VUB 120-12NO2	149	VUO 68-14NO7	147	VVZF 70-16io7	150		
VUB 120-16NO2	149	VUO 68-16NO7	147	VW 2x30-12io1	151		
VUB 135-22NO1	149	VUO 70-08NO7	147	VW 2x30-14io1	151		
VUB 145-16NO1	149	VUO 70-12NO7	147	VW 2x30-16io1	151		
VUB 160-12NO2	149	VUO 70-14NO7	147	VW 2x45-12io1	151		
VUB 160-16NO2	149	VUO 70-16NO7	147	VW 2x45-14io1	151		
VUC 25-12go2	150	VUO 80-08NO1	147	VW 2x45-16io1	151		
VUC 25-14go2	150	VUO 80-12NO1	147	VW 2x60-12io1	151		
VUC 25-16go2	150	VUO 80-14NO1	147	VW 2x60-14io1	151		
VUC 36-12go2	150	VUO 80-16NO1	147	VW 2x60-16io1	151		
VUC 36-14go2	150	VUO 80-18NO1	147	VWI 15-12P1	85		
VUC 36-16go2	150	VUO 82-08NO7	147	VWI 20-06P1	85		
VUE 22-06NO7	142	VUO 82-12NO7	147	VWI 35-06P1	85		
VUE 22-12NO7	142	VUO 82-14NO7	147	VWM 200-01P	115		
VUE 30-20NO1	142	VUO 82-16NO7	147	VWM 350-0075P	115		
VUE 35-06NO7	142	VUO 82-18NO7	147	VWO 35-08ho7	151		
VUE 35-12NO7	142	○ VUO 85-08NO7	147	VWO 35-12ho7	151		
VUE 50-12NO1	142	○ VUO 85-12NO7	147	VWO 36-12io7	151		
VUE 75-06NO7	142	○ VUO 85-14NO7	147	VWO 36-14io7	151		
VUE 75-12NO7	142	○ VUO 85-16NO7	147	VWO 36-16io7	151		
VUE 130-06NO7	142	VUO 86-08NO7	147	VWO 40-12io7	151		
VUE 130-12NO7	142	VUO 86-12NO7	147	VWO 40-14io7	151		
VUI 30-12N1	140	VUO 86-14NO7	147	VWO 40-16io7	151		
VUM 24-05N	140	VUO 86-16NO7	147	VWO 50-12io7	151		

Westcode

C	
C0030BG400SAA	201
C0030BG400SAB	201
C0030BG400SAC	201
C0030BG400SAD	201
C0030BG400SAK	201
C0030BG400SAL	201
C0030BG400SAM	201
C0030BG400SAN	201
C0030BG400SAP	201
C0030BG400SAR	201
C0030BG400SAS	201
C0030BG400SAT	201
CMK0600D74M	212
CMK0600S74M	212
CMK1000D74M	212
CMK1000S74M	212
CMK1100D76M	212
CMK1130D76M	212
CMK1130D76M	212
CMK1130S76M	212
CMK1800D76M	212
CMK1800D76M	212
CMK1800S76M	212
CMK2000D114M	212
CMK2000S114M	212
CMK2100D76M	212
CMK2100S76M	212
CMK2140D76M	212
CMK2140D76M	212
CMK2140S76M	212
CMK2500D114M	212
CMK2500D116M	212
CMK2500S114M	212
CMK2500S116M	212
CMK2700D76M	212
CMK2700D76M	212
CMK2700S76M	212
CMK3000D116M	212
CMK3000S116M	212
CMK3060D140ML	212
CMK3060S140ML	212
CMK3500D116M	212
CMK3500S116M	212
CMK4000D116M	212
CMK4000S116M	212
CMK450B 19M	212
CMK450B 25M	212
CMK450B 25M	212
CMK450D56M	212
CMK450D56M	212
CMK450D56M	212
CMK450D56M	212
CMK5000D128M	212
CMK550D56M	212
CMK550S56M	212
CMK6120D180ML	212
CMK6120S180ML	212
CMK7000D128M	212
CMK9000D160M	212

Alphanumeric Index

○ Not for new design
 > New

CMK9000S160M	212	> K0443LG650	187	M0130SL200	176	M0914LC200	177
CMK900D56M	212	> K0682LC360	187	M0130SL250	176	M0914LC250	177
CMK900DT56M	212	> K0682LC420	187	M0130SM200	176	M0955LC200	179
CMK900S56M	212	> K0682LG360	187	M0130SM250	176	M0955LC250	179
E		> K0682LG420	187	M0139RL120	176	M1010NC400	177
E0300YH400	181	K0769NC600	187	M0139RL180	176	M1010NC450	177
E0300YH450	181	K0769NC650	187	M0139RM120	176	M1022LC120	179
E0400YH200	181	> K0769NG600	187	M0139RM180	176	M1022LC160	179
E0400YH250	181	> K0769NG650	187	M0139SL120	176	M1022LC200	179
E0900NC400	181	K0890NC360	187	M0139SL180	176	M1080LC100	179
E0900NC450	181	K0890NC420	187	M0139SM120	176	M1080LC120	179
> E0900NH400	181	> K1120NC360	187	M0139SM180	176	M1102NC500	179
> E0900NH450	181	> K1120NC420	187	M0225YH300	178	M1102NC600	179
E1500NC200	181	> K1120NG360	187	M0225YH360	178	M1104NC400	179
E1500NC250	181	> K1120NG420	187	M0225YH450	178	M1104NC450	179
> E1500NC36P	181	K1121NC320	187	M0268RC200	176	M1163NC400	177
> E1500NC42P	181	K1121NC360	187	M0268RC250	176	M1163NC450	177
> E1500NC48P	181	K1197NC300	187	M0268RJ200	176	M1242NC260	179
> E1500NH200	181	K1197NC320	187	M0268RJ250	176	M1242NC360	179
> E1500NH250	181	K1351VC600	187	M0268SC200	176	M1242ND260	179
> E1500NH36P	181	K1351VC650	187	M0268SC250	176	M1242ND360	179
> E1500NH42P	181	K1351VF600	187	M0268SJ200	176	M1494NC160	179
> E1500NH48P	181	K1351VF650	187	M0268SJ250	176	M1494NC250	179
E1500VF400	181	K1947ZC400	187	M0280RC200	176	M1502NC200	177
E1500VF450	181	K1947ZC440	187	M0280RC250	176	M1502NC250	177
E2000NC140	181	K1947ZD400	187	M0280RJ200	176	> M1502ND200	177
E2000NC170	181	K1947ZD440	187	M0280RJ250	176	> M1502ND250	177
> E2000NH140	181	> K2065VC360	187	M0280SC200	176	M1565VC400	179
> E2000NH170	181	> K2065VC420	187	M0280SC250	176	M1565VC450	179
E2400TC400	181	> K2065VF360	187	M0280SJ200	176	M1565VF400	179
E2400TC450	181	> K2065VF420	187	M0280SJ250	176	M1565VF450	179
E2500VF200	181	K2095ZC360	187	M0310YH300	178	M1583VC400	177
E2500VF250	181	K2095ZC420	187	M0310YH350	178	M1583VC450	177
F		K2095ZD360	187	M0334RC120	176	M1583VF400	177
F0240YC250	180	K2095ZD420	187	M0334RC200	176	M1583VF450	177
F0240YC300	180	K2359TC600	187	M0334RJ120	176	M1609NC200	177
F0240YH250	180	K2359TC650	187	M0334RJ200	176	M1609NC260	177
F0240YH300	180	K2359TD600	187	M0334SC120	176	M1858NC120	179
F0300WC140	180	K2359TD650	187	M0334SC200	176	M1858NC160	179
F0300WC180	180	K2623TC450	187	M0334SJ120	176	M2273VC300	177
F0800LC140	180	K2623TC480	187	M0334SJ200	176	M2273VC360	177
F0800LC180	180	K2623TC520	187	M0336RA120	176	M2273VF300	177
F0900VC450	180	K2623TD450	187	M0336RA140	176	M2273VF360	177
F0900VC520	180	K2623TD480	187	M0336SA120	176	M2322ZC300	179
F0900VF450	180	K2623TD520	187	M0336SA140	176	M2322ZC400	179
F0900VF520	180	K2960TC450	188	M0347WC160	178	M2322ZD300	179
F1000LC080	180	K2960TC480	188	M0347WC200	178	M2322ZD400	179
F1000LC120	180	K2960TC520	188	M0347WC250	178	M2408NC020	177
> F1300NC45P	180	K2960TD450	188	M0358WC120	178	M2408NC060	177
> F1300NC50P	180	K2960TD480	188	M0358WC180	178	> M2408ND020	177
> F1300NC55P	180	K2960TD520	188	M0367WC140	178	> M2408ND060	177
F1400NC140	180	K2973FC600	188	M0367WC220	178	M2413VC200	179
F1400NC180	180	K2973FC650	188	M0367WC280	178	M2413VC250	179
F1500NC200	180	K2973FD600	188	M0371YH350	178	M2413VF200	179
F1500NC250	180	K2973FD650	188	M0371YH450	178	M2413VF250	179
F1600NC080	180	> K3207EC450	188	M0433WC120	178	M2639ZC360	177
F1600NC120	180	> K3207EC480	188	M0433WC160	178	M2639ZC420	177
G		> K3207EC520	188	M0433WC200	178	> M2639ZC450	177
G Fin	213	K3362TC360	188	M0437WC080	178	M2639ZD360	177
G1000NL450	199	K3362TC420	188	M0437WC140	178	M2639ZD420	177
> G1000QC400	199	K3362TD360	188	M0451YC120	178	> M2639ZD450	177
> G1000QC450	199	K3362TD420	188	M0451YC160	178	M2698ZC250	177
G2000VC250	199	K3503FC450	188	M0451YC200	178	M2698ZC280	177
G2000VC450	199	K3503FC480	188	M0451YH120	178	M2698ZC350	177
G3000TC250	199	K3503FC520	188	M0451YH160	178	M2698ZD250	177
G3000TC450	199	K3503FD450	188	M0451YH200	178	M2698ZD280	177
G3000TC600	199	K3503FD480	188	M0588LC400	177	M2698ZD350	177
G4000EC450	199	K3503FD520	188	M0588LC450	177	M2837VC180	177
GA Fin	213	> KX101FC360	188	M0659LC400	178	M2837VC250	177
> GX185QC250	199	> KX101FC420	188	M0659LC450	178	M2837VF180	177
H		> KX101FD360	188	M0710LC560	178	M2837VF250	177
H Fin	213	> KX101FD420	188	M0710LC600	178	M3770ZC200	177
H0500KC200	199	> KX163VC520	188	M0736LC400	178	M3770ZC240	177
H0500KC20Y	199	> KX163VF520	188	M0736LC450	178	M3770ZC300	177
H0500KC25D	199	> KX191LC520	188	M0759YC040	178	M3770ZD200	177
H0500KC25Y	199	> KX191LG520	188	M0759YC120	178	M3770ZD240	177
H0700KC140	199	> KX193NC520	188	M0759YC160	178	M3770ZD300	177
H0700KC14Y	199	> KX193NG520	188	M0759YH040	178	MCA 431-22io1	204
H0700KC17D	199	L		M0759YH120	178	MCA 431-24io1	204
H0700KC17Y	199	LK	214	M0759YH160	178	MCA 501-12io1	204
H1200NC200	199	LKA	214	M0790YC200	177	MCA 501-16io1	204
H1200NC20Y	199	LKB	214	M0790YC250	177	MCA 501-18io1	204
H1200NC25D	199	LKC	214	M0790YH200	177	MCA500-14io1	204
H1200NC25Y	199	LKD	214	M0790YH250	177	MCA500-16io1	204
K		LKE	214	M0859LC140	178	MCA500-18io1	204
K0349LC600	187	LKF	214	M0859LC160	178	MCA500-20io1	204
K0349LC650	187	LP100 Fin (40 Vane)	213	M0863LC260	178	MCA500-22io1	204
> K0349LG600	187	M		M0863LC300	178	MCA700-12io1W	205
> K0349LG650	187	M0130RL200	176	M0863LC360	178	MCA700-14io1W	205
> K0443LC600	187	M0130RL250	176	M0872LC140	178	MCA700-16io1W	205
> K0443LC650	187	M0130RM200	176	M0872LC180	178	MCA700-18io1W	205
> K0443LG600	187	M0130RM250	176	M0872LC210	178	MCA700-20io1W	205

Alphanumeric Index

○ Not for new design

➤ New

MCA700-22io1W	205	MDD 810-12N1	203	N0992YS020	183	➤ N3022MK040	186
MCC 431-22io1	204	MDD 810-16N1	203	N0992YS060	183	➤ N3022MK120	186
MCC 431-24io1	204	MDD 810-18N1	203	N1010NC300	183	➤ N3022MK140	186
MCC 501-12io1	204	MDD600-12N1	203	N1010NC380	183	➤ N3022ZC160	184
MCC 501-16io1	204	MDD600-14N1	203	N1042LS120	183	➤ N3022ZC220	184
MCC 501-18io1	204	MDD600-16N1	203	N1042LS180	183	➤ N3022ZD160	184
MCC500-12io1	204	MDD600-18N1	203	N1114LS120	183	➤ N3022ZD220	184
MCC500-14io1	204	MDD600-20N1	203	N1114LS180	183	➤ N3029ZC240	184
MCC500-16io1	204	MDD600-22N1	203	N1132NC300	183	➤ N3029ZC280	184
MCC500-18io1	204	MDD950-12N1W	205	N1132NC320	183	➤ N3029ZD240	184
MCC500-20io1	204	MDD950-14N1W	205	N1159NC380	183	➤ N3029ZD280	184
MCC500-22io1	204	MDD950-16N1W	205	N1159NC420	183	N3229QK020	186
MCC700-12io1W	205	MDD950-18N1W	205	➤ N1174JK200	186	N3229QK040	186
MCC700-14io1W	205	MDD950-20N1W	205	➤ N1174JK220	186	N3229QK060	186
MCC700-16io1W	205	MDD950-22N1W	205	➤ N1263JK160	186	N3476TC360	184
MCC700-18io1W	205	MDK 710-22N1	203	➤ N1263JK180	186	N3476TC420	184
MCC700-20io1W	205	MDK 710-26N1	203	N1265LS120	183	N3476TD360	184
MCC700-22io1W	205	MDK 810-12N1	203	N1265LS160	183	N3476TD420	184
MCD 431-22io1	204	MDK 810-16N1	203	N1297NS200	183	N3533ZC140	184
MCD 431-24io1	204	MDK 810-18N1	203	N1297NS260	183	➤ N3533ZC200	184
MCD500-12io1	204	MDK600-12N1	203	N1314NC300	183	N3533ZC220	184
MCD500-14io1	204	MDK600-14N1	203	N1314NC360	183	N3533ZD140	184
MCD500-16io1	204	MDK600-16N1	203	N1351VC400	183	➤ N3533ZD200	184
MCD500-18io1	204	MDK600-18N1	203	N1351VC450	183	N3533ZD220	184
MCD500-20io1	204	MDK600-20N1	203	N1351VF400	183	N3839TC300	184
MCD500-22io1	204	MDK600-22N1	203	N1351VF450	183	N3839TC350	184
MCD501-12io1	204	MDK950-12N1W	205	➤ N1366JK080	186	N3839TD300	184
MCD501-16io1	204	MDK950-14N1W	205	➤ N1366JK120	186	N3839TD350	184
MCD501-18io1	204	MDK950-16N1W	205	➤ N1366JK140	186	➤ N3904HK200	186
MCD700-12io1W	205	MDK950-18N1W	205	N1467NS200	183	➤ N3904HK220	186
MCD700-14io1W	205	MDK950-20N1W	205	N1467NS260	183	➤ N3930ZC120	184
MCD700-16io1W	205	MDK950-22N1W	205	N1479NS240	183	➤ N3930ZC160	184
MCD700-18io1W	205	MDO1200-14N1	203	N1479NS300	183	➤ N3930ZD120	184
MCD700-20io1W	205	MDO1200-16N1	203	N1547NS160	183	➤ N3930ZD160	184
MCD700-22io1W	205	MDO1200-18N1	203	N1547NS200	183	N4085ZC080	185
MCK 431-22io1	204	MDO1200-20N1	203	N1588NS200	183	N4085ZC120	185
MCK 431-24io1	204	MDO1200-22N1	203	N1588NS260	183	N4085ZD080	185
MCK 501-12io1	204	N		N1651QK200	186	N4085ZD120	185
MCK 501-16io1	204	N0131SH120	182	N1651QK220	186	N4151FC360	185
MCK 501-18io1	204	N0131SH160	182	N1661VC300	184	N4151FC420	185
MCK500-12io1	204	N0131SJ120	182	N1661VC360	184	N4151FD360	185
MCK500-14io1	204	N0131SJ160	182	N1661VF300	184	N4151FD420	185
MCK500-16io1	204	N0180SH120	182	N1661VF360	184	N4316MK020	186
MCK500-18io1	204	N0180SH160	182	N1712VC240	184	➤ N4316MK040	186
MCK500-20io1	204	N0180SJ120	182	N1712VC300	184	N4316MK060	186
MCK500-22io1	204	N0180SJ160	182	N1712VF240	184	N4400TC120	185
MCK700-12io1W	205	N0194WC120	183	N1712VF300	184	➤ N4400TC220	185
MCK700-14io1W	205	N0194WC160	183	N1718NS120	184	N4400TC280	185
MCK700-16io1W	205	N0255WC120	183	N1718NS180	184	N4400TD120	185
MCK700-18io1W	205	N0255WC160	183	N1718NS200	184	➤ N4400TD220	185
MCK700-20io1W	205	N0290SC120	182	N1802NS120	184	N4400TD280	185
MCK700-22io1W	205	N0290SC160	182	N1802NS160	184	N4472HK160	186
MCO740-20io1	204	N0290SD120	182	N1806QK160	186	N4472HK180	186
MCO740-22io1	204	N0290SD160	182	N1806QK180	186	N4803FC300	185
MCO800-16io1	204	N0290SG120	182	N2046NS120	184	N4803FC350	185
MCO800-18io1	204	N0290SG160	182	N2046NS160	184	N4803FD300	185
MDA 710-22N1	203	N0335SC120	182	N2083QK080	186	N4803FD350	185
MDA 710-26N1	203	N0335SC160	182	N2083QK120	186	N5177FC200	185
MDA 810-12N1	203	N0335SD120	182	N2083QK140	186	N5177FC280	185
MDA 810-16N1	203	N0335SD160	182	N2086NS060	184	N5177FD200	185
MDA 810-18N1	203	N0335SG120	182	N2086NS100	184	N5177FD280	185
MDA600-12N1	203	N0335SG160	182	N2154JK020	186	N5946FC180	185
MDA600-14N1	203	N0339WC120	183	➤ N2154JK040	186	N5946FC220	185
MDA600-16N1	203	N0339WC160	183	N2154JK060	186	N5946FD180	185
MDA600-18N1	203	N0392WC120	183	N2172ZC400	184	N5946FD220	185
MDA600-20N1	203	N0392WC160	183	N2172ZC450	184	➤ N6974HK020	186
MDA600-22N1	203	N0416SC020	182	N2172ZD400	184	➤ N6974HK040	186
MDA950-12N1W	205	N0416SC080	182	N2172ZD450	184	➤ N6974HK060	186
MDA950-14N1W	205	N0416SD020	182	N2293VC180	184	➤ NX037VC200	185
MDA950-16N1W	205	N0416SD080	182	N2293VC220	184	➤ NX037VC260	185
MDA950-18N1W	205	N0416SG020	182	N2293VF180	184	➤ NX037VF200	185
MDA950-20N1W	205	N0416SG080	182	N2293VF220	184	➤ NX037VF260	185
MDA950-22N1W	205	N0491WC020	183	N2367MK200	186	➤ NX160HK080	186
MDC 431-22io1	204	N0491WC080	183	N2367MK220	186	➤ NX160HK120	186
MDC 431-24io1	204	N0606YS200	183	N2418ZC300	184	➤ NX160HK140	186
MDC500-12io1	204	N0606YS250	183	N2418ZC360	184	P	
MDC500-14io1	204	N0616LC400	183	N2418ZD300	184	➤ P0128SH10C	189
MDC500-16io1	204	N0616LC450	183	N2418ZD360	184	P0128SH10D	189
MDC500-18io1	204	N0634LC380	183	N2500VC120	184	P0128SH10E	189
MDC500-20io1	204	N0634LC420	183	N2500VC160	184	P0128SH10F	189
MDC500-22io1	204	N0646LC300	183	N2500VF120	184	➤ P0128SH12C	189
MDC501-12io1	204	N0646LC360	183	N2500VF160	184	P0128SH12D	189
MDC501-16io1	204	N0676YS120	183	N2543ZC240	184	P0128SH12E	189
MDC501-18io1	204	N0676YS180	183	N2543ZC300	184	P0128SH12F	189
MDC700-12io1W	205	N0734YS120	183	N2543ZD240	184	➤ P0128SJ10C	189
MDC700-14io1W	205	N0734YS160	183	N2543ZD300	184	P0128SJ10D	189
MDC700-16io1W	205	N0782YS120	183	N2593MK160	186	P0128SJ10E	189
MDC700-18io1W	205	N0782YS160	183	N2593MK180	186	P0128SJ10F	189
MDC700-20io1W	205	N0882NC400	183	N3012ZC200	184	➤ P0128SJ12C	189
MDC700-22io1W	205	N0882NC450	183	N3012ZC260	184	P0128SJ12D	189
MDD 710-22N1	203	N0910LS200	183	N3012ZD200	184	P0128SJ12E	189
MDD 710-26N1	203	N0910LS260	183	N3012ZD260	184	P0128SJ12F	189

Alphanumeric Index

○ Not for new design
 ➤ New

P0248SC10D	189	P0330SC08D	190	R0736LS22K	192	R1158NS24N	194
P0248SC10E	189	P0330SD04C	190	R0736LS22M	192	R1158NS24P	194
P0248SC10F	189	P0330SD04D	190	R0736LS25J	192	➤ R1158NS24T	194
P0248SC12D	189	P0330SD08C	190	R0736LS25K	192	R1158NS26N	194
P0248SC12E	189	P0330SD08D	190	R0736LS25L	192	R1158NS26P	194
P0248SC12F	189	P0330SG04C	190	R0736LS25M	192	➤ R1158NS26T	194
P0248SD10D	189	P0330SG04D	190	R0809LS06A	192	R1178NS10E	194
P0248SD10E	189	P0330SG08C	190	R0809LS06B	192	R1178NS10F	194
P0248SD10F	189	P0330SG08D	190	R0809LS06C	192	R1178NS10G	194
P0248SD12D	189	P0366WC04A	191	R0809LS10A	192	R1178NS12E	194
P0248SD12E	189	P0366WC04B	191	R0809LS10B	192	R1178NS12F	194
P0248SD12F	189	P0366WC04C	191	R0809LS10C	192	R1178NS12G	194
P0248SG10D	189	➤ P0366WC04D	191	R0830LS10D	192	R1178NS14E	194
P0248SG10E	189	P0366WC06A	191	R0830LS10E	192	R1178NS14F	194
P0248SG10F	189	P0366WC06B	191	R0830LS10F	192	R1178NS14G	194
P0248SG12D	189	P0366WC06C	191	R0830LS10G	192	R1211NS08C	194
P0248SG12E	189	➤ P0366WC06D	191	R0830LS12D	192	R1211NS08D	194
P0248SG12F	189	P0366WC08A	191	R0830LS12E	192	R1211NS08E	194
P0273SC10D	189	P0366WC08B	191	R0830LS12F	192	R1211NS10C	194
P0273SC10E	189	P0366WC08C	191	R0830LS12G	192	R1211NS10D	194
P0273SC10F	189	➤ P0366WC08D	191	R0830LS14D	192	R1211NS10E	194
P0273SC12D	189	P0367WC12E	191	R0830LS14E	192	R1211NS12C	194
P0273SC12E	189	P0367WC12F	191	R0830LS14F	192	R1211NS12D	194
P0273SC12F	189	P0367WC12G	191	R0830LS14G	192	R1211NS12E	194
P0273SD10D	189	➤ P0389WC04B	191	R0878LS16K	193	➤ R1271NS08C	194
P0273SD10E	189	P0389WC04C	191	➤ R0878LS16L	193	R1271NS08D	194
P0273SD10F	189	P0389WC04D	191	R0878LS16M	193	R1271NS08E	194
P0273SD12D	189	➤ P0389WC08B	191	R0878LS18K	193	R1271NS08G	194
P0273SD12E	189	P0389WC08C	191	➤ R0878LS18L	193	➤ R1271NS10C	194
P0273SD12F	189	P0389WC08D	191	R0878LS18M	193	R1271NS10D	194
P0273SG10D	189	P0431SC04C	190	R0878LS20K	193	R1271NS10E	194
P0273SG10E	189	P0431SC06C	190	➤ R0878LS20L	193	R1271NS10G	194
P0273SG10F	189	P0431SD04C	190	R0878LS20M	193	R1271NS12B	194
P0273SG12D	189	P0431SD06C	190	R0878LS21K	193	➤ R1271NS12C	194
P0273SG12E	189	P0431SG04C	190	➤ R0878LS21L	193	R1271NS12D	194
P0273SG12F	189	P0431SG06C	190	R0878LS21M	193	R1271NS12E	194
P0295WC12D	191	P0515WC04C	191	➤ R0929LS08A	193	R1271NS12G	194
P0295WC12E	191	P0515WC04D	191	➤ R0929LS08B	193	➤ R1275NS14J	194
P0295WC12F	191	P0515WC06C	191	R0929LS08C	193	➤ R1275NS14K	194
P0306SC04A	189	P0515WC06D	191	R0929LS08D	193	R1275NS14L	194
P0306SC04B	189	P0848YS04B	191	R0929LS08E	193	R1275NS14M	194
P0306SC04C	189	P0848YS04C	191	➤ R0929LS10A	193	➤ R1275NS18J	194
P0306SC08A	189	P0848YS04D	191	➤ R0929LS10B	193	➤ R1275NS18K	194
P0306SC08B	189	P0848YS06B	191	R0929LS10C	193	R1275NS18L	194
P0306SC08C	189	P0848YS06C	191	R0929LS10D	193	R1275NS18M	194
P0306SD04A	189	P0848YS06D	191	R0929LS10E	193	➤ R1275NS20J	194
P0306SD04B	189	P1007LS08D	191	➤ R0929LS12A	193	➤ R1275NS20K	194
P0306SD04C	189	P1007LS08E	191	➤ R0929LS12B	193	R1275NS20L	194
P0306SD08A	189	P1007LS12D	191	R0929LS12C	193	R1275NS20M	194
P0306SD08B	189	P1007LS12E	191	R0929LS12D	193	➤ R1275NS21J	194
P0306SD08C	189	P1007LS12F	191	R0929LS12E	193	➤ R1275NS21K	194
P0306SG04A	189	R		R0964LS08C	193	R1275NS21L	194
P0306SG04B	190	R0487YS10D	192	R0964LS08D	193	R1275NS21M	194
P0306SG04C	190	R0487YS10E	192	R0964LS08E	193	R1279NS22J	194
P0306SG08A	190	R0487YS10F	192	R0964LS08F	193	R1279NS22K	194
P0306SG08B	190	R0487YS12D	192	R0964LS10C	193	➤ R1279NS22L	194
P0306SG08C	190	R0487YS12E	192	R0964LS10D	193	R1279NS22M	194
P0311SC10E	190	R0487YS12F	192	R0964LS10E	193	R1279NS25J	194
P0311SC10F	190	R0487YS12G	192	R0964LS10F	193	R1279NS25K	194
P0311SC10G	190	R0487YS14D	192	R0964LS12C	193	➤ R1279NS25L	194
P0311SC12E	190	R0487YS14E	192	R0964LS12D	193	R1279NS25M	194
P0311SC12F	190	R0487YS14F	192	R0964LS12E	193	R1280NS18K	195
P0311SC12G	190	R0577YS08C	192	R0964LS12F	193	➤ R1280NS18L	195
P0311SD10E	190	R0577YS08D	192	R0990LS04A	193	R1280NS18M	195
P0311SD10F	190	R0577YS08E	192	R0990LS04B	193	R1280NS21K	195
P0311SD10G	190	R0577YS10C	192	R0990LS04C	193	➤ R1280NS21L	195
P0311SD12E	190	R0577YS10D	192	R0990LS06A	193	R1280NS21M	195
P0311SD12F	190	R0577YS10E	192	R0990LS06B	193	R1280NS22K	195
P0311SD12G	190	R0577YS12C	192	R0990LS06C	193	➤ R1280NS22L	195
P0311SG10E	190	R0577YS12D	192	R0990LS08A	193	R1280NS22M	195
P0311SG10F	190	R0577YS12E	192	R0990LS08B	193	R1280NS25K	195
P0311SG10G	190	R0633YS08D	192	R0990LS08C	193	➤ R1280NS25L	195
P0311SG12E	190	R0633YS08E	192	➤ R1124NS18J	193	R1280NS25M	195
P0311SG12F	190	R0633YS08F	192	R1124NS18K	193	R1331NS10B	195
P0311SG12G	190	R0633YS10D	192	➤ R1124NS18L	193	R1331NS10C	195
➤ P0327WC08D	191	R0633YS10E	192	R1124NS18M	193	R1331NS10D	195
➤ P0327WC08E	191	R0633YS10F	192	➤ R1124NS20J	193	R1331NS12B	195
➤ P0327WC08F	191	R0633YS12D	192	R1124NS20K	193	R1331NS12C	195
➤ P0327WC10D	191	R0633YS12E	192	➤ R1124NS20L	193	R1331NS12D	195
➤ P0327WC10E	191	R0633YS12F	192	R1124NS20M	193	➤ R1446NS08C	195
➤ P0327WC10F	191	R0717LS14G	192	➤ R1124NS21J	193	R1446NS08E	195
P0327WC12D	191	R0717LS14H	192	R1124NS21K	193	R1446NS08F	195
P0327WC12E	191	R0717LS14J	192	➤ R1124NS21L	193	R1446NS08G	195
P0327WC12F	191	R0717LS16G	192	R1124NS21M	193	➤ R1446NS10C	195
➤ P0330SC04A	190	R0717LS16H	192	➤ R1127NC32P	193	R1446NS10E	195
P0330SC04C	190	R0717LS16J	192	R1127NC32R	193	R1446NS10F	195
P0330SC04D	190	R0736LS20J	192	R1127NC32S	193	R1446NS10G	195
➤ P0330SC06A	190	R0736LS20K	192	R1127NC32T	193	➤ R1446NS12C	195
P0330SC06C	190	R0736LS20L	192	R1127NC34S	193	R1446NS12E	195
P0330SC06D	190	R0736LS20M	192	R1127NC34T	193	R1446NS12F	195
➤ P0330SC08A	190	R0736LS22J	192	R1127NC36S	193	R1446NS12G	195
P0330SC08C	190	R0736LS22K	192	R1127NC36T	193	R1448NS14H	195

Alphanumeric Index

○ Not for new design

➤ New

R1448NS14J	195	➤ R3047TD24K	196	R3968FD28K	198	➤ W0428SF250	170
➤ R1448NS14K	195	➤ R3047TD24K	196	R3968FD28L	198	➤ W0428SF280	170
R1448NS14L	195	➤ R3047TD24M	196	R3968FD28M	198	➤ W0428SF320	170
➤ R1448NS14M	195	R3047TD24N	196	R3968FD28N	198	W0438RC160	170
R1448NS18H	195	R3047TD24R	196	➤ R3968FD28R	198	W0438RC200	170
R1448NS18J	195	R3047TD24T	196	➤ R3968FD28T	198	W0438RC240	170
➤ R1448NS18K	195	➤ R3047TD28K	197	S		W0438RD160	170
R1448NS18L	195	➤ R3047TD28L	197	S0500KC200	199	W0438RD200	170
➤ R1448NS18M	195	➤ R3047TD28M	197	S0500KC20Y	199	W0438RD240	170
R1448NS20H	195	R3047TD28N	197	S0500KC25D	199	W0438SC160	170
R1448NS20J	195	R3047TD28R	197	S0500KC25Y	199	W0438SC200	170
➤ R1448NS20K	195	R3047TD28T	197	S0700KC140	199	W0438SC240	170
R1448NS20L	195	R3370ZC10C	197	S0700KC14Y	199	W0438SD160	170
➤ R1448NS20M	195	R3370ZC10D	197	S0700KC17D	199	W0438SD200	170
➤ R2475ZC20M	195	R3370ZC10E	197	S0700KC17Y	199	W0438SD240	170
R2475ZC20N	195	R3370ZC12C	197	➤ S1000NC300	199	W0503RC160	170
➤ R2475ZC20R	195	R3370ZC12D	197	➤ S1000NC30Y	199	W0503RC200	170
➤ R2475ZC28M	195	R3370ZC12E	197	➤ S1000NC36D	199	W0503RC240	170
R2475ZC28N	195	R3370ZD10C	197	➤ S1000NC36Y	199	W0503RD160	170
➤ R2475ZC28R	195	R3370ZD10D	197	S1200NC200	199	W0503RD200	170
➤ R2475ZD20M	195	R3370ZD10E	197	S1200NC20Y	199	W0503RD240	170
R2475ZD20N	195	R3370ZD12C	197	S1200NC25D	199	W0503SC160	170
➤ R2475ZD20R	195	R3370ZD12D	197	S1200NC25Y	199	W0503SC200	170
➤ R2475ZD28M	195	R3370ZD12E	197	SXB11987HEX	208	W0503SC240	170
R2475ZD28N	195	R3559TC16K	197	SXB1214FG	208	W0503SD160	170
➤ R2475ZD28R	195	➤ R3559TC16M	197	SXB1265FB	208	W0503SD200	170
R2619ZC18J	195	R3559TC16N	197	SXB1375B	208	W0503SD240	170
R2619ZC18K	195	R3559TC16R	197	SXB1645FB	208	W0507YH360	171
R2619ZC18L	195	R3559TC16T	197	SXB1764FG	208	W0507YH450	171
R2619ZC20J	195	R3559TC20K	197	SXB1920G	208	W0508RA040	170
R2619ZC20K	195	➤ R3559TC20M	197	SXB2096B	208	W0508RA120	170
R2619ZC20L	195	R3559TC20N	197	SXB2167FB	208	W0508RA150	170
R2619ZC21J	195	R3559TC20R	197	SXB2324FG	208	W0508RB040	170
R2619ZC21K	195	R3559TC20T	197	SXB2428HEXT	208	W0508RB120	170
R2619ZC21L	196	R3559TD16K	197	SXB2939G	208	W0508RB150	170
R2619ZC25J	196	➤ R3559TD16M	197	SXB3120FG	208	W0508SA040	170
R2619ZC25K	196	R3559TD16N	197	SXB3442B	208	W0508SA120	170
R2619ZC25L	196	R3559TD16R	197	SXB3529HEXT	208	W0508SA150	170
R2619ZD18J	196	R3559TD16T	197	SXB3840HEX	208	W0508SB040	170
R2619ZD18K	196	R3559TD20K	197	SXB4264B	208	W0508SB120	170
R2619ZD18L	196	➤ R3559TD20M	197	SXB4649HEXT	208	W0508SB150	170
R2619ZD20J	196	R3559TD20N	197	SXB4869G	208	W0614WC160	171
R2619ZD20K	196	R3559TD20R	197	SXB5877HEX	208	W0614WC200	171
R2619ZD20L	196	R3559TD20T	197	SXB5993G	208	W0614WC240	171
R2619ZD21J	196	➤ R3636EC16K	197	SXB6240HEXT	208	W0628RA040	170
R2619ZD21K	196	➤ R3636EC16M	197	SXB868FB	208	W0628RA120	170
R2619ZD21L	196	➤ R3636EC16N	197	SXB9737HEX	208	W0628RA150	170
R2619ZD25J	196	➤ R3636EC16R	197	SXC1076FB	211	W0628RB040	170
R2619ZD25K	196	➤ R3636EC16T	197	SXC1195FR	211	W0628RB120	170
R2619ZD25L	196	➤ R3636EC20K	197	SXC1318FB	211	W0628RB150	170
R2620ZC22J	196	➤ R3636EC20M	197	SXC1464FR	211	W0628SA040	170
R2620ZC22K	196	➤ R3636EC20N	197	SXC1517FG	211	W0628SA120	170
R2620ZC22L	196	➤ R3636EC20R	197	SXC1609FB	211	W0628SA150	170
R2620ZC25J	196	➤ R3636EC20T	197	SXC1788FR	211	W0628SB040	170
R2620ZC25K	196	R3708FC40V	197	SXC1871FG	211	W0628SB120	170
R2620ZC25L	196	R3708FC40W	197	SXC2319FG	211	W0628SB150	170
R2620ZD22J	196	R3708FC45V	197	T		W0642WC160	171
R2620ZD22K	196	R3708FC45W	197	T Fin	213	W0642WC200	171
R2620ZD22L	196	R3708FD40V	197	T0160NA45A	202	W0642WC240	171
R2620ZD25J	196	R3708FD40W	197	T0240NA45E	202	W0646WC060	171
R2620ZD25K	196	R3708FD45V	197	➤ T0340VA45G	202	W0646WC120	171
R2620ZD25L	196	R3708FD45W	197	T0360NA25A	202	W0646WC150	171
R2714ZC14H	196	R3968FC20K	197	T0500NA25E	202	W0735RA040	170
R2714ZC14J	196	R3968FC20L	197	➤ T0500NC17A	202	W0735RA120	170
➤ R2714ZC14K	196	R3968FC20M	197	➤ T0510VA45E	202	W0735RA150	170
R2714ZC16H	196	R3968FC20N	197	➤ T0570VA25G	202	W0735RB040	170
R2714ZC16J	196	➤ R3968FC20R	197	T0600TA45A	202	W0735RB120	170
➤ R2714ZC16K	196	➤ R3968FC20T	197	➤ T0700NC17E	202	W0735RB150	170
R2714ZC18H	196	R3968FC24K	198	T0800TA45E	202	W0735SA040	170
R2714ZC18J	196	R3968FC24L	198	➤ T0800VC15G	202	W0735SA120	170
➤ R2714ZC18K	196	R3968FC24M	198	➤ T0850VA25E	202	W0735SA150	170
R2714ZD14H	196	R3968FC24N	198	T0900EA45A	202	W0735SB040	170
R2714ZD14J	196	➤ R3968FC24R	198	T1200EA45E	202	W0735SB120	170
➤ R2714ZD14K	196	➤ R3968FC24T	198	T1200TA25A	202	W0735SB150	170
R2714ZD16H	196	R3968FC28K	198	➤ T1200VC17E	202	W0797WC040	171
R2714ZD16J	196	R3968FC28L	198	T1500TA25E	202	W0797WC120	171
➤ R2714ZD16K	196	R3968FC28M	198	➤ T1600TC17A	202	W0797WC150	171
R2714ZD18H	196	R3968FC28N	198	T1800GA45A	202	W0944WC040	171
R2714ZD18J	196	➤ R3968FC28R	198	➤ T2100TC17E	202	W0944WC120	171
➤ R2714ZD18K	196	➤ R3968FC28T	198	T2400GA45E	202	W0944WC150	171
➤ R3047TC24K	196	R3968FD20K	198	TB Fin	213	W1032LC500	171
➤ R3047TC24L	196	R3968FD20L	198	TC Fin	213	W1032LC560	171
➤ R3047TC24M	196	R3968FD20M	198	W		W1032LC600	171
R3047TC24N	196	R3968FD20N	198	➤ W0428RE250	170	W104CFC200	173
R3047TC24R	196	➤ R3968FD20R	198	➤ W0428RE280	170	W104CFC220	173
R3047TC24T	196	➤ R3968FD20T	198	➤ W0428RE320	170	W104CFD200	173
➤ R3047TC28K	196	R3968FD24K	198	➤ W0428RF250	170	W104CFD220	173
➤ R3047TC28K	196	R3968FD24L	198	➤ W0428RF280	170	W1074YC200	171
➤ R3047TC28M	196	R3968FD24M	198	➤ W0428RF320	170	W1074YC320	171
R3047TC28N	196	R3968FD24N	198	➤ W0428SE250	170	W1074YH200	171
R3047TC28R	196	➤ R3968FD24R	198	➤ W0428SE280	170	W1074YH320	171
R3047TC28T	196	➤ R3968FD24T	198	➤ W0428SE320	170	W1185LC300	171

Alphanumeric Index

○ Not for new design
 ➤ New

W1185LC380	171	➤ W3842MC280	172	WS72-1	214
W1185LC450	171	W4096ZC340	172	WS72-2	214
W1263YC160	171	W4096ZC450	172	➤ WX198PB008	174
W1263YC200	171	W4096ZD340	172	➤ WX198PB012	174
W1263YC250	171	W4096ZD450	172	➤ WX198PB020	174
W1263YH160	171	W4307ZC200	172	WX210MK050	175
W1263YH200	171	W4307ZC240	172	WX210MK080	175
W1263YH250	171	W4307ZC300	172	WX248MC030	173
W1294NC500	171	W4307ZD200	172	WX248MC060	173
W1294NC600	171	W4307ZD240	172	WX249MC120	173
W1294ND500	171	W4307ZD300	172	WX249MC150	173
W1294ND600	171	W4534NC020	172	WX250MC180	173
W1411LC300	171	W4534NC060	172	WX250MC220	173
W1411LC360	171	➤ W4534ND020	172	WX254MC520	173
W1520NC500	171	➤ W4534ND060	172	WX254MC600	173
W1520NC600	171	➤ W4693QK050	175	Y	
W1524LC240	171	➤ W4693QK080	175	➤ Y200CKC250	200
W1524LC300	171	➤ W4713HL300	175	➤ Y500CKC250	200
W1608NC400	171	➤ W4713HL350	175		
W1608NC500	171	➤ W4713HM300	175		
W1748LC080	171	➤ W4713HM350	175		
W1748LC180	171	W5092ZC240	172		
W1748LC220	171	W5092ZC280	172		
W1748LC250	171	W5092ZC320	172		
W1856NC400	171	W5092ZC350	173		
W1856NC500	171	W5092ZD240	173		
W2020NC360	171	W5092ZD280	173		
W2020NC450	171	W5092ZD320	173		
W2052NC300	171	W5092ZD350	173		
W2052NC400	171	W5282ZC200	173		
W2054NC360	171	W5282ZC240	173		
W2054NC450	171	W5282ZC300	173		
W2058LC020	171	W5282ZD200	173		
W2058LC100	171	W5282ZD240	173		
W2058LC120	171	W5282ZD300	173		
W2058LC140	171	W5292TC500	173		
W2134NC300	171	W5292TC560	173		
W2134NC400	171	W5292TD500	173		
W2416NC160	172	W5292TD560	173		
W2416NC200	172	➤ W5334MK200	175		
W2416NC250	172	➤ W5334MK220	175		
W2624NC160	172	W5439VC020	173		
W2624NC200	172	W5439VC100	173		
W2624NC250	172	W5439VC140	173		
W2664NC300	172	W5439VF020	173		
W2664NC400	172	W5439VF100	173		
W2820VC360	172	W5439VF140	173		
W2820VC450	172	W5696VC020	173		
W2820VF360	172	W5696VC100	173		
W2820VF450	172	W5696VC140	173		
➤ W2899MC320	172	W5696VF020	173		
➤ W2899MC360	172	W5696VF100	173		
➤ W2899MC400	172	W5696VF140	173		
➤ W2899MC420	172	W5838ZC120	173		
➤ W2899MC480	172	W5838ZC180	173		
W2958NC280	172	W5838ZC220	173		
W2958NC350	172	W5838ZD120	173		
➤ W3082MC420	172	W5838ZD180	173		
➤ W3082MC450	172	W5838ZD220	173		
W3128VC300	172	W6262ZC120	173		
W3128VC400	172	W6262ZC200	173		
W3128VF300	172	W6262ZC240	173		
W3128VF400	172	W6262ZD120	173		
W3270NC080	172	W6262ZD200	173		
W3270NC160	172	W6262ZD240	173		
W3270NC200	172	W6908FC450	173		
W3270NC220	172	W6908FC500	173		
➤ W3455QK200	175	W6908FD450	173		
➤ W3455QK220	175	W6908FD500	173		
➤ W3477MC360	172	➤ W7032DB008	174		
➤ W3477MC400	172	➤ W7032DB012	174		
W3697VC160	172	➤ W7032DB020	174		
W3697VC220	172	W7675ZC020	173		
W3697VC280	172	W7675ZC100	173		
W3697VF160	172	W7675ZC140	173		
W3697VF220	172	W7675ZD020	173		
W3697VF280	172	W7675ZD100	173		
➤ W3708MC320	172	W7675ZD140	173		
➤ W3708MC350	172	W8405ZC020	173		
W3743ZC400	172	W8405ZC100	173		
W3743ZC450	172	W8405ZC140	173		
W3743ZC500	172	W8405ZD020	173		
W3743ZD400	172	W8405ZD100	173		
W3743ZD450	172	W8405ZD140	173		
W3743ZD500	172	WS27	214		
W3841VC300	172	WS30 Copper Fin	213		
W3841VC340	172	WS46 Fin	213		
W3841VF300	172	WS65	214		
W3841VF340	172	WS69	214		
➤ W3842MC160	172	WS70	214		
➤ W3842MC200	172	WS71-1	214		
➤ W3842MC240	172	WS71-2	214		

Symbols and Terms

a	Acceleration	I_{FM}	Maximum forward current
BV_{CES}	Collector emitter breakdown voltage	I_{FAV}	Average forward current
BV_{DSS}	Drain source breakdown voltage	I_{F(AV)M}, I_{T(AV)M}	Maximum average forward current
C_{ies}, C_{iss}	Input capacitance	I_{FLT}	Sink current of fault terminal
C_{oes}, C_{oss}	Output capacitance	I_{FRM}	Maximum repetitive forward current
C_{res}, C_{rss}	Reverse transfer (Miller) capacitance	I_{F(RMS)}, I_{T(RMS)}	RMS forward current
d	Duty cycle	I_{FSM}, I_{TSM}	Maximum surge forward current
d_A	Strike distance through air	I_G, I_{GT}	Trigger gate current
di/dt, - di/dt	Rate of change of current	I_{GD}	Non-trigger gate current
(di/dt)_{cr}	Critical rate of rise of current	I_{GES}	Gate emitter leakage current
di_F/dt, -di_F/dt	Rate of change of forward current	I_H	Holding current
d_s	Creep distance on surface	I_{IN(H)}	Signal input current (high level)
dv/dt	Rate of rise of voltage	I_{IN(L)}	Signal input current (low level)
(dv/dt)_{cr}	Critical rate of rise of voltage	I_{ISOL}	RMS current for isolation test
E_{AR}	Repetitive avalanche energy	I_L	Latching current
E_{AS}	Non-repetitive avalanche energy	I_R	Reverse current
E_{off}	Turn-off energy per pulse	I_{RM}	Maximum reverse recovery current
E_{on}	Turn-on energy per pulse	I_{RMS}	RMS current
E_{rec(off)}	Reverse recovery losses at turn-off	I_{RRM}	Maximum repetitive reverse current
F_(mounting)	Required force to mount hole-less discretes on heat sink	I_S	Continuous source current
g_{fs}	Forward transconductance	I_{SM}	Maximum pulsed source current
I_{AR}	Repetitive avalanche current	I²t	I ² t value for fusing
I_{AVM}	Maximum average forward current	I_{TSM}	Maximum surge on-state current
I_{BO}	Breakover current	K_f	Characteristic factor
I_{C(on)}	Short circuit current	K_p	Coeff. for energy per pulse Ep (material constant)
I_C	Collector current	K_T	Temperature coefficient of VBO
I_{C25}	Continuous DC collector current at T _C = 25°C	L	Series stray inductance
I_{C90}	Continuous DC collector current at T _C = 90°C	M_d	Mounting torque
I_{CES}	Collector emitter leakage current	P_C	Collector power dissipation
I_{CM}	Maximum pulsed collector current	P_D	Power dissipation
I_D	Drain current	P_{GAV}	Average gate power dissipation
I_{DD}	Module supply current, operating mode	P_{G(AV)M}	Maximum average gate power dissipation
I_{DD0}	Module supply current, standby mode	P_{GM}	Maximum gate power dissipation
I_{D(cont)}	Continuous drain current	P_{RSM}	Maximum surge reverse power dissipation
I_{D25}	Continuous drain current at T _C = 25°C	P_T, P_{tot}	Total power dissipation
I_{DAV}	Average DC output current	Q_g	Total gate charge
I_{D(AV)M}	Maximum average DC output current	Q_{gc}	Gate collector (Miller) charge
I_{DM}	Maximum pulsed drain current	Q_{gd}	Gate drain (Miller) charge
I_{DRM}	Maximum repetitive off-state current	Q_{ge}	Gate emitter charge
I_{D(RMS)}	RMS output current	Q_{gs}	Gate source charge
I_{DSS}	Drain source leakage current	Q_r	Reverse recovery charge
I_F, I_T	Forward current	Q_{RM}	Reverse recovery charge (intrinsic diode)
		Q_S	Recovered charge to IRM

Symbols and Terms

RBSOA	Reverse Bias Safe Operating Area	V_{DSM}	Max. non-repetitive forward blocking voltage
R_{DS(on)}	Static drain source on resistance	V_{DSS}	Drain source breakdown voltage
R_{FI}	Radio frequency interference (= EMI)	Version	Various construction designs of products
R_G	Gate resistance	V_F	Forward voltage
R_{GE}	Gate emitter resistance	V_{FLT}	Voltage at fault terminal
r_T	Slope resistance (for power loss calculation only)	V_{FR}	Forward recovery voltage
R_{thCK}; R_{thCH}	Thermal resistance case to heatsink	V_{GD}	Gate non-trigger voltage
R_{thJA}	Thermal resistance junction to ambient	V_{GE}	Gate emitter voltage
R_{thJC}	Thermal resistance junction to case	V_{GE(th)}	Gate emitter threshold voltage
R_{thJK}; R_{thJH}	Thermal resistance junction to heatsink	V_{GEM}	Maximum transient collector gate voltage
R_{thJS}	Thermal resistance junction to heatsink	V_{GES}	Maximum DC gate voltage
R_{thJW}	Thermal resistance junction to water	V_{GS}	Gate source voltage
R_{thKA}	Thermal resistance heatsink to ambient	V_{GS(th)}	Gate threshold voltage
SCSOA	Short Circuit Safe Operating Area	V_{GSM}	Maximum transient gate source voltage
T_{amb}, T_A	Ambient (cooling medium) temperature	V_{GT}	Gate trigger voltage
T_C, T_{case}	Case temperature	V_H	Holding voltage
t_{d(off)}	Turn-off delay time	V_{IN}	Input control voltage
t_{d(on)}	Turn-on delay time	V_{IN(H)}	Input voltage threshold for IGBT turn-on
t_{fi}	Current fall time (inductive load)	V_{IN(L)}	Input voltage threshold for IGBT turn-off
t_{fr}	Forward recovery time	V_{ISOL}	Isolation voltage
t_{FLT}	Overcurrent or short circuit trip delay time	V_R	Reverse voltage
t_{gd}	Gate controlled delay time	V_{RES}	Input voltage threshold for Reset = active
T_J, T_{VJ}	Virtual junction temperature	V_{RGM}	Maximum reverse gate voltage
T_{JM}, T_{VJM}	Maximum virtual junction temperature	V_{RRM}	Maximum repetitive reverse voltage
T_K, T_H, T_S	Heatsink temperature	V_{RSM}	Maximum non-repetitive reverse voltage
T_L	Lead temperature	VSD	Forward voltage drop
T_{S(max)}	Maximum allowable heatsink temperature	V_T	Forward voltage
T_{stg}	Storage temperature	V_{TO}	Threshold voltage (for power loss calculation)
t_p	Pulse time	Z_{thJC}	Transient thermal impedance junction to case
t_q	Turn-off time	Z_{thJK}, Z_{thJH}	Transient thermal impedance junction to heatsink
t_r	Current rise time		
t_{rr}	Reverse recovery time		
t_{rv}	Rise time of collector emitter voltage		
t_{SC}	Short circuit duration		
V_{BO}	Breakover voltage		
V_{CE}	Collector emitter voltage		
V_{CE(sat)}	Collector emitter saturation voltage		
V_{CE(sat)FLT}	Collector emitter saturation voltage to indicate fault		
V_{CEK}	Collector emitter clamp voltage on chip level		
V_{CES}	Collector emitter voltage		
V_{CGR}	Collector gate voltage		
V_{DD}	Module supply voltage		
V_{DD FLT}	Module supply voltage without fault		
V_{DGR}	Drain gate voltage		
V_{DRM}	Maximum repetitive forward blocking voltage		
V_{DS}	Drain source voltage		

Semiconductor Catalog, Edition 2008

© IXYS Corporation 2008
All Rights reserved

Note

As far as patents or other rights of third parties are concerned, liability is only assumed for components per se, not for applications, processes and circuits implemented with components or assemblies. The information describes the type of component and shall not be considered as assured characteristics.

Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the characteristics sections of the specification is not implied. Exposure to limiting values for extended periods may affect device reliability. Terms of delivery and rights to change design or specifications are reserved. Changes have been made to earlier published specifications. The data herein supersedes all previously published informations.

Life support applications

IXYS products used in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury must be expressly authorized for such purposes.

CAPSULE DEVICES

W | **0646** | **W** | **C** | **15** | **0** | **(Sample)**
 |
W
M
F
E
N
R
P
K
A
T
S
H
G
Y

0646
 *

W
Y
K
J
L
Q
D
N
M
P
V
H
Z
T
E
F
G

A
B
C
D
F
G
H
J
K
L
M
R
S
T
V
W
Y

15

0
P

- Device Type**
- Rectifier diode
 - Fast/soft recovery diode
 - Extra fast diode
 - HP Sonic-FRD™
 - Phase control thyristor
 - Distributed gate thyristor
 - Fast turn-off thyristor
 - Medium voltage thyristor
 - Asymmetric thyristor (refer to Factory)
 - Press-Pack IGBT capsule
 - Symmetrical Gate Turn-off thyristor
 - Fast Symmetrical Gate Turn-off thyristors
 - Anode Short Gate Turn-off thyristors
 - Pulse Thyristors

Device nominal current rating
 For devices exceeding 9999 amperes, digit 5 of the part number changes to C, D or E

- Pole face Diameter**
- 19 mm
 - 25 mm
 - 29 mm
 - 32 mm
 - 34 mm
 - 38 mm
 - 44.4 mm
 - 47 mm
 - 50 mm
 - 57 mm
 - 63 mm
 - 68 mm
 - 73 mm
 - 75 mm
 - 85 mm
 - 99 mm
 - 125 mm

tq Code			
0	No code		
A	10	M	70
B	12	N	100
C	15	P	120
D	20	R	140
E	25	S	160
F	30	T	200
G	35	V	250
H	40	W	300
J	50	X	400
K	60	Y	500
L	65	Z	1000

- Housing Type**
- IGBT Capsule 26 mm (N, T, E, G)
 - Welding Diodes 8 mm (D, P)
 - Standard outline 14 mm (W, Y) 16 mm (K) 26 mm (L, Q, M, T, E) 26.5 mm (N) 33 mm (V) 36 mm (F, G) 37 mm (Z)
 - Slim pack 21 mm (N), 24 mm (V, Z), Thick pack 26 mm (Z, F, G)
 - Slim pack 19.5 mm (L), Thick pack 26 mm (K, N, V), 35 mm (Z)
 - Thick pack 35 mm (L, N)
 - Slim pack 14 mm (N), Thick pack 26 mm (Y) or slotted 32 mm (V)
 - Slim pack 19.5 mm (N) or Special thick pack 25.8 mm (V)
 - Wespack 14.5 mm (J, Q, M, H)
 - Wespack 26 mm (Q, M), -GTO 26 mm (L, N), 35 mm (V)
 - Wespack 33 mm (H)
 - Wespack 14 mm (Q), Standard 26 mm (N)
 - S' housing 14 mm (Y), 26 mm (L), 27 mm (N)
 - C' housing explosion rated (N, V, Z, T, F)
 - D' housing explosion rated (V, Z, T)
 - F' housing explosion rated (Z)
 - C' housing extended explosion rating (Z)

V _{RRM} % of V _{DRM} for GTO's	
0	100
D	80
Y	100 V

Voltage grade = $V_{RRM} / V_{DRM} \div 100$

t_q code or V_{RRM} % of V_{DRM} for GTO thyristors, or for Press-Pack IGBTs

PIN diode (Product Groups: W, M, F and E)

STUD DEVICES

W	0508	S	A	04	0	(Sample)
W						Device type
M						Rectifier diode
N						Fast/soft recovery diode
P						Phase control thyristor
	0508					Fast turn-off thyristor
		S				Device nominal current rating
		R				
			A			Polarity
			B			Normal
			C			Reverse (diode only)
			D			Package
			E			3/4" stud glass/metal
			F			3/4" stud glass/metal stud removed
			G			3/4" stud ceramic
			H			3/4" stud ceramic stud removed
			J			3/4" HV ceramic stud with lug
			K			3/4" HV ceramic stud
			L			3/4" ceramic stud with lug
			M			1/2" stud ceramic
			S			1/2" stud ceramic with flag
			T			M12 stud ceramic
						M12 stud ceramic with lug
						3/8" stud ceramic
						60 mm ² square base
						3/4" metal stud with 130 mm lead
				15		Voltage grade = $V_{RRM} / V_{DRM} \div 100$
						tq code
					0	No code
					A	10
					B	12
					C	15
					D	20
					E	25
					F	30
					G	35
					H	40
					J	50
					K	60
					L	65
					M	70
					N	100
					P	120
					R	140
					S	160
					T	200
					V	250
					W	300
					X	400
					Y	500
					Z	1000

PRESS-PACK IGBT CAPSULE DEVICES

T	0240	N	A	45	E	(Sample)
T						Device type
	0240					Press-pack IGBT thyristor
						Device pulse current rating
						Pole face Diameter
			E			85 mm
			G			125 mm
		N				47 mm
		T				75 mm
		V				63 mm
						Die Series
			C			Voltage grade
			A			
				45		Build Description for multiple square die
					A	Fully rated diode
					E	No diode
					G	IGBT to diode ratio of 2:1

Optically Isolated Solid State Relays

The OptoMOS™ line of Solid State Relays uses discrete semiconductor components and the patented OptoMOS™ architecture to deliver fast, reliable, bounce-free switching in a compact design. From the world's smallest single pole, high-voltage, 4-pin relay to multi-pole and multifunction devices, OptoMOS™ products are an ideal solid state replacement for larger reed and electromechanical relays. Compared to older electromagnetic

technologies, Clare OptoMOS™ relays offer significantly lower drive current, small package size, no susceptibility to magnetic interference, and solid state reliability. All of these are key requirements for the design of today's complex low-power, multichannel products.

The small single pole 4-pin SOP relays combine our state-of-the-art, double-molded, vertical-construction packaging with high performance to give you a

reliable product with 20% savings in board space compared to other 4-pin products.

Dual pole OptoMOS™ relays combine two independent relays into a single 8-pin package paving the way for designers to condense functionality using a single component. Common-input OptoMOS™ relays provide a design alternative where two independent outputs are driven by the same input signal.

Features


- Low drive current
- High reliability
- No EMI/RFI generation
- Arc-free with no snubbing circuits
- Machine insertable, wave solderable
- AC/DC switching
- Current limiting (available)
- FCC compatible
- Low off state leakage




Applications

- Telecommunications/ Datacommunications
- Instrumentation
- Multiplexers
- Data acquisition/Electronic switching
- I/O subsystems
- Meters (watt-hour, water, gas)
- Medical equipment (patient/ equipment isolation)
- Security
- Aerospace
- Industrial controls


Block diagrams



AC/DC Configuration



DC Only Configuration



Single Pole Normally Open: 1-Form-A - Operational temperature range of -40° to 85°C

Part Number	Load Voltage	Load Current	On Resistance	Input Control Current	Switching Speeds T _{ON} /T _{OFF} ms	Isolation Voltage	Package Type	Features
► New	V	mA	Ω	mA		V _{rms}	①	
CPC1008N	100	150	8	2	2 / 0.5	1500	4-Pin SMT	
CPC1016N	100	100	16	2	2 / 0.5	1500	4-Pin SMT	
CPC1017N	60	100	16	1	10 / 10	1500	4-Pin SMT	
CPC1018N	60	600	0.8	2	2 / 1	1500	4-Pin SMT	
► CPC1020N	30	1000	0.25	2	5 / 5	1500	4-Pin SMT	
CPC1025N	400	120	30	2	2 / 1	1500	4-Pin SMT	
CPC1030N	350	120	30	2	2 / 1	1500	4-Pin SMT	
CPC1035N	350	100	35	2	2 / 1	1500	4-Pin SMT	
► CPC1225N	400	120	30	2	2 / 1	1500	4-Pin SMT	Supplementary Isolation
CPC1230N	350	120	30	2	2 / 1	1500	4-Pin SMT	Supplementary Isolation
► CPC1317	70	150	16	1	2.5 / 2.5	3750	8-Pin SMT	Bidirectional TVS Protection
► CPC1330	350	120	30	2	2 / 1	5000	4-Pin SMT, TH	
► CPC1335P	350	100	35	1	10 / 10	3750	8-Pin SMT	Bidirectional TVS Protection
► CPC1390	400	140	22	2	1 / 0.5	5000	4-Pin SMT, TH	
► CPC1393	600	100	50	5	5 / 5	5000	4-Pin SMT, TH	
CPC1510	250	200	15	5	2 / 2	3750	6-Pin SMT, TH	Active Current Limit, Thermal Shutdown, Speed Enhancement
► CPC1560	60	300	5.6	1	0.1 / 0.4	3750	8-Pin SMT, TH	
LCA100	350	120	25	5	5 / 5	3750	6-Pin SMT, TH	Current Limit
LCA100L	350	120	25	5	5 / 5	3750	6-Pin SMT, TH	
LCA110	350	120	35	2	3 / 3	3750	6-Pin SMT, TH	
LCA110L	350	120	35	2	3 / 3	3750	6-Pin SMT, TH	Current Limit
LCA120	250	170	20	5	5 / 5	3750	6-Pin SMT, TH	Current Limit
LCA120L	250	150	20	5	3 / 3	3750	6-Pin SMT, TH	
LCA125	350	170	16	5	5 / 5	3750	6-Pin SMT, TH	
LCA125L	350	170	20	5	5 / 5	3750	6-Pin SMT, TH	Current Limit


Single Pole Normally Open: 1-Form-A - Operational temperature range of -40° to 85°C

Part Number	Load Voltage	Load Current	On Resistance	Input Control Current	Switching Speeds T_{ON}/T_{OFF} ms	Isolation Voltage	Package Type	Features
► New	V	mA	Ω	mA		V_{rms}	①	
LCA126	250	170	15	5	5 / 5	3750	6-Pin SMT, TH	Current Limit
LCA127	250	200	10	5	5 / 5	3750	6-Pin SMT, TH	
LCA127L	250	170	15	5	5 / 5	3750	6-Pin SMT, TH	
LCA129	250	170	20	2	8 / 8	3750	6-Pin SMT, TH	
LCA710	60	1000	0.5	10	2.5 / 0.25	3750	6-Pin SMT, TH	Low Off-State Leakage 10nA High Load Current
LCA712	60	1000	0.5	10	2.5 / 0.5	3750	6-Pin SMT, TH	
LCA715	60	1800	0.25	10	5 / 2	3750	6-Pin SMT, TH	
► LCA717	30	2000	0.15	2	3 / 3	3750	6-Pin SMT, TH	
LCA182	350	120	35	0.25	3 / 3	3750	6-Pin SMT, TH	Ultra Low Input Control Current
OMA160	250	50	100	10	0.125/0.125	3750	6-Pin SMT, TH	Low Off-State Leakage 25nA
PLA110	400	150	22	5	1 / 0.25	3750	6-Pin SMT, TH	Current Limit
PLA110L	400	150	25	5	1 / 0.25	3750	6-Pin SMT, TH	
PLA132	60	600	1	5	5 / 2	3750	6-Pin SMT, TH	
PLA134	100	350	3	5	5 / 5	3750	6-Pin SMT, TH	
PLA140	400	250	8	5	3 / 1	3750	6-Pin SMT, TH	Current Limit
PLA140L	400	170	13	5	5 / 3	3750	6-Pin SMT, TH	
PLA143	600	100	50	2	5 / 5	4000	6-Pin SMT, TH	
PLA150	250	250	7	5	2.5 / 0.5	3750	6-Pin SMT, TH	
PLA160	300	50	100	10	0.05 / 0.05	3750	6-Pin SMT, TH	Low Off-State Leakage 25nA
PLA170	800	100	50	5	5 / 5	3750	6-Pin SMT, TH	
PLA190	400	150	22	5	1 / 0.5	5000	6-Pin SMT, TH	
PLA191	400	250	8	5	1.5 / 0.25	5000	6-Pin SMT, TH	
PLA192	600	150	22	5	5 / 5	5000	6-Pin SMT, TH	
PLA193	600	100	50	5	5 / 5	5000	6-Pin SMT, TH	
XCA170	350	100	50	5	5 / 5	3750	6-Pin SMT, TH	

Single Pole Normally Open: 1-Form-A DC-Only - Operational temperature range of -40° to 85°C

Part Number	Load Voltage	Load Current	On Resistance	Input Control Current	Switching Speeds T_{ON}/T_{OFF} ms	Isolation Voltage	Package Type	Features
	V	mA	Ω	mA		V_{rms}	①	
CPC1002N	60	700	0.55	2	5 / 2	1500	4-Pin SMT	
CPC1004N	100	300	4	2	3 / 1	1500	4-Pin SMT	Operat. Temperat. to +110°C

Block diagram



① For Package Type, SMT indicates Surface Mount Technology while TH indicates Through-hole.


Single Pole Normally Open: 1-Form-A Voltage Controlled - Operational temperature range of -40° to 85°C

Part Number	Load Voltage	Load Current	On Resistance	Input Control Voltage	Switching Speeds T_{ON}/T_{OFF} ms	Isolation Voltage	Package Type	Features
► New	V	mA	Ω	V		V_{rms}		
► CPC1217Y	60	200	16	5-12	5 / 5	2500	4-Pin SIP	Reed Relay
► CPC1218Y	60	600	0.8	5-12	5 / 5	2500	4-Pin SIP	Replacement


Single Pole Normally Open: 1-Form-B Voltage Controlled - Operational temperature range of -40° to 85°C

► CPC1219Y	60	200	16	5-12	5 / 5	2500	4-Pin SIP	
------------	----	-----	----	------	-------	------	-----------	--

Block diagram
CPC1217Y +
CPC1218Y



Block diagram
CPC1219Y

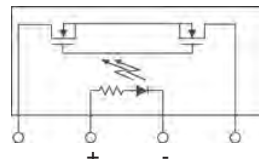


Dual Independent Single Pole Normally Open: Dual 1-Form-A

Operational temperature range of -40° to 85°C

Part Number	Load Voltage	Load Current	On Resistance	Input Control Current	Switching Speeds T_{ON}/T_{OFF} ms	Isolation Voltage	Package Type	Features
	V	mA	Ω	mA		V_{rms}	①	
LAA100	350	120	25	5	5 / 5	3750	8-Pin SMT, TH	Current Limit
LAA100L	350	120	25	5	5 / 5	3750	8-Pin SMT, TH	
LAA110	350	120	35	5	3 / 3	3750	8-Pin SMT, TH	Current Limit
LAA110L	350	120	35	5	3 / 3	3750	8-Pin SMT, TH	
LAA120	250	170	20	5	5 / 5	3750	8-Pin SMT, TH	Current Limit
LAA120L	250	150	25	5	5 / 5	3750	8-Pin SMT, TH	
LAA125	350	170	16	5	5 / 5	3750	8-Pin SMT, TH	Current Limit
LAA125L	350	150	20	5	5 / 5	3750	8-Pin SMT, TH	
LAA126	250	170	15	5	5 / 5	3750	8-Pin SMT, TH	Current Limit
LAA126L	250	170	20	5	5 / 5	3750	8-Pin SMT, TH	
LAA127	250	200	10	5	5 / 5	3750	8-Pin SMT, TH	Current Limit
LAA127L	250	170	15	5	5 / 5	3750	8-Pin SMT, TH	
LAA710	60	1000	0.5	10	2.5 / 0.25	3750	8-Pin SMT, TH	
OAA160	250	50	100	3	0.125/0.125	3750	8-Pin SMT, TH	Low Off-State Leakage 25nA
PAA110	400	150	22	5	1 / 0.25	3750	8-Pin SMT, TH	Current Limit
PAA110L	400	150	25	5	1 / 0.25	3750	8-Pin SMT, TH	
PAA132	60	600	1	5	5 / 2	3750	8-Pin SMT, TH	
PAA140	400	250	8	5	1.5 / 0.25	3750	8-Pin SMT, TH	Current Limit
PAA140L	400	200	13	5	5 / 3	3750	8-Pin SMT, TH	
PAA150	250	250	7	5	2.5 / 0.5	3750	8-Pin SMT, TH	
PAA190	400	150	22	5	1 / 0.5	5000	8-Pin SMT, TH	
PAA191	400	250	8	5	3 / 1	5000	8-Pin SMT, TH	
PAA193	600	100	50	5	5 / 5	5000	8-Pin SMT, TH	
XAA170	350	100	50	5	5 / 5	3750	8-Pin SMT, TH	

① For Package Type, SMT indicates Surface Mount Technology while TH indicates Through-hole.

Block diagram

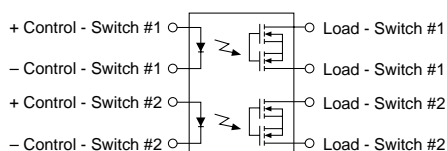


Common Input, Dual Pole: 2-Form-A - Operational temperature range of -40° to 85°C

Part Number	Load Voltage V	Load Current mA	On Resistance Ω	Input Control Current mA	Switching Speeds T_{ON}/T_{OFF} ms	Isolation Voltage V_{rms}	Package Type ①	Features
LCA210	350	85	35	8	3 / 3	3750	8-Pin SMT, TH	Current Limit
LCA210L	350	100	35	5	4 / 4	3750	8-Pin SMT, TH	
LCA211	350	85	35	8	1 / 1.2	3750	8-Pin SMT, TH	
LCA220	250	120	20	10	5 / 5	3750	8-Pin SMT, TH	

① For Package Type, SMT indicates Surface Mount Technology while TH indicates Through-hole.

Block diagram




Single Pole Normally Closed: 1-Form-B - Operational temperature range of -40° to 85°C

Part Number	Load Voltage V	Load Current mA	On Resistance Ω	Input Control Current mA	Switching Speeds T_{ON}/T_{OFF} ms	Isolation Voltage V_{rms}	Package Type ①	Features
► New								
► CPC1117N	60	150	16	1	1 / 2	1500	4-Pin SMT	
CPC1130N	350	120	30	2	2 / 2	1500	4-Pin SMT	Supplementary Isol.
CPC1135N	350	120	35	1	2 / 2	1500	4-Pin SMT	
CPC1150N	350	120	50	2	1 / 2	1500	4-Pin SMT	
CPC1231N	350	120	30	2	2 / 2	1500	4-Pin SMT	
LCB110	350	120	35	5	3 / 3	3750	6-Pin SMT, TH	
LCB111	350	120	35	2	5 / 5	3750	6-Pin SMT, TH	
LCB120	250	170	20	5	5 / 5	3750	6-Pin SMT, TH	
LCB126	250	170	15	5	5 / 5	3750	6-Pin SMT, TH	
LCB127	250	200	10	5	5 / 5	3750	6-Pin SMT, TH	
PLB150	250	250	7	5	1 / 2.5	3750	6-Pin SMT, TH	

① For Package Type, SMT indicates Surface Mount Technology while TH indicates Through-hole.

Block diagram

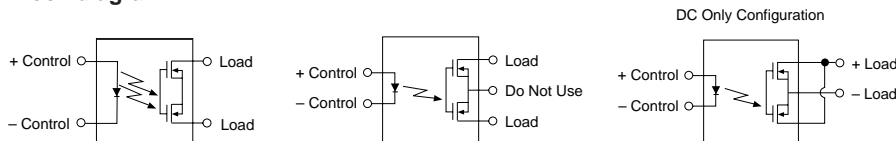


Dual Independent Single Pole Normally Closed: 1-Form-B - Operational temperature range of -40° to 85°C

Part Number	Load Voltage V	Load Current mA	On Resistance Ω	Input Control Current mA	Switching Speeds T_{ON}/T_{OFF} ms	Isolation Voltage V_{rms}	Package Type ①
LBB110	350	120	35	5	3 / 3	3750	8-Pin SMT, TH
LBB120	250	170	20	5	5 / 5	3750	8-Pin SMT, TH
LBB126	250	170	15	5	5 / 5	3750	8-Pin SMT, TH
LBB127	250	200	10	5	5 / 5	3750	8-Pin SMT, TH
PBB150	250	250	7	5	2.5 / 2.5	3750	8-Pin SMT, TH
XBB170	350	100	50	5	5 / 5	3750	8-Pin SMT, TH

① For Package Type, SMT indicates Surface Mount Technology while TH indicates Through-hole.

Block diagram


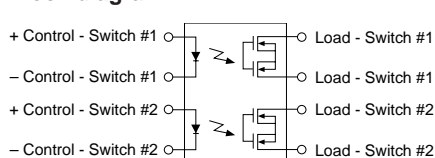


Dual Pole Combination: Form-A & B - Operational temperature range of -40° to 85°C

Part Number	Load Voltage V	Load Current mA	On Resistance Ω	Input Control Current mA	Switching Speeds T_{ON}/T_{OFF} ms	Isolation Voltage V_{rms}	Package Type ①	Features
LBA110	350	120	35	2	3 / 3	3750	8-Pin SMT, TH	Current Limit
LBA110L	350	120	35	5	3 / 3	3750	8-Pin SMT, TH	
LBA120	250	170	20	5	5 / 5	3750	8-Pin SMT, TH	Current Limit
LBA120L	250	150	25	5	5 / 5	3750	8-Pin SMT, TH	
LBA126	250	170	15	5	5 / 5	3750	8-Pin SMT, TH	Current Limit
LBA126L	250	150	20	5	5 / 5	3750	8-Pin SMT, TH	
LBA127	250	200	10	5	5 / 5	3750	8-Pin SMT, TH	Current Limit
LBA127L	250	150	15	5	5 / 5	3750	8-Pin SMT, TH	
PBA150	250	250	7	5	2.5 / 2.5	3750	8-Pin SMT, TH	
XBA170	350	100	50	5	5 / 5	3750	8-Pin SMT, TH	

① For Package Type, SMT indicates Surface Mount Technology while TH indicates Through-hole.

Block diagram

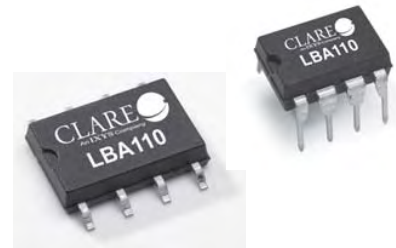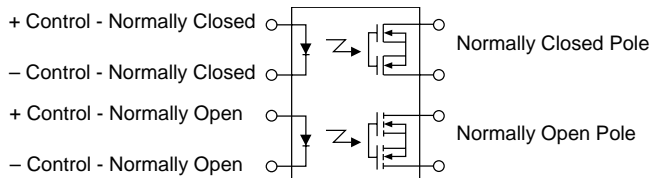


Common Input: 1-Form-C - Operational temperature range of -40° to 85°C

Part Number	Load Voltage V	Load Current mA	On Resistance Ω	Input Control Current mA	Switching Speeds T_{ON}/T_{OFF} ms	Isolation Voltage V_{rms}	Package Type ①
LCC110	350	120	35	8	4 / 4	3750	8-Pin SMT, TH
LCC120	250	170	20	10	5 / 5	3750	8-Pin SMT, TH

① For Package Type, SMT indicates Surface Mount Technology while TH indicates Through-hole.

Block diagram

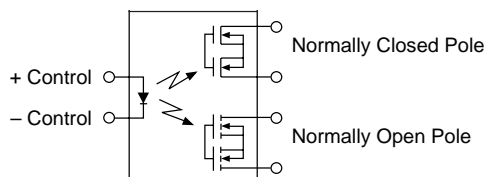

Optically Isolated AC-Power Switches

The OptoMOS™ line of power products use dual power SCR outputs to produce an alternative to optocoupler and Triac circuits. These AC Power Switches are robust enough to provide a blocking voltage of up to 800V_p. In addition, tightly controlled zero-cross circuitry ensures switching of AC loads without the generation of transients. The input and

output circuits are optically coupled to provide 3750V_{rms} of isolation and noise immunity between control and load circuits. Long life and environmental integrity make these power switches ideal to control a variety of AC circuits in industrial environments where electromagnetic interference would disrupt the operation of electromechanical relays.

Features

- Load current up to 2A
- Blocking voltage up to 800V_p
- 5mA sensitivity
- Zero-crossing detection
- DC control, AC switching
- Optically isolated I/O
- TTL and CMOS compatible
- Low EMI and RFI generation
- High noise immunity
- VDE compatible
- Machine insertable, wave solderable
- Switching speed < 0.5 cycle


Applications

- Programmable controls
- Process control
- Power control panels
- Remote switching
- Gas pump electronics
- Contactors
- Large relay control circuits
- Solenoids
- Motor controls
- Heater controls

Operational temperature range of -40° to 85°C

Part Number	Blocking Voltage	Load Current	Input Control Current	Operating Frequency	Isolation Voltage	Package Type	Features
► New	V _p	A _{rms}	mA	min/max Hz	V _{rms}		
CPC1943G	240	0.5	5	20 / 400	3750	D, E	
CPC1945G	400	1	5	20 / 400	3750	C	
CPC1945Y	400	1	5	20 / 400	3750	A	
► CPC1961G	600	0.2	5	20 / 400	3750	F, G	Dual
CPC1963G	600	0.5	5	20 / 500	3750	D, E	
CPC1965G	600	1	5	20 / 400	3750	C	
CPC1965Y	600	1	5	20 / 400	3750	A	
CPC1972G	800	0.25	5	20 / 500	3750	D, E	
► CPC1976Y	600	2	5	20 / 500	3750	B	
► PD1201	400	1	5	20 / 500	3750	C	
PD2401	500	1	5	20 / 500	3750	C	
PD2601	600	1	5	20 / 500	3750	C	
PM1204	400	0.5	5	20 / 500	3750	D, E	
PM1205	500	0.5	5	20 / 500	3750	D, E	
PM1206	600	0.5	5	20 / 500	3750	D, E	
PS1201	400	1	5	20 / 500	3750	A	
PS2401	500	1	5	20 / 500	3750	A	
PS2601	600	1	5	20 / 500	3750	A	

Block Diagram



A



B



C



D



E



F



G

Power Solid State Relays

(Power dissipation greater than 1 Watt)

Power SIP, ISOPLUS™-264 and i4-PAC™ Relays



Clare and IXYS have joined forces to bring OptoMOS™ technology, reliability, and compact size to the new Power SIP, i4-PAC and ISOPLUS-264 series of power solid state relays. Development of these new products was founded on the blending of Clare's traditional strengths in the design and manufacture of photovoltaic integrated circuits (ICs), leadframe design, and multichip packaging with IXYS' expertise in power MOSFETs, power packages, and substrate technology.

The optically coupled MOSFET technology provides 2500V_{rms} of input to output isolation. Similar to Clare's solid state relays, the optically coupled output is controlled by a GaAlAs infrared LED.

Clare Power Relays are now offered in three package types: the **Power SIP**, the **i4-PAC**, and the **ISOPLUS-264**. The Power SIP package offers pin-to-pin compatibility with other solid state relays providing an easy upgrade path for existing designs and compatibility for new designs.

The i4-PAC and the ISOPLUS-264 packages feature a unique assembly process whereby the silicon is soft soldered onto a Direct Copper Bond (DCB) substrate rather than traditional bonding onto an epoxy encapsulated copper frame. This structure allows for a substantially lower junction-to-case thermal impedance when compared to conventionally assembled power relays. The i4-PAC thermal resistance is 0.35°C/W while the ISOPLUS-264 has an even lower impedance of 0.30°C/W.

Although exposed on the backside of these packages, the electrically non-conductive surface of the DCB ceramic substrate provides 2500V_{rms} of isolation to the package's electrically conductive power switching and control leads.

The combination of an electrically isolated non-conductive exterior and low thermal impedance makes the new i4-PAC and ISOPLUS-264 power relays an ideal solution for power applications preferring a non-biased heat sink with superior thermal management properties.

Features

- Handles loads up to 9A
- Voltage ratings up to 1000V_p
- Low On-resistance
- Non-conductive thermal pad for heat sink applications
- Industry standard 4-Pin SIP package
- Low input control current
- Low thermal impedances:
0.30°C/W - ISOPLUS-264
0.35°C/W - i4-PAC
1.5°C/W - Power SIP

Applications



- Motor controls
- Robotics
- Medical equipment
- Railroad/traffic controls
- Consumer appliances
- Industrial control
- Test and measurement equipment

Specifications for: AC/DC Single Pole Power SIP, ISOPLUS-264 and i4-PAC Relays

Part Number ② ► New	Blocking Voltage V _P	Load Current			On Resistance Ω	Input Control Current mA	Switching Speeds T _{ON} /T _{OFF} ms	Package Type
		No Heat Sink A _{rms}	with Heat Sink ① A _{rms}	with T _c =25°C A _{rms}				
CPC1906	60	2.0		-	0.3	10	10 / 5	Power SIP
CPC1908	60	3.5	8.5	15	0.3	10	20 / 5	i4-PAC
CPC1909	60	6.5	15.0	15	0.1	10	25 / 10	ISOPLUS-264
CPC1916Y	100	2.5		-	0.34	10	5 / 3	Power SIP
CPC1918	100	5.25	13.0	15	0.1	10	25 / 10	ISOPLUS-264
CPC1926Y	250	0.7		-	1.4	10	10 / 10	Power SIP
► CPC1927	250	2.7	6.7	15	0.2	10	25 / 10	ISOPLUS-264
CPC1967	400	1.35	3.35	13.15	0.85	10	20 / 5	i4-PAC
CPC1973Y	400	0.35		-	5.0	10	5 / 3	Power SIP
CPC1977	600	1.25	3.1	12.25	1.0	10	20 / 5	i4-PAC
CPC1978	800	0.75	1.85	7.25	2.3	10	20 / 5	i4-PAC
CPC1979	600	1.4	3.5	14.5	0.75	10	25 / 5	ISOPLUS-264
CPC1981Y	1000	0.18		-	18.0	10	10 / 5	Power SIP
CPC1986	1000	0.65	1.6	6.5	3.0	10	20 / 5	i4-PAC
CPC1988	1000	0.9	2.25	9.4	2.5	10	20 / 5	ISOPLUS-264

① 5°C/W Heat Sink, ② All parts provide 2500 V_{rms} of isolation voltage.

Block Diagrams

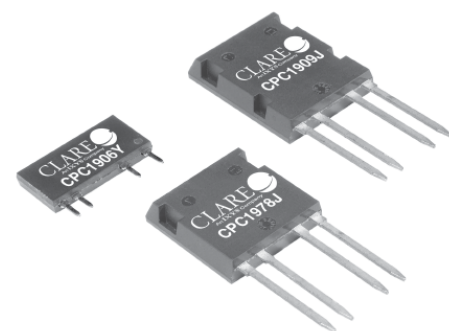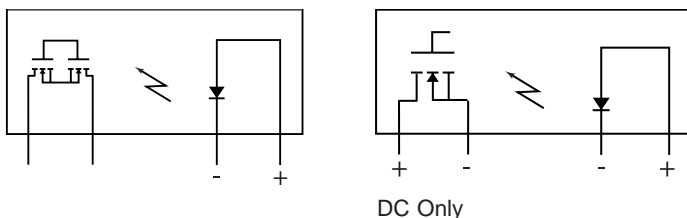


Specifications for: DC-only Single Pole i4-PAC Relays

Part Number ② ► New	Blocking Voltage V_P	No Heat Sink A_{DC}	Load Current with Heat Sink ① A_{DC}	with $T_C=25^\circ C$ A_{DC}	On Resistance Ω	Input Control Current mA	Switching Speeds T_{ON}/T_{OFF}	Package Type
► CPC1708	60	4.0	11.85	24	0.08	10	20 / 5	i4-PAC
► CPC1709	60	9.0	22.8	32	0.05	10	20 / 5	ISOPLUS-264
CPC1718	100	6.75	17.5	32	0.075	10	20 / 5	ISOPLUS-264
CPC1727	250	3.4	8.6	20	0.09	10	20 / 5	ISOPLUS-264
CPC1777	600	1.5	4.6	15	0.5	10	20 / 5	i4-PAC
CPC1779	600	1.65	4.12	15	0.4	10	20 / 5	ISOLPLUS-264
CPC1786	1000	0.65	1.75	6.9	2.0	10	20 / 5	i4-PAC
CPC1788	1000	1.0	2.45	10.3	1.25	10	20 / 5	ISOPLUS-264

① $5^\circ C/W$ Heat Sink, ② All parts provide $2500 V_{rms}$ of isolation voltage.

Package Dimensions

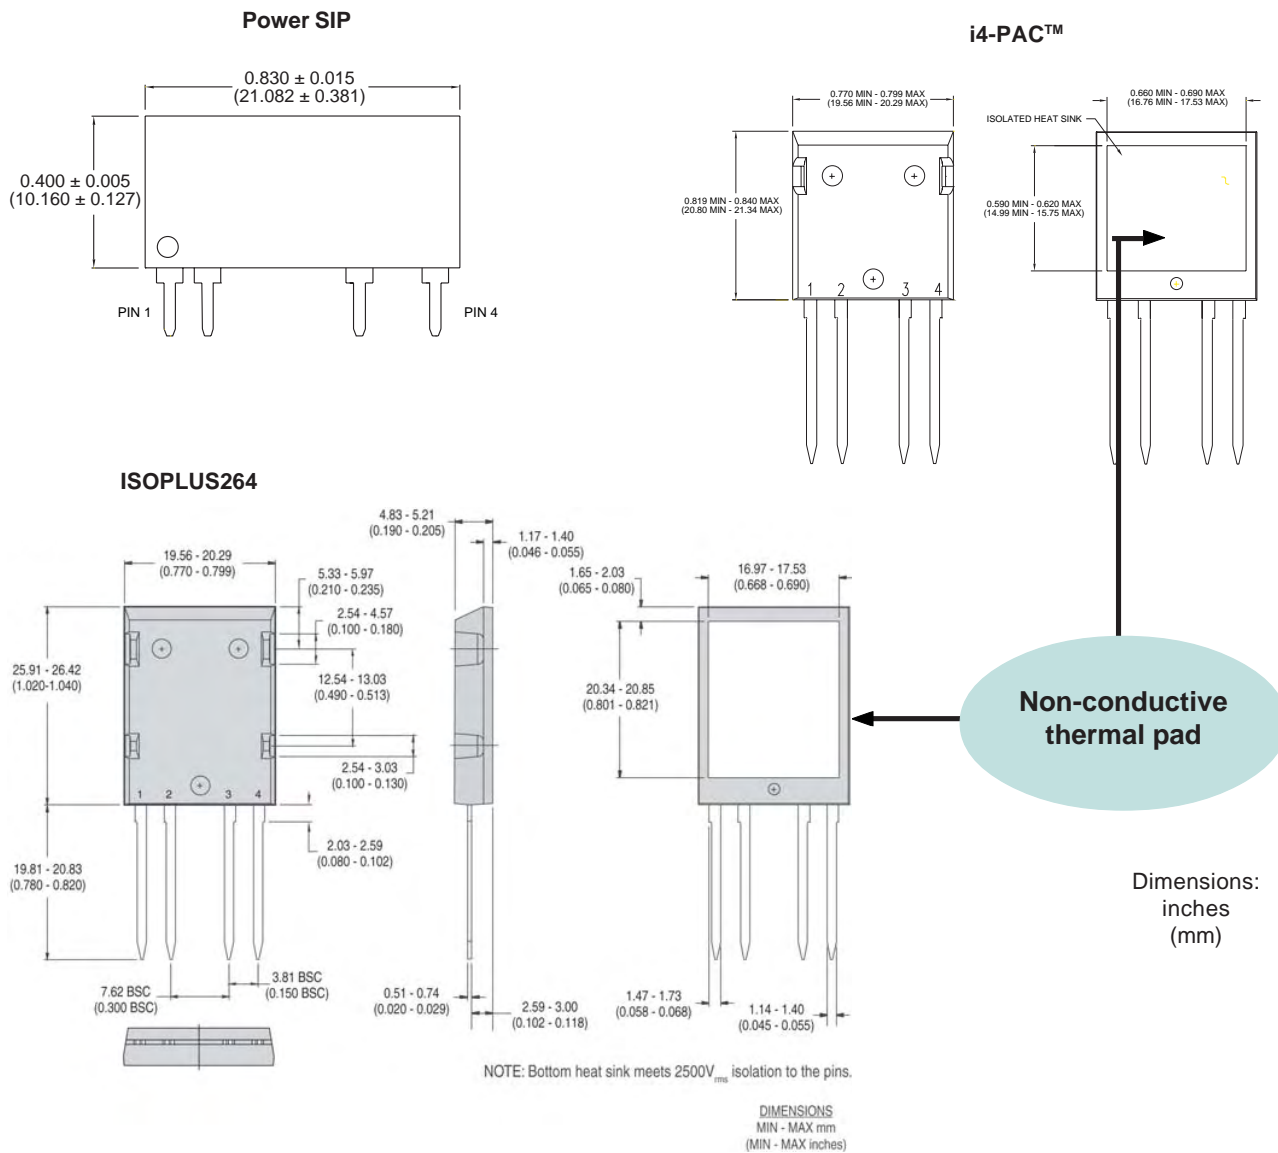

OptoMOS™ Linear Optocouplers feature an infrared LED optically coupled to a pair of phototransistors. One feedback (input) phototransistor is used to generate a control signal that provides a servomechanism to the LED drive current thus compensating for the LEDs nonlinear time and temperature characteristics. The output phototransistor provides an isolated output signal that is linear with respect to the servo LED current.

OptoMOS™ Linear Isolation Amplifiers integrate a linear optocoupler with two independent LF356 op-amps in a single 16-pin package. These amplifiers can couple both AC and DC signals in either unipolar or bipolar modes, while providing 3750V_{rms} of input/output isolation. Using a servo control loop to compensate for the nonlinear time and temperature characteristics of the LED, these amplifiers distinguish themselves among conventional optocouplers by significantly improving linearity and stability.

Features

- Couples analog and digital signals
- 3750V_{rms} input/output isolation
- Wide bandwidth (>200kHz)
- High gain stability
- Low input/output capacitance
- Low power consumption
- 0.01% servo linearity
- THD 87dB typical
- Machine insertable, wave solderable
- VDE compatible

Applications

- Modem transformer replacement with no insertion loss
- Digital telephone isolation
- Power supply feedback voltage/current
- Medical sensor interfacing
- Isolation of process control transducers





Operational temperature range of -40° to 85°C

Part Number ▶ New	Servo Gain K1	Forward Gain K2	Transfer Gain K3	Input Control Current mA	Isolation Voltage V _{rms}	Package Type ①
LOC110	0.004 / 0.030	0.004 / 0.030	0.55 / 1.43	2-10	3750	8-Pin SMT, TH
LOC111	0.008 / 0.030	0.006 / 0.030	0.733 / 1.072	2-10	3750	8-Pin SMT, TH
LOC112	0.004 / 0.030	0.004 / 0.030	0.55 / 1.43	2-10	3750	8-Pin SMT, TH
▶ LOC117	0.008 / 0.030	0.006 / 0.030	0.887 / 1.072	2-10	3750	8-Pin SMT, TH
LOC210P	0.004 / 0.030	0.004 / 0.030	0.733 / 1.072	2-10	3750	16-Pin SMT
LOC211P	0.008 / 0.030	0.006 / 0.030	0.733 / 1.072	2-10	3750	16-Pin SMT
LIA100	0.004 / 0.030	0.004 / 0.030	0.55 / 1.43	2-10	3750	16-Pin SMT
LIA101	0.004 / 0.030	0.004 / 0.030	0.733 / 1.072	2-10	3750	16-Pin SMT

① For Package Type, SMT indicates Surface Mount Technology while TH indicates Through-hole.

Block Diagrams

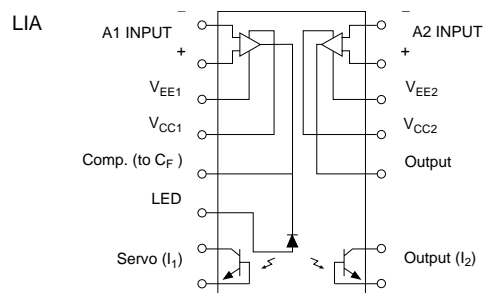

Optically Isolated Linear Error Amplifiers combine Clare's optical technology with an industry standard 431-type precision programmable shunt regulator to provide linear isolated feedback for power supply designs. The LIA120 features matched photodiodes for linear high-gain response exhibiting excellent temperature stability for a total gain error of less than 2dB.

These devices are well suited for isolated high-gain feedback amplifiers that require excellent linearity and low temperature variation such as power supply feedback stages, modem and audio transformer replacements, industrial control signals, and sensor feedback.

Features

- Optocoupler, precision reference, and error amplifier in single package
- Low voltage operation 2.7V
- 3750 V_{rms} isolation
- Fully Matched IC Linear Optocoupler-LIA120
- 70dB Linearity (typ.) LIA120

Applications

- Power supply feedback
- Telecom central office supply
- Telecom bricks
- Modem transformer replacement




Operational temperature range of -40° to 85°C

Part Number ▶ New	Reference Voltage	V _{REF} Tolerance	CTR K1	CTR K2	CTR Matching K3	Linearity V _{rms}	Isolation Voltage	Package Type ①
▶ LIA120	1.24V	1%	1 to 3%	1 to 3%	85 to 115%	70dB	3750	8-Pin SMT, TH
▶ LIA130	1.24V	1%	N/A	N/A	N/A	N/A	3750	8-Pin SMT, TH


① For Package Type, SMT indicates Surface Mount Technology while TH indicates Through-hole.

Block Diagrams

LIA120



LIA130



Single and Dual Optocouplers

Single and dual OptoMOST™ products provide an optically isolated means of current detection or control of switching circuits. Devices offer a single or dual antiparallel LED input stage for unidirectional or bidirectional signal control to the optically coupled phototransistor output. The phototransistor output can be either a single transistor or, for greater gain, a darlington transistor.

These optocouplers allow for either AC or DC input circuits and are ideal for telecom, industrial control, and instrumentation circuits where electrical isolation of control circuitry is crucial.

Features

- AC and DC compatible inputs
- 3750V_{rms} input/output isolation
- Machine insertable, wave solderable



Applications

- Telecom switching
- Tip/ring circuits
- Modem switching (laptops, notebooks, PDAs)
- Loop detection
- Ringing detection
- Current sensing




Operational temperature range of -40° to 85°C

Part Number	Breakdown Voltage	Nominal Current Transfer Ratio	Saturation Voltage	Input Control Current	Isolation Voltage	Package Type	Configuration
► New	V	%	V	mA	V _{rms}	①	
► CPC1001N	30	330	0.3	0.2	1500	4-Pin SMT	J
CPC1301	350	5500	1	1	5000	4-Pin SMT, TH	I
CPC1302	350	5500	1	1	3750	8-Pin SMT, TH	H
► CPC1303	30	1000	0.5	0.2	5000	4-Pin SMT, TH	J
LDA100	20	100	0.5	6	3750	6-Pin SMT, TH	A
LDA101	20	100	0.5	6	3750	6-Pin SMT, TH	B
► LDA102	30	350	0.5	1	3750	6-Pin SMT, TH	B
LDA110	20	1000	0.8	2	3750	6-Pin SMT, TH	C
LDA111	20	1000	0.8	2	3750	6-Pin SMT, TH	D
LDA200	20	100	0.5	6	3750	8-Pin SMT, TH	E
LDA201	20	100	0.5	6	3750	8-Pin SMT, TH	F
► LDA202	20	100	0.5	6	3750	8-Pin SMT, TH	E
► LDA203	20	100	0.5	6	3750	8-Pin SMT, TH	F
LDA210	20	1000	0.8	2	3750	8-Pin SMT, TH	G
LDA211	20	1000	0.8	2	3750	8-Pin SMT, TH	H
► LDA212	20	1000	0.8	2	3750	8-Pin SMT, TH	G
► LDA213	20	1000	0.8	2	3750	8-Pin SMT, TH	H

① For Package Type, SMT indicates Surface Mount Technology while TH indicates Through-hole.

Block Diagrams

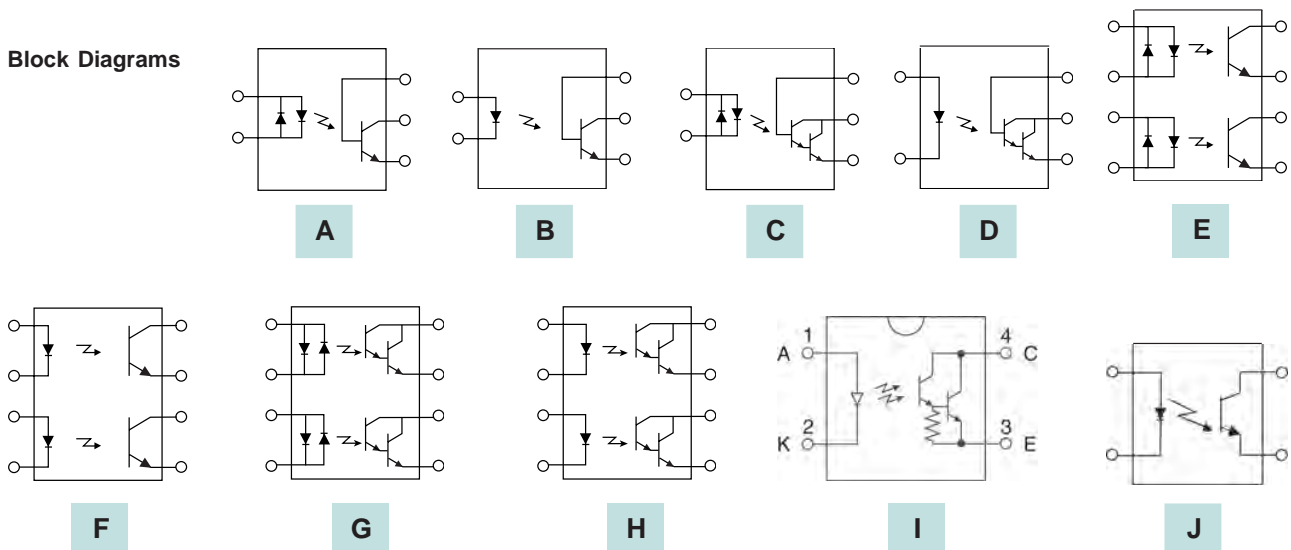

The **OptoMOS™** line of Multifunction products combines optically isolated discrete component functions into a single package. These products mix and match solid state relays, optocouplers, bridge rectifiers, Darlington transistors, and zener diodes to create highly functional circuits in a single, small package. Multifunction devices allow designers to consolidate circuit functions into a single device, freeing up valuable board space

and reducing component count. Designed specifically for the telecommunications industry, the Integrated Telecom Circuit (ITC) series is well suited for voice telephony and modem applications, providing most of the major functions required when designing DAA (Data Access Arrangement) or voice (FXO) line interface circuits.

Features

- 3750V_{rms} input to output isolation
- Multiple functionality in single package
- Current limiting (part numbers with L suffix)
- Machine insertable, wave solderable
- TTL and CMOS compatible

Applications

- Telecommunication/Datacommunication
- Instrumentation
- I/O subsystems
- Electronic switching
- Medical equipment (patient/equipment isolation)
- Security
- Aerospace
- Industrial controls




Combination SSR & Optocoupler Products (IAx, IBx, TS, XS) - Operational temperature range of -40° to 85°C

Part Number	Relay Parameters				Optocoupler Parameters				Isolation Voltage V _{rms}	Package Type ①	Features
	Load Voltage V _p	Current Handling mA	On Resistance Ω	Input Control Current mA	Break-down Voltage V	Current Transfer Ratio %	Saturation Voltage V	Input Control Current mA			
IAA110P	350	100	35	5	20	33	0.5	6	3750	16-Pin SMT	
IAA170P	350	100	50	5	20	33	0.5	6	3750	16-Pin SMT	
IAB110P	350	100	35	5	20	33	0.5	6	3750	16-Pin SMT	
IAD110P	350	100	35	5	20	33	0.5	6	3750	16-Pin SMT	
IAD170P	350	100	50	5	20	33	0.5	6	3750	16-Pin SMT	
IBB110P	350	100	35	5	20	33	0.5	6	3750	16-Pin SMT	
TS112N	350	120	20	2	20	100	0.5	6	1500	8-Pin SMT	Narrow body
TS117	350	120	35	2	20	100	0.5	6	3750	8-Pin SMT, TH	
TS117L	350	120	35	2	20	100	0.5	6	3750	8-Pin SMT, TH	Current Limit
TS118	350	120	35	5	20	100	0.5	6	3750	8-Pin SMT, TH	Form B
TS120	350	120	35	5	20	1000	0.8	2	3750	8-Pin SMT, TH	
TS120L	350	120	35	5	20	1000	0.8	2	3750	8-Pin SMT	Current Limit
TS122	350	170	20	5	20	100	0.5	6	3750	8-Pin SMT, TH	
TS190	350	150	22	5	20	100	0.5	6	3750	8-Pin SMT, TH	
TS190L	350	150	25	5	20	100	0.5	6	3750	8-Pin SMT	Current Limit
XS170	350	120	50	2	20	100	0.5	6	3750	8-Pin SMT, TH	

① For Package Type, SMT indicates Surface Mount Technology while TH indicates Through-hole.

Block Diagrams

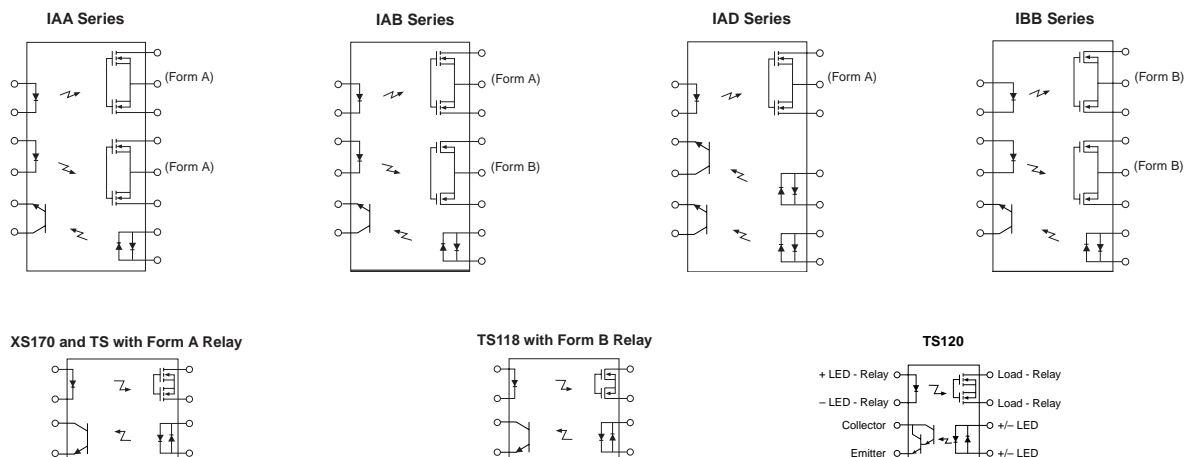

Telecom Series (ITC) - Operational temperature range of -40° to 85°C


Part Number	Relay Parameters				Octocoupler Parameters				Isolation Voltage V_{rms}	Package Type ①	Features
	Load Voltage V_p	Load Current mA	On Resistance Ω	Input Control Current mA	Break-down Voltage V	Current Transfer Ratio %	Saturation Voltage V	Input Control Current mA			
ITC117P	350	120	15	5	20	33	0.5	6	3750	16-Pin SMT	
ITC117PL	350	120	15	5	20	33	0.5	6	3750	16-Pin SMT	Current Limit
ITC135P	350	120	15	5	20	33	0.5	6	3750	16-Pin SMT	Half-wave ringing detect
ITC137P	350	120	15	5	20	33	0.5	6	3750	16-Pin SMT	Full-wave ringing detect

① For Package Type, SMT indicates Surface Mount Technology while TH indicates Through-hole.




Block Diagrams

No zener protection Bidirectional opto-input

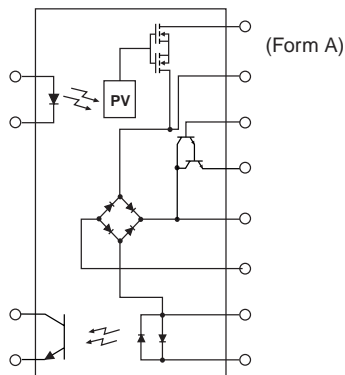


ITC117

Zener protection Bidirectional opto-input

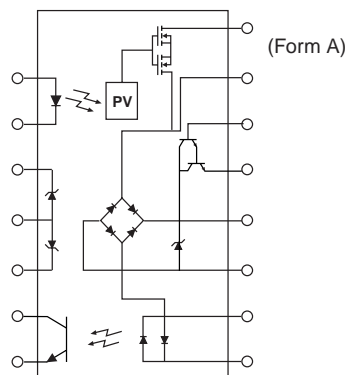

ITC137

Zener protection Unidirectional opto-input

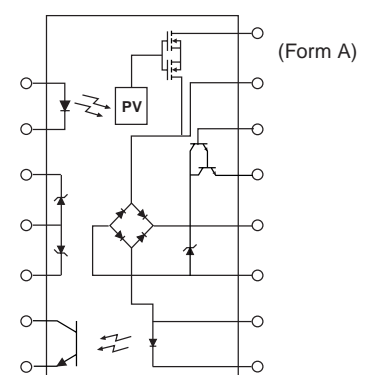

ITC135

Line Card Access Switch (LCAS)




The Line Card Access Switch (LCAS) product family is an integral part of Clare's product portfolio for the telecommunications market. Clare's unique high-voltage Silicon-On-Insulator (SOI) process technology, manufactured in its state-of-the-art fab in Beverly, MA, provides the foundation for a multitude of silicon solutions that enable low power, high density line cards.

The LCAS product family consists of monolithic ICs that contain high-voltage switches for tip and ring line break, power ringing,

line test access, test in access, and ringing generator testing. They provide the necessary functions to replace all 2-Form-C electromechanical relays found on both traditional voice and integrated voice and data (IVD) line cards found in Central Office, Digital Loop Carriers, and Channel Banks.

New features include: (1) TTL compatible inputs, (2) Smart logic for safe power up and hot plug state control, and (3) Increased dv/dt immunity.

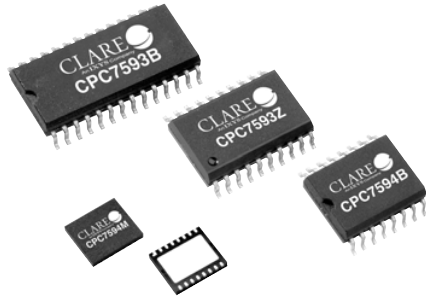

Features

- Small surface mount SOIC or DFN package
- Monolithic IC reliability
- Low, matched on-resistance
- Built-in zero-cross switching
- Impulse noise reduction
- Current limiting, thermal shutdown and SLIC protection
- Robust power cross and lightning surge performance
- Ultra-low power consumption of <10.5mW
- Pin-to-pin compatibility to the Legerity 7581, 7582, and 7583 SOIC products

Applications

- VOIP gateways
- Central Offices (CO)
- Digital Loop Carriers (DLC)
- Digitally Added Main Line (DAML)
- Hybrid Fiber Coax (HFC)
- Fiber in the Loop (FITL)
- Pair Gain systems
- Channel banks
- PBX systems


Part Number	# Switches	Switching Pairs				Protection Features					Logic States	Package Type
		Break	Ringing	Test Out	Test in	Ringing Test	Zero-Cross Switching	Diode Bridge	Protection SCR	Minimum Hold Current mA		
CPC7591xA CPC7591xB	4 4	• •	• •				• •	Half Full	•	110	3 3	16 SOIC or DFN 16 SOIC or DFN
CPC7592xA CPC7592xB CPC7592xC	6 6 6	• • •	• • •	• • •			• • •	Half Full Half	• •	60 110	4 4 5	16 SOIC or DFN 16 SOIC or DFN 16 SOIC or DFN
CPC7593xA CPC7593xB CPC7593xC CPC7593xD	10 10 10 10	• • • •	• • • •	• • • •	• • • •	• • • •	• • • •	Half Full Half Full	• •	110 110	7 7 8 8	20 or 28 SOIC or 28 DFN 20 or 28 SOIC or 20 DFN 20 or 28 SOIC or 20 DFN 20 or 28 SOIC or 20 DFN
CPC7594xA CPC7594xB CPC7594xC	6 6 6	• • •	• • •		• • •		• • •	Half Full Half	• •	110 110	4 4 4	16 SOIC or DFN 16 SOIC or DFN 16 SOIC or DFN
CPC7595xA CPC7595xB CPC7595xC	10 10 10	• • •	• • •	• • •	• • •	• • •	• • •	Half Full Half	• •	110 110	7 7 8	20 or 28 SOIC or 28 DFN 20 or 28 SOIC or 28 DFN 20 or 28 SOIC or 28 DFN
CPC7581xA CPC7581xB CPC7581xC	4 4 4	• • •	• • •				• • •	Half Full Half	• •	60 110	3 3 3	16 SOIC or DFN 16 SOIC or DFN 16 SOIC or DFN
CPC7582xA CPC7582xB CPC7582xC	6 6 6	• • •	• • •	• • •			• • •	Half Full Half	• •	60 110	4 4 5	16 SOIC 16 SOIC 16 SOIC
CPC7583xA CPC7583xB CPC7583xC CPC7583xD	10 10 10 10	• • • •	• • • •	• • • •	• • • •	• • • •	• • • •	Half Full Half Full	• •	100 100	7 7 8 8	20 or 28 SOIC 20 or 28 SOIC 20 or 28 SOIC 20 or 28 SOIC

Line Card Access Switch (LCAS) DFN Package Products




With the introduction of the DFN Package, the same functionality and performance now comes at a fraction of the size and makes 32 channel (or greater) line cards a reality. Even compared to fourth generation EMRs, these DFNs offer a dramatic area and

height savings of 65% and 80% respectively. All LCAS versions listed below are available in the DFN package. The last digit in the part number indicates the logic version and is the same for both the DFN and SOIC versions.

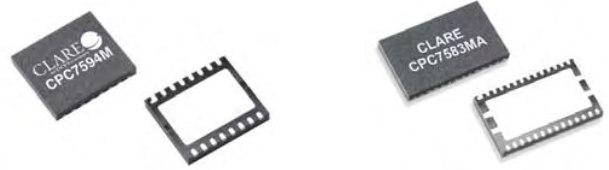

Part Number	Package	W mm	L mm	H mm	Area mm ²	# of EMRs LCAS replaces	Area Savings vs EMRs
CPC7591Mx	16DFN	6	7	0.9	42	1	43%
CPC7592Mx	16DFN	6	7	0.9	42	2	71%
CPC7593Mx	28DFN	7	11	0.9	77	3	65%
CPC7594Mx	16DFN	6	7	0.9	42	2	71%
CPC7595Mx	28DFN	7	11	0.9	77	3	65%

Block Diagram

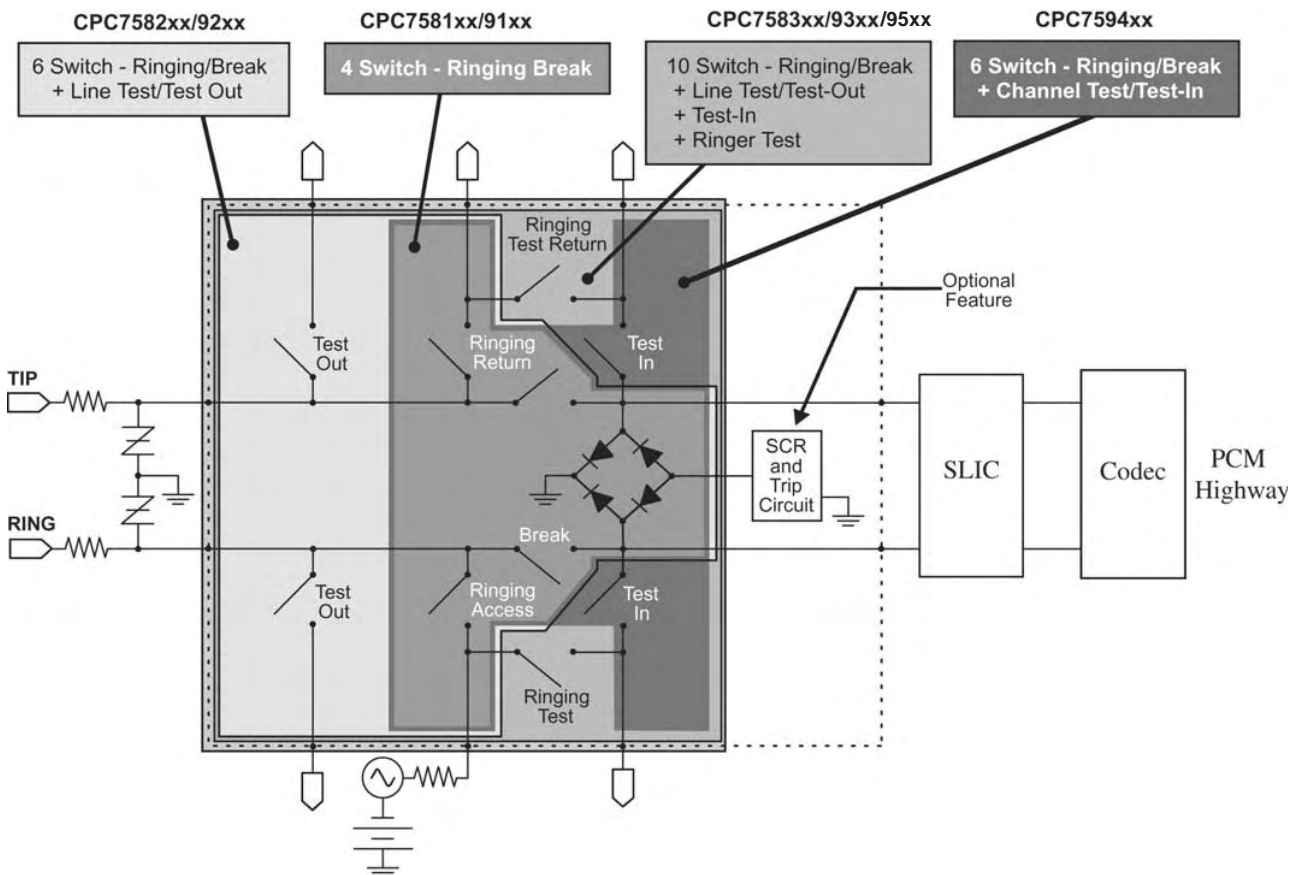

LITELINK™ Silicon DAA, Phone Line Interface



The LITELINK™ phone line interface is the industry's only single package silicon Data Access Arrangement, featuring a 32-pin, small outline, low profile, surface mount package. It is ideal for both voice and data (V.22bis to V.90/V.92) and applications in particularly dense circuit environments. The internal optical isolation barrier eliminates high cost transformer or capacitive isolation circuits. This solution saves cost relative to competitive circuits through reduced passive component count and smaller printed circuit board space.

The 3kV_{rms} internal isolation barrier exceeds all worldwide regulatory requirements. The optical isolation barrier yields low distortion performance necessary for high speed communications. In addition, the LITELINK™ application circuit is capable of surviving 6kV (10usec x 700usec) lightning surge waveforms (K.21) making it the most robust silicon DAA on the market.

LITELINK™ offers the lowest operational phone line quiescent current. The device easily interfaces to commonly available standard single-ended or differential voice and modem codecs on the market. Contact Clare for information on codec reference designs that offer programmable AC termination impedance for global applications. LITELINK™ complies with international PSTN agency requirements.

The newest device is the CPC5622, which is part of the LITELINK™ III product family. It offers continuous Caller-ID (CID) signal reception which is ideal for telephony applications in countries where CID information is present before the ringing signal. The CPC5622 also offers both full and half wave ringing signal detection allowing the designer to choose the appropriate interface to the codec/DSP block.

Features

- Voice and data applications
- Modem DAA for speeds up to V.92
- Half-wave or full-wave ringing detection
- Worldwide telephone network compatibility
- Caller-ID reception
- Line side powered from telephone line
- 3.3V to 5V power supply
- Easy interface with modem ICs and voice codecs
- High power transmit option for voice applications (>3dBm)


Applications

- VoIP gateways
- PBXs
- Satellite set-top box
- V.92 modems
- Fax machines
- Voice mail systems
- Embedded modems
- Remote metering
- Security systems



Part Number	Family	Isolation Voltage V _{rms}	Power Supply	MODE pin	Caller ID	Ringing Detect	Status
CPC5622	LITELINK III	3000	3.3V to 5V	Yes	Continuous	Half & Full wave	Recommended for New Designs
CPC5621	LITELINK III	3000	3.3V to 5V	Yes	Selectable	Full wave	Recommended for New Designs
CPC5620	LITELINK III	3000	3.3V to 5V	Yes	Selectable	Half wave	Recommended for New Designs
CPC5611	LITELINK II	1500	3.3V to 5V	No	Selectable	Full wave	
CPC5610	LITELINK II	1500	3.3V to 5V	No	Selectable	Half wave	
CPC5604	LITELINK I	1500	5V	No	Selectable	Half wave	

CPC5622 LITELINK™ III Block Diagram

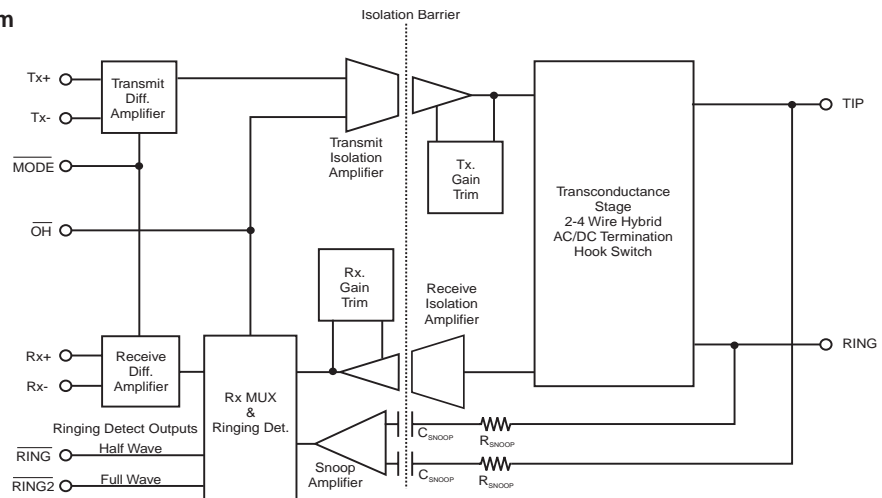

Optional LITELINK™ Support Components

CPC5601	Optically Isolated Programmable Driver IC	16-Pin SOIC
CPC5608	5-Channel, Low-Power Transistor Array IC	8-Pin SOIC

Phone Line Supervisory ICs

CPC5712 Phone Line Monitor with Detectors IC



The CPC5712 is a special purpose Phone Line Monitor with Detectors (PLMD) integrated circuit that is used in various high-voltage telephony applications such as VoIP gateways and IP-PBXs. The device monitors the TIP/RING potential through a high-impedance divider (resistor isolation) to derive two programmable signal-level detects, polarity information, and a scaled representation of the phone voltages. In use, the resistor divider and the high input impedance of the CPC5712 make the circuit practically undetectable on the line. The high-impedance resistive barrier application circuit is fully compliant to the EN60950 safety standard, and meets ITU-T K.21 over-voltage and over-current specification.

The two voltage-level detects are programmed with external resistors, which gives the designer complete freedom with respect to line voltage detection levels. The level settings also have programmable hysteresis to prevent false triggering conditions. Detection of these levels allows the user to determine the condition of the line.

This device can also be used in non-telephony applications such as instrumentation and industrial controls, especially when a low-level differential level needs to be detected in the presence of a large common-mode voltage.

Features


- Two independent Programmable Level Detectors with Programmable Hysteresis
- Fixed-Level Polarity Detector with Hysteresis
- Differential Linear Output
- Minimum External Components
- Excellent Common-Mode Rejection Ratio (CMRR>55dB)
- Application Circuits meet Isolation Requirements of Worldwide Telephony Standards
- Worldwide Telephone Network Compatibility
- 3.0 V to 5.5V Operation
- High Differential Input Impedance; Very Low Common-Mode Input Impedance
- Fixed Gain
- CMOS Logic Level Output (TTL Compatible)
- Small QSOP 16-Lead Package

Applications

- VoIP Gateways, IP-PBX, xDSL
- TIP/RING Monitoring
- Line-In-Use Detection
- Polarity Detection
- Battery Detection, PSTN Check
- Non-Telephony Voltage-Level Detection Applications
- Instrumentation
- Industrial Controls



Block Diagram

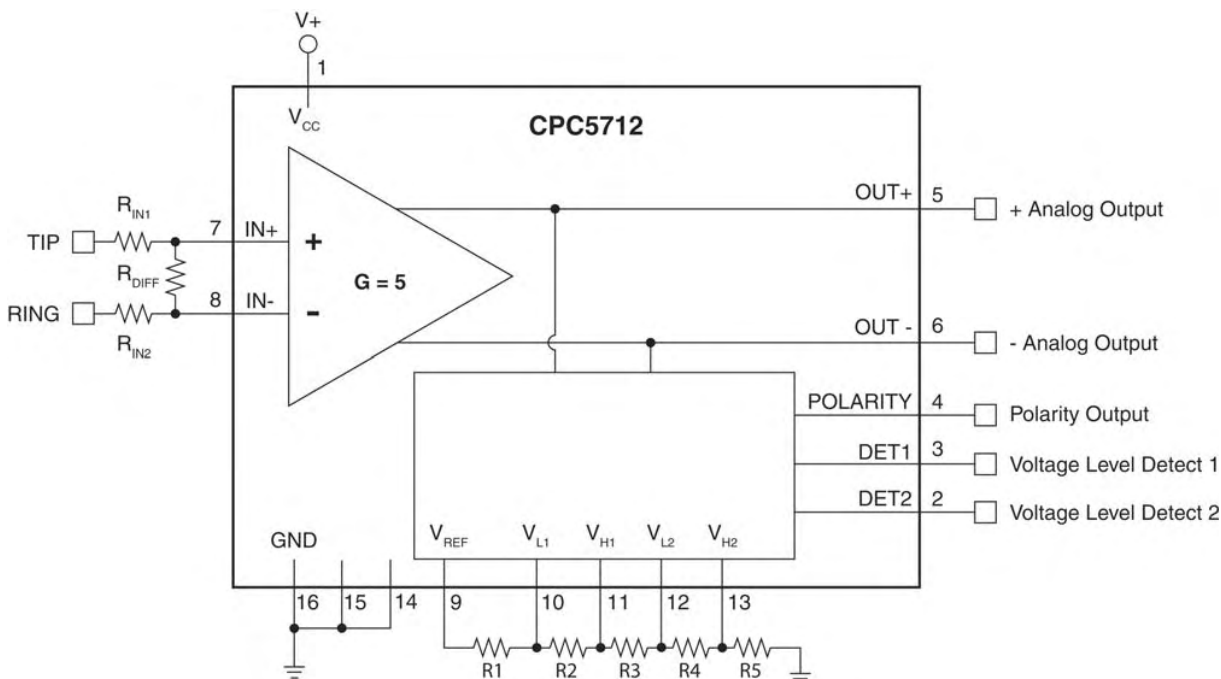

CPC5710 Phone Line Monitor IC

Clare's CPC5710N 8-pin SOIC is a versatile building block for designing telephone line monitoring circuits. High common-mode rejection ratio (>40dB) and high input impedance makes the CPC5710N an excellent choice for tip/ring voltage monitoring, battery presence detection, line-in-use detection (another-phone-off-hook), polarity reversal, display feature (Caller ID) signal reception, ringing detection, and discrete voice recording.

The CPC5710N high impedance input circuit eliminates phone line monitoring discrete components that reduce central office

(CO) battery voltage to Customer Premise Equipment (CPE) equipment. This allows the CPE equipment to work properly on long phone loops and meet difficult worldwide regulatory low CO voltage conditions. The high impedance resistive barrier application circuit is fully compliant to the EN60950 safety standard and meets the ITU-T K.21 over-voltage and over-current specifications. Common applications include telephony gateways, IP-PBX, computer telephony, embedded modems, set-top boxes, voice recording applications, and point-of-sale equipment.

Features

- Excellent common-mode rejection ratio (CMRR), >40 dB
- Supplied application circuits meet EN60950 Safety and ITU-T K.21 specification isolation requirements
- High input impedance circuit eliminates line voltage drop for better performance and compliance to worldwide specifications
- Small 8-pin SOIC
- Worldwide telephone network compatibility
- Full-wave ringing level detector comparator with internal threshold, large hysteresis, and logic-level output
- 3.3V to 5V operation
- High differential input impedance, very low common mode input impedance
- Fixed gain
- Differential or single-ended linear output
- TTL logic input
- CMOS logic output (TTL compatible)
- Virtually non-detectable in voice monitoring

Applications


In monitoring applications the CPC5710N can be used for:

- Display feature (caller ID) signal processing
- Line-in-use detection (another phone-off-hook)
- Ringing signal level detection
- Battery presence monitoring
- Tip and ring lead voltage monitoring
- Line polarity



Part Number	Power Supply
CPC5710	3.3V to 5V

APOH and Polarity Detection Application Circuit

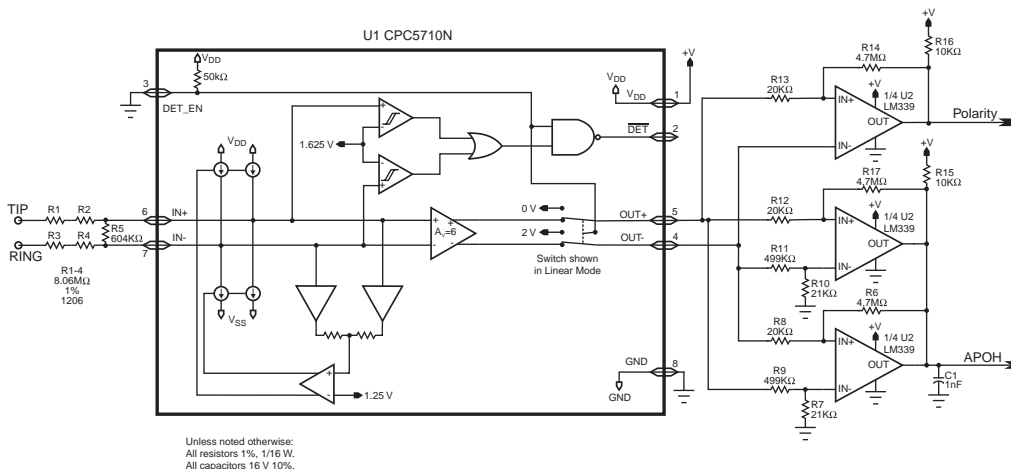

The CPC1465 provides a polarity-insensitive DC termination for wetting (sealing) current on the CPE side conforming to ITU-T G.991.2 to eliminate corrosion on SHDSL/ISDN lines. The CPC1465 has excellent linearity (70dB typ.) to minimize harmonic distortion and well-controlled turn-on and turn-off characteristics to minimize injecting impulse noise with in band signal energy into the channel.

This DC termination IC, which interfaces with the tip/ring pair, is rated at 300V and is able to handle power cross and lightning transients with appropriate protection. Manufactured in Clare's proven 320V Silicon On Insulator (SOI) process, the CPC1465 is packaged in a 16-pin SOIC or DFN.

Features


- Meets wetting (sealing) current requirements per ITU-T G.991.2
- Integrated bridge rectifier for polarity correction
- Uses inexpensive optocoupler for DC signaling
- Electronic inductor, breakover, and latch circuits
- Current limiting and excess power protection circuits
- ANSI SHDSL and ISDN compatible
- MLT and SARTS compatible
- Excellent linearity (70dB typ.)

Applications


- SHDSL
- ISDN
- Router and bridge customer premises equipment
- Leased line equipment
- T1/E1 network line cards and repeaters
- Network Termination 1 (NT1) equipment
- Mechanized Loop Test (MLT) networks
- Switched Access Remote Test System (SARTS) networks

High-speed Line Interface Product

Part Number	Package
► New	
CPC1465D	16-pin SOIC
► CPC1465M	16-pin DFN

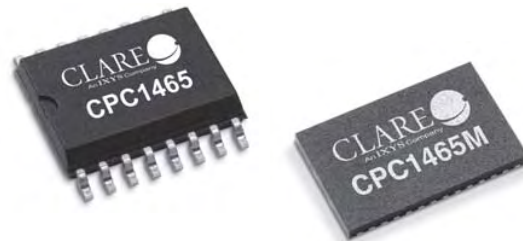

Block Diagram

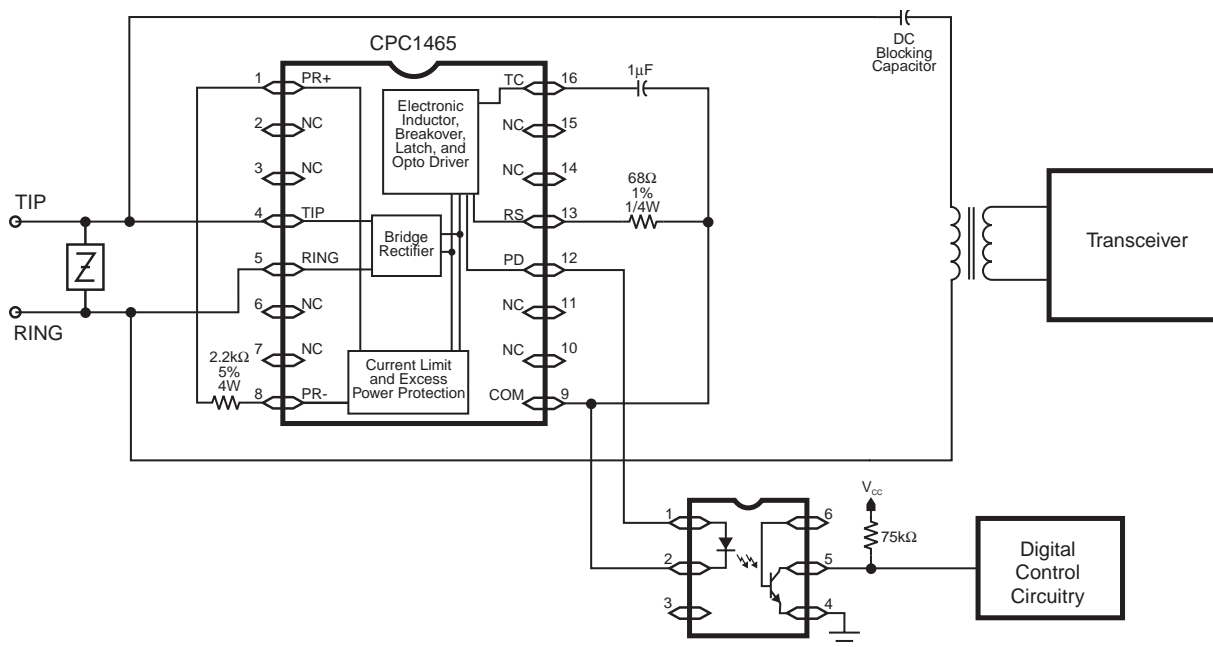

CPC1466 Broadband ADSL / VDSL DC Termination IC

The CPC1466 is a DC Termination IC for broadband ADSL/VDSL applications. The high-voltage, monolithic device provides a termination for DC wetting (sealing) current in customer premises equipment (CPE) to eliminate phone line corrosion on DSL twisted-pair copper lines without telephone voice services (i.e. only broadband services).

Internally, a bridge rectifier provides a polarity-insensitive DC termination for DSL loop sealing current. The IC includes an

electronic inductor, breakover and latch circuits, current limit and excess power protection. A sealing current detect output provides the means to monitor the loop for the presence of sealing current in the loop.

The CPC1466 is manufactured in Clare's high voltage BCD MOS process that is used extensively in telephony applications worldwide.

Features

- Meets wetting (sealing) current requirements per ITU-T G.992.3
- Integrated bridge rectifier for polarity correction
- Uses inexpensive opto-coupler for DC sealing current monitoring
- Electronic inductor, breakover, and latch circuits
- Current limiting and excess power protection circuits
- ADSL / VDSL compatible with low-pass filter network
- MLT and SARTS compatible
- Compatible with portable test sets
- Small SOIC or DFN Package
- DFN package 60 percent smaller than SOIC

Applications


- ADSL / VDSL broadband modems
- Router and bridge customer premises equipment
- Leased line equipment
- Mechanized Loop Test (MLT) networks
- Switched Access Remote Test System (SARTS) networks

High-speed Line Interface Product

Part Number	Package
► New	
► CPC1466D	16-pin SOIC



Block Diagram

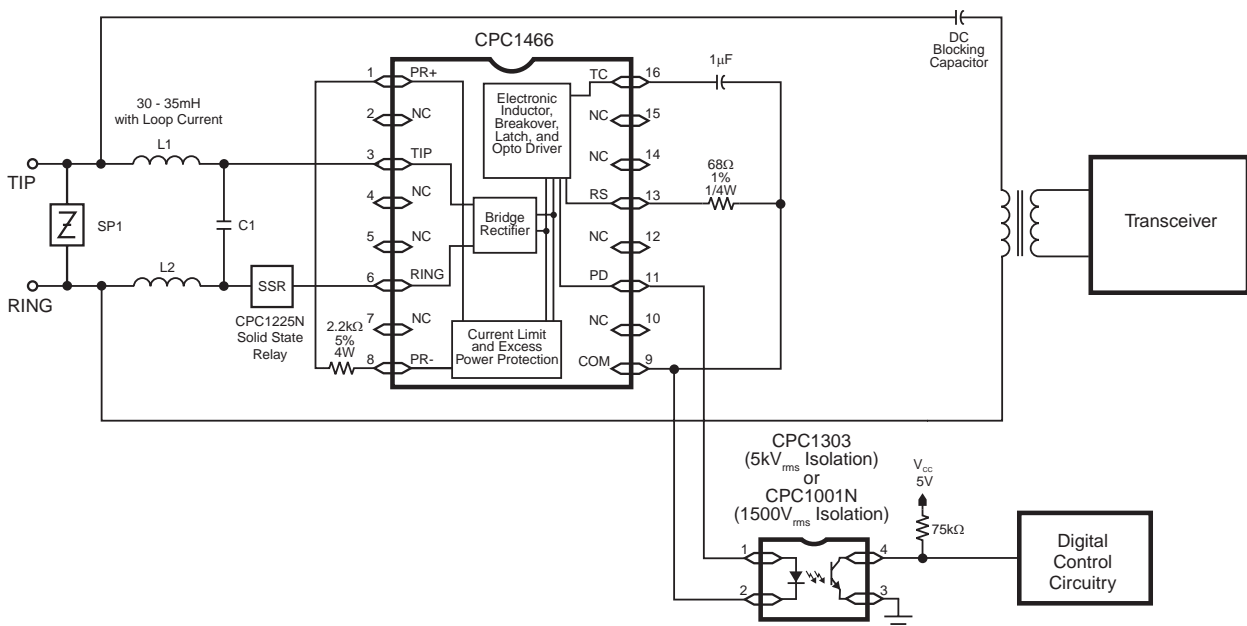

Data Access Arrangement (DAA) Modules

The Cybergate family is Clare's turnkey modular DAA solution. The V.34 family provides the circuitry required in a single, completely functional DAA circuit in a 1.07" x 1.07" x 0.4" plastic module. This plug-and-play design allows the user to choose the necessary options to minimize costs, and in turn, maximize

value. Standard features include surge protection, transient protection zeners, ringing detection, hook switch circuitry, gyrator circuitry (impedance balancing), and a transformer. Caller-ID (CID) and loop current detection are also available as options.

Features

- 28.8kbps (except for CYG2911 at 9.6kbps)
- Optional caller ID and loop current sense
- Ringing detection
- Low power Hook Switch
- Surge protection
- Low THD
- Gyrator circuitry
- Meets most regulatory agency requirements

Applications

- Modems
- Remote data acquisition
- Fax machines
- Security/metering
- Computer telephony
- PBX
- Voice mail systems



Cybergate Data Access Arrangements

Part Number	Region	Hook Switch Resistance	DC Loop Current	Return Loss (min.)	Insertion Loss (max.) TX-Transmit RX-Receive	Ringing Voltage Detection Range	Isolation Voltage	Features					
								Ringing Detection		Caller-ID	Loop Current Detect	911 Emergency	2-4 Wire Conversion
								Full Wave	Half Wave				
		Ω	mA	dB	V_{rms}	V_{rms}							
CYG2000	N. America Asia	15	20-120	18	Tx 7 Rx 7	20-150	1000		•				
CYG2001	N. America Asia	15	20-120	18	Tx 7 Rx 7	20-150	1000	•					
CYG2010	N. America Asia	15	20-120	18	Tx 7 Rx 7	20-150	1000		•		•		
CYG2011	N. America Asia	15	20-120	18	Tx 7 Rx 7	20-150	1000	•			•		
CYG2020	N. America Asia	15	20-120	18	Tx 7 Rx 7	20-150	1000		•	•			
CYG2021	N. America Asia	15	20-120	18	Tx 7 Rx 7	20-150	1000	•		•			
CYG2030	N. America Asia	15	20-120	18	Tx 7 Rx 7	20-150	1000		•	•	•		
CYG2031	N. America Asia	15	20-120	18	Tx 7 Rx 7	20-150	1000	•		•	•		
CYG2100	Europe	35	5-120	14	Tx 7 Rx 7	29-150	1500		•				
CYG2110	France	35	5-120	14	Tx 7 Rx 7	29-150	1500		•				
CYG2111	CTR-21	35	5-120	14	Tx 7.5 Rx 7.5	29-150	1500		•				
CYG2120	Spain	35	5-120	14	Tx 7 Rx 7	28-150	1500		•				
CYG2217	N. America Asia	15	20-120	39	Tx 7 Rx 1	20-150	1000		•				•
CYG2218	N. America Asia	15	20-120	39	Tx 1 Rx 1	20-150	1000		•				•
CYG2300	Germany	-	5-120	14	Tx 7 Rx 7	29 MIN	1500		•				
CYG2320	Australia	-	5-120	14	Tx 7 Rx 7	29 MIN	1500		•				
CYG2911	N. America Asia	15	20-120	18	Tx 9 Rx 9	20-150	1000		•	•		•	

*All of the parts listed are in a DIP package, operate using a 5V power supply, have a minimum On-hook impedance of 10 M Ω , Maximum Total Harmonic Distortion (THD) of 0.01% and a tip to ring surge protection voltage of 300V.

Embedded Modem Module (EMM)

The Embedded Modem Module combines a datapump and microcontroller with the Data Access Arrangement (DAA) to deliver an all-in-one solution for V.22 bis modem transaction-oriented applications. This plug-and-play module provides a total solution complete with transferable FCC registration. It


supports a standard serial V.24 TTL interface to the DTE equipment. The CPC2400E features a quick handshake time of 1.6 seconds. This offers a clear advantage for short connection sessions when compared to V.34 and V.90 modems which have a data handshake period greater than 10 seconds.

Features


- Easy integration and installation
- Small footprint of 1.00" x 2.50"
- Low power consumption
- 5V Power Supply operation
- Supports V.22bis, V.22, V.23
- FCC part 15B compliant
- FCC part 68 user transferable registration
- UL Approved

Applications


- Point-of-Sale (POS)
- Gaming equipment
- Utility metering
- Lock boxes
- Remote monitoring
- Embedded applications
- Medical appliances

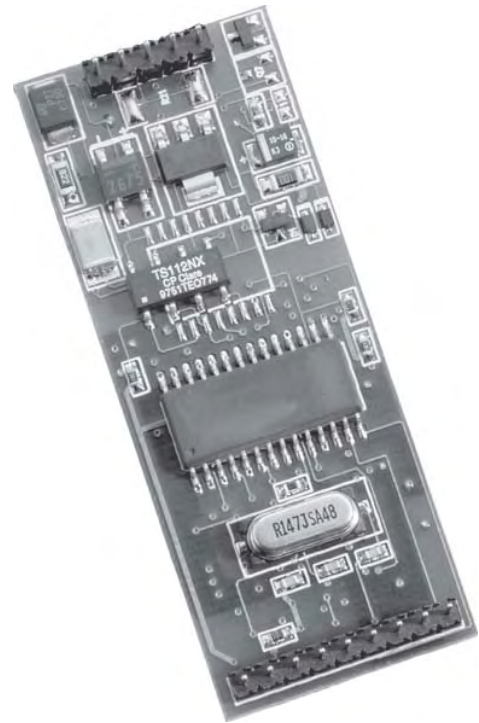

Block Diagram

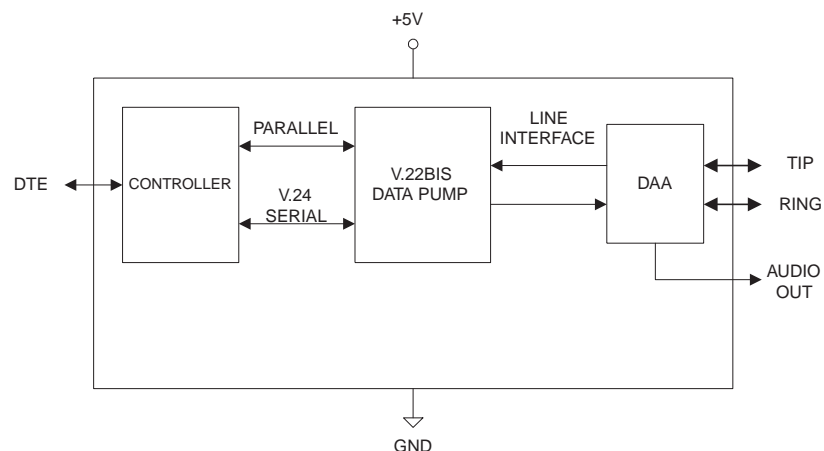

Pin Diagram

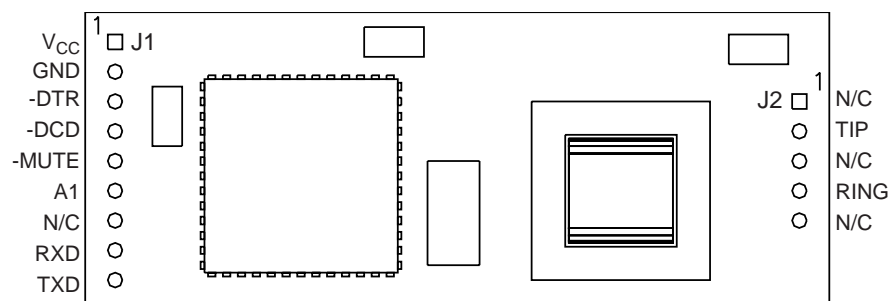

Tone Signaling Products include MF Trunk Signaling ICs, Call Progress Detectors and Generators, and Hook Switch Status Devices.

Call Progress Detectors and Generators

Clare's family of Call Progress Detectors and Generators provides an inexpensive method of detecting and generating common call progress tones including busy tone, dial tone, call waiting tones, and others. The family includes both an inexpensive band detector and precise call tone detectors that detect individual tones. Detectors are available in both DIP and SOIC packages, and operate on a 3V to 5V supply. The call progress generator allows for a simple method of providing dial tone, busy tone, and other call progress tones in applications where a POTS interface is required such as VoIP or other network gateways.


Features

- Receive and generate common call progress tones
- Detectors operate with a single 3 to 5 Volt supply
- Linear input (detectors) and output (generator)
- Inexpensive band detector with wide dynamic range (>38dB)
- Low power consumption
- Detectors available for both common call progress and SIT tones
- Available in both DIP and SOIC packages


Applications

- PBX circuits
- Billing systems
- Test equipment
- Point of Sale terminals
- Pay telephones

M-980-02

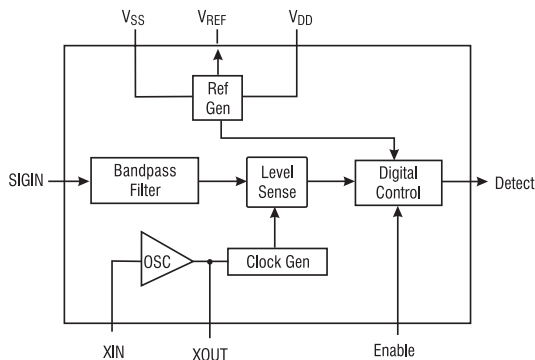

M-991

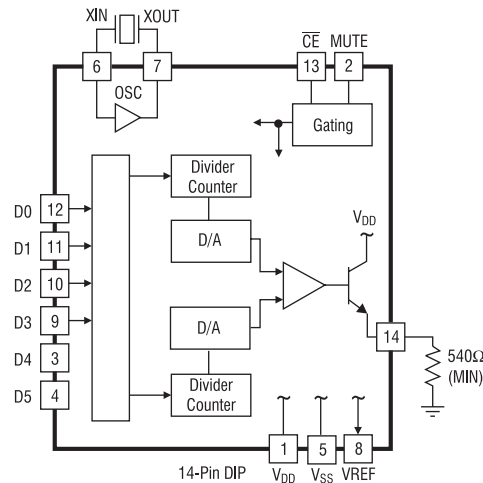

Part Number	Function	Detection Frequencies					Package Type
		Band	Dial Tone	Audible Ringing	Busy Tone	Special Information Tones (SIT)	
M-980-02	Detector	315-640Hz 350 + 440Hz	440 + 480Hz	480 + 620Hz			16-Pin SMT, 8-Pin TH
M-982-02	Detector		•	•	•		20-Pin SMT, 22-Pin TH
M-985-01	Detector		•	•	•	•	20-Pin SMT, 22-Pin TH
M-991	Generator		•	•	•		16-Pin SMT, 14-Pin TH

MF Trunk Signaling ICs

MF signaling ICs, available in a variety of formats, eliminate the need for additional software required to implement MF signaling protocols in trunk circuits. Used in MF trunk signaling applications, these products include a family of PCM digital MF transceivers in a variety of formats. Signaling formats include R1 (A Law and μ Law), and R2 Specification.

Features


- Direct PCM interface to chip
- Manual or Compelled Mode operation for R2 signaling
- 2.048 MHz clocking
- Dual Channel
- Microprocessor read/write interface
- R1 and R2 formats provided

The M-993 is a stand-alone generator that provides a simple, inexpensive method of generating analog R1 MF signaling tones. Already used in thousands of systems worldwide, these products give the system designer a proven method of providing MF signaling capability.

Applications

- Trunk Circuits requiring MF trunk signaling in R1 or R2 signaling formats

Block Diagram

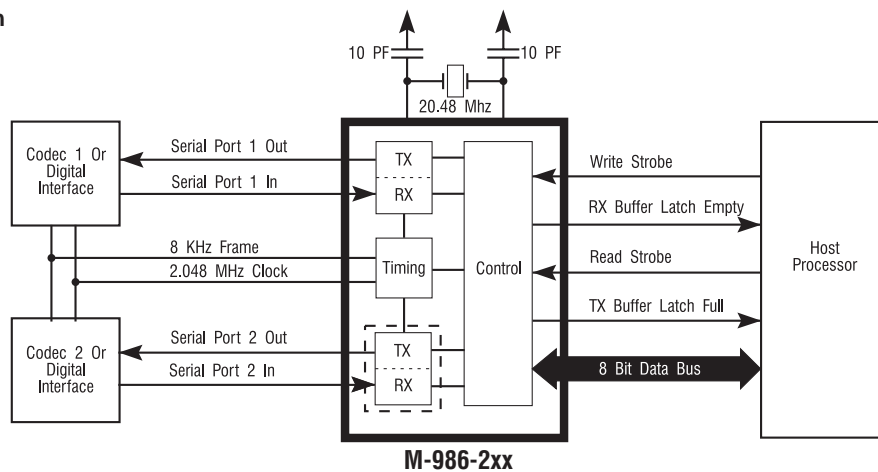

Part Number	Function	CCITT R1	CCITT R2	A Law PCM	μ Law PCM	PCM in/Out	Analog out	PackageType
M-986-2A1P	Transceiver	•		•	•	•		44-Pin SMT, 40-Pin TH
M-986-2R2P	Transceiver		•	•		•		44-Pin SMT, 40-Pin TH
M-993	Generator	•					•	14-Pin DIP TH

Hook Switch Status Devices

M-949-01 Line Sense Relay


- Senses telephone line current from 18 to 125 mA
- Used by control circuitry for on-hook/off-hook monitoring, switch hook flash detection and rotary dial pulse
- Provides 1500V_{DC} coil-to-contact isolation
- Includes 1-Form-A relay contact
- Applications Include: Central Office products, PBX and key systems, rotary dial monitoring devices

M-949-11 Balanced Dual Coil Telephone Line Current Sensing Relay

- Senses telephone line current from 15 to 200mA
- Used by control circuitry for on-hook/off-hook monitoring, switch hook flash detection and rotary dial pulse
- Meets high isolation voltage requirement of 4000V
- Meets UL and British Standard specifications
- Includes 1-Form-A relay contact

M-959 Dial Pulse Counter and Hook Status Monitor

- Independent hook status monitoring
- Time-guarded dial pulse counting
- 10 or 20 PPS dialing speeds pin selectable
- Valid data output strobe

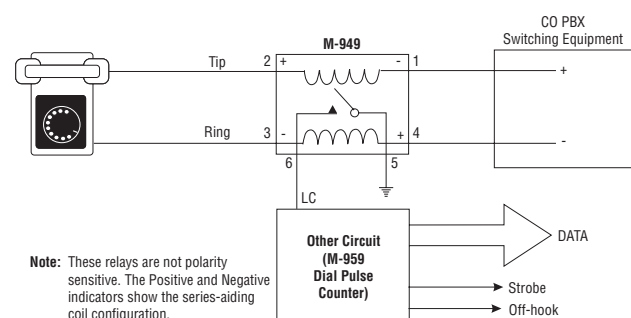

High Voltage Products - Analog Switches and Display Drivers



The high-voltage process technology used on these devices is Clare's reliable BCDMOS on SOI (Silicon On Insulator). This process offers unique performance features such as multiple 300 Volt open drain FET devices and 200 Volt bi-directional analog switch cells with 1 Amp peak current capability.

CPC7220/CPC7221 High-Voltage 8 Channel Analog Switch

The CPC7220 and CPC7221 are low charge injection 8-channel high-voltage analog switch integrated circuits (ICs). These devices are capable of switching large load voltages and have a flexible load voltage range, e.g. V_{PP}/V_{NN} : +40V/-160V or +100V/100V. Switch manipulation is managed by an 8-bit serial to parallel shift register whose outputs are buffered and stored by an 8-bit transparent latch. Level shifters buffer the latch outputs and operate the high-voltage switches.

Features


- DC to 10MHz analog signal frequency
- 200 Volts peak-to-peak output switches
- Low quiescent power dissipation (< 1 μ A typical)
- Output on-resistance typically 20 Ω
- TTL inputs and outputs for 3.3V interface
- 28-Pin SOIC Package



Applications

- Ultrasound imaging
- Printers
- Industrial controls and measurement

Block Diagram

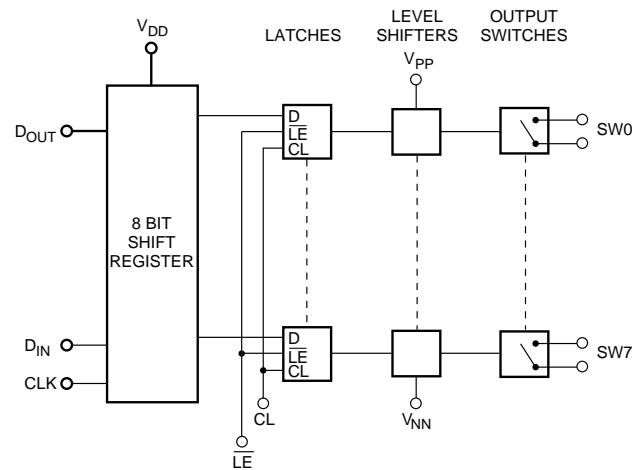

CPC6826 High-Voltage EL Lamp Driver

The CPC6826 is an electroluminescent (EL) lamp driver designed for applications operating from an input supply voltage range of 1.8V to 3.5V. The architecture features an integrated boost switching supply with an H-bridge driver circuit to illuminate the EL lamp. Three passive components are required to complete the boost switcher circuit: an inductor, a capacitor, and a diode. The internal high-voltage H bridge provides a nominal $\pm 75V$ output between pins V_A and V_B.

Features


- 1.8V to 3.5V supply voltage
- DC to AC conversion
- Adjustable output frequency
- Adjustable switch frequency
- Output voltage regulation
- 150V_{PP} H-Bridge drive output
- Enable/Disable function
- MSOP-8 Package



Applications

- Mobile cellular phones
- Keypad illumination
- Instrument panels

Block Diagram

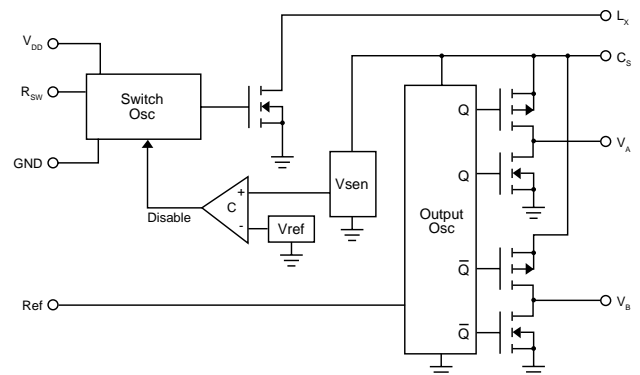

Optically Isolated Gate Driver Circuits

The CPC1580 and CPC1590 are high speed Optically Isolated Gate Driver ICs. On-chip circuitry charges an external capacitor from the AC load voltage which eliminates the need for an external IC power supply. The Driver IC is ideal for low duty cycle switching applications.

Features

- Low drive power requirements (TTL/CMOS Compatible)
- Fast switching T_{ON}/T_{OFF} 20/200 μ sec
- Load Voltages up to 200V
- No external IC power supply



Applications


- Instrumentation
 - Multiplexers
 - Electronic switching
 - I/O Subsystems
 - Meters (Watt-Hour, Water, Gas)
- Medical Equipment (patient/equipment isolation)
- Security
- Aerospace
- Industrial controls

Operational temperature range of -40° to 85°C

Part Number	Input Control Current	Gate Voltage @ $I_f = 5\text{mA}$	Load Voltage	Regulated Capacitor Voltage	Nominal Switching Speeds ①	Isolation Voltage	Package Type
► New	mA	V_G	V_D	$V_{CAP-MAX}$	T_{ON}/T_{OFF} ms	V_{rms}	②
► CPC1580	5	7.5 to 12	65	$V_{DS}-0.2$	0.04 / 0.4	3750	8-Pin SMT
► CPC1590	5	7.5 to 9.1	200	16	0.04 / 0.4	3750	8-Pin SMT

① With $I_f = 5\text{mA}$ ② For Package Type, SMT indicates Surface Mount Technology while TH indicates Through-hole.

Block Diagrams

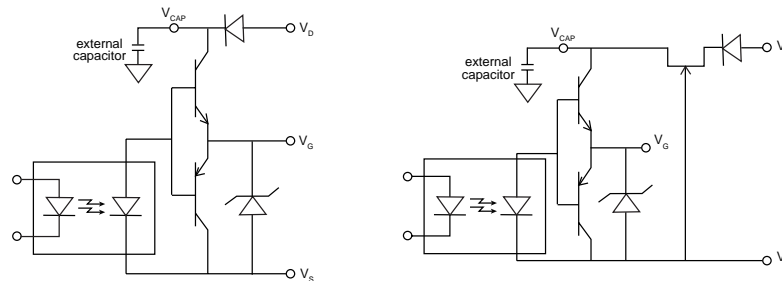

Optically Isolated Dual MOSFET Gate Driver

The FDA215 is a Dual Optically Isolated Photodiode Array. The light-activated array produces an open circuit voltage of 8 Volts. This device is suited for use in discrete solid state relay designs.

Features

- Isolated 5V photovoltaic output
- May be configured for AC and DC switching
- Floating outputs for parallel or series configuration

Applications


- MOSFET Driver
- Programmable control
- Process control
- Instrumentation

Operational temperature range of -40° to 85°C

Part Number	Input Control Current I_f	Open Circuit Voltage	Nominal Short Circuit Current I_{SC}	Switching Speeds T_{ON}/T_{OFF}	Isolation Voltage	Package Type ①
	mA	V_{OC}	μA	ms	V_{rms}	
FDA215	5	5	2.5	5 / 5	3750	8-Pin SMT, TH

① For Package Type, SMT indicates Surface Mount Technology while TH indicates Through-hole.

Block Diagram




Clare's N-channel depletion mode Field Effect Transistors (FETs) utilize a proprietary third generation vertical DMOS process. The third generation process realizes world class, high-voltage MOSFET performance in an economical silicon gate process. The vertical DMOS process yields a robust device for high power applications with high input impedance. These highly reliable FET devices have been used extensively in Clare's solid state relays for industrial and telecommunications applications.

The normally-on MOSFETs are well suited for low cost, pre-regulator applications that are tolerant of high voltage drop and power dissipation between the power source and the output regulator stage. The pre-regulator is particularly effective as an inexpensive solution for filtering AC line voltage variations in non-isolated DC power supplies as compared to switch-mode power supplies or step-down transformers.

FETs N-Channel Depletion Mode

Part Number	BV _{DSX} V	R _{DS(ON)} Max Ω	V _{GS(off)} Min V	V _{GS(off)} Max V	I _{DSS} @ V _{GS} = 0V Min mA	Package
CPC3703	250	4	-1.6	-3.9	300	SOT89
CPC3710	250	10	-1.6	-3.9	220	SOT89
CPC3714	350	14	-1.6	-3.9	240	SOT89
CPC3720	350	22	-1.6	-3.9	130	SOT89
CPC3730	350	30	-1.6	-3.9	140	SOT89
CPC5602	350	14	-2.0	-3.6	130	SOT223
CPC5603	415	14	-2.0	-3.6	130	SOT223

Application - Pre-regulator Non-isolated Power Supply with Depletion Mode FET

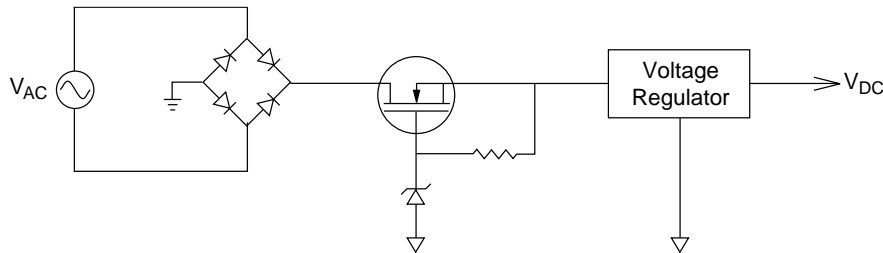

The Clare Solar Cell is a revolutionary new product offering that addresses the diverse needs and applications of the growing low power solar energy market. This technology development is based on Clare's strength in photovoltaic silicon processing and IC packaging. The Solar Cell product family offers several open circuit voltage levels (4 or 8 Volts) when activated by natural or artificial light. These voltage levels correlate to common circuit board power supply voltages making the solar cell ideal for battery charging applications and trickle charge power sources. Standard JEDEC SOIC package styles make

these Solar Cell products ideal for prototype and high volume production usage.

Clare's flexible Solar Cell architecture facilitates product family growth by means of its scalable technology thus paving the way for future solar cell offerings with different voltage and current ratings. Additionally, since there is excellent isolation between the various circuit elements on the Solar Cell's photovoltaic die, it is possible to add options such as power management or logic control circuitry with minimal incremental cost to the product.

Features



- Select from multiple voltage and current outputs
- 4 V - 8 V output
- 25 μ A - 100 μ A current output
- Provides true wireless power
- Triggers with natural sunlight or artificial light
- Semiconductor miniature size and reliability

Applications

- Portable Electronics
- Solar Battery Chargers
- Battery Operated Equipment
- Consumer Electronics
- Off Grid Installation
- Wireless Sensors and Detection
- Self Powered Sunlight/ Light Detection
- Self Powered Products
- Remote Installation

Product Part Number	Open Circuit Voltage	Short Circuit Current	SOIC Package
	V	μ A	
CPC1822	4	50	8-Pin
CPC1824	4	100	16-Pin
CPC1831	8	25	8-Pin
CPC1832	8	50	16-Pin

Block Diagram

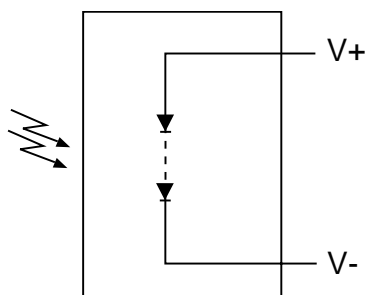

The following application notes can be downloaded from our web site at www.clare.com

General

- AN-131 Handling MOS Devices

Solid-State Relays

- AN-108 Current Limited Solid State Relays
- AN-145 Advantages of Solid State Relays Over Electromechanical Relays (English, Espanol, Deutsch, Francais)

Opto-Isolators

- AN-107 LOCxx Series - Isolated Amplifier Design Principals
- AN-109 LOC110 - Variable Speed Motor Controller Design
- AN-111 Isolated 0-10 V to 4-20 mA Converter Application
- AN-118 Detecting Line Polarity Reversal

Multifunction Products

- AN-112 Ground-Start Supervision Circuit Using Clare's IAA110
- AN-114 ITC117P Integrated Telecom Circuit

Optically Isolated Gate Drivers

- AN-201 CPC1580 Application Technical Information

Line Interface Products

LCAS

- AN-100 Design Surge and Power Fault Protection for Subscriber Line Interfaces
- AN-144 Impulse Noise Benefits of Line Card Access Switches
- AN-154 LCAS Longitudinal Balance Calculator Excel Spreadsheet for Line Card Applications

LITELINK™ Silicon DAA

- AN-102 Loop Current Detection for LITELINK™
- AN-140 Understanding LITELINK™ II
- AN-146 Guidelines for Effective LITELINK™ Designs
- AN-152 Using LITELINK™ III in a LITELINK™ II Circuit
- AN-155 Understanding LITELINK™ Display Feature Signal Routing and Applications
- AN-157 Increased LITELINK™ Transmit Power
- AN-158 LITELINK™III Application Circuit Calculations

Tone Signaling Products

- AN-125 M-986 - Configuring the M-986 MF Trunk Signaling
- AN-128 M-980 - Algorithm for Call Progress Signal Detection
- AN-129 M-991 - Call Progress Tone Generator
- AN-130 Call Progress Tone Standards
- AN-132 M-980 - Clare Components in Private Pay Stations
- AN-138 M-980 - Call Progress Tone Detector Applications
- AN-142 M-949 - Loop Current Sensing and Ring Chatter

Cybergate Products

- AN-121 Cybergate 20xx Series
- AN-122 Cybergate 21xx Series
- AN-123 Using CYG2911 and TS117 in APOH (911) Circuits
- AN-124 FCC "B" Surge Requirements

Since our founding in 1983, Micronix has supplied hundreds of high performance mixed analog-digital integrated circuits for the commercial, industrial and military markets.

Using our own Intellectual Property (IP) combined with third party IP, we can work with you to develop an ASSP that meets the needs of your particular industry or we can perform a complete turnkey solution of a high volume, proprietary mixed-signal ASIC specifically for your product.

As a subsidiary of IXYS, we have access to an in-house High Voltage Silicon On Insulator foundry and multi-chip module assembly line. Additionally, we have developed strategic alliances with other select, highly capitalized wafer foundries

and assembly houses. This unique capability enables us to apply the optimum mix of circuit topology and process to each application.

Experience has taught us that the most successful programs are those in which our customer's engineering staff play a major role in defining the circuit requirements. This close working relationship maximizes the benefits derived from a custom integrated circuit.

We believe that in today's complex business and technical relationships, trust and loyalty are as relevant as they ever have been. These simple virtues have provided the foundation of our growth, and we are committed to bringing them into each new business relationship.

Mixed Signal Design Flow

- **Turnkey:**
Micronix develops and manufactures a device that meets your product specifications.
- **Collaborative:**
Your digital design is incorporated via VHDL (or other high level language) or GDSII with Micronix analog functions to develop and manufacture a device that meets your product specifications.

General Performance Parameters

- Supply Voltages from 0.5 V to 550 V
- Operating Frequencies from DC to 150MHz

Foundry Partners

- **US:** AMI, X-Fab
- **Europe:** AMI, X-Fab, Zarlinc
- **Asia:** Dongbu, Samsung, UMC

Process Technologies

- CMOS Mixed Signal w/High Voltage
- Bipolar
- BiCMOS
- SOI BCDMOS High Voltage

Packaging

- Through-Hole
DIP, PGA
- Surface Mount
BGA
CLCC, PLCC
QFN, QFP
SOIC
- Multi-Chip Module
- TCP/COF (Tape Carrier Packaging, Chip On Flex)
70mm
Super 48mm
Super 35mm
- Tested Die (option = bumped)
Waffle Pack
Wafer (Inked or wafer map)
- Tape & Reel

Screening

- Mil-Std-883 Class B
- Custom

Quality

- Mil-I-45208 Certified
- ISO 9001:2000 Certified

MX840A/B

Hex Driver for GaAs FET
Switches and Attenuators

Features

- CMOS Technology
- TTL/CMOS compatible inputs
- Low switching noise
- <5nS typical true / complement output skew
- <3.5nS typical output rise and fall times
- Up to 11V output voltage
- Output high voltage programmable via V_{OPT}
- Output low voltage programmable via V_{EE}

Applications

- Digital control of analog circuits
- Level shifting and amplification
- Circuit applications requiring complementary signal generation with low skew
- Bias control for a PIN diode drivers in a microwave switch

General Description

The MX840A and MX840B are high speed six channel level shifters with complimentary output drivers. The MX840A features a 3.3V V_{CC} positive supply, and the MX840B features a 5.0V V_{CC} positive supply.

The input buffers accept digital TTL or CMOS level signals, amplifies them to the V_{CC} and GND supply rails, and generates complementary outputs. The translator level shifts these output signals by amplifying them to the V_{CC} and V_{EE} supply rails.

The output drivers then buffer the signals to V_{OPT} and V_{EE} . V_{OPT} may be set within the range of V_{CC} and GND. The output drivers also adjust the complimentary signals for minimized skew error.

The MX840A and MX840B are designed to operate over a temperature range of -40°C to +85°C, and are available as die in wafer form, die in waffle pack, 24 lead SOIC package, and SOIC on Tape and Reel.

Ordering Information


MX840A

Part No.	Description	Quantity
MX840AB	24 Lead SOIC Tube	32


MX840B

Part No.	Description	Quantity
MX840BB	24 Lead SOIC Tube	32

Functional Block Diagram

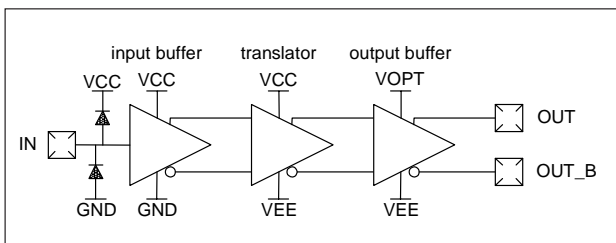

24 Lead SOIC Configuration

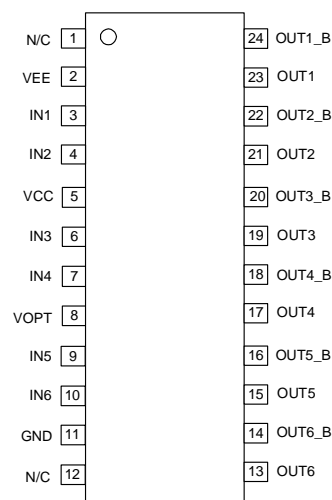

MX844

12 BIT, MULTI-CHANNEL POWER & TEMP SENSOR FOR MONITOR & CONTROL SYSTEMS

Features

- Wide Input Supply Range: 4.5V to 40V
- Programmable gain differential amplifier ($\pm 10\text{mV}$, $\pm 25\text{mV}$, $\pm 50\text{mV}$, $\pm 250\text{mV}$ ranges)
- 4 channel differential input multiplexer (3 input channels plus ground)
- Integrated 12-bit ADC
- Serial data output (SDO) with data ready pin
- Fine calibration of Full Scale Range (FSR) using VTRIM pin
- Bi-directional Current Sense
- Internal temperature sensor with 0.2°C resolution
- Compatible with 3.3V and 5V Microcontrollers
- Operating Temperature Range: -40°C to 85°C
- 5mm x 5mm, QFN-28 RoHS Package


General Description

The MX844 is a fully integrated subsystem that measures temperature plus differential current and voltage. An internal temperature sensor measures ambient temperature with 2.5°C accuracy. Current and voltage measurements are made differentially through a four input multiplexer connected to a programmable gain fully differential sense amplifier. The differential sense amplifier is optimized to measure very small positive or negative voltages near ground for low side bi-directional sensing. A dual slope ADC converts the temperature sensor or sense amplifier outputs to a 12-bit digital word that includes $3\frac{1}{2}$ digits plus sign. The input multiplexer channel and programmable gain amplifier range may be changed between ADC conversions. An on-chip voltage regulator enables the MX844 to operate over a wide input voltage range of 4.5 to 40 volts. Controller interrupt or over-voltage/over-current signals may be generated by a pair of 12-bit digital comparators configured as a window comparator or simple threshold detection function. The serial port supports standard 4-wire synchronous serial data, or asynchronous serial „talk-only“ data, and is compatible with most 3.3V and 5V microcontrollers.


Ordering Information

Part No.	Description	Qty
MX844R	QFN-28 Tube	73
MX844RTR	QFN-28 Tape & Reel	2500


Functional Block Diagram

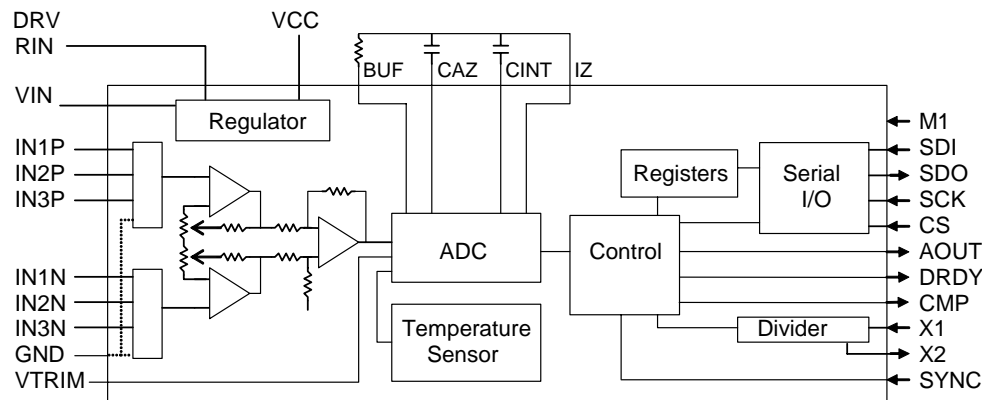

Typical Application

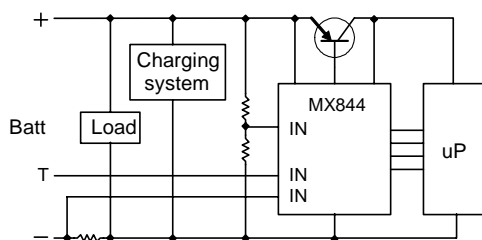

Battery charge/discharge current, voltage, temperature

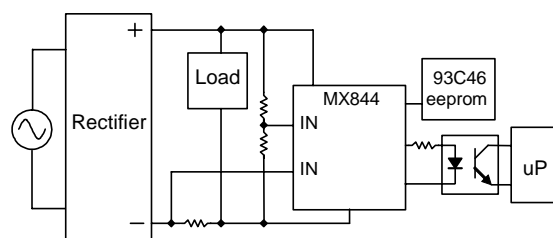

Isolated voltage, current, and temperature sensing

MX846-02

50 mA Switched Capacitor Buck-Boost DC/DC Converter with Regulated Output

Features

- Fully Regulated Output Voltage (5 V and Adjustable)
- Input Voltage Range from 3 V to 5 V
- 50 mA Output Current
- Output Accuracy: $\pm 5\%$
- High Switching Frequency: 1MHz
- Low Power Shutdown Mode: 1 μ A (Typical)
- Minimum Number of Low Cost External Components
- 8 lead, RoHS compliant, SOIC package
- Wide Temperature Range: -40°C to $+85^{\circ}\text{C}$

Applications

- Local 3V to 5V Conversions
- Battery Powered Devices
- Computer Peripherals and Add-On Cards
- Portable Instruments
- Mobile Phones

General Description


The MX846 is a 50 mA regulated output switched capacitor Buck-Boost DC/DC Converter targeting portable, battery powered devices. The MX846 supplies a high efficiency regulated output voltage with a minimum number of external components. The output is adjustable from 3 to 5 volts with an accuracy of $\pm 5\%$. The charge pump topology of the MX846 eliminates the need for an inductor making it ideal for low noise applications.

With an operating range of 3 to 5 volts, and a typical shutdown current of 1 μ A, the MX846 is an optimum choice for portable battery powered devices. A 1MHz switching frequency enables the use of small charge pump and filter capacitors to meet the demands of size sensitive applications.


Ordering Information

Part No.	Description	Qty
MX846B	SOIC-8 Tube	100
MX846BTR	SOIC-8 Tape and Reel	2500

Functional Block Diagram

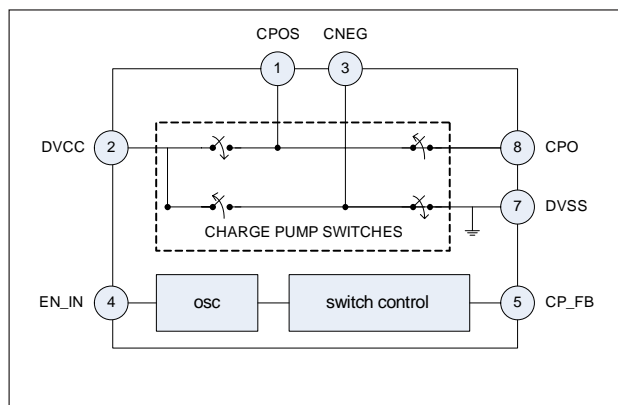

Typical Application

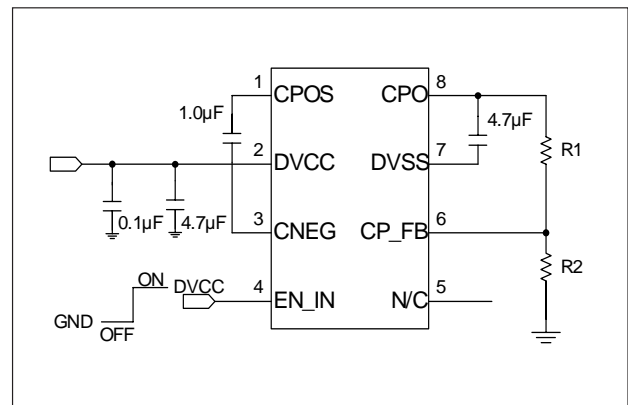

Features

- CMOS Technology
- ±15 Volt Output Driver Supply Voltage
- Drives Segment or Active Matrix Displays
- 4 Level Gray Scale
- 25MHz Clock Frequency
- Bi-Directional Data Transfer
- Selectable Register Length
- 2.7V to 5.5V Logic Supply Voltage
- Cascadable

Applications

- eBooks / eReaders
- Electronic Shelf Labels / Point Of Purchase Displays
- Mobile Phones / Portable Hand Held Devices
- Smart Cards
- Signage

General Description

The MX860 is a selectable 240, 256, or 268 bit long 2-bit wide serial-input parallel-output digital shift register with level conversion on each parallel output which converts the 2 digital bits into VPOS, VSS, or VNEG analog output voltages. An 8-bit input bus simultaneously inputs 4 groups of 2 bits each.


The MX860 consists of a selectable length Bi-Directional Input Register, Transfer Latch, and 268 bit Level Shifter / Output Driver. Each „OUT“ pin is switched to one of [VSS, VPOS, VNEG] according to the D0...D7 logic levels clocked into the MX860, modified by the OE pin.

The MX860 is designed to operate over a temperature range of -40°C to +85°C, and is available as Gold Bumped in Wafer Form or Waffle Pack, and 48mm Tape Carrier Package.

Ordering Information

Part No.	Description
MX860WB	Gold Bumped Die / Wafer Form
MX860XB	Gold Bumped Die / Waffle Pack
MX860TC	48mm Super Wide Tape Carrier

Block Diagram

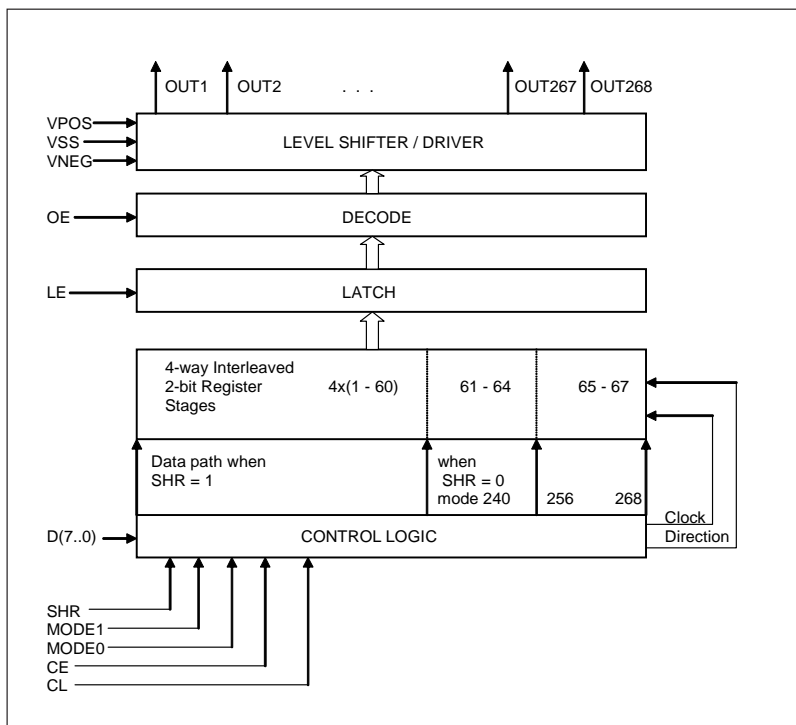

Features

- Single 5 Volt Power Supply
- Externally Configurable $\pm 50A$ Bi-Direction Current Sense per Turn
- 12-Bit Serial Digital Output
- Full Scale Magnetic Flux Intensity of $\pm 500Gauss$
- 2K Conversions/Second
- Microcontroller Compatible
- Standard 3 Wire Serial Interface plus ChipSelect
- In System Calibration: OTP Full Scale Trim via the Serial I/O Port
- Programmable Digital Filter Time Constant
- 8 Lead DFN package RoHS Compliant

Applications

- Load Detection and Management
- Motor Control
- Power Supplies

Ordering Information

Part No.	Description	Qty
MX868R	DFN-8 Tube	91
MX868RTR	DFN-8 Tape & Reel	2500


General Description

The MX868 is a 12 Bit Digital Output Magnetic Flux Sensor. The device is a complete sampled data subsystem that converts a magnetic flux intensity of ± 500 Gauss full scale into a 12-bit digital output word. The sensor operates as a slave on the serial interface with TTL-level compatible inputs SDI (serial data input), SCK (serial clock), and CS* (chip select, active low). Terminal SDO is the tri-state serial data output.


An adjustable exponentially weighted moving average digital filter is included that is capable of improving the signal to noise ratio while reducing the signal bandwidth. The full scale trim and/or the digital filter time constant are controllable through the serial I/O interface and are one-time programmable through the serial interface (once programmed, the values are loaded at every power-on).

The MX868 can be mounted onto a PCB or incorporated into a magnetic assembly and then calibrated in-system through the serial interface. The operating voltage range is 4.5V to 5.5V.

Functional Block Diagram Typical

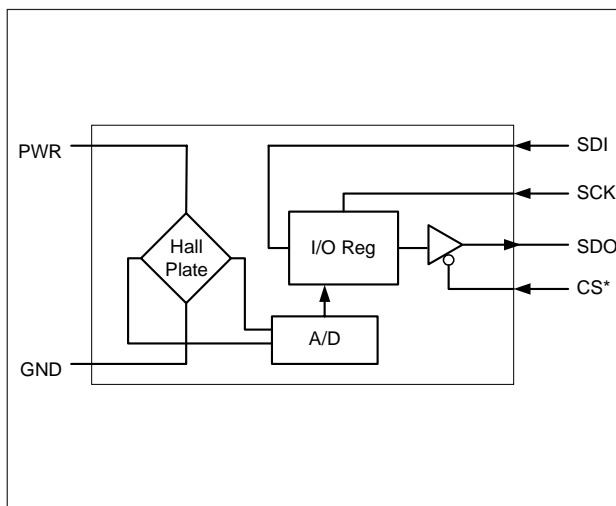

Application Circuit

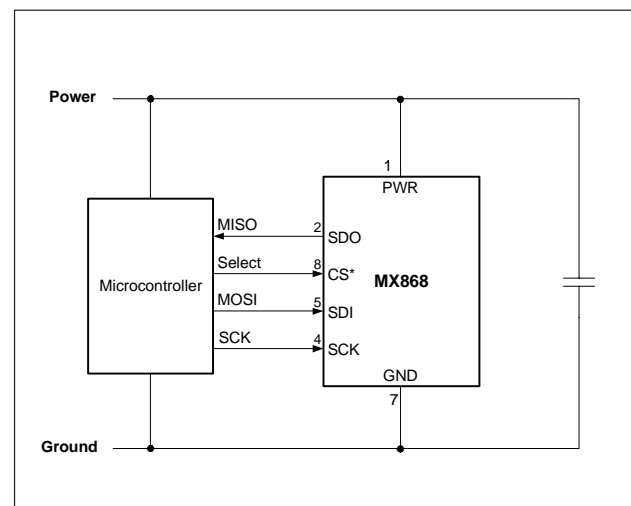

Features

- 8 Outputs Rated at 60V, 80mA
- Push-Pull Driver Configuration
- 6V to 60V Driver Supply Range
- 2.7V to 5.5V Logic Supply Range
- 3 Wire Serial Interface plus Chip Select
- Captures Serial & Parallel Input Data
- Outputs can be paralleled
- 28 Lead QFN Package

Applications

- White Goods
- ATE
- Industrial Equipment
- Automotive Relay Control

General Description


The MX877 is an 8 channel high voltage switch with 8-bit parallel or serial input control. The MX877 connects directly to a microprocessor through a standard 3 wire serial interface. The push-pull output configuration can drive up to 60 volts at 80mA. Outputs can be paralleled for increased drive current up to a device total of 400mA sink or source.

The MX877 is designed to operate over a temperature range of -40°C to +85°C, and is available in a QFN-28 Package.

Ordering Information

Part No.	Description	Qty
MX877R	QFN-28	73
MX877RTR	QFN-28 Tape & Reel	2500

Functional Block Diagram

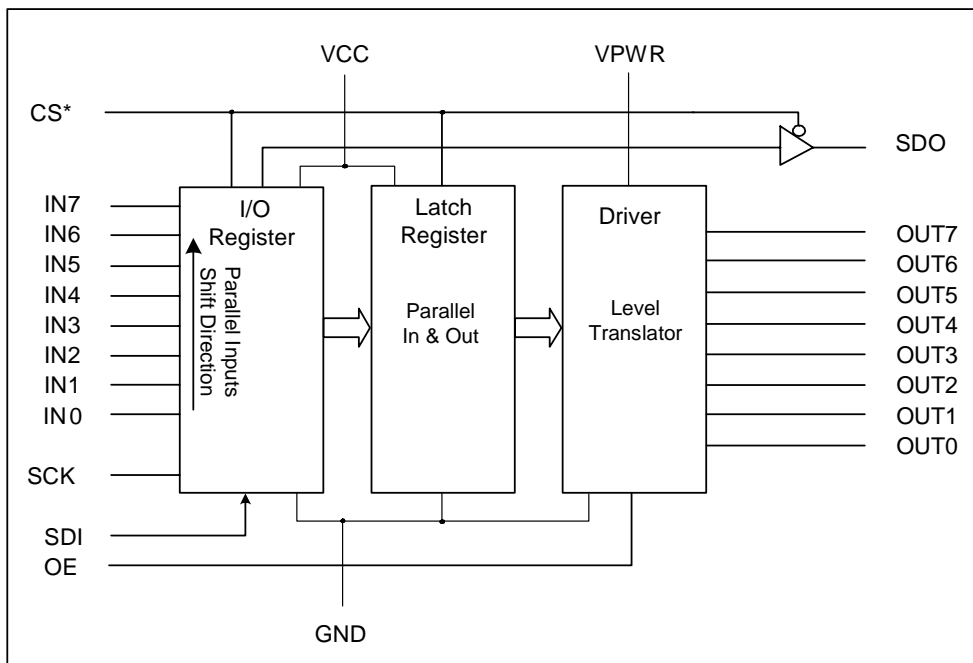

MX878

8-Channel, 60V Relay/Load Driver
Open Drain Output, 3 Wire Interface

Features

- 8 Outputs Rated at 60V, 200mA
- Open Drain Pull-Down Driver Configuration
- 6V to 60V Driver Supply Range
- 2.7V to 5.5V Logic Supply Range
- 3 Wire Serial Interface plus Chip Select
- Captures Serial & Parallel Input Data
- Outputs can be paralleled
- 28 Lead QFN Package

Applications

- White Goods
- ATE-Industrial Equipment
- Automotive Relay Control

General Description


The MX878 is an 8 channel high voltage switch with 8-bit parallel or serial input control. The MX878 connects directly to a microprocessor through a standard 3 wire serial interface. The open drain pull-down output configuration can drive up to 60 volts at 200mA. Outputs can be paralleled for increased drive current up to a device total of 1000mA sink.

The MX878 is designed to operate over a temperature range of -40°C to +85°C, and is available in a QFN-28 Package.

Ordering Information

Part No.	Description	Qty
MX878R	QFN-28	73
MX878RTR	QFN-28 Tape & Reel	2500

Functional Block Diagram

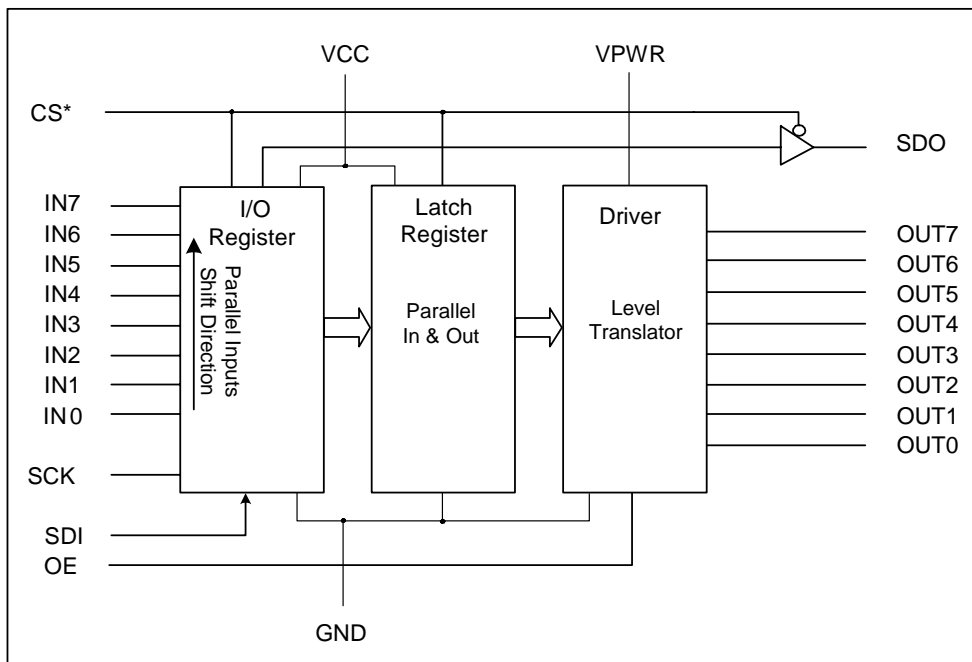

Features

- 8 Outputs Rated at 60V, 120mA
- Open Drain Pull-Up Driver Configuration
- 6V to 60V Driver Supply Range
- 2.7V to 5.5V Logic Supply Range
- 3 Wire Serial Interface plus Chip Select
- Captures Serial & Parallel Input Data
- Outputs can be paralleled
- 28 Lead QFN Package

Applications

- White Goods
- ATE
- Industrial Equipment
- Automotive Relay Control

General Description


The MX879 is an 8 channel high voltage switch with 8-bit parallel or serial input control. The MX879 connects directly to a microprocessor through a standard 3 wire serial interface. The open drain pull-up output configuration can drive up to 60 volts at 120mA. Outputs can be paralleled for increased drive current up to a device total of 600mA source.

The MX879 is designed to operate over a temperature range of -40°C to +85°C, and is available in a QFN-28 Package.

Ordering Information

Part No.	Description	Qty
MX879R	QFN-28	73
MX879RTR	QFN-28 Tape & Reel	2500

Functional Block Diagram

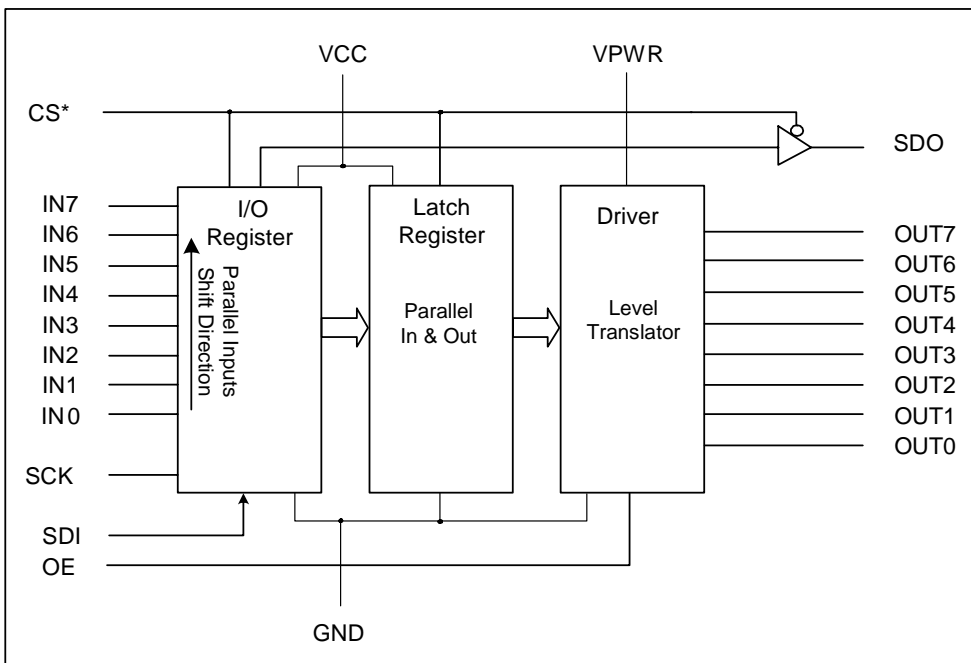

Features

- Highly Integrated Solution that includes:
 - Optimized Flyback Boost Converter Controller, IGBT Driver, 100mA LED Torch Driver, and Transformer Drive Transistor
- Small Size (3mm x 5mm DFN-16)
- High Efficiency
- 3.0 to 5.5 Volt Battery Operation
- 1.65 to 5.5 Volt Digital Interface Operation
- Low Shut Down Current: 0.1µA
- SPI and I²C Bus Compatibility
- Programmable Average Battery Current: (50mA – 220mA)
- Programmable Output Voltage: (300V - 330V)

Applications

- Camera Cell Phones, Digital Still Cameras, and Optical Film Cameras

General Description

The MX881 offers a highly integrated Xenon Flash controller, providing an ideal solution for small form factor flash and torch lighting applications. The MX881 integrates a user programmable Controller, IGBT Driver, 100mA LED Torch Driver, and Transformer Drive Transistor to significantly reduce component count, solution size, and design complexity.


The Boost Control Logic manages the peak primary current and off time to optimize charge time and control average battery current.

The Charge Cycle Control starts the charge cycle on a low to high transition of the CHARGE input. Then detects when the output voltage has reached the desired voltage and stops the Boost Control Logic, while asserting the DONE output signal. The SPI/I²C serial interface adds the flexibility of 6 programmable average battery currents and 4 programmable high voltage output levels for the flash function.

Ordering Information

Part No.	Description	Qty
MX881R	3mm X 5mm DFN-16	73
MX881RTR	DFN-16 Tape & Reel	2000

Typical Application

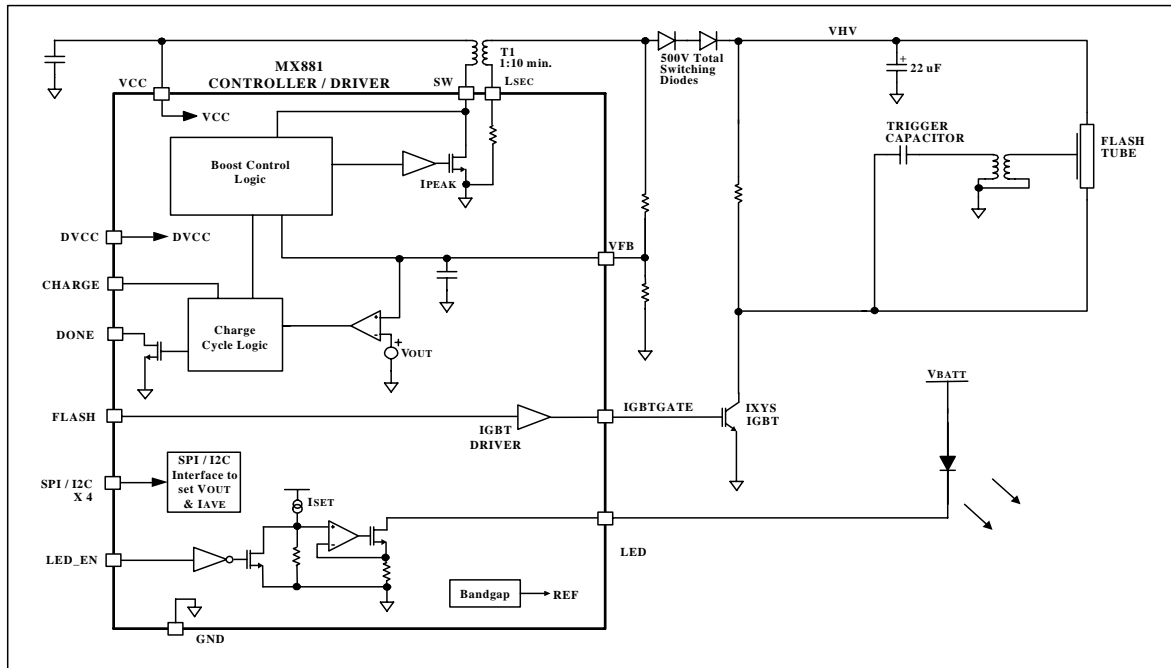

Features

- 3-60 V Operating Voltage Range
- Integrated 10-bit ADC
- 3 wire serial interface
- Microcontroller Compatible
- Low Power
- Minimum External Components
- TSOT-23 RoHS Compliant Package

Applications

- Lighting Management
- Current Shunt Measurement
- Remote Sensing
- Battery Monitoring
- Microprocessor Controlled Power Management

General Description


The MX884 targets power management applications where high noise immunity and low cost are primary requirements. Its integrated 10-bit ADC provides high resolution, making it ideal for current monitoring systems. The MX884 enables digital power management, in which a microcontroller can readily monitor the current in a system and perform other control functions in power systems and motion control products.

The MX884 converts a small voltage developed across an external „current“ sense resistor to a 10-bit digital output. It features a wide common mode input supply voltage range of 3V to 60V and easily interfaces to most microcontrollers. The design is simple yet cost-effective, requiring very few external components, making it especially suitable for high volume applications.

Ordering Information


Part No.	Description	Qty
MX884HTTR	6L TSOT23 Tape & Reel	3,000

Functional Block Diagram

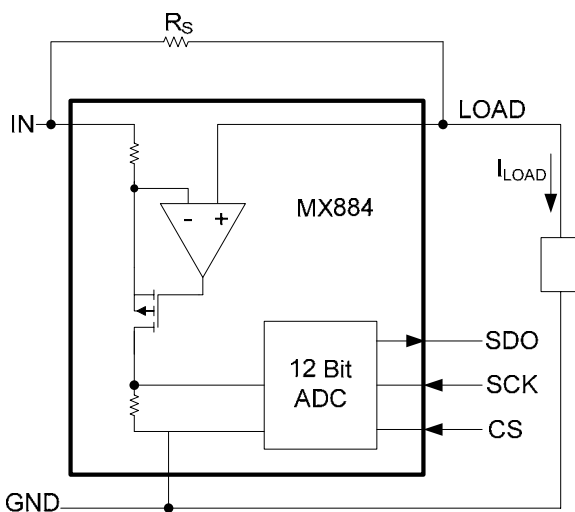

Typical Application Circuit

(1 Amp full scale)

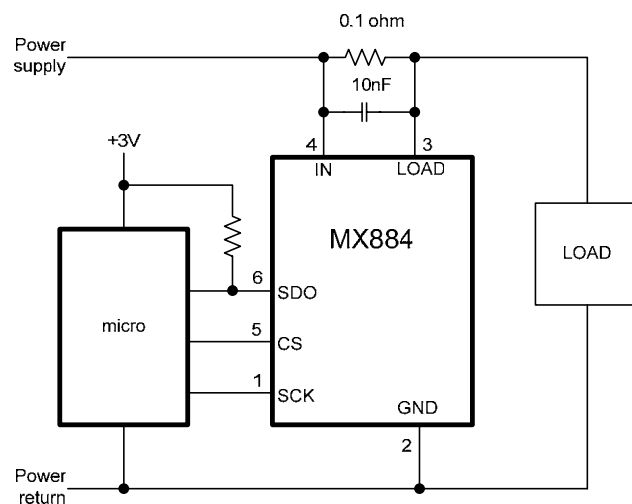

Features

- µPower Operation (15 µW typical at 25°C)
- Omni polar (switches with N or S pole)- 2.5 to 5.5 Volt Operation
- Simple Digital Output Interfacing
 - Open Drain
- Ultra Low Offset Canceling Amplifiers Provide
 - Sensitive, Accurate, Stable Switching Points and Immunity to Mechanical Stress
- Solid State Circuitry
- Operating Temperature Range: -40°C to +85°C
- RoHS Compliant TSOT-23 3 Lead Package

Applications

- Handheld Portable Devices
- White Goods
- Automotive - Body Systems
- Security Systems
- High Reliability Reed Switch Replacement

General Description


The MX887D integrated Hall-Effect switch targets the requirements of low-power portable devices with battery operating voltages from 2.5V to 5.5V. On-chip power management circuitry reduces the effective average current to just 5µA at 3.0 V_{SUPPLY}.

The switch output will turn „on“ when either a north or south magnetic pole is applied. The absence of a magnetic field will turn the switch into a high impedance „off“ state. Emulating the behavior of a traditional reed switch, together with the advantages of high integration and solid state reliability, makes the MX887D an ideal replacement in low-power portable device applications.

Ordering Information

Part No.	Description	Qty
MX887DHTTR	TSOT-23 3L Tape & Reel	3000

Functional Block Diagram

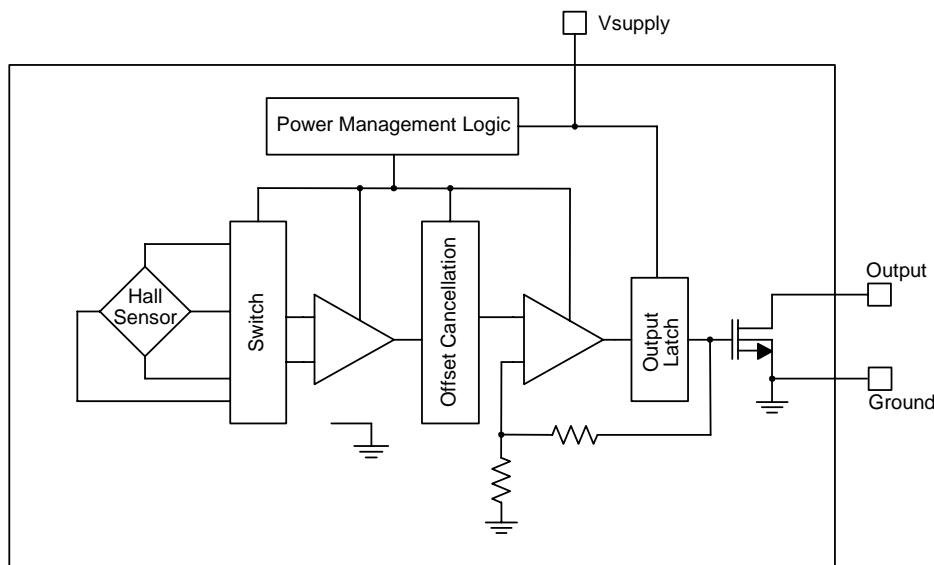

Features

- µPower Operation (15 µW typical at 25°C)
- Omni polar (switches with N or S pole)
- 2.5 to 5.5 Volt Operation
- Simple Digital Output Interfacing CMOS Push-Pull
- Ultra Low Offset Canceling Amplifiers Provide Sensitive, Accurate, Stable Switching Points and Immunity to Mechanical Stress
- Solid State Circuitry
- Operating Temperature Range: -40°C to +85°C
- RoHS Compliant TSOT-23 3 Lead Package

Applications

- Handheld Portable Devices
- White Goods
- Automotive - Body Systems
- Security Systems
- High Reliability Reed Switch Replacement

General Description


The MX887P integrated Hall-Effect switch targets the requirements of low-power portable devices with battery operating voltages from 2.5V to 5.5V. On-chip power management circuitry reduces the effective average current to just 5µA at 3.0 V_{SUPPLY}.

The switch output will transition to the Ground potential when either a north or south magnetic pole is applied. The removal of a magnetic field will transition the switch to the V_{supply} potential. Emulating the behavior of a traditional reed switch, together with the advantages of high integration and solid state reliability, makes the MX887P an ideal replacement in low-power portable device applications.

Ordering Information

Part No.	Description	Qty
MX887PHTR	TSOT-23 3L Tape & Reel	3000

Functional Block Diagram

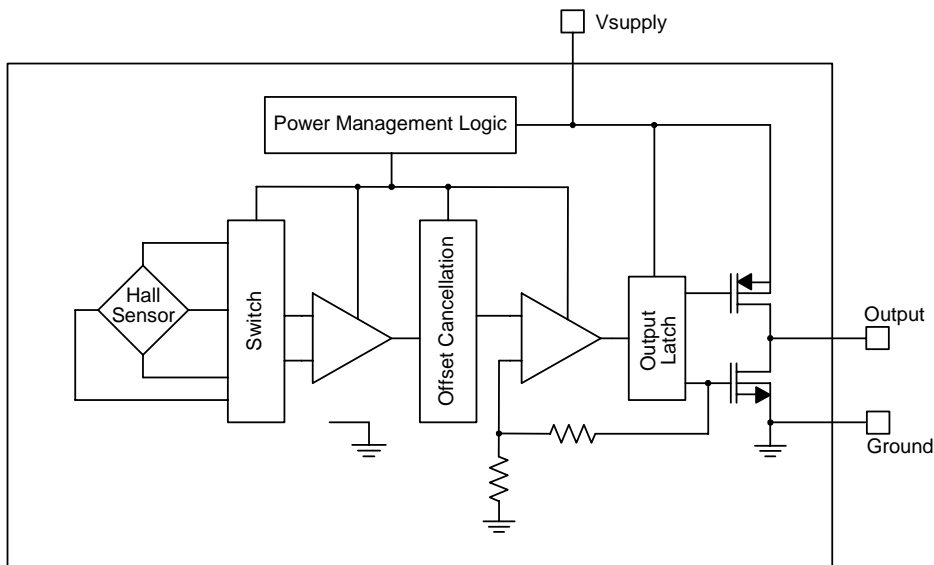

Features

- Full Bridge Gate Driver
- Internal high voltage level shift function
- Negative 300V Lamp Supply Voltage
- 3V to 12V CMOS Logic Compatible
- External Dead Time Control

General Description

The MX895 is a high voltage integrated circuit fabricated using a trench isolated BiCMOS process. The circuit is designed for driving N-channel power MOSFETs in a full bridge configuration. The circuit is intended as a commutator for High Intensity Discharge (HID) lamps.


Applications

- Commutator for High Intensity Discharge Lamps

Ordering Information

Part No.	Description	Qty
MX895B	SOIC-16 Tube	49
MX895BTR	SOIC-16 Tape & Reel	2500

Functional Block Diagram and Typical Application Circuit

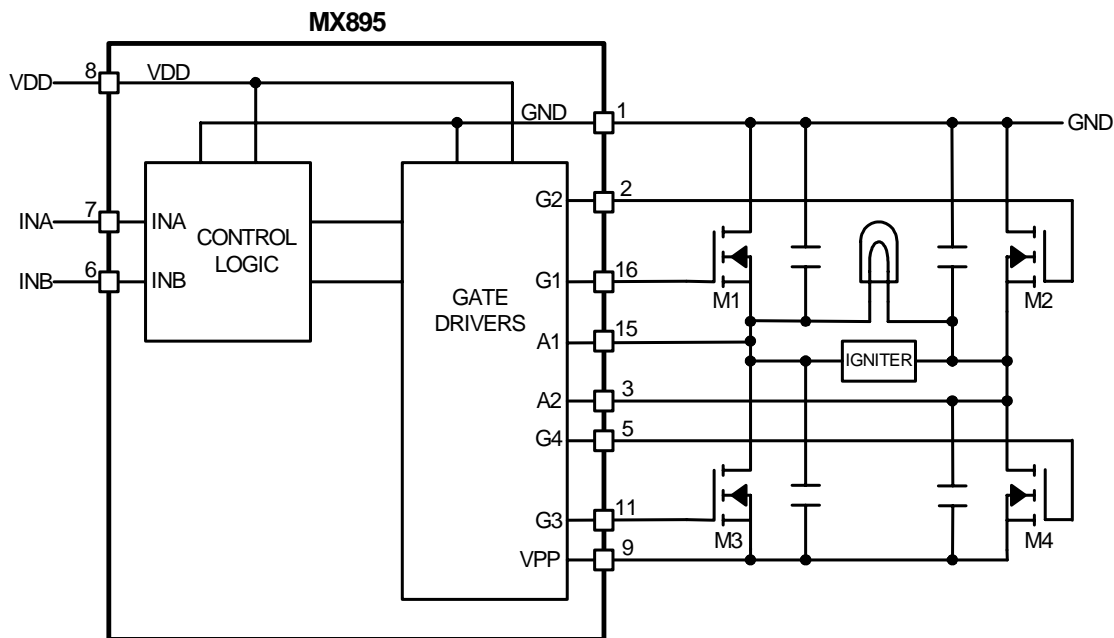

Features

- CMOS Technology
- ±15 Volt Output Driver Supply Voltage
- Drives Segment or Active Matrix Displays
- 4 Level Gray Scale
- 25MHz Clock Frequency
- Bi-Directional Data Transfer
- Selectable Register Length
- 2.7V to 5.5V Logic Supply Voltage
- Cascadable

Applications

- eBooks / eReaders
- Electronic Shelf Labels / Point Of Purchase Displays
- Mobile Phones / Portable Hand Held Devices
- Smart Cards
- Signage

General Description

The MXE11480 is a selectable 400, or 480 bit long 2-bit wide serial-input parallel-output digital shift register with level conversion on each parallel output which converts the 2 digital bits into VPOS, VSS, or VNEG analog output voltages. An 8-bit input bus simultaneously inputs 4 groups of 2 bits each.


The MXE11480 consists of a selectable length Bi-Directional Input Register, Transfer Latch, and 480 bit Level Shifter / Output Driver. Each „OUT“ pin is switched to one of [VSS, VPOS, VNEG] according to the D0...D7 logic levels clocked into the MXE11480, modified by the OE pin.

The MXE11480 is designed to operate over a temperature range of -40°C to +85°C, and is available as Gold Bumped Die in Wafer Form or Waffle Pack, and 70mm Tape Carrier Package.

Ordering Information

Part No.	Description
MXE11480WB	Gold Bumped Die / Wafer Form
MXE11480XB	Gold Bumped Die / Waffle Pack
MXE11480TC	70mm Super Wide Tape Carrier

Block Diagram

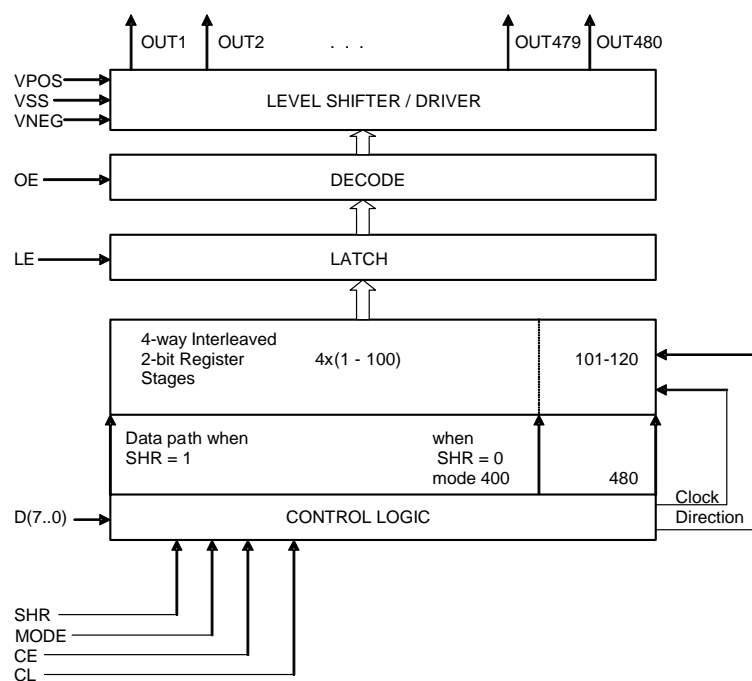

Features

- Full Bridge Gate Driver
- Internal high voltage level shift function
- Negative 550V Lamp Supply Voltage
- 3V to 12V CMOS Logic Compatible
- External Dead Time Control
- 8V to 12V Input Supply Voltage
- No External Bootstrap Capacitors

Applications

- Commutator for High Intensity Discharge Lamps
 - Vehicle Head Lamps
 - Outdoor/Street Lighting
 - Multimedia Projectors
 - Warehouse Lighting


General Description

The MX6895 features our high voltage integrated circuit (HVIC) technology integrating high and low side N-channel power MOSFET drivers in a full bridge configuration. The circuit is intended as a commutator for High Intensity Discharge (HID) lamps.

Ordering Information

Part No.	Description	Qty
MX6895BE	SOIC-16 Tube	49
MX6895BETR	SOIC-16 Tape & Reel	2500

Functional Block Diagram and Typical Application Circuit

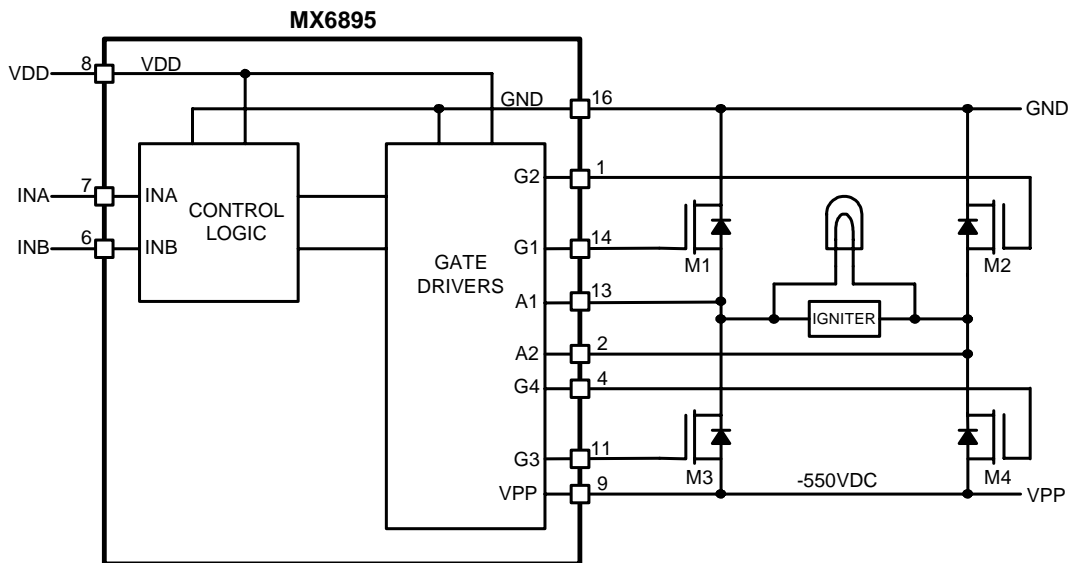

MX856 / MX857

Single Driver for GaAs FET
Switches and Attenuators

Features

- CMOS Technology
- TTL/CMOS compatible inputs
- Low switching noise
- 5nS typical true / complement output skew
- 5nS typical output rise and fall times
- Up to 20V output voltage
- Output high voltage programmable via V_{OPT}
- Output low voltage programmable via V_{EE}

Applications

- Digital control of analog circuits
- Level shifting and amplification
- Circuit applications requiring complementary signal generation with low skew
- Bias control for PIN diode drivers in a microwave switch

General Description

The MX856 and MX857 are high speed single channel level shifters with complimentary output drivers. The MX856 features a 5.0V V_{CC} positive supply, and the MX857 features a 3.3V V_{CC} positive supply.

The input buffers accept digital TTL or CMOS level signals, amplifies them to the V_{CC} and GND supply rails, and generates complementary outputs. The translator level shifts these output signals by amplifying them to the V_{CC} and V_{EE} supply rails.

The output drivers then buffer the signals to V_{OPT} and V_{EE} . V_{OPT} may be set within the range of V_{CC} and GND. The output drivers also adjust the complimentary signals for minimized skew error.

The MX856 and MX857 are designed to operate over a temperature range of -40°C to +85°C, and are available as die in wafer form, die in waffle pack, 8 lead SOIC package, and SOIC on Tape and Reel.


Ordering Information MX856

Part No.	Description	Qty
MX856B	8 Lead SOIC Tube	100
MX856BTR	SOIC on Tape & Reel	1000


Ordering Information MX857

Part No.	Description	Qty
MX857B	8 Lead SOIC Tube	100
MX857BTR	SOIC on Tape & Reel	1000

Functional Block Diagram

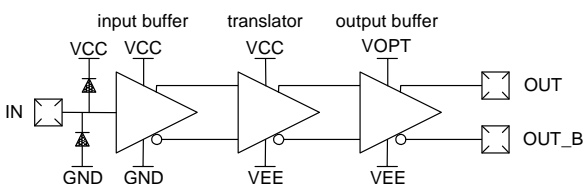

8 Lead SOIC Configuration

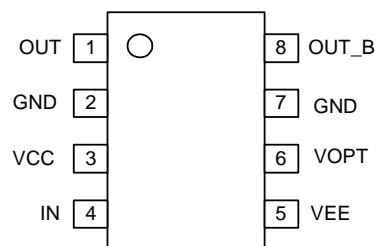

MX8681

12-Bit Digital Output Magnetic Flux Sensor
±200 Gauss / 2KHz Conversion Rate

Features

- Higher Sensitivity Version of the MX868
- Single 5 Volt Power Supply
- Externally Configurable ±20A Bi-Direction Current Sense per Turn
- 12-Bit Serial Digital Output
- Full Scale Magnetic Flux Intensity of ±200 Gauss
- 2K Conversions/Second
- Microcontroller Compatible
- Standard 3 Wire Serial Interface plus Chip Select
- In System Calibration: OTP Full Scale Trim via the Serial I/O Port
- Programmable Digital Filter Time Constant
- 4mm x 4mm 8 Lead DFN package RoHS Compliant

Applications

- Load Detection and Management
- Motor Control
- Power Supplies

Ordering Information

Part No.	Description	Qty
MX8681R	DFN-8 Tube	91
MX8681RTR	DFN-8 Tape & Reel	2500


General Description

The MX8681 is a 12 Bit Digital Output Magnetic Flux Sensor. The device is a complete sampled data subsystem that converts a magnetic flux intensity of ±200 Gauss full scale into a 12-bit digital output word. The sensor operates as a slave on the serial interface with TTL-level compatible inputs SDI (serial data input), SCK (serial clock), and CS* (chip select, active low). Terminal SDO is the tri-state serial data output.


An adjustable exponentially weighted moving average digital filter is included that is capable of improving the signal to noise ratio while reducing the signal bandwidth. The full scale trim and/or the digital filter time constant are controllable through the serial I/O interface and are one-time programmable through the serial interface (once programmed, the values are loaded at every power-on).

The MX8681 can be mounted onto a PCB or incorporated into a magnetic assembly and then calibrated in-system through the serial interface. The operating voltage range is 4.5V to 5.5V.

Functional Block Diagram Typical

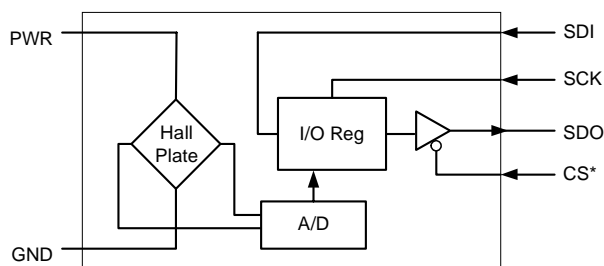

Application Circuit

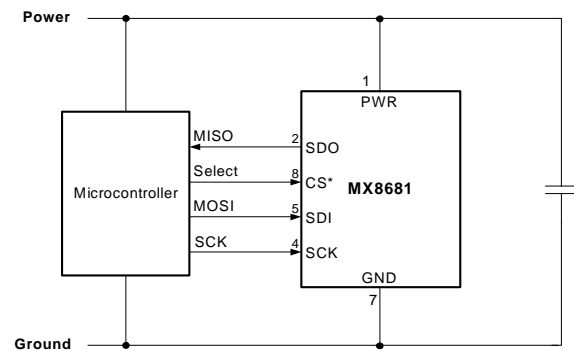

Features

- Higher Sensitivity Version of the MX8681
- Single 5 Volt Power Supply
- Externally Configurable ±10A Bi-Direction Current Sense per Turn
- 12-Bit Serial Digital Output
- Full Scale Magnetic Flux Intensity of ±100 Gauss
- 2K Conversions/Second
- Microcontroller Compatible
- Standard 3 Wire Serial Interface plus Chip Select
- In System Calibration: OTP Full Scale Trim via the Serial I/O Port
- Programmable Digital Filter Time Constant
- 4mm x 4mm 8 Lead DFN package RoHS Compliant

Applications

- Load Detection and Management
- Motor Control
- Power Supplies

Ordering Information

Part No.	Description	Qty
MX8682R	DFN-8 Tube	91
MX8682RTR	DFN-8 Tape & Reel	2500


General Description

The MX8682 is a 12 Bit Digital Output Magnetic Flux Sensor. The device is a complete sampled data subsystem that converts a magnetic flux intensity of ±100 Gauss full scale into a 12-bit digital output word. The sensor operates as a slave on the serial interface with TTL-level compatible inputs SDI (serial data input), SCK (serial clock), and CS* (chip select, active low). Terminal SDO is the tri-state serial data output.


An adjustable exponentially weighted moving average digital filter is included that is capable of improving the signal to noise ratio while reducing the signal bandwidth. The full scale trim and/or the digital filter time constant are controllable through the serial I/O interface and are one-time programmable through the serial interface (once programmed, the values are loaded at every power-on).

The MX8682 can be mounted onto a PCB or incorporated into a magnetic assembly and then calibrated in-system through the serial interface. The operating voltage range is 4.5V to 5.5V.

Functional Block Diagram Typical

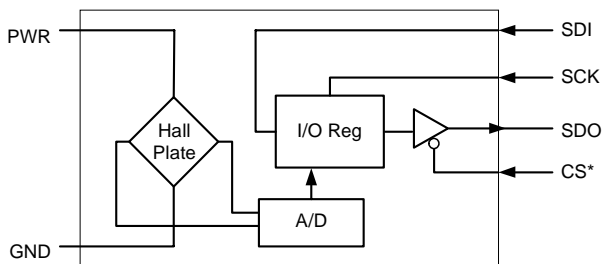

Application Circuit

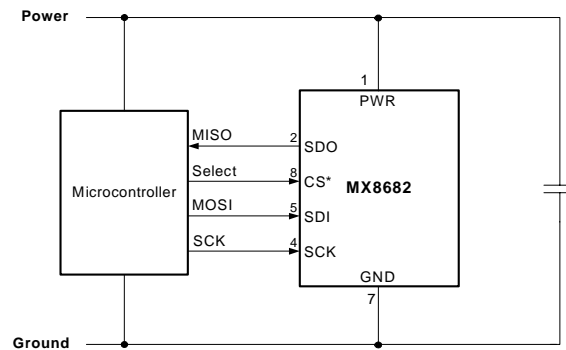

MX8683

10-Bit Digital Output Magnetic Flux Sensor
±200 Gauss / 20KHz Conversion Rate

Features

- Single 5 Volt Power Supply
- Externally Configurable ±20A Bi-DirectionCurrent Sense per Turn
- 12-bit Serial Digital Output / 10-bit ADC
- Full Scale Magnetic Flux Intensity of ±200Gauss
- 20K Conversions/Second
- Microcontroller Compatible
- Standard 3 Wire Serial Interface plus ChipSelect
- In System Calibration: OTP Full Scale Trim via the Serial I/O Port
- Programmable Digital Filter Time Constant
- 4mm x 4mm 8 Lead DFN package RoHS Compliant

Applications

- Load Detection and Management
- Motor Control
- Power Supplies

Ordering Information

Part No.	Description	Qty
MX8683R	DFN-8 Tube	91
MX8683RTR	DFN-8 Tape & Reel	2500

General Description


The MX8683 is a 10-bit Digital Output Magnetic Flux Sensor. The device is a complete sampled data subsystem that converts a magnetic flux intensity of ±200 Gauss full scale into a 12-bit format digital output word, (10-bit resolution). The sensor operates as a slave on the serial interface with TTL-level compatible inputs SDI (serial data input), SCK (serial clock), and CS* (chip select, active low). Terminal SDO is the tri-state serial data output.

An optional exponentially weighted moving average digital filter is included that averages the 10-bit ADC output into a 12-bit output word. The digital filter has a transfer function equivalent to a first order low pass filter.


The full scale trim and/or the digital filter time constant are controllable through the serial I/O interface and are one-time programmable through the serial interface (once programmed, the values are loaded at every power-on).

The MX8683 can be mounted onto a PCB or incorporated into a magnetic assembly and then calibrated in-system through the serial interface. The operating voltage range is 4.5V to 5.5V.

Functional Block Diagram Typical

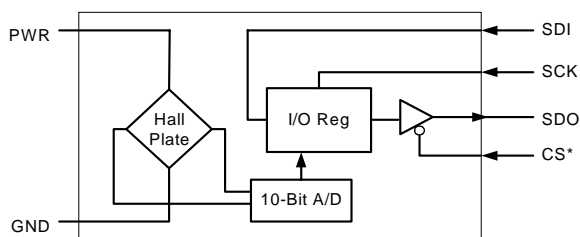

Application Circuit

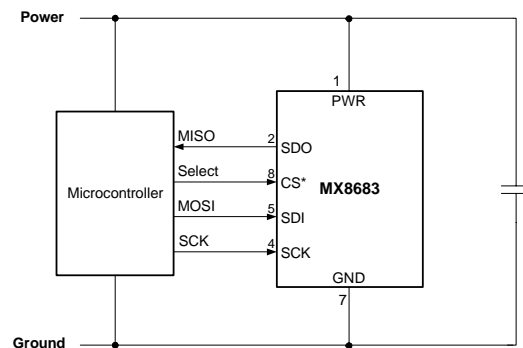

MX8771

16-Channel, 60V Driver
Push-Pull Output, I2C Interface

Features

- 16 Push-Pull Outputs Rated at 60V, 15mA
- 6V to 60V Driver Supply Range
- 1.65V to 5.5V Logic Supply Range
- I2C Interface
- Synchronous update across multiple packages
- Outputs can be paralleled
- 28 Lead QFN Package

Applications

- White Goods
- ATE
- Industrial Equipment

General Description


The MX8771 is a 16 channel high voltage switch with I2C serial input control. The MX8771 connects directly to a microprocessor through a standard I2C interface. The push-pull output configuration can drive up to 60 volts at 15mA. Outputs can be paralleled for increased drive current up to a device total of 240mA sink or source.

The MX8771 is designed to operate over a temperature range of -40°C to +85°C, and is available in a QFN-28 Package.

Ordering Information

Part No.	Description	Qty
MX8771R	QFN-28	73
MX8771RTR	QFN-28 Tape & Reel	2500

Functional Block Diagram

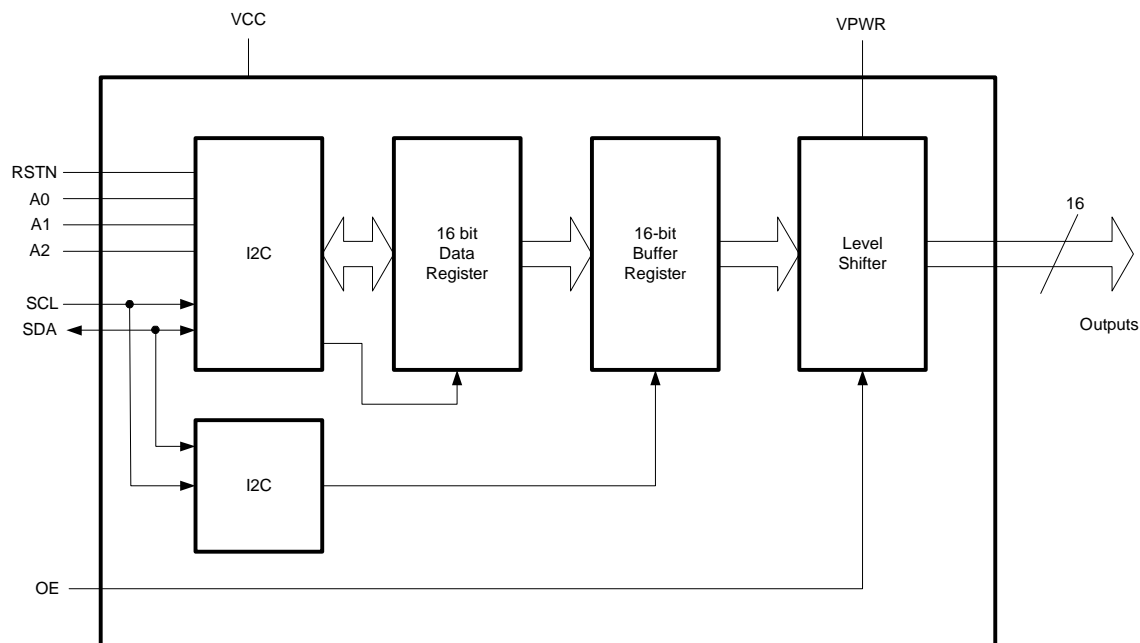

Features

- Logic Level Gate Drive Compatible
- 1A Source, 1A Sink Peak Drive Current
- Programmable High-Side Driver Turn-on Delay
- Supports Floating Voltage for Top Driver Up to 24V
- MX8830B/MX8830R/MX8830X: Undervoltage Lockout
- MX8830R/MX8830X: Output Shutdown, Low Side Shutdown Inputs
- 10µA Shut Down Current
- 2mA Quiescent Current (Non- Switching)
- Bootstrapped High Side Driver
- Cross-Conduction Protection

Applications

- Multiphase Desktop CPU Supplies
- Mobile CPU Core Voltage supplies
- High Current / Low Voltage DC/DC Synchronous Buck Converters

General Description

The MX8830 family are 1A Source / 1A Sink Synchronous Buck MOSFET Drivers. These Synchronous Buck MOSFET Drivers are specifically designed to drive two N-channel power MOSFETs in a synchronous buck converter. The High-Side driver is powered via a bootstrapped power connection. The driver is capable of 13ns High-Side output, and 12ns Low-Side output transition times driving a 3000pF load.


The MX8830B, MX8830R, and MX8830X incorporate an undervoltage lockout to prevent unintentional gate drive output during low voltage conditions. The MX8830R/X include External Shutdown, and the MX8830X Low-Side Drive Shutdown features. Simultaneous shutdown of both outputs prevents rapid output capacitor discharge. The high-side turn-on delay is adjustable with an external capacitor added at the DLY pin.

The MX8830B/MX8830R/MX8830X are designed to operate over a temperature range of -40°C to +85°C. The MX8830B is available in an 8-Lead SOIC, and the MX8830R in a 10-lead DFN.

Ordering Information

Part No.	Package	Pack Qty
MX8830B	SOIC-8	98 (Tube)
MX8830BTR	SOIC-8	2500 (Tape&Reel)
MX8830R10	DFN-10	121 (Tube)
MX8830R10TR	DFN-10	2000 (Tape&Reel)
MX8830X	Die	Waffle Pack

Functional Block Diagram and General Application Circuit

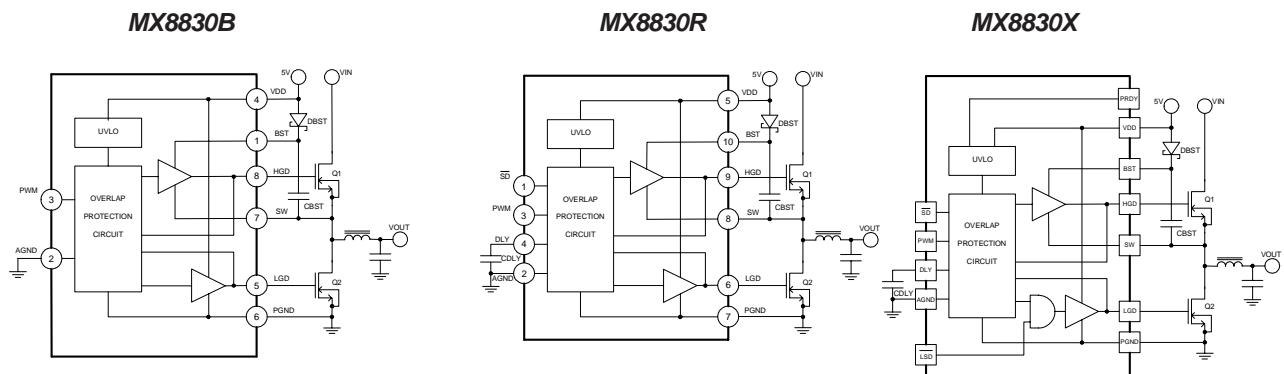

Features

- MX887D with 64 times faster sampling
- Omni polar (switches with N or S pole)
- 2.5 to 5.5 Volt Operation
- Simple Digital Output Interfacing
 - Open Drain
- Ultra Low Offset Canceling Amplifiers Provide
 - Sensitive, Accurate, Stable Switching Points and Immunity to Mechanical Stress
- Solid State Circuitry
- Operating Temperature Range: -40°C to 100°C
- RoHS Compliant TSOT-23 3 Lead Package

Applications

- White Goods
- Automotive
- Security Systems
- High Reliability Reed Switch Replacement

General Description


The MX8871D integrated Hall-Effect switch targets battery operating voltages from 2.5V to 5.5V. On-chip power management circuitry reduces the effective average current to just 125µA at 3.0 V_{SUPPLY}.

The switch output will turn „on“ when either a north or south magnetic pole is applied. The absence of a magnetic field will turn the switch into a high impedance „off“ state.

Ordering Information

Part No.	Description	Qty
MX8871DHTR	TSOT-23 3L Tape & Reel	3000

Functional Block Diagram

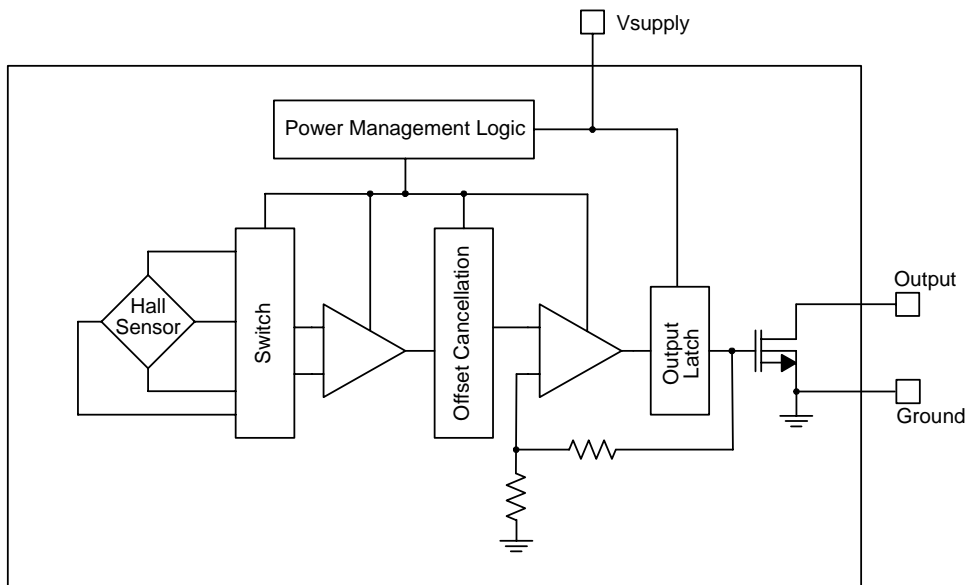

Features

- MX887P with 64 times faster sampling
- Omni polar (switches with N or S pole)
- 2.5 to 5.5 Volt Operation
- Simple Digital Output Interfacing
 - CMOS Push-Pull
- Ultra Low Offset Canceling Amplifiers Provide
 - Sensitive, Accurate, Stable Switching Points and Immunity to Mechanical Stress
- Solid State Circuitry
- Operating Temperature Range: -40°C to 100°C
- RoHS Compliant TSOT-23 3 Lead Package

Applications

- White Goods
- Automotive
- Security Systems
- High Reliability Reed Switch Replacement

General Description


The MX8871P integrated Hall-Effect switch targets battery operating voltages from 2.5V to 5.5V. On-chip power management circuitry reduces the effective average current to just 125µA at 3.0 V_{SUPPLY}.

The switch output will transition to the Ground potential when either a north or south magnetic pole is applied. The absence of a magnetic field will transition the switch to the V_{SUPPLY} potential.

Ordering Information

Part No.	Description	Qty
MX8871PHTR	TSOT-23 3L Tape & Reel	3000

Functional Block Diagram

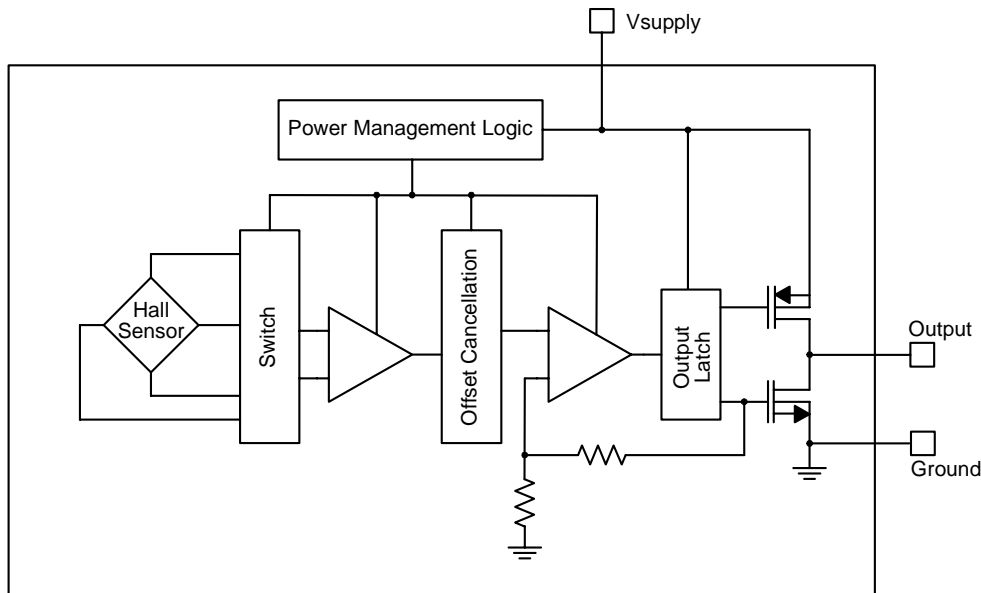

Features

- CMOS Technology
- Drives Segment or Active Matrix Displays
- 16 to 57.5 Volt Output Drive
- Selectable Output Shift Direction and Polarity
- 3 Output Switching Modes
- Cascadable (4 Maximum)

Applications

- eBooks / eReaders
- Electronic Shelf Labels / Point Of Purchase Displays
- Mobile Phones / Portable Hand Held Devices
- Smart Cards
- Signage

General Description

The MXEI2240 is a 240 bit serial shift register, level translator, and high voltage buffered driver. The shift register is 'seeded' by the CE1, CE2, R/L, SPV, and CKV inputs.

The output pulse pattern is selected with the MODE1 and MODE2 inputs. A one pulse, continuous two pulse, jumping two pulse, or no pulse pattern can be generated. Pulse polarity is selected with the WALK0 input.


The register output bits are amplified rail-rail from V_{EE} to V_{DD} , and the output strength of the buffer drivers is modulated by the Vbias generator. This allows the OGN outputs to be continuously optimized for peak performance while minimizing transients over a wide operating range.

The MXEI2240 is designed to operate over a temperature range of -40°C to $+85^{\circ}\text{C}$, and is available as Gold Bumped Die in Wafer Form or Waffle Pack.

Ordering Information

Part No.	Description
MXEI2240WB	Gold Bumped Die / Wafer Form
MXEI2240XB	Gold Bumped Die / Waffle Pack

Block Diagram

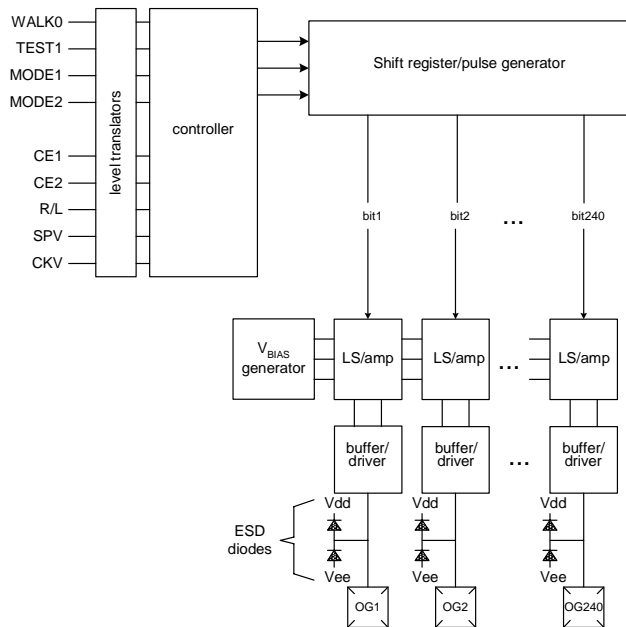

Features

- CMOS Technology
- Drives Segment or Active Matrix Displays
- 16 to 47 Volt Output Drive
- Selectable Output Shift Direction and Polarity
- 3 Output Switching Modes
- Cascadable (4 Maximum)

General Description

The MXEI2300 is a 300 bit serial shift register, level translator, and high voltage buffered driver. The shift register is 'seeded' by the CE1, CE2, R/L, SPV, and CKV inputs.

The output pulse pattern is selected with the MODE1 and MODE2 inputs. A one pulse, continuous two pulse, jumping two pulse, or no pulse pattern can be generated. Pulse polarity is selected with the WALK0 input.


The register output bits are amplified rail-rail from V_{EE} to V_{DD} , and the output strength of the buffer drivers is modulated by the Vbias generator. This allows the OGN outputs to be continuously optimized for peak performance while minimizing transients over a wide operating range.

The MXEI2300 is designed to operate over a temperature range of -40°C to $+85^{\circ}\text{C}$, and is available as Gold Bumped Die in Wafer Form, Tape Carrier Package, and BGA Package.

Ordering Information

Part No.	Description
MXEI2300WB	Gold Bumped Die / Wafer Form
MXEI2300XB	Gold Bumped Die / Waffle Pack

Block Diagram

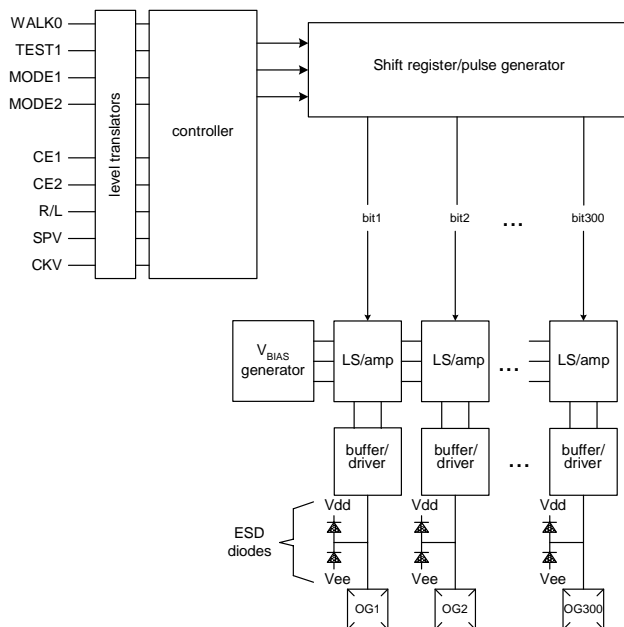

Features

- 8V to 450V Input Voltage Range
- >90% Efficiency
- Drives from 1 to Hundreds of LEDs in Series/Parallel Combinations
- Regulated LED Drive Current
- Linear or PWM Brightness Control
- Resistor Programmable Oscillator Frequency
- SOIC-8 EP RoHS Compliant Package

Applications

- Flat Panel Display RGB Backlighting
- Signage and Decorative LED Lighting
- DC/DC or AC/DC LED Driver Applications


General Description

The MXHV9910 is a high-efficiency off-line LED driver. Manufactured using a dielectrically isolated process the MXHV9910 can operate from 8V to 450V. This highly versatile input operating voltage enables a broad range of High Brightness (HB) LED applications. The MXHV9910 drives an external MOSFET at a fixed oscillator frequency set by an external resistor. Peak constant current to an LED string is maintained by modulating the MOSFET GATE signal on and off through the external current sense resistor connected to the CS input. Dimming of and LED string is controlled by adjusting the duty cycle of the PWM input, or applying a control voltage from 0 to 250mV to the LD input.

Ordering Information

Part No.	Description	Qty
MXHV9910BE	SOIC-8 EP Tube	100
MXHV9910BETR	SOIC-8 EP Tape & Reel	2000

Functional Block Diagram and Typical Application

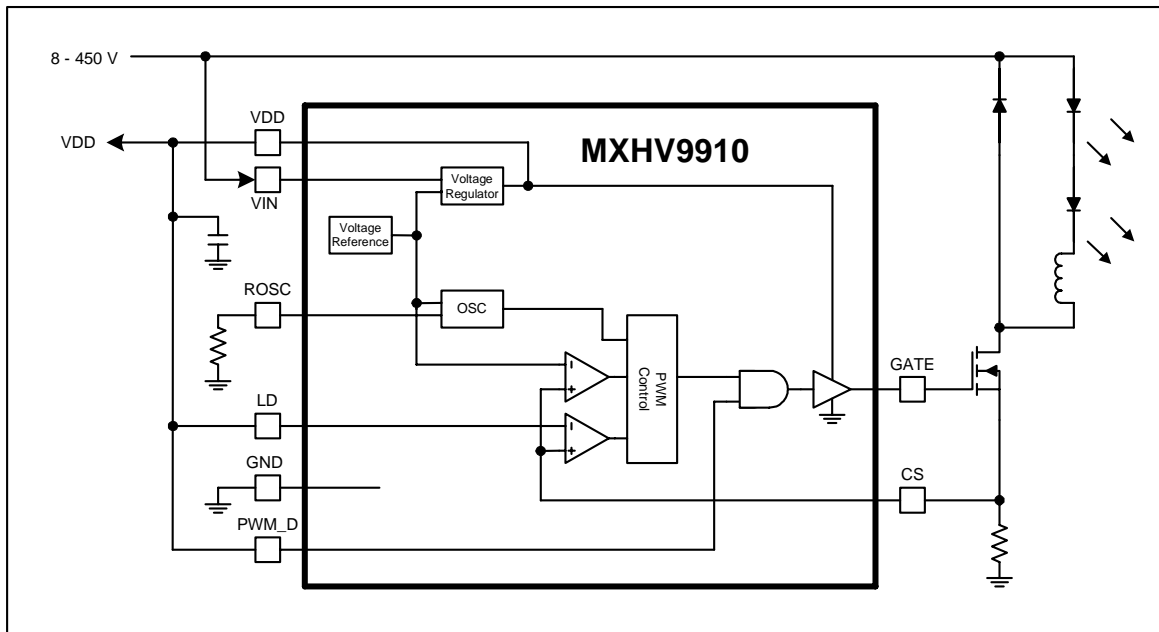

Features

- 8V to 250V Input Voltage Range
- Constant Frequency Current Mode Converter
- Closed Loop LED Current Control
- Resistor Programmable Slope Compensation
- Resistor Programmable Oscillator Frequency
- Linear or PWM Brightness Control
- Large PWM Dimming Ratio
- Open LED String (Over Voltage) Protection
- Shorted LED String (Over Current) Protection
- Multi-Device Synchronization Capability
- Capacitor Programmable Soft-Start Function
- Auxiliary Winding V_{DD} Operation Capability
- SOIC-16 EP RoHS Compliant Package

Applications

- Flat Panel Display RGB Backlighting
- Signage and Decorative LED Lighting
- DC/DC or AC/DC LED Driver Applications


General Description

The MXHV9911 is a high-efficiency off-line LED driver designed to operate as a constant current source. MXHV9911 can operate from 8Vdc to 250Vdc and the range can be extended by using external zener diodes. The wide input operating voltage enables a broad range of High Brightness (HB) LED applications that include Off-Line. The MXHV9911 employs a constant frequency, peak-current mode control with slope compensation that can be configured as buck, boost, buck-boost or SEPIC configuration. The user can program the oscillator frequency and the slope compensation ramp to optimize efficiency and external component size. Multiple MXHV9911 controllers can be synchronized to an external clock applied to the SYNC pin. The MXHV9911 can accomplish a very wide LED dimming range by using a combination of analog and digital brightness controls.

Ordering Information

Part No.	Description	Qty
MXHV9911BE	SOIC-16 EP Tube	100
MXHV9911BETR	SOIC-16 EP Tape & Reel	2000

Functional Block Diagram and Typical Application

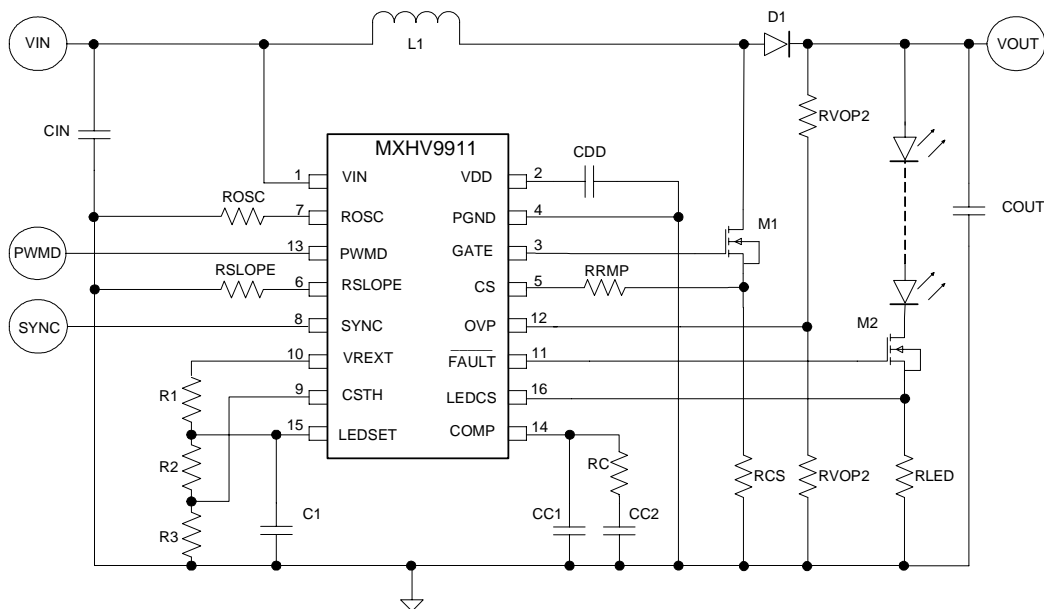

Features

- Multiple Color Input Formats (CIE XYZ, Yxy, Yu' v', and RGB)
- 3 Channel Analog Interface to Color Sensor (X,Y and Z Channels)
- 3 Channel 12-bit PWM Output (Red, Green, Blue LED Channels)
- I²C Serial Interface
- Optional External Push-Button Interface
- Color Set Point Calibration to System Measurements
- Internal Clock Generator & Voltage Reference
- Error Flag Output
- Passive External Components
- Mixed Signal CMOS Technology
- 5V Digital and Analog Supply Voltages
- -40°C to +85°C Operating Range
- RoHS Compliant 24 Lead SOIC Package

General Description

The MXJDJ822 is an optical feedback controller for LED based lighting systems. These systems typically consist of red, green and blue LED's, LED drivers, a tri-color photosensor, and the MXJDJ822 feedback controller.

The MXJDJ822 processes color information from the phototransistor and adjusts the red, green and blue LED drivers to achieve the desired color. Through the feedback control of the MXJDJ822 an LED array will maintain its color over time and temperature.


The desired color from the light output of the LED array is user programmable by simply writing the color coordinates from the CIE color space into the MXJDJ822 through the I²C serial interface.

The LED drivers are controlled by PWM signals from the MXJDJ822. These signals determine the on-time durations of the red, green and blue LED's. On-time durations are continuously adjusted in real-time to match the light output of the LED array to the desired color programmed into the MXJDJ822.


Ordering Information

Part No.	Description	Qty
MXJDJ822B	SOIC-24 Tube	31
MXJDJ822BTR	SOIC-24 Tape & Reel	

Functional Block Diagram

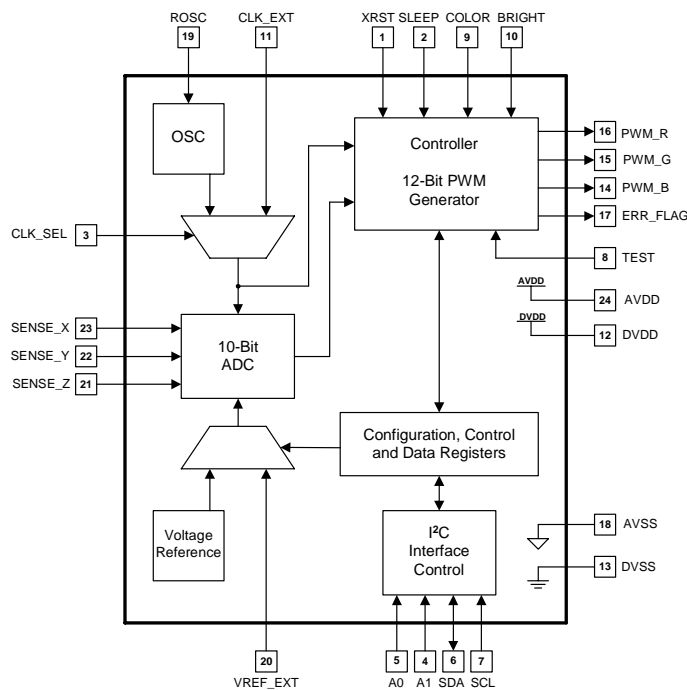

Pin Configuration

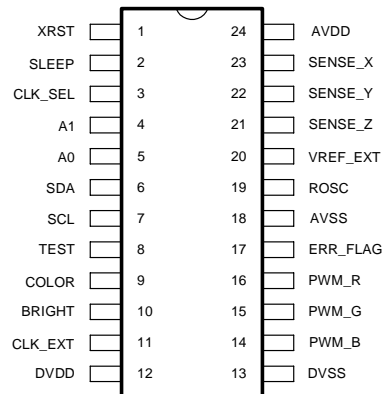

- Robust 0.25 micron gate-length PHEMT MMICs
- Ultra Broadband Performance, (1-20 GHz, and 2-10 GHz)
- Range of PSAT from +15 dBm to +30 dBm
- Designed for EW, Radar, Communications, and Instrumentation applications
- Available in chip form and custom packaging
- Input and Output matched to 50 ohms
- Space / Hi-Rel screening available

Military/Commercial MMICs

Model	Case Code	Freq Range	Linear Gain	Gain Flatness	Input Return Loss	Output Return Loss	Noise Figure	Pout @ -1 dB	IP3	Vgs Voltage Applied	DC Voltage Applied	DC Current Typ/Max
► New	QFN	GHz	Typ/Min dB	Typ/Max ± dB	Typ dB	Typ dB	Typ dBm	Typ/Min dBm	Typ dBm	V	V	mA
► MMA-021015 <i>In Production</i>	chip	2-10	18.0 / -	2.5 / -	-12	-15	4,8	17.0 / -		NA	6,0	89 / -
► MMA-022028 <i>In Development</i>	chip	2-10	7.0 / 6.0	1.0 / -	-10	-15	6,5	28.0 / 26.0		-0,3	8,0	420 / 500

Instrumentation and Communication MMICs

Model	Case Code	Freq Range	Linear Gain	Gain Flatness	Input Return Loss	Output Return Loss	Noise Figure	Pout @ -1 dB	IP3	Vgs Voltage Applied	DC Voltage Applied	DC Current Typ/Max
► New	QFN	GHz	Typ/Min dB	Typ/Max ± dB	Typ dB	Typ dB	Typ dBm	Typ/Min dBm	Typ dBm	V	V	mA
► MMA-206024-Q3 <i>In Development</i>	3X3	2.0-6.0	17.0 / 15.0	1.0 / 1.5	12	12 ⁽¹⁾ /10 ⁽²⁾	3,5	25.0 / 24.0	40,0	-0,9	8,0	250 / 300
► MMA-053223-Q3 <i>In Production</i>	3X3	0.5-3.2	12.0 / -	1.5 / -	10	10	3,5	24.0 / -	42,0	NA	6,0	120 / 200

⁽¹⁾ @ 2-4 GHz, ⁽²⁾ @ 4-6 GHz

WiMAX / WLAN MMICs

- Operates in all WiMAX / WLAN frequency ranges 2.5, 3.5, and 5.5 GHz
- Pave @ 2% EVM up to +29.5 dBm @ 3.5 GHz
- P-1dB options; +36.5dBm, +33dBm, and +30dBm
- Two gain configurations; Single and dual stage
- Ideally suited for power amplification of WiMAX / WLAN base stations, or access points
- Input and Output matched to 50 ohms
- Available in RoHS Compliant Low Cost QFN packages

Model	Case Code	Freq Range	Linear Gain	Gain Flatness	Input Return Loss	Output Return Loss	Pout @ -1 dB	Pout @ 2.0% EVM	IP3	Vgs Voltage Applied	DC Voltage Applied	DC Current Typ/Max
► New	QFN	GHz	Typ/Min dB	Typ/Max ± dB	Typ dB	Typ dB	Typ/Min dBm	Typ dBm	Typ dBm	V	V	mA
► MMA-232730-Q4 <i>In Development</i>	4X4	2.3-2.7	24.0 / 20.0	1.0 / 1.2	10	8	29.0 / -	22,0	45,0	-0,9	7,5	450 / 500
► MMA-232733-Q5 <i>In Development</i>	5X5	2.3-2.7	10.5 / 10.0	0.8 / 0.9	NA	NA	33.0 / 32.5	26,0	46,0	-1,0	7,5	600 / -
► MMA-333737-Q10 <i>In Development</i>	10X10	3.3-3.7	13.0 / 12.0	NA	NA	NA	36.5 / -	29,0	48,0	NA	8,5	1000 / -
► MMA-333830-Q4 <i>In Development</i>	4X4	3.3-3.8	11.0 / 10.0	1.0 / 1.2	7	10	28.5 / -	21,5	45,0	-0,9	7,5	300 / 400
► MMA-333833-Q5 <i>In Development</i>	5X5	3.3-3.8	11.0 / 9.0	1.0 / 1.2	10	10	33.0 / -	25,0	46,0	-0,9	7,5	600 / 800
► MMA-343737-Q10 <i>In Development</i>	10X10	3.4-3.7	13.0 / 12.0	NA	NA	NA	36.5 / -	29,0	48,0	NA	8,5	1000 / -
► MMA-495930-Q4 <i>In Development</i>	4X4	4.9-5.9	20.0 / 18.0	1.0 / 1.2	8	8	30.0 / -	22,0	45,0	-0,9	7,5	450 / 500
► MMA-495933-Q5 <i>In Production</i>	5X5	4.9-5.9	10.5 / 10.0	0.8 / 0.9	NA	NA	33.0 / 32.5	26,0	46,0	-1,0	7,5	600 / -

Standard GaAs FETs / PHEMTs




- Ultra Linear, High Dynamic Range, Low Phase Noise
- GaAs Process is Approved for Space Applications with Proven Reliability
- Commercial, Industrial, Military, and Space Grades
- 100% Wafer Bond Pull, Die Shear, Wafer DC Burn In, and Bake Tests in Evaluation per MIL-PRF-38534
- 100% Die Probe Test with Data Recorded for Shipment
- 100% Visual Inspection (Level 1, 3, or 4)
- 100% Idss Match to Provide Performance Consistency
- RF Sample Test Capability Available Upon Request
- Standard and Custom Device Specifications
- High-Rel and Space-Rel Screening Options Available
- RoHS (lead-free) Compliant Product Available

MwT Standard GaAs FETs / PHEMTs RF Properties (DC Properties Listed on 2nd Page)

Model	Package Available Sealed / Hermetic	Gate Width / Length	Gate Layout Method	Gate Drain Source Bond Pads Qty	Chip Thickness & VIA mil, y/n	S.S. Gain @12GHz Typ/Min dB	N. F. @12GHz Typ/Max dB	Ga @ N.F @12GHz Typ/Min dB	P-1dB @ 12GHz Typ/Min dBm	IP3 @ 12GHz Typ dBm	Nominal Chip Size um • um	Ideal Circuit
► New		um										
MwT-1	70, 73 / 71	630/0.3	single stripe	1, 1, 2	5, no	10.0 / 9.0	2.0 / -	7.0 / -	24.0/23.0	-	775 • 241	FB Amp
MwT-2	70, 73 / 71	630/0.3	single stripe	2, 2, 3	5, no	8.5 / 8.0	- / -	- / -	24.5/23.0	-	775 • 241	BA Amp
MwT-3	70, 73 / 71	300/0.3	single stripe	1, 1, 2	5, no	11.0 / 10.0	- / -	- / -	21.0/20.0	-	406 • 241	BA Amp
MwT-4	70, 73 / NA	180/0.3	single stripe	1, 1, 2	5, no	9.0 / 8.0	1.5 / 1.8	9.0 / 8.0	14.0/13.0	-	356 • 241	Osc & Amp
MwT-5	NA / NA	2•300/0.3	dual gate	3, 1, 2	5, no	13.0 / 12.0	3.5 / -	11.0 / -	19.0/15.0	-	406 • 241	Buffer Amp
MwT-7	70, 73 / NA	250/0.3	single stripe	2, 2, 2	5, no	10.5 / 10.0	2.0 / -	8.0 / -	20.0/18.0	-	356 • 241	BA/SE Amp
MwT-LP7	70, 73 / NA	250/0.3	single stripe	2, 2, 2	5, no	10.5 / 10.0	2.0 / -	8.0 / -	20.0/18.0	-	356 • 241	Oscillator
MwT-8	71	2400/0.3	Interdigit	2, 2, 3	4, no	7.5 / 7.0	-	-	28.0/27.0	-	673 • 305	Power Amp
MwT-A9	70, 73 / 71	750/0.3	single stripe	1, 1, 2	5, no	9.5 / 8.5	1.8 / -	6.5 / 6.0	25.5/23.0	-	419 • 292	FB Amp
MwT-A989	sot89	750/0.5	Interdigit	1, 1, 2	4, no	17.0/15.0 ⁽¹⁾	0.9 ⁽¹⁾	-	25.0/23.0	40	419 • 292	Power Amp
► MwT-A989SB	sot89	750/0.5	Interdigit	1, 1, 2	4, no	17.0/15.0 ⁽¹⁾	0.9 ⁽¹⁾	-	25.0/23.0	40	419 • 292	Power Amp
MwT-10	NA	83/0.3	single stripe	1,1,2	5, no	4.5 / 5.5	4.5 / 5.0	- / -	11.0/12.0	-	279 • 241	BA Amp
► MwT-11	71	2400/0.3	Interdigit	2, 2, 3	4, no	9.0 / 7.0	-	-	30.0/28.0	-	775 • 343	Power Amp
MwT-16	- / -	900/0.3	single stripe	6, 2, 7	5, no	8.5 / 7.5	- / -	- / -	27.0/26.0	-	1067 • 241	BA Amp
MwT-17	89 / 71	2400/0.8	Interdigit	4, 4, 5	5, no	7.0 / 6.0	⁽²⁾	-	29.5/28.5	45/-	1130 • 279	BA/FB Amp
MwT-1789HL	sot89	2400/0.8	Interdigit	4, 4, 5	4, no	--	⁽³⁾	14.0 ⁽¹⁾	28,0	46	1130 • 279	High Linearity
MwT-1789LN	sot89	2400/0.8	Interdigit	4, 4, 5	4, no	--	⁽⁴⁾	16.0 ⁽¹⁾	28,0	46	1130 • 279	Low Noise
MwT-1789SB	sot89	2400/0.8	Interdigit	4, 4, 5	4, no	--	⁽³⁾	18.0 ⁽¹⁾	28,0	44	1130 • 279	Power Amp
► MwT-17Q3	QFN	2400/0.8	Interdigit	4, 4, 5	4, no	18.0/16.0 ⁽¹⁾	1.5 ⁽¹⁾	-	28.0/27.0	46	1130 • 279	Power Amp
MwT-22	71	4800/0.5	Interdigit	6, 6, 7	4, no	12.0 / 9.0	-	-	33.0/31.0	48	1651 • 508	Power Amp
► MwT-22Q4	QFN	4800/0.5	Interdigit	6, 6, 7	4, no	13.5/12.0 ⁽⁵⁾	-	-	33.0/32.0	48	1651 • 508	Power Amp
► MwT-25	-	14400/0.5	Interdigit	6, 6, 7	4, no	10.0 / 9.0	-	-	37.5/36.0	48	2311 • 508	Power Amp
► MwT-PH5	-	300/0.3	single stripe	1, 1, 2	4, no	18.0 / 15.0	2.0 / -	12.0 / -	20.0/18.0	-	406 • 241	Power Amp
MwT-PH7	70, 73 / 71	250/0.3	single stripe	2, 1, 2	4, no	13.5 / 12.0	-	-	24.0/22.0	-	356 • 241	Medium pow
► MwT-PH8	71	1200/0.3	Interdigit	2, 2, 3	4, no	10.0 / 9.0	-	-	30.0/29.0	-	673 • 305	Medium pow
MwT-PH9	70, 73 / 71	750/0.3	single stripe	1, 1, 2	4, no	10.0 / 9.0	-	-	27.0/26.0	-	419 • 292	Power Amp
MwT-PH11	71	2400/0.3	Interdigit	2, 2, 3	4, no	9.0 / 7.0	-	-	32.0/30.0	42	775 • 343	Power Amp
► MwT-PH15	70, 73 / 71	630/0.3	single stripe	3, 2, 5	4, no	12.0 / 10.0	-	-	28.5/27.0	-	775 • 241	Medium pow
► MwT-PH15QACSB	QFN	630/0.3	single stripe	3, 2, 5	4, no	11.0 / -	-	-	25.0 / -	-	775 • 241	Medium pow
► MwT-PH16	71	900/0.3	single stripe	6, 2, 7	4, no	11.5 / 10.0	-	-	30.0/28.5	-	1067 • 241	Medium pow
► MwT-PH16A	-	1600/0.25	Interdigit	4, 4, 5	4, no	11.0 / 9.5	-	-	31.0/29.0	-	1126 • 330	Medium pow

SB = Self-Biased (1) @ 2.0GHz, (2) noise figure = 0.8dB @ 0.9GHz, (3) noise figure = 3.0dB @ 2.0GHz, (4) noise figure = 1.3dB @ 2.0GHz, (5) @ 4.0GHz

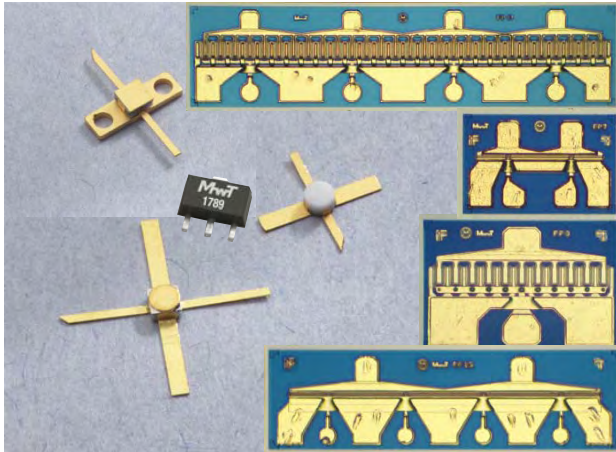

MwT Standard GaAs FETs / PHEMTs RF Properties (RF Properties Listed on First Page)

Model	Device Type	I _{dss} Range Min/Max mA	G _m Tested at V _{ds} /V _{gs} V/V	G _m Typ/Min mS	V _p Tested at V _{ds} /I _{ds} V/mA	V _p Typ/Max (- V)	B _{vgso} Tested at I _{gs} (- mA)	B _{vgso} Typ/Min (- V)	B _{vgdo} Tested at I _{gd} (- mA)	B _{vgdo} Typ/Min V/V	V _{ds} Absolute Max V	Chip R _{th} Typ °C/W
► New												
MwT-1	MESFET	60 / 240	4.0 / 0.0	120 / 90	3.0 / 4.0	2.0 / 5.0	1.0	10.0 / 5.0	1.0	10.0 / 6.0	6.0	80
MwT-2	MESFET	60 / 240	4.0 / 0.0	100 / 75	3.0 / 4.0	2.0 / 5.0	0.4	12.0 / 6.0	0.4	12.0 / 8.0	7.0	80
MwT-3	MESFET	30 / 120	4.0 / 0.0	55 / 35	3.0 / 2.0	2.0 / 5.0	0.2	12.0 / 6.0	0.2	12.0 / 8.0	7.0	150
MwT-4	MESFET	18 / 66	3.0 / 0.0	35 / 27	3.0 / 1.0	1.5 / 4.0	0.2	8.0 / 5.0	0.2	8.0 / 6.0	6.0	250
MwT-5	MESFET	30 / 110	2.0 / 0.0	40 / 23	3.0 / 0.0	2.0 / 4.5	0.4	8.0 / 5.0	0.4	10.0 / 7.0	6.5	150
MwT-7	MESFET	26 / 98	3.0 / 0.0	45 / 36	3.0 / 1.0	1.5 / 4.5	0.4	8.0 / 5.0	0.4	8.0 / 6.0	6.0	180
MwT-LP7	MESFET	38 / 98	3.0 / 0.0	45 / 36	3.0 / 1.0	1.5 / 4.5	0.4	8.0 / 5.0	0.4	8.0 / 6.0	6.0	180
MwT-8	MESFET	120 / 480	2.5 / 0.0	160 / 144	3.0 / 5.0	2.0 / 5.0	1.2	12.0 / 8.0	1.2	12.0 / 8.0	7.5	45
MwT-A9	MESFET	78 / 282	2.0 / 0.0	120 / 95	3.0 / 5.0	2.0 / 5.0	1.0	10.0 / 5.0	1.0	10.0 / 6.0	6.0	70
MwT-A989	MESFET	100 / 200	2.0 / 0.0	90 / 120	3.0 / 5.0	2.5 / 5.0	1.0	10.0 / 5.0	1.0	10.0 / 6.0	8.0	75
► MwT-A989SB	MESFET	100 / 200	2.0 / 0.0	90 / 120	3.0 / 5.0	2.5 / 5.0	1.0	10.0 / 5.0	1.0	10.0 / 6.0	8.0	75
MwT-10	MESFET	8 / 30	3.0 / 0.0	12 / 16	3.0 / 0.5	1.5 / 4.0	0.1	4.0 / 7.0	0.1	5.0 / 7.0	5.0	450
► MwT-11	MESFET	240 / 920	2.5 / 0.0	380 / 290	3.0 / 16.0	2.0 / 5.0	2.4	12.0 / 8.0	2.4	12.0 / 8.0	8.0	28
MwT-16	MESFET	90 / 360	2.0 / 0.0	130 / 108	3.0 / 6.0	2.0 / 5.0	0.6	12.0 / 6.0	0.6	12.0 / 8.0	7.0	55
MwT-17	MESFET	240 / 920	2.0 / 0.0	380 / 290	3.0 / 6.0	2.5 / 5.0	1.6	12.0 / 6.0	1.6	12.0 / 8.0	7.0	33
MwT-1789HL	MESFET	440 / 680	2.5 / 0.0	380	3.0 / 16.0	2.0 / 5.0	2.4	12.0 / 6.0	2.4	12.0 / 9.0	8.0	35
MwT-1789LN	MESFET	440 / 680	2.5 / 0.0	380	3.0 / 16.0	2.0 / 5.0	2.4	12.0 / 6.0	2.4	12.0 / 9.0	8.0	35
MwT-1789SB	MESFET	440 / 680	2.0 / 0.0	380	3.0 / 16.0	2.5 / 5.0	2.4	12.0 / 6.0	2.4	12.0 / 9.0	8.0	30
► MwT-17Q3	MESFET	440 / 680	2.5 / 0.0	380	3.0 / 16.0	2.0 / 5.0	2.4	12.0 / 6.0	2.4	12.0 / 9.0	8.0	35
MwT-22	MESFET	800 / 1200	2.5 / 0.0	650 / 500	3.0 / 30.0	2.0 / 5.0	5.0	12.0 / 8.0	0.5	14.0 / 12.0	9.0	12
► MwT-22Q4	MESFET	800 / 1200	2.5 / 0.0	650	3.0 / 30.5	2.0 / 5.0	5.0	12.0 / 8.0	5.0	14.0 / 12.0	9.0	12
► MwT-25	MESFET	2000/2600	2.5 / 0.0	1500 / 1000	3.0 / 150.0	2.0 / 5.0	14.0	12.0 / 8.0	14.0	16.0 / 14.0	12.0	6
► MwT-PH5	PHEMT	40 / 120	2.5 / 0.0	60 / 40	3.0 / 2.0	1.2 / 2.5	0.4	12.0 / 6.0	0.4	13.0 / 10.0	7.0	150
MwT-PH7	PHEMT	50 / 122	2.5 / 0.0	80 / 50	3.0 / 1.0	1.2 / 2.5	0.4	12.0 / 6.0	0.4	12.0 / 8.0	7.0	150
► MwT-PH8	PHEMT	240 / 600	2.5 / 0.0	320 / 240	3.0 / 8.0	1.2 / 2.5	1.2	12.0 / 6.0	1.2	13.0 / 10.0	8.0	40
MwT-PH9	PHEMT	120 / 292	2.5 / 0.0	200 / 150	3.0 / 5.0	1.2 / 2.5	1.0	12.0 / 6.0	1.0	13.0 / 10.0	8.0	56
MwT-PH11	PHEMT	440 / 800	2.0 / 0.0	800 / 450	3.0 / 16.0	1.2 / 2.5	2.4	12.0 / 6.0	2.4	13.0 / 10.0	8.0	24
► MwT-PH15	PHEMT	120 / 240	2.5 / 0.0	200 / 130	3.0 / 2.0	1.2 / 2.5	1.0	12.0 / 6.0	1.0	13.0 / 10.0	8.0	65
► MwT-PH15QACSB	PHEMT	120 / 240	2.0 / 0.0	200 / 130	--	--	--	--	--	--	8.0	65
► MwT-PH16	PHEMT	150 / 360	2.5 / 0.0	280 / 180	3.0 / 3.0	1.2 / 2.5	1.0	12.0 / 6.0	1.0	13.0 / 10.0	8.0	45
► MwT-PH16A	PHEMT	300 / 600	2.0 / 0.0	400 / 300	3.0 / 2.0	1.2 / 2.5	2.0	8.0 / 6.0	2.0	13.0 / 10.0	9.0	30

NOTE: Contact Factory For Binning Ranges

Wireless Amplifiers (MPS, ULA and WPS WiMax)



- Miniature, Low Cost, SMT, Flange, & Leadless Options
- Miniature, High Reliability, Hermetic SMT Options
- Low Noise, High Linearity, and Broadband Options
- Suitable for High Dynamic Range LNA Applications
- Suitable for High Linear Driver Amp Gain Stages
- Low VSWR for Improved Cascade Performance
- Single Voltage Supply and Low Current Operation
- Uses MwT's Hi-Rel and Space-Qualified GaAs Devices
- Most Parts are Eutectic Assembly for High Reliability
- Standard and Custom Amplifier Specifications
- High-Rel and Space-Rel Screening Available (class H, K, and S)

MwT Standard High Linearity Driver Amplifiers

Model (Case Code - XX)	Case Code (- XX) Sealed	Freq Range	Linear Gain	Gain Flatness	VSWR Input	VSWR Output	Noise Figure	Pout @ -1 dB	IP3	DC Voltage Applied	DC Current
> New	SMT, Flange	MHz	Typ/Min dB	Typ/Max ± dB	Typ/Max dB	Typ/Max dB	Typ/Max dB	Typ/Min dBm	Typ/Min dBm	V	Typ-Max mA
MPS-0030H16-XX	02	10-3000	14.5/16.0	0.50/0.80	2.0/-	2.0/-	-	27.0 / 25.5	33.5 / -	7.0-8.0	240-270
MPS-0325A9D-XX	82	300-2500	12.5/13.5	0.20/0.60	1.4 / 1.7	1.2 / 1.7	4.0 / -	25.0 / -	42.0 / 39.0	7,5	300-330
MPS-081017-XX	02	800-1000	15.0/14.0		2.0 / -	2.5 / -	-	28.5 / -	45.0 / 42.0	7,5	380-450
MPS-0810A9-XX	02	800-960	15.0/14.0		1.5 / -	2.0 / -	1.1 / 1.5	20.5 / -	34.0 / -	6,0	160-240
MPS-0810A9D-XX	82, -	800-960	14.0/13.0	0.20/0.30	1.4 / 1.5	1.2 / 1.5	5.0 / -	26.0 / 25.0	42.0 / 41.0	7,5	300-400
MPS-0820A9D-XX	02	800-2050	13.5/12.5		1.4 / -	1.4 / -	5.5 / -	24.0 / -	43.0 / -	6,0	220-280
MPS-093011-XX	82, 85, *	800-1000	16.0/14.0	0.25/0.50	1.5 / -	2.2 / -	6.0 / -	30.0 / -	45.0 / 43.0	7,5	380-450
MPS-1720A9-XX	02	800-960	14.0/13.0		2.1 / 2.2	1.5 / 2.1	1.1 / 1.5	20.0 / -	33.0 / -	6,0	100-140
MPS-172208-XX	82, 85	1900-2000	13.0/12.0	0.20/0.50	2.0 / 2.5	2.0 / 2.5	5.0 / -	26.0 / 25.0	38.0 / -	7,5	380-450
MPS-173011-XX	82, 85, *	1400-1700	14.0/13.0	0.25/0.50	1.5 / -	2.2 / -	6.0 / -	30.0 / -	45.0 / 42.0	7,5	380-450
MPS-1820A9D-XX	82, -, 02	1800-2000	14.0/13.0	0.20/0.30	1.4 / 1.5	1.2 / 1.5	5.0 / -	26.0 / 25.0	42.0 / 41.0	7,5	300-400
MPS-182117-XX	02	1800-2100	14.0/13.0		2.0 / -	2.5 / -	-	28.5 / -	45.0 / 42.0	7,5	380-450
MPS-182217-XX	82, -, 02	1800-2200	14.0/13.0	0.25/0.50	1.5 / -	3.0 / -	6.0 / -	28.5 / -	45.0 / 42.0	7,5	380-450
MPS-2125A9D-XX	82, -, 02	2100-2500	14.0/13.0	0.20/0.50	1.4 / 1.5	1.2 / 1.5	5.0 / -	26.0 / 25.0	42.0 / 41.0	7,5	300-400
MPS-213011-XX	82, 85, 02	1700-2100	14.0/13.0	0.25/0.50	1.5 / -	2.2 / -	6.0 / -	29.0 / -	45.0 / 42.0	7,5	380-450
MPS-242520-XX	-, 83	2400-2500	13.0/12.0	0.30/0.50	3.0 / -	2.0 / -	- / -	36.0 / 35.0	- / -	8,0	750-900
MPS-242717-XX	02	2400-2700	13.0/12.0		2.0 / -	-	-	28.0 / -	45.0 / 42.0	6.0-7.0	380-450
MPS-252730-XX	-, 83	2500-2700	13.0/12.0	0.40/0.60	3.0 / -	2.0 / -	- / -	36.0 / 35.0	- / -	8,0	750-900
MPS-253011-XX	02, 82, 85, *	2400-2700	13.0/12.0	0.25/0.50	1.5 / -	2.2 / -	6.0 / -	29.0 / -	45.0 / 42.0	7,5	380-450
MPS-343517-XX	02, 82	3400-3500	13.0/12.0	0.25/0.50	2.0 / -	2.2 / -	6.0 / -	29.0 / -	45.0 / 42.0	7,5	380-450
MPS-3435A9D-XX	82, -	3400-3500	13.0/12.0	0.20/0.30	1.4 / 1.5	1.3 / 1.5	6.0 / -	24.0 / 23.0	41.0 / 39.0	7,5	300-400
MPS-343617-XX	82	3400-3600	13.0/12.0		2.0 / -	2.2 / -	-	29.0 / -	48.0 / 44.0	7,5	350-420
MPS-343717-XX	02	3400-3700	12.5/11.7		1.5 / -	2.5 / -	-	28.5 / -	45.0 / 42.0	6.0-7.0	330-400
MPS-343717-XX	82	3400-3700	12.5/11.7		1.5 / -	2.5 / -	-	28.5 / -	45.0 / 42.0	6,7	380-450
MPS-363817-XX	82	3600-3800	13.0/12.0		2.0 / -	2.2 / -	-	29.0 / -	48.0 / 44.0	7,5	350-420
ULA 808-XX Special Order Only	82, -	1800-2100	14.0/13.0	0.25/0.50	2.0 / -	2.0 / -	- / -	28.0 / -	48.0 / 46.0	8,0	270-350
ULA 818-XX Special Order Only	82, -	800-1000	15.5/14.0	0.25/0.50	1.5 / -	1.5 / -	- / -	28.0 / -	48.0 / 46.0	8,0	270-350


* Hermetic Version Available (96 package)

MwT Standard Low Noise Receiver Amplifiers

Model (Case Code - XX)	Case Code (- XX) Sealed	Freq Range	Linear Gain	Gain Flatness	VSWR Input	VSWR Output	Noise Figure	Pout @ -1 dB	PAE @ -1 dB	IP3	DC Voltage Applied	DC Current
> New	SMT, Flange	MHz	Typ/Min dB	Typ/Max ± dB	Typ/Max dB	Typ/Max dB	Typ/Max dB	Typ/Min dBm	Typ %	Typ/Min dBm	V	Typ/Max mA
MPS-080817P-XX	82, 85, 02	806-849	14.0/13.0	0.20/0.50	2.0 / 2.5	2.0 / 2.5	1.1 / 1.5	28.0 / NA	26	44.0 / 42.0	7,5	330 / 400
MPS-080817N-XX	82, 85, 02	806-849	13.5/12.0	0.20/0.50	2.0 / 2.5	2.0 / 2.5	0.8 / 1.0	23.0 / NA	26	36.0 / 33.0	7,5	180 / 250
MPS-0808A9-XX	85	806-849	16.0/14.0	0.20/0.50	2.0 / 2.5	2.0 / 2.5	1.1 / 1.5	22.0 / NA	26	36.0 / 33.0	6,0	180 / 250
MPS-080917P-XX	85, 02	870-925	14.5/13.0	0.20/0.50	2.0 / 2.5	2.0 / 2.5	1.1 / 1.5	28.0 / NA	26	44.0 / 42.0	7,5	330 / 400
MPS-080917N-XX	82, 85, 02	870-925	13.5/12.0	0.20/0.50	2.0 / 2.5	2.0 / 2.5	0.8 / 1.0	23.0 / NA	26	36.0 / 33.0	7,5	180 / 250
MPS-0809A9-XX	82, 85	870-925	16.0/14.0	0.20/0.50	2.0 / 2.5	2.0 / 2.5	1.1 / 1.5	22.0 / NA	26	36.0 / 33.0	6,0	180 / 250
MPS-090917P-XX	82, 85, 02	925-960	14.5/13.0	0.20/0.50	2.0 / 2.5	2.0 / 2.5	1.1 / 1.5	28.0 / NA	26	44.0 / 42.0	7,5	330 / 400
MPS-090917N-XX	85, 02	925-960	13.5/12.0	0.20/0.30	2.0 / 2.5	2.0 / 2.5	0.8 / 1.0	23.0 / NA	26	36.0 / 33.0	7,5	180 / 250
MPS-0909A9-XX	82, 85	925-960	16.0/14.0	0.20/0.50	2.0 / 2.5	2.0 / 2.5	1.1 / 1.5	22.0 / NA	26	36.0 / 33.0	6,0	180 / 250
MPS-1718A9-XX	82, 85	1710-1785	15.5/14.0	0.20/0.50	2.0 / 2.5	2.0 / 2.5	1.1 / 1.5	22.0 / NA	26	36.0 / 33.0	6,0	100 / 150
MPS-1820A9-XX	82, 85	1850-1910	15.5/14.0	0.20/0.50	2.0 / 2.5	2.0 / 2.5	1.1 / 1.5	22.0 / NA	26	36.0 / 33.0	6,0	100 / 137
MPS-081017N-XX	02	800-960	13.5/12.0		2.0 / -	2.0 / -	1.0 / 1.3	21.0 / -	36.0 / -	6.0-7.0	180-250	
MPS-081017P-XX	02	800-960	14.0/13.0		2.0 / -	2.0 / -	1.3 / 1.7	26.0 / -	44.0 / -	6.0-7.0	330-400	

Note: Contact factory for hermetic package and low cost surface mount package.

Wireless Amplifiers (MPS, ULA and WPS WiMax)

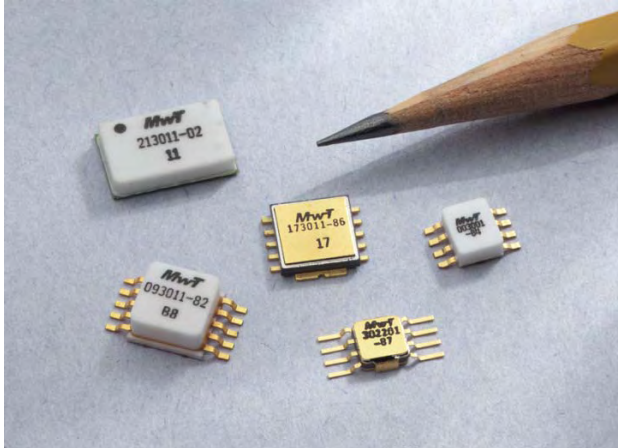

MwT Standard Broad Band General Purpose Amplifiers

Model (Case Code - XX)	Case Code (- XX) Sealed SMT, Flange	Case Code (- XX) Hermetic	Freq Range MHz	Linear Gain Typ/Min dB	Gain Flatness Typ/Max ± dB	VSWR Input Typ/Max dB	VSWR Output Typ/Max dB	Noise Figure Typ/Max dB	Pout @ -1 dB Typ/Min dBm	PAE @ -1 dB Typ %	IP3 Typ/Min dBm	DC Voltage Applied V	DC Current Typ/Max mA
► New													
► MPS-002701-XX	84	-	00-2700	11.5/10.5	0.5/0.8	2.0/-	1.8/-	6.0/-	20.0/19.0	-	35.0/-	5.0	120/160
MPS-003001-XX	84	87	20-3000	11.5/10.5	0.80/1.20	1.6/2.5	1.6/2.5	4.0/-	21.0/19.0	30*	34.0/-	5.0	90/160
MPS-013001-XX	84	-	100-3000	11.5/10.5	0.80/1.20	1.6/2.5	1.6/2.5	3.5*/5.0*	21.0/19.0	30	34.0/-	5.0	90/160
► MPS-032701A-XX	82	96	300-2700	20.0/-	1.0/-	2.0/-	2.0/-	5.0/-	20.0/19.0	-	34.0/-	5.0	320/360
► MPS-0425A9D-XX	82	96	400-2500	14.0/13.0	-	1.4/1.7	1.2/1.7	-	25.0/-	-	42.0/-	7.5	300/330
MPS-082508-XX	82, 85	96	800-2500	13.0/11.0	0.50/1.00	2.0/2.5	2.0/2.5	5.0/-	27.0/26.0	25	38.0/36.0	12.0	200/300
MPS-302201-XX	-	87	100-3000	11.5/10.5	0.50/0.80	1.6/2.5	1.6/2.5	3.5*/5.0*	22.0/20.5	30	35.0/-	5.0	90/160


* NF - See Data Sheet

WPS - WiMax Amplifiers

Model (Case Code - XX)	Case Code Sealed	Freq Range MHz	Linear Gain Typ dB	Gain Flatness Typ/Max ± dB	VSWR Input Typ	VSWR Output Typ	P1dB Typ dBm	Pout @ 2.0% EVM Typ dBm	IP3 Typ/Min dBm	DC Voltage V	DC Current Typ/Max mA
► New											
WPS-242717-XX	02, 82	2450-2700	13,0	0.30/0.60	1,5	2,5	28,5	22,0	45,0	7,5	330
WPS-252717-XX	82	2500-2700	13,0	0.30/0.60	1,5	2,5	28,5	22,0 (1)	45,0	7,5	300
WPS-252724-XX	02, 99	2500-2700	14,0	0.30/0.60	1,5	2,5	36,0	29,0	50,0	8,5	1200
► WPS-303322-XX	02	3000-3300	13,0	0.30/0.60	1,5	2,5	32,0	26,0 (1)	47,0	8,0	600
WPS-343617-XX	82	3400-3600	13,0	0.30/0.60	1,5	2,5	29,0	22,0 (1)	48,0	7,5	380-450
WPS-343717-XX	82	3400-3700	13,0	0.30/0.60	1,5	2,5	29,0	22,0 (1)	45,0	7,5	380-450
WPS-343722-XX	02	3400-3700	13,0	0.30/0.60	1,5	2,5	32,0	26,0 (1)	47,0	8,0	600
WPS-343724-XX	02, 99	3400-3700	14,0	0.30/0.60	1,5	2,5	36,0	29,0	50,0	8,0	1200
WPS-363817-XX	82	3600-3800	13,0	0.30/0.60	1,5	2,5	29,0	22,0 (1)	48,0	7,5	380-450
► WPS-444922-XX	02	4400-4900	11,0	0.30/0.60	1,5	2,5	32,0	26,0	47,0	7,5	600
► WPS-445122-XX	02	4400-5100	11,0	0.30/0.60	1,5	2,5	32,0	26,0	47,0	7,5	600
► WPS-495122-XX	02	4900-5100	11,0	0.30/0.60	1,5	2,5	32,0	26,0	47,0	7,5	600
WPS-495917-XX	02	4900-5900	13,0	0.30/0.60	1,5	2,5	28,5	22,0	44,0	7,5	300
WPS-495922-XX	02	4900-5900	11,0	0.30/0.60	1,5	2,5	32,0	26,0	47,0	7,5	600
► WPS-545922-XX	02	5400-5900	11,0	0.30/0.60	1,5	2,5	32,0	26,0	47,0	7,5	600

(1) @ 2.5% EVM

Hybrid Microwave Modules

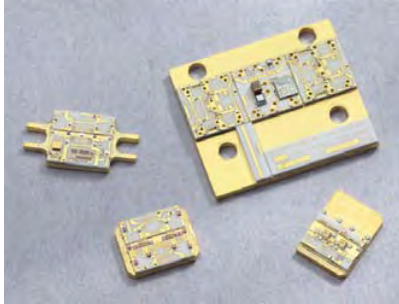

- Miniature Drop-In Hybrid Amplifiers
- Low Noise, High Gain, and High Power Options
- Gain Block, Temp Comp, and Regulator Options
- Low VSWR for Improved Cascade Performance
- Single Voltage Supply and Low Current Design
- Uses MwT's Space-Qualified GaAs Devices and Thin Film Substrates
- 100% Eutectic Assembly Technique Assure High Reliability
- Standard and Customer Specific Specifications
- Connectorized Amplifier Options Upon Request
- High-Rel and Space-Rel Qualification Available

MwT Standard Gain Block Modules

Model	Freq Range	Linear Gain	Gain Flatness	VSWR : 1 In & Out	Reverse Isolation	Noise Figure	Pout @ -1 dB	IP3	Current @ +8 V	Case Code	Carrier Size
	GHz	Typ/Min dB	Typ/Max ± dB	Typ/Max	Typ dB	Typ dB	Typ/Min dBm	Typ	Typ/Max mA		mil x mil
► New											
MwT 0206-11P2	2.0-6.0	6.0 / 5.0	0.4 / 0.6	1.7 / 2.0	-18,0	7.0	30.0 / 29.5	41,0	850 / 950	S/Z-1	300 • 600
MwT 0206-1G1	2.0-6.0	16.0 / 15.0	0.6 / 0.6	1.8 / 2.0	-30,0	4.5	17.0 / 16.0	27,0	150 / 180	U/L-1	300 • 600
MwT 0206-1G2	2.0-6.0	18.0 / 17.0	0.5 / 0.6	1.8 / 2.0	-30,0	3.5	19.0 / 18.0	29,0	150 / 200	U/L-1	300 • 600
MwT 0206-2P2	2.0-6.0	10.5 / 10.0	0.4 / 0.6	1.5 / 1.8	-20,0	4.5	24.5 / 24.0	35,0	220 / 260	S/Z-1	300 • 600
MwT 0206-7G2	2.0-6.0	11.0 / 10.5	0.4 / 0.6	1.5 / 1.8	-20,0	3.0	15.0 / 14.0	25,0	60 / 80	S/Z-1	300 • 600
MwT 0206-9P2	2.0-6.0	11.0 / 10.0	0.4 / 0.6	1.7 / 2.0	-20,0	4.0	26.0 / 25.0	37,0	260 / 290	S/Z-1	300 • 600
MwT 0206-A9G1	2.0-6.0	17.0 / 16.0	0.5 / 0.6	1.8 / 2.0	-30,0	1.5	15.0 / 14.0	25,0	50 / 55	S/Z-1	300 • 600
► MwT 0206-A9N2	2.0-6.0	15.0 / 12.5	2.0 / 2.5	1.7 / 2.0	-17,0	1.0	15.0 / 13.0	25,0	50 / 70	S/Z-1	300 • 600
MwT 0618-2P1	6.0-18.0	5.0 / 4.5	0.4 / 0.6	1.5 / 1.7	-20,0	7.0	24.8 / 24.0	35,0	200 / 250	S/Z-2	250 • 500
MwT 0618-2P2	6.0-18.0	5.5 / 5.0	0.3 / 0.5	1.5 / 1.7	-20,0	7.0	25.5 / 24.5	36,0	220 / 275	S/Z-2	250 • 500
MwT 0618-3P1	6.0-18.0	6.0 / 5.0	0.4 / 0.6	1.5 / 1.7	-20,0	6.5	20.5 / 20.0	30,0	100 / 120	S/Z-2	250 • 500
MwT 0618-3P2	6.0-18.0	6.5 / 6.0	0.3 / 0.5	1.5 / 1.7	-20,0	6.5	21.5 / 21.0	31,0	100 / 120	S/Z-2	250 • 500
MwT 0618-4N1	6.0-18.0	7.5 / 7.0	0.4 / 0.6	1.5 / 1.7	-20,0	4.5	14.0 / 12.0	25,0	40 / 60	S/Z-2	250 • 500
MwT 0618-4N2	6.0-18.0	8.0 / 7.5	0.4 / 0.6	1.5 / 1.7	-20,0	4.0	14.0 / 11.0	25,0	40 / 60	S/Z-2	250 • 500
MwT 0618-H4N2	6.0-18.0	9.0 / 8.5	0.4 / 0.6	1.5 / 1.7	-20,0	3.0	10.0 / 7.0	20,0	40 / 60	S/Z-2	250 • 500
MwT 0618-5G1	6.0-18.0	10.0 / 9.5	0.4 / 0.6	1.5 / 1.7	-30,0	5.5	16.0 / 14.0	26,0	90 / 100	S/Z-2	250 • 500
MwT 0618-5G2	6.0-18.0	10.5 / 10.0	0.4 / 0.6	1.5 / 1.7	-30,0	5.0	18.0 / 15.5	28,0	100 / 120	S/Z-2	250 • 500
MwT 0618-7G2	6.0-18.0	7.5 / 7.0	0.4 / 0.6	1.5 / 1.7	-20,0	5.0	15.0 / 14.0	25,0	60 / 80	S/Z-2	250 • 500
MwT 0618-12P2	6.0-18.0	4.6 / 4.2	0.4 / 0.6	1.5 / 1.7	-20,0	7.5	27.5 / 27.0	38,0	350 / 450	S/Z-2	250 • 500
MwT 0618-H15P2	6.0-18.0	8.5 / 7.5	0.4 / 0.6	1.5 / 1.7	-20,0	7.5	27.0 / 26.0	34,0	250 / 275	S/Z-2	250 • 500
MwT 0618-H15P3	6.0-18.0	7.5 / 6.5	0.4 / 0.6	1.5 / 1.7	-20,0	7.5	29.0 / 28.0	36,0	250 / 300	S/Z-2	250 • 500
MwT 0618-H16P3	6.0-18.0	5.0 / 6.0	0.8 / 1.2	1.7 / 2.0	-17,0	8.0	30.0 / 29.0	38,0	450 / 550	S/Z-2	250 • 500
► MwT 0618-H5G2	6.0-18.0	15.0 / 14.0	0.5 / 1.0	1.7 / 2.0	-17,0	3.0	20.0 / 17.0	29,0	80 / 120	S/Z-2	250 • 500
MwT 0618-H7P2	6.0-18.0	9.0 / 9.5	0.5 / 1.0	1.7 / 2.0	-17,0	5.5	21.0 / 24.0	33,0	110 / 150	S/Z-2	250 • 500
MwT 0820-3P1	8.0-20.0	5.0 / 4.5	0.4 / 0.6	1.5 / 1.7	-20,0	7.5	19.0 / 18.0	29,0	100 / 120	S/Z-2	250 • 500
MwT 0820-3P2	8.0-20.0	5.5 / 5.0	0.4 / 0.6	1.5 / 1.7	-20,0	7.0	20.0 / 19.0	29,0	100 / 120	S/Z-2	250 • 500
MwT 0820-4N1	8.0-20.0	6.0 / 5.5	0.4 / 0.6	1.5 / 1.7	-20,0	8.0	14.0 / 12.0	25,0	40 / 60	S/Z-2	250 • 500
MwT 0820-4N2	8.0-20.0	6.5 / 6.0	0.4 / 0.6	1.5 / 1.7	-20,0	4.0	14.0 / 11.0	25,0	40 / 60	S/Z-2	250 • 500
MwT 0820-5G1	8.0-20.0	9.0 / 8.0	0.4 / 0.6	1.5 / 1.7	-28,0	4.0	16.0 / 14.0	26,0	90 / 110	S/Z-2	250 • 500
MwT 0218-4N1	2.0-18.0	6.0 / 5.0	0.8	1.7 / 2.0	-20,0	7.0	15.0 / 14.0	25,0	100 / 120	S/Z-2	250 • 500
MwT 0218-4N2	2.0-18.0	6.5 / 6.0	1.2	1.7 / 2.0	-20,0	8.5	17.0 / 16.0	26,0	160 / 180	S/Z-2	250 • 500
MwT 0218-H4N1	2.0-18.0	12.0 / 11.0	0.8	1.7 / 2.0	-20,0	4.0	6.0 / 5.0	15,0	40 / 50	S/Z-2	250 • 500
MwT 0218-H4N2	2.0-18.0	11.0 / 10.0	0.8	1.7 / 2.0	-20,0	4.0	12.0 / 11.0	24,0	60 / 75	S/Z-2	250 • 500

Note: Typical 2nd Harmonics @ P-I -21.0 dBc Typ

MwT Standard Temperature Compensation Modules

Model	Freq Range	Insertion Loss	Loss Flatness	Atten.	Current @ +8 V	Case Code	Carrier Size
	GHz	Typ/Max dB	± Max dB	Typ / Min dB	Max mA		milxmil
MwT 0206-TCM	2.0-6.0	1.0 / 2.5	0.4 / 0.6	13.0 / 12.0	10 / 20	S/Z-1	300 • 600
MwT 0618-TCM	6.0-18.0	2.5 / 3.0	0.4 / 0.6	13.0 / 12.0	10 / 20	S/Z-2	250 • 500

MwT Standard Voltage Regulator Modules (Each Module Contains Dual Adjustable Voltage Regulators)

Model	Freq Range	Insertion Loss	Ripple Rej @ 120Hz	Pw Diss Per VR	Regulated Voltage	Supply Voltage	Total Sup. Current	Case Code	Carrier Size
	GHz	Typ/Max dB	Min dB	Max Watts	Min / Max V	Typ / Max V	Max mA		milxmil
MwT 0206-VRM	2.0-6.0	- / 0.5	50.0	1.5	7.9 / 8.1	12.0 / 20.0	800	U/L-1	300 • 600
MwT 0618-VRM	6.0-18.0	- / 1.0	50.0	1.5	7.9 / 8.1	12.0 / 20.0	800	U/L-2	250 • 500

Standard, Military, and Hi-Rel Connectorized Amplifiers



Model Number WideBand Amplifier Type	Freq Range GHz	Linear Gain dB MIN/TYP	Gain Flatness ±dB MAX	Noise Figure dB MAX/TYP	Pout-1dB dBm MIN/TYP	Current @12 V mA MAX *	Case Code
AW052202N	0.5-2	30/33	1.4	2.5/2.2	15/17	300	SL-2
AW052203	0.5-2	23/26	1.0	3.0/2.5	17/19	260	SL-2
AW054201N	0.5-4	19/26	1.0	2.5/2.2	15/17	220	SL-2
AW054203	0.5-4	21/24	1.0	4.5/4.0	16/18	260	SL-2
AW12201N	1-2	28/31	1.1	2.5/2.2	18/20	225	SL-2
AW12203	1-2	27/30	1.1	3.5/3.0	27/28	555	SL-2
AW26201N	2-6	21/23	1.0	2.5/2.2	13/15	155	SL-2
AW26204	2-6	19/21	1.0	4.5/4.0	23/24	335	SL-2
AW28201N	2-8	29/32	1.5	3.0/2.5	13/15	175	SL-2
AW28302	2-8	31/33	1.5	5.5/5.0	23/24	615	SL-3
AW612301N	6-12	30/32	1.0	3.5/3.0	16/17	240	SH-3
AW612304	6-12	22/23	1.0	6.5/6.0	27/28	750	SH-4
AW1218301N	12-18	24/26	0.8	3.5/3.0	14/15	230	SH-3
AW1218504	12-18	29/31	1.3	7.5/7.0	27/28	1200	SH-6
AW818301N	8-18	24/26	1.0	3.5/3.0	14/15	230	SH-3
AW818504	8-18	29/32	1.5	7.5/7.0	27/28	1300	SH-6
AW618301N	6-18	24/26	1.3	3.5/3.0	14/15	230	SH-3
AW618302	6-18	19/21	1.3	6.0/5.5	20/21	350	SH-3
AW618404	6-18	20/22	1.5	7.5/7.0	27/28	1200	SH-5
AW218201N	2-18	25/28	1.8	5.0/4.5	6/7	135	SH-2
AW218301N	2-18	24/26	2.0	6.5/6.0	15/16	365	SH-3
AW218301	2-18	20/22	2.0	6.0/5.5	20/21	500	SH-3
Model Number Temp Comp Amplifier Type	Freq Range GHz	Linear Gain dB MIN/TYP	Gain Flatness ±dB MAX	Noise Figure dB MAX/TYP	Gain vs Temp ±dB MAX	Current @12 V mA MAX *	Case Code
AT26301	2-6	21/23	1.0	6.0/5.5	0.8	300	SL-3
AT26401	2-6	36/40	1.5	5.5/5.0	1.0	470	SL-4
AT618401	6-18	22/24	1.0	7.5/7.0	0.8	380	SH-4
AT618501	6-18	31/33	1.3	7.0/6.5	0.8	500	SH-5
Model Number Limiting Amplifier Type	Freq Range GHz	Pin Dynamic dBm MIN/MAX	Noise Power dBm MAX	Pout-sat dBm MIN/MAX	Pout Flatness ±dB MAX	Current @12 V mA MAX *	Case Code
AL26501	2-6	-50/10	7.0	+15/+20	1.0	500	SL-5
AL618801	6-18	-50/10	10.0	+15/+20	2.0	800	LH-44
Model Number Low Noise Amplifier Type	Freq Range GHz	Linear Gain dB MIN	Gain Flatness ±dB MAX	Noise Figure dB MAX/TYP	Pout-1dB dBm MIN/TYP	Current @12 V mA MAX *	Case Code
AN12201N	1.2-1.8	28/31	0.5	1.7	15/17	180	CL-1
AN23201N	2.2-2.9	28/31	0.5	1.7	15/17	180	CL-1
AN45201N	4.4-5.0	25/27	0.5	1.7	15/17	180	CL-1
AN78201N	7.2-7.8	23/25	0.5	1.8	14/16	150	CH-1
AN910201N	9.0-10.0	21/23	0.5	1.8	14/16	150	CH-1
AN1415301N	14.5-15.3	24/27	0.5	2.1	13/15	200	CH-3
AN1718401N	17.7-18.7	29/32	1.0	2.8	12/14	250	CH-3
Model Number Med Power Amplifier Type	Freq Range GHz	Linear Gain dB MIN	Gain Flatness ±dB MAX	VSWR In/Out MAX	Pout-1dB dBm MIN/TYP	Current @12 V mA MAX *	Case Code
AP45401	4.4-5.0	35.0	0.6	1.5/1.5	30.0/30.5	1400	CL-3
AP67402	5.9-6.4	33.0	0.6	1.5/1.5	33.0/33.5	2700	CL-3
AP78401	7.2-8.4	33.0	0.8	1.5/1.5	30.0/30.5	1450	CH-3
AP910401	9.0-10.0	32.0	0.8	1.5/1.5	30.0/30.5	1450	CH-3
AP1011401	10.7-11.7	27.0	0.8	1.5/1.5	30.0/30.5	1550	CH-3
AP1415401	14.0-14.5	23.0	0.5	1.5/1.5	29.0/30.0	1700	CH-3
AP1718501	17.7-18.7	24.0	1.0	1.8/1.8	26.0/27.0	1250	CH-5
Model Number Telecom Power Amplifier Type	Freq Range GHz	Linear Gain dB MIN	Gain Flatness ±dB MAX	IMD3 (dBc) @ Po dBm/Tone	Pout-1dB dBm MIN/TYP	Current @12 V mA MAX *	Case Code
AP1819701	18.1-18.6	30	0.5	-50@+15	27	2300	PH-01
AP1819801	18.1-18.6	35	0.5	-54@+15	29	2700	PH-01

Contact factory for application assistance on custom and standard amplifiers. Hi-Rel and Space-Rel screening are available.

* Built in voltage regulator.

DE Linear and Switch Mode Series

The patented DE-SERIES Fast Power™ MOSFETs are in a new class of unique high power transistors designed as a circuit element from the ground up for high speed, high frequency, high power applications at frequencies up to 100 MHz. DEI's Fast Power™ technology features low insertion inductance (≤ 1.5 nH), and a low profile package, with

$R_{(\theta JA)HS}$ as low as 0.17°C/W , which provides exceptional switching speeds and power handling capabilities. The DE-Series MOSFETs offer 10 times the speed and 3 times the thermal dissipation, with $1/2$ the volume, $1/3$ the weight and greatly reduced die stress, of comparable conventional power MOSFET devices.

Features

- Isolated Substrate
 - high isolation voltage (> 2500 V)
 - excellent thermal transfer
 - increased temperature and power cycling capability
- IXYS advanced low Q_g process
- Low gate charge and capacitances
 - easier to drive
 - faster switching
- Low $R_{DS(on)}$
- Very low insertion inductance (≤ 1.5 nH)


Advantages

- Optimized for RF and high speed switching at frequencies to 175 MHz
- Higher voltages - lower DC current requirements, higher load impedances, reduced system size and weight, simplifies paralleling of devices
- Easy to mount - no insulators needed
- High power density

Applications

- RF Power Amplifiers
- High Frequency SMPS
- Laser Diode Drivers
- RF Power Generators
- Induction Heating
- High Speed Pulse Generators

Linear Z-MOS

Part Number	Configuration	$B_{V_{DSS}}$	I_d A	Gain 175 MHz dB	Pout 175 MHz W	Pd W	Fig. No.	Package Style Outlines page O-29
100V (operating) Linear RF MOSFETs								
IXZ2210N50L	PUSH-PULL		10X2	14	550	1080	D3	D2 Weight = 2 g 
IXZH10N50LA	SINGLE G-S-D		9	14	150	180	X014a*	
IXZH10N50LB	SINGLE D-S-G		9	14	150	180	X014a#	
IXZ1221050L-754	tdb	tdb	tdb	tdb	tdb	tdb	tdb	
50V (operating) Linear RF MOSFETs								
IXZ215N12L	SINGLE	125	15	13	150	300	D2	

Switch Mode Z-MOS FETs

Part Number	Configuration	$B_{V_{DSS}}$	I_b A	$R_{DS(on)}$ Ω	tr ns	Ciss pF	Coss pF	Crss	Pd	Fig.
IXZ2211N50	PUSH-PULL	500	11X2	0.6		790	78	12	1030	D3
IXZ318N50	SINGLE		19	0.325		1960	139	19	880	D4
IXZH18N50	SINGLE		19	0.325		1960	139	19	300	X014a
IXZR18N50	SINGLE G-D-S		19	0.325		1960	139	19	300	X016a
IXZR18N50A	SINGLE G-S-D		19	0.325		1960	139	19	300	X016a*
IXZR18N50B	SINGLE D-S-G		19	0.325		1960	139	19	300	X016a#
IXZ316N60	SINGLE	600	18	0.44	4	1930	125	17.8	880	D4
IXZH16N60	SINGLE		18	0.44					300	X014a
IXZR16N60	SINGLE G-D-S		18	0.44					300	X016a
IXZR16N60A	SINGLE G-S-D		18	0.44					300	X016a*
IXZR16N60B	SINGLE D-S-G		18	0.44					300	X016a#
IXZ308N120	SINGLE	1200	8	2.1	5	1960	59	9.2	880	D4
IXZH08N120	SINGLE		8	2.1					300	X014a
IXZR08N120	SINGLE G-D-S		8	2.1					300	X016a
IXZR08N120A	SINGLE G-S-D		8	2.1					300	X016a*
IXZR08N120B	SINGLE D-S-G		8	2.1					300	X016a#

D2
Weight = 2 g



D3
Weight = 4 g




D4
Weight = 3 g



X014a **TO-247 AD**

Weight = 6 g




Pin configuration
X014a* GSD
X014a# DSG

X016a **ISOPLUS247™**

Weight = 5 g

Pin config.: GDS



X016a*

Pin config. GSD








X016#

Pin config. DSG





Switch Mode MOSFETs



DE Series (DE Package)

Part Number	Configuration	B_{VDSS} V	ID A	$R_{DS(ON)}$ Ω	$T_{R(ON)}$ ns	C_{ISS} pF	C_{OSS} pF	C_{RSS} pF	PD W	Fig. No.	Package style Outline drawings on page O-29
100V (max) Switch Mode MOSFETS											
DE150-101N09A	SINGLE	100	9	0.16	4	800	200	30	200	D1	D1 Weight = 2 g 
DE275-101N30A	SINGLE		30	0.05	5	2500	500	100	270	D2	D2 Weight = 2 g 
200V (max) Switch Mode MOSFETS											
DE150-201N09A	SINGLE	200	15	0.2	4	700	150	20	200	D1	D3 Weight = 4 g 
DE275-201N25A	SINGLE		25	0.08	5	2500	250	50	590	D2	D4 Weight = 3 g 
500V (max) Switch Mode MOSFETS											
DE150-501N04A	SINGLE	500	4.5	1.5	4	700	90	5	200	D1	D5 Weight = 3 g 
DE275-501N16A	SINGLE		16	0.4	2	1800	150	40	590	D2	X014a Weight = 6 g 
DE275X2-501N16A	PUSH-PULL		16	0.38	2	1800	150	45	1180	D3	
DE375-501N21A	SINGLE		25	0.22	3	2000	200	45	940	D4	
DE475-501N44A	SINGLE		44	0.11	5	5500	230	130	1800	D5	
1000V (max) Switch Mode MOSFETS											
DE150-102N02A	SINGLE	1000	2	7.8	4	500	150	3	200	D1	X015a Weight = 5 g 
DE275-102N06A	SINGLE		8	1.6	2	1800	130	25	590	D2	
DE275X2-102N06A	PUSH-PULL		16	1.6	2	1800	130	25	1180	D3	
DE375-102N10A	SINGLE		10	1.2	3	2900	100	25	940	D4	
DE375-102N12A	SINGLE		12	0.95	3	2000	150	30	940	D4	
DE475-102N20A	SINGLE		20	0.6	5	5600	175	50	1800	D5	
DE475-102N21A	SINGLE		24	0.41	5	5500	200	60	1800	D5	

F Series (Industry Standard Packages)

Part Number	Configuration	B_{VDSS} V	ID A	$R_{DS(ON)}$ Ω	$T_{R(ON)}$ ns	C_{ISS} pF	C_{OSS} pF	C_{RSS} pF	PD W	Fig. No.	Package style
200V (max) Switch Mode MOSFETS											
IXFH60N20F	SINGLE	200	60	0.038	14	2930	940	320	315	X014a	X016a Weight = 5 g 
IXFT60N20F	SINGLE		60	0.038	14	2930	940	320	315	X019	X019 Weight = 4 g 
500V (max) Switch Mode MOSFETS											
IXFH12N50F	SINGLE	500	12	0.4	14	1870	290	90	180	X014a	X020a Weight = 10 g 
IXFT12N50F	SINGLE		12	0.4	14	1870	290	90	180	X019	
IXFH21N50F	SINGLE		21	0.25	12	2600	470	160	300	X014a	
IXFT21N50F	SINGLE		21	0.25	12	2600	470	160	300	X019	
IXFH28N50F	SINGLE		28	0.19	13	3000	500	130	315	X014a	
IXFT28N50F	SINGLE		28	0.19	13	3000	500	130	315	X019	
IXFK44N50F	SINGLE		44	0.12	18	5500	990	330	500	X020a	
IXFX44N50F	SINGLE		44	0.12	18	5500	990	330	500	X015a	
IXFK55N50F	SINGLE		55	0.085	20	6700	1250	330	560	X020a	
IXFN55N50F	SINGLE		55	0.085	20	6700	1250	330	600	X027a	
IXFX55N50F	SINGLE		55	0.085	20	6700	1250	330	560	X015a	
1000V (max) Switch Mode MOSFETS											
IXFH6N100F	SINGLE	1000	6	1.9	14	1870	190	60	180	X014a	X027a Weight = 30 g 
IXFT6N100F	SINGLE		6	1.9	14	1870	190	60	180	X019	
IXFH12N100F	SINGLE		12	1.05	12	2700	305	93	300	X014a	
IXFR12N100F	SINGLE		12	1.05	12	2700	305	93	300	X016a	
IXFT12N100F	SINGLE		12	1.05	12	2700	305	93	300	X019	
IXFK21N100F	SINGLE		21	0.5	16	5500	640	190	500	X020a	
IXFX21N100F	SINGLE		21	0.5	16	5500	640	190	500	X015a	
IXFK24N100F	SINGLE		24	0.39	18	6600	760	230	560	X020a	
IXFN24N100F	SINGLE		24	0.39	18	6600	760	230	600	X027a	
IXFX24N100F	SINGLE		24	0.39	18	6600	760	230	560	X015a	

RF MOSFET Gate Driver IC



The DEIC 420 ultra-fast high current driver is optimized to drive DEI DE-Series MOSFETs for high efficiency performance in RF generators, laser diode drivers, pulse generators, and high frequency power conversion applications. It is designed to switch power MOSFETs with

minimum switching times at frequencies to 45 MHz. The innovative DEIC 420 is manufactured in DEI's patented low-inductance RF package, offering superior thermal performance and high continuous operating frequencies.

Features

- Wide operating voltage range from 8 V to 30 V
- Very low output impedance
- No internal cross conduction which allows operating frequencies to 45 MHz
- Latch-up protected to rated reverse current
- Output Current - up to 20 A peak
- Very low thermal impedance
- Matched rise and fall times
- Evaluation Board available

Applications

- Class D and E RF Generators
- Laser Diode Drivers
- High Frequency Power Factor Correction
- Acoustic Transducer Drivers
- High Frequency SMPS
- Pulse Generators


Fig. D1
DE 150



Fig. D2
DE 275



X550
28-pin SOP



MOSFET Driver ICs

Part Number	Configuration	t _{on} /t _{off} ns	Logic	Peak I A	Zout Ω	Package	PD W	Enable Pin	Kelvin Input	Evaluation Board
DEIC420	SINGLE	3/4	Non-Inv	20	0.6	DE275	100	NO	NO	EVIC420A/B
DEIC421	SINGLE	3/4	Non-Inv	20	0.6	DE275-IC	100	NO	YES	
DEIC515	SINGLE	3/4	Non-Inv	15	0.6	DE150-IC	100	NO	YES	
IXDD415SI	DUAL	3/4	Non-Inv	15	0.8	SOIC-28 w/heat slug	12	YES	YES	EVDD415

Outline drawings
see pages O-29

Laser Diode Driver IC

Part Number	Pulse Width	Max Freq.	Peak I A	Package	Evaluation Board
IXLD02SI	1.5nS to >1μS	17MHz	2	SOIC-28 w/heat slug	EVLD02

Evaluation Boards

Part Number	Configuration
EVDD415	IXDD415SI for DE Series
EVIC420A	DEIC420 for DE150/275
EVIC420B	DEIC420 for DE375/475

Driver and MOSFET

Part Number ▶ New	t _{ON} /t _{OFF} ns	Logic	BV _{dss} V	Peak I A	Zout Ω	Package	PD W	Kelvin Input
▶ IXZ4DF08N120	4/4	NI DRIVER	1200	8	0.6	4DF	500	YES
▶ IXZ4DF12N100	4/4	NI DRIVER	1000	12	0.4	4DF	500	YES
▶ IXZ4DF18N50	4/4	NI DRIVER	500	18	0.325	4DF	500	YES

ISOPLUS Family

ISOPLUS220™

ISOPLUS247™

ISOPLUS264™

ISOPLUS i4-PAC™

ISOPLUS-DIL™

Isolated Discrete Packages

ISOPLUS247™ is the DCB isolated version of the PLUS247™ package (TO-247 without a mounting hole). The design of this new patented package is revolutionary: the silicon chip is soft soldered onto a Direct Copper Bond (DCB) substrate instead of the usual copper lead frame. The DCB ceramic, the same substrate material as used in the high power modules, not only provides high isolation capability (2500 V_{RMS}) but also unbeatable low thermal resistance compared to conventional, external mounted isolation materials.


Advantages:

- Isolation capability from leads to back-side 2500 V_{RMS} – no external isolation foil needed
- Thermal resistance from Junction to Case only slightly higher as for non-isolated version
- Increased power- and temperature cycling capability
- DCB can be patterned like printed circuit boards – allowing special functions to be realized

Parts in the ISOPLUS247™ housing can be identified by the letter "R" in the IXYS part number. Potentially all devices now encapsulated in TO-247, TO-264 and PLUS247™ housings can be molded in the ISOPLUS247™. There are already more than 100 different ISOPLUS247™ types available.

Another interesting feature is the capability to pattern the DCB substrate like a printed circuit board. Now additional special functions can be realized, e.g. the **series connection of single diode chips** within one package.

Package cross section

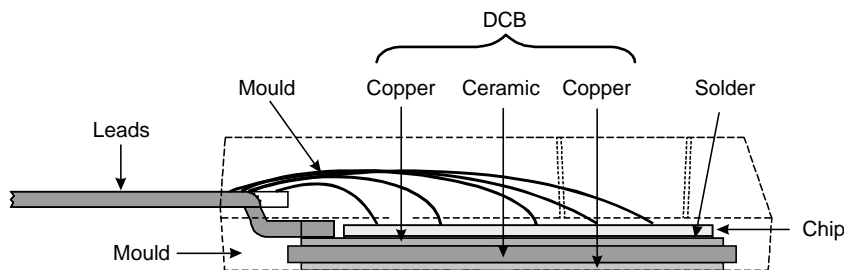

While the junction-to-case thermal resistance is higher than an equivalent, non-isolated device, what really matters is the total thermal resistance from junction-to-heat sink (R_{thJH}). Comparing a device in ISOPLUS247™ to its companion in the non-isolated package with an external isolation foil, one can see that the overall R_{th} is now lower for the part in the already isolated package (see example).

Due to the matched thermal expansion coefficients of silicon and DCB ceramic, mechanical stress to the die and solder caused by power- and temperature cycling is reduced so that reliability is improved. Mounting is done with clips, which not only saves time but also guarantees constant pressure force over the whole lifetime of the assembly.

ISOPLUS220™, ISOPLUS247™ and ISOPLUS264™ are the DCB substitutes for the corresponding standard packages.

A larger version of this packaging technology is named **ISOPLUS i4-PAC™**. It has up to five terminal pins, making it possible to build up full diode bridges, phase-leg transistor configurations, buck and boost converters and much more within one isolated discrete package.

ISOPLUS-DIL™ is the latest member of IXYS ISOPLUS family. 37.5 mm long and 25 mm wide, plane power pins for 300 A RMS on one side and 12 control pins on the opposite side enables IXYS to provide the user with high current six-pack configuration in one package.

ISOPLUS-DIL™ features the highest power density and reliability and is therefore ideally suited for automotive designs.

Example: ISOPLUS247™ compared to conventional isolated device

Type	Package	Isolation	R_{thJC} K/W	R_{thCK} K/W	Total K/W	Factor
IXFR 180N10	ISOPLUS247™	internal DCB	0.3	0.15	0.45	1
IXFX 180N10	PLUS247™	external foil	0.22	1.02	1.24	2.8


Product	Type	V _{DSS}	I _{D25}	R _{DS(on)}
➤ New		V	A	mΩ
MOSFETs	IXTC110N055T	55	78	9.0
Trench Gate	IXTC180N055T	55	105	5.0
	IXTC220N055T	55	130	4.4
	IXTC240N055T	55	132	4.0
	IXTC280N055T	55	145	3.6
	IXTC200N075T	75	110	5.5
	IXTC220N075T	75	115	5.0
	IXTC250N075T	75	128	4.4
	IXTC152N085T	85	90	7.0
	IXTC180N085T	85	110	6.1
	IXTC200N085T	85	110	5.5
	IXTC230N085T	85	120	5.3
	IXTC160N10T	100	83	7.5
	IXTC180N10T	100	90	7.0
	IXTC200N10T	100	101	6.3
	IXTC160N15T	150	95	9.6
	IXTC102N20T	200	60	22
	IXTC110N25T	250	60	24
Polar	IXFC110N10P	100	60	17
	IXFC96N15P	150	42	26
	IXFC74N20P	200	35	36
	IXFC52N30P	300	25	75
	IXFC16N50P	500	10	450
	IXFC26N50P	500	15	260
	IXTC26N50P	500	15	260
	IXFC36N50P	500	19	190
	IXFC14N60P	600	8	630
	IXFC22N60P	600	12	360
	IXFC30N60P	600	15	250
	IXFC10N80P	800	5	1200
	IXFC12N80P	800	7	900
	IXFC14N80P	800	8	750
	IXFC16N80P	800	9	600
	IXFC20N80P	800	10	570
CoolMOS™	IXKC15N60C5	600	15	165
➤	IXKC19N60C5	600	19	125
➤	IXKC20N60C	600	15	190
➤	IXKC23N60C5	600	23	100
	IXKC40N60C	600	28	95
	IXKC13N80C	800	13	290
	IXKC25N80C	800	25	150
Product	Type	V _{CES}	I _C	V _{CE(sat)} max
		V	A	V
IGBTs	IXGC 16N60B2	600	28	2.3
	IXGC 16N60B2D1	600	28	2.3
	IXGC 16N60C2	600	20	3.0
	IXGC 16N60C2D1	600	20	3.0

If your application requires electrically isolated TO-220 device, then it needs ISOPLUS220™ parts. We have replaced the normal copper lead frame with our proprietary lead frame to give it -

- Superior heat transfer junction to heatsink
- 2500 V isolation voltage
- Higher current and power control
- Less weight

Available products include

- MOSFETs
- IGBTs
- FREDs
- SCRs
- Rectifiers
- Schottky diodes



Product	Type	V _{RRM}	I _{F(T(AV))M}	V _F
		V	A	V
Dual Ultrafast Diodes				
	Phase leg			
NEW	DPG 30P300PJ	2x 300	30	0.98
NEW	DPG 10P400PJ	2x 400	10	1.02
	DSEE 15-12CC	2x 600	15	1.50
	DSEE 29-12CC	2x 600	30	1.75
	Common cathode			
	DSEC 16-06AC	600	2x 10	1.42
	DSEC 29-06AC	600	2x 15	1.34
	DSEC 59-06BC	600	2x 30	1.56
Schottky Diode <i>T_{VJ}</i> = 125°C				
	DSS 20-01AC	100	20	0.8
GaAs Schottky Diode <i>T_{VJ}</i> = 125°C				
	Phase leg			
	DGSS 10-06CC	2x 300	10	cont. fact.
	DGSS 20-06CC	2x 300	20	cont. fact.
Rectifier Diode <i>T_{VJ}</i> = 150°C				
	DSI 30-08AC	800	30	1.25
	DSI 30-12AC	1200	30	1.25
Series connected				
	DSP 8-12AC	2x 1200	11	1.25
Thyristor <i>T_{VJ}</i> = 125°C				
	CS 19-08ho1C	80 0	13	1.25
	CS 29-08io1C	800	23	1.20
	CS 19-12ho1C	1200	13	1.25
	CS 29-12io1C	1200	23	1.20


See alphanumeric index
for the page number of the particular product.

ISOPLUS247™, ISO264 and ISOPLUS264™

Isolating TO-247 power devices has never been easier than using our new ISOPLUS247™ products. They're internally isolated with our proprietary "integrated leadframe" using our DCB ceramic substrate as part of the package!

The result -

- Excellent thermal transfer (R_{thJH})
- High Isolation Voltage ($V_{ISOL} > 2500$ V)
- Increased Temperature & Power Cycling capability
- Reduced EMI/RFI emissions due to lower stray capacitance (junction to heatsink)
- Less weight



Type	V_{DSS} V	$I_{D(cont)}$ A	$R_{DS(on)}$ Ω	Type	V_{CES} V	I_C A	$V_{CE(sat)}$ V
MOSFETs in ISOPLUS247™				IGBT + FRED			
IXTR 200N10P	100	120	0.008	IXGR 40N60C2D1	600	56	2.70
IXFR 200N10P	100	120	0.008	IXGR 50N60C2D1	600	75	2.70
IXFR 180N15P	150	180	0.013	IXGR 60N60C2D1	600	75	2.70
IXFR 140N20P	200	90	0.022	IXGR 32N90B2D1	900	47	2.90
IXFR 102N30P	300	60	0.036	IXGR 50N90B2D1	900	40	2.90
IXFR 140N30P	300	82	0.024	IXA 17IF1200HJ	1200	27	2.10
IXFR 36N50P	500	19	0.17	IXA 37IF1200HJ	1200	57	2.10
IXFR 44N50P	500	24	0.15	IXA 55I1200HJ	1200	84	2.10
IXFR 64N50P	500	35	0.1	IXSR 35N120BD1	1200	52	3.60
IXFR 80N50P	500	45	0.07	IXGR 32N170H1	1700	38	3.50
IXFR 40N50Q2	500	29	0.14	IXGR 32N170AH1	1700	26	5.20
IXFR 66N50Q2	500	50	0.074	Type			V_{RRM} V
IXFR 30N60P	600	15	0.27				I_F A
IXFR 36N60P	600	20	0.2				V_F V
IXFR 48N60P	600	32	0.15	UltraFast Rectifiers			
IXFR 64N60P	600	36	0.1	$T_{VJ} = 150^\circ\text{C}$			
IXKR 40N60C	600	38	0.07	DSEK 60-02AR	200	2x 30	0.85
IXFR 20N80P	800	10	0.5	DPG 60C300HJ	300	2x 30	0.96
IXFR 24N80P	800	14	0.4	DSS 17-06CR*	600	15	2.71
IXFR 32N80P	800	20	0.27	DSEP 30-06BR	600	30	1.56
IXFR 44N80P	800	26	0.19	DPH 30IS600HI*	600	30	1.89
IXFR 38N80Q2	800	28	0.3	DSEI 30-10AR	1000	30	1.88
IXKR 25N80C	800	25	0.15	DSEP 15-12CR*	1200	15	2.67
IXFR 24N90Q	900	24	0.4	DSEP 30-12CR*	1200	30	3.10
IXFR 4N100Q	1000	3.5	3	DSEP 30-12AR	1200	30	1.79
IXFR 14N100Q2	1000	9.1	1	DSEP 60-12AR	1200	60	1.74
IXFR 21N100Q	1000	19	0.5	Schottky			
IXFR 24N100	1000	28	0.39	$T_{VJ} = 125^\circ\text{C}$			
MOSFETs in ISOPLUS264™				DSSS 35-008AR	2x 80	35	0.68
IXTL 2x240N055T	55	240	4.4	DSSS 30-01AR	2x 100	30	0.63
IXTL 2x220N075T	75	220	5.5	DSSK 80-006BR	60	2x 40	0.51
IXTL 2x200N085T	85	200	6.0	DSSK 70-008AR	80	2x 35	0.64
IXTL 2x180N10T	100	180	7.4	DSSK 60-015AR	150	2x 30	0.69
IXFL 100N50P	500	70	0.05	DSSK 60-02AR	200	2x 30	0.70
IXFL 80N50Q2	500	80	0.066	Rectifiers			
IXFL 82N60P	600	54	0.08	$T_{VJ} = 150^\circ\text{C}$			
IXKL 60N80P	800	42	0.14	DSP 25-16AR	2x 1600	25	1.18
IXFL 38N100Q2	800	22	0.28	DSI 45-16AR	1600	45	1.30
IXKL 34N100	800	34	0.28	DSP 45-16AR	2x 1600	45	1.30
MOSFETs in ISO264™				DSIK 45-16AR	1600	2x 45	1.30
IXKG 25N80C	800	25	0.15	Type			
				V_{RRM} V			
				I_T A			
				V_T V			
				Thyristor			
				$T_{VJ} = 125^\circ\text{C}$			
				CS 45-16io1R	1600	80	1.73

See alphanumeric index for the page number of the particular part



* series connected diodes

ISOPLUS i4-PAC™

3, 4 and 5 leaded packages for various circuit topologies

DCB base plate - 2500 V electrical isolation


- low thermal resistance
- increased power & temperature cycling
- saves space
- replaces multiple discretes
- reduces parasitic inductance and capacitance
- reduces EMI
- less weight

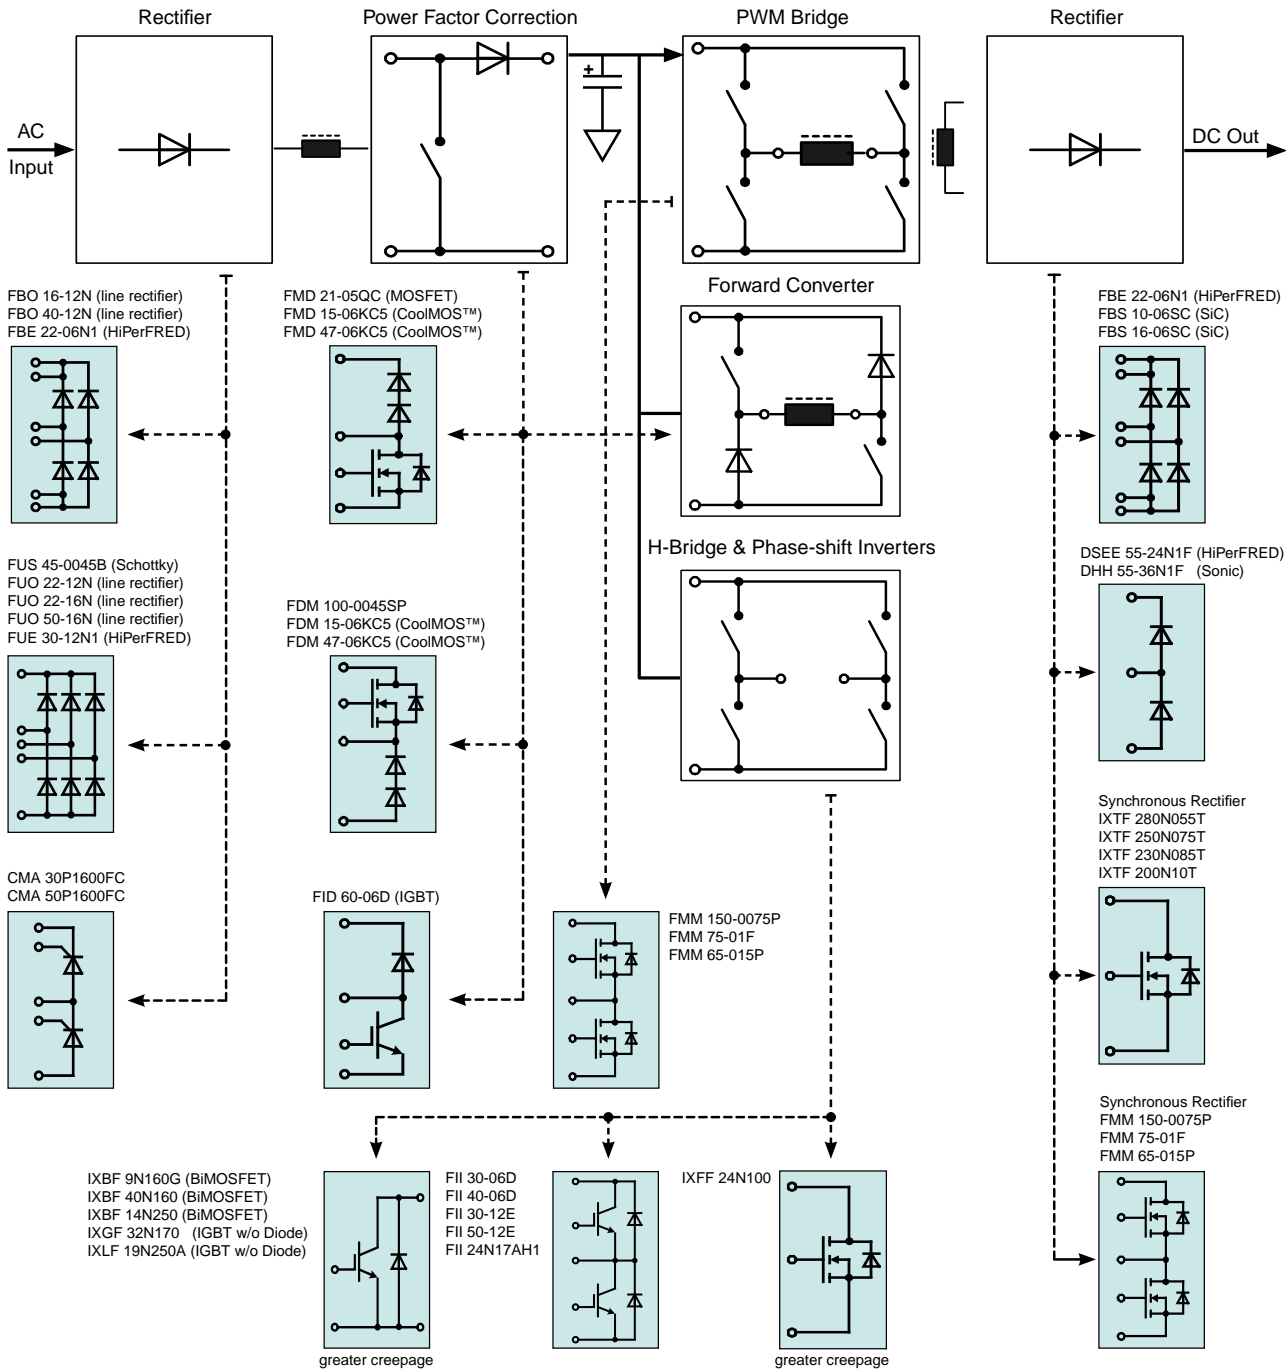

See application note „Combining the features of modules and discretes in a new Power Semiconductor packages“ for general description of the packaging technologies.

See alphanumeric index for the page number of the particular product.

ISOPLUS i4-PAC™



Type with MOSFET	Configuration	Circuit diagram / Technology	V _{DSS} V	I _{D25} T _C = 25°C A	I _{D90} T _C = 90°C A	R _{DS(on)} typ. T _C = 25°C mΩ	Fig. No.	Package style Outline drawings on pages O-30...O-52
> New FMM 150-0075P FMM 75-01F FMM 65-015P	phase leg	B Trench MOSFET B HiPerFET B Trench MOSFET	2x 75 2x 100 2x 150	150 75 65	120 50 50	4.7 20.0 13.0	X024a	
> IXTF 280N055T > IXTF 250N075T > IXTF 230N085T > IXTF 200N10T	single	A Trench MOSFET A Trench MOSFET A Trench MOSFET A Trench MOSFET	55 75 85 100	160 140 130 120		max 4.0 max 4.4 max 5.3 max 6.3	X024d	
IXKF 40N60SCD1		H CoolMOS™ & serial Schottky & HiPerFRED as free wheel. Diode	600	38	25	60.0	X024c	
IXFF 24N100		A HiPerFET	1000	22	15	320.0	X024c	
FMD 21-05QC	boost	E HiPerFET & HiPerDynFRED	500	21	15	180.0	X024a	
> FMD 15-06KC5		E CoolMOS™ & HiPerDynFRED	600	under development				
FMD 40-06KC		E CoolMOS™ & HiPerDynFRED	600	contact factory				
> FMD 47-06KC5		E CoolMOS™ & HiPerDynFRED	600	under development				
FDM 100-0045SP	buck	F Trench MOSFET & Schottky	45	100	80	5.7	X024a	
> FDM 15-06KC5		G CoolMOS™ & HiPerDynFRED	600	under development				
> FDM 47-06KC5		G CoolMOS™ & HiPerDynFRED	600	under development				

CoolMOS™ is a trademark of Infineon Technologies

Type with IGBT	Configuration	Circuit diagram / Technology	V _{CES} V	I _{C25} T _C = 25°C A	I _{C90} T _C = 90°C A	V _{CE(sat)} typ. T _C = 25°C V	Fig. No.
> New FII 30-06D FII 40-06D FII 30-12E FII 50-12E	phase leg	K NPT IGBT K NPT IGBT K NPT3 IGBT K NPT3 IGBT	2x 600 2x 600 2x 1200 2x 1200	30 40 50 50	18 25 32 32	1.9 1.8 2.4 2.0	X024a
> FII 24N17AH1		K High voltage IGBT	2x 1700	18	11	4.5	X024a
FID 60-06D	boost	M NPT IGBT & HiPerFRED	600	65	40	1.6	X024a
IXBF 9N160G	single	J BiMOSFET	1600	7	4	4.9	X024c
IXBF 40N160		J BiMOSFET	1600	28	16	6.2	
> IXGF 32N170		I High voltage IGBT	1700	26	12	3.5	
> IXBF 14N250		J BiMOSFET	2500	under development			
IXLF 19N250A		I High voltage IGBT	2500	32	19	3.2	

Type AC Switch	Circuit diagram / Technology	Voltage V	Current T _C = 25°C A	Fig. No.
> New				
FMK 75-01F	C MOSFET Common Source	100	2x 50	X024a
FIO 50-12BD	N 1-phase Bridge and IGBT	1200	32	

Type Bipolar	Configuration	Circuit diagram / Diode type	Voltage V	I _{D(AV)M} T _C = 90°C A	Fig. No.	
> New						
FUS 45-0045B	3-phase bridge	T Schottky	45	45	X024a	
FBS 10-06SC	1-phase bridge	Q Si-Carbide	600	contact factory		
FBS 16-06SC	1-phase bridge	Q Si-Carbide	600	contact factory		
FBE 22-06N1	1-phase bridge	R HiperFRED	600	20		
FUE 30-12N1	3-phase bridge	S HiperFRED	1200	30		
FBO 16-12N	1-phase bridge	R Rectifier	1200	22		
FBO 40-12N	1-phase bridge	R Rectifier	1200	40		
FUO 22-12N	3-phase bridge	S Rectifier	1200	27		
FUO 22-16N	3-phase bridge	S Rectifier	1600	27		
FUO 50-16N	3-phase bridge	S Rectifier	1600	50		
CMA 30P1600FC	phase leg	U Thyristor	2x 1600	30		
CMA 50P1600FC	phase leg	U Thyristor	2x 1600	50		
CS 20-22moF1	single part, high voltage	V Thyristor	2200	18		X024c
CS 20-25mo1F	single part, high voltage	V Thyristor	2500	18		
DSEE 55-24N1F	phase leg	P HiperFRED	2x 1200	55		X024b
DHH 55-36N1F	phase leg	P Sonic-FRD	2x 1800	50		

High Current low $R_{DS(on)}$ Trench MOSFET Six-Pack

New DCB based surface mount package for automotive applications

In the automotive industry the usage of electronics is growing each year, especially with MOSFET technology. Steering aids, valve control, active suspension and many other functions in a car are driven by MOSFETs. The trends in these applications are the usage of Trench MOSFET and miniaturization of the electronic components, which results in low inductance designs with low EMC disturbance, easy manufacturability and the most important one, reliability. IXYS has introduced the new GWM product series exactly for these applications fulfilling these market demands.

The standard GWM ISOPLUS-DIL™ (Dual-In-Line) package includes a Trench MOSFET Six-Pack, also customized configurations can be integrated.

The ISOPLUS-DIL™ package is a new member of the IXYS ISOPLUS family. The IXYS ISOPLUS family is well known for its advantages: the expansion coefficient of the DCB is close to that of silicon which results in high temperature cycle reliability, the heat transfer through the ceramic is optimal, if the GWM is compared with standard solutions the current loops are reduced and also the parasitic capacity is reduced. Both results in better EMI behavior of the application. The advantages of the Direct Copper Bonded substrate results in a very reliable, high power density component. The GWM, targeted for the automotive segment, will be qualified according to the AEC-Q101.

The GWM ISOPLUS-DIL™ Six-Pack is a very compact and reliable solution for automotive applications, which contains the latest technology of Trench MOSFET's. With the electrical and mechanical properties of the GWM ISOPLUS-DIL™, design-in and usability is improved compared to solutions currently used.

In GMM 3x-series the Six-Pack is split up in 3 electrically isolated and identical phase legs. The advantage is a lower stray inductance with a superior performance at very high frequencies used for SMPS topologies.

IPC 75PX330GD makes use of the same internal construction as GMM 3x-series but it is built with very fast switching 300 V IGBTs.

Features

- Low $R_{DS(on)}$
- Optimized intrinsic reverse diode
- High level of integration
- Multi chip packaging
- High power density
- High current power terminals (300 A, RMS)
- Auxiliary terminals for MOSFET control
- Terminals for soldering (wave or re-flow) or welding connections
- Isolated DCB ceramic base plate with optimized heat transfer
- 1000 V electrical isolation
- Logic level version feasible

Applications


- Automobile electric power steering
- Active suspension
- Water pump
- Automobile starter generator
- Propulsion drives
- Fork lift drives
- Battery operated equipment

Benefits

- Highest reliability
- Easy assembly
- Optimized EMI behavior
- Extremely low power loss
- Less weight


ISOPLUS-DIL™

Customized configurations possible

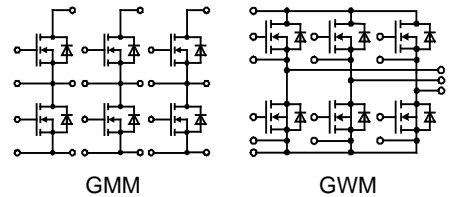

Six-Pack Trench MOSFET


Type	Trench Gate Level	V _{DS} max.	I _{D(cont)} T _C = 25°C	I _{D90} T _C = 90°C	R _{DS(on)} typ. T _C = 25°C	Q _{G(on)} typ.	t _{rr} typ.	Fig. No.	
➤ New		V	A	A	mΩ	nC	ns		
GWM 220-004P3-SL	standard	40	190	145	2.0	490	70	X026a	
GWM 220-004P3-SMD	standard		190	145	2.0	490	70	X026c	
➤ GWM 220-004X1-SL	standard		under development						X026a
➤ GWM 220-004X1-SMD	standard		under development						X026c
➤ GWM 160-0055X1-SL	standard	55	160	120	2.7	105	40	X026a	
➤ GWM 160-0055X1-SMD	standard		160	120	2.7	105	40	X026c	
➤ GWM 120-0075X1-SL	standard	75	under development						X026a
➤ GWM 120-0075X1-SMD	standard		under development						X026c
➤ GWM 100-0085X1-SMD	standard	85	contact factory						X026c
➤ GWM 100-01X1-SL	standard	100	90	68	7.5	90	55	X026a	
➤ GWM 100-01X1-SMD	standard		90	68	7.5	90	55	X026c	
➤ GWM xxx-xxx-BL	for types with Bent Leads contact factory							X026b	
➤ GMM 3x160-0055X2-SMD	standard	55	under development						X026d
➤ GMM 3x120-0075X2-SMD	standard	75	under development						X026d




Six-Pack IGBT

Type	V _{CES} max.	I _{C25} T _C = 25°C	V _{CES} typ. T _J = 25°C	@ I _C	E _(off)	I _{F25} T _C = 25°C	Fig. No.
➤ New	V	A	V	A	mJ	nC	
➤ IPC 75PX330GD	330	75	1.85	100	under development		X026d


Outline drawings on pages O-30...O-52

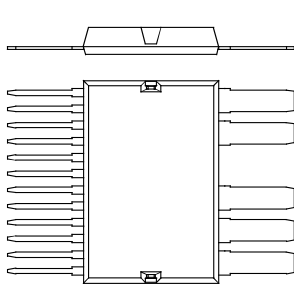


GWM xxx - SL
STRAIGHT LEADS

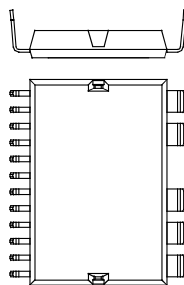


GWM xxx - BL
BENT LEADS

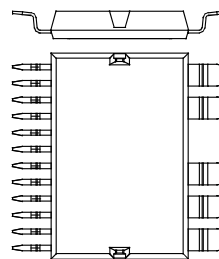

GWM xxx - SMD
SURFACE MOUNT DEVICE

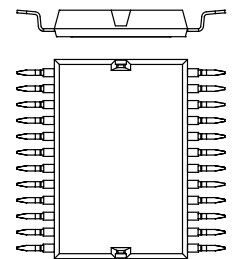

GMM 3x xxx - SMD
IPC 75PX330GD
SURFACE MOUNT DEVICE




X026a ISOPLUS-DIL™
Weight = 25 g



X026b ISOPLUS-DIL™
Weight = 25 g



X026c ISOPLUS-DIL™
Weight = 25 g



X026d ISOPLUS-DIL™
Weight = 25 g

Insulated Gate Bipolar Transistors (IGBT)

Xtreme light Punch Through (XPT) IGBTs

IGBTs are the latest generation IGBTs, which are ideal for extremely critical applications, requiring lowest conduction and switching losses and 10 μ s short-circuit withstand capability and a positive temp coefficient of $V_{CE(sat)}$.

Either discrete or co-packaged with ultrafast soft recovery Sonic diodes, IXYS XPT IGBTs have lower saturation voltage $V_{CE(sat)}$ and low total switching energy ($E_{on} + E_{off}$). These result in reduced power dissipation and higher power density in a wide range of motion control applications, such as air conditioners, refrigerator compressors, home appliances, AC drives, and circulating pump speed controllers.

Non-Punch Through (NPT) IGBTs Ideal for paralleling, also sometimes preferred for motor drive applications.

,D' Class – IXDxxxx part numbers 600/1200 V rated NPT IGBTs ,E' Class – IXExxxx part numbers 1200 V rated NPT IGBTs.

Soft-Punch Through (NPT3) IGBTs are the Third Generation NPT IGBTs They feature extremely low E_{on} and E_{off} and very fast turn-off times with negligible tail current.

Trench IGBTs in the 600 V and 1200 V class for slow to medium-speed switching applications.

All these IGBTs feature 10 μ s short-circuit-withstand capability and a positive temperature coefficient of $V_{CE(sat)}$. They feature extremely low E_{on} and E_{off} and very fast turn-off times with negligible tail current.

G-series Legacy IGBTs

The "G" series IGBTs use HDMOS™, a planar, high density process which incorporates new techniques to improve operating characteristics and stability at high voltages. This technology combines with a poly silicon gate cell structure, which gives this family of IGBTs a peak current capability of two times its 90°C current rating.

G-series, A B & C Class IGBTs

G-Series IGBTs are available with and without a body diode and very high voltage IGBTs are included under this family. Both NPT and PT IGBTs are designated as G-series and classified as being "A" for low speed, "B" for medium-speed and "C" for high speed or very high speed applications. In the same-series, today, IXYS is trying to push "A2", "B2" and "C2" class of IGBTs, as well as "A3", "B3", and "C3" class with the development of the latest Polar IGBT platform.

G-series, A2 B2 & C2 Class IGBTs

IXYS' new A2, B2, C2-Class IGBTs offer greater system design flexibility and the opportunity to reach the best compromise between conflicting requirements of switching frequency, efficiency and cost. This family of IGBTs exhibit excellent choices of saturation voltage versus speed, resulting in much improved efficiencies over traditional NPT IGBTs.

These IGBTs use IXYS' next generation IGBT Technology, tailored to provide significant improvements in efficiency for off-line power conversion applications requiring 600V devices with switching frequency ranges of DS to 10kHz, 1kHz to 100kHz and 25kHz to 200kHz for each of the IGBT Classes respectively. The A2 and B2-Class IGBTs have up to 25% lower saturation voltage and lower turn-off versus prior generation of IGBTs. These performance improvements are further enhanced by a 25% reduction in thermal resistance, additionally providing significant increases in power handling and reliability.

G-series, A3 B3 & C3 Class (GenX3™) IGBTs

Manufactured using IXYS' robust HDMOS IGBT process, these IGBTs are suitable for high power applications requiring switching frequencies upwards of 150kHz. These devices utilize IXYS proven Punch-Through (PT) technology providing higher surge current capabilities and a saturation voltage with a negative temperature coefficient, reducing conduction losses with increasing temperature.

S-series Legacy (SCSOA) IGBTs

Legacy S-series IGBTs combine the advantages of MOS gated drive simplicity with the high current handling capability of bipolar transistors. These "S" series devices are ultra-rugged IGBTs that can survive overload and accidental short circuit currents for a guaranteed period of time. This allows the design of gating circuits that would detect these fault currents and turn-off the IGBT before device degradation.

The basic cell design characteristics are very similar to power MOSFETs. The drive circuitry required to control the gate is basically the same as a power MOSFETs. During turn-on of the IGBT, minority carrier injection into the N-drift region modulates the body on-resistance to a level 10 to 20 times lower than an equivalently sized MOSFET, resulting in a proportionate 5 to 10 times increase in current handling capability.

S-series A B & C Class IGBTs

The "S" series IGBTs such as IXSA, IXSH, IXSN, etc. are Short-Circuit Safe Operating Area (SCSOA) rated devices. They are members of an advanced series of N-channel power MOS products, which use HDMOS™, a proprietary vertical DMOS technology developed by IXYS. HDMOS™ is a planar, high density process, which incorporates new techniques to improve operating characteristics and stability at high voltage. They can survive overload and accidental short circuit currents for a guaranteed period of time. This allows the design of gating circuits that would detect these fault currents and turn-off the IGBT before device degradation.

S-series, B2 Class IGBTs

This family of Short Circuit Rated IGBTs feature a 25% reduction in lower saturation voltage and lower turn-off energy. Their improved performance enables better efficiency in a broad range of motor control applications. This family utilizes IXYS' next generation IGBT technology to provide significant improvements in efficiency for switching frequencies up to 30kHz, while also providing a robust short circuit capability. Performance is further enhanced by a 25% reduction in thermal resistance, providing significant increases in power handling and reliability.

Insulated Gate Bipolar Transistors (IGBT)

These 600V Short Circuit Rated B2-Class Medium Speed IGBTs are targeted at the expanding use of variable speed drive technology in the appliance and automation industry. Typical industrial products are motor drives for robotics and conveyer belts. Common products in the appliance field include washing machines, refrigerators, vacuum cleaners and air conditioners. These high efficient IGBTs are also optimal for inverters for electrical scooters and light electrical vehicles applications.

L-series IGBTs

These IGBTs are high voltage devices designed and optimized for capacitor discharge circuits. With voltage ratings from 2500V to 4500V, these devices can be used as substitutes for high voltage MOSFETs offering significantly lower voltage drops and comparable switching speeds. They can also be used as substitutes for high voltage thyristors, electro-mechanical triggers, and discharge relays. Suitable applications include switch mode power supplies, DC-DC converters, resonant converters, laser/x-ray generators, and discharge circuits.

1600 V & 1700 V Low Sat IGBTs

These rugged High Voltage NPT devices are designed for capacitor discharge applications, featuring a low saturation voltage, high power density, & high peak current capability.

These High Voltage NPT IGBTs enable the elimination of more costly, lower performance solutions such as thyristors or series connected MOSFETs or IGBTs typically used at voltages above 1200 V. Offered as co-packs, they provide a more complete solution for power conversion applications to improved efficiency and reliability due to reduced voltage drop, lower switching losses and the need for fewer components.

1600 V & 1700 V Low Sat IGBTs w/diode

These are rugged High Voltage NPT devices featuring a low saturation voltage. They are co-packed with SONIC-FRD Fast Recovery Diodes providing superior soft recovery characteristics, minimizing switching noise and eliminating the need for costly snubber circuits. In addition, these diodes exhibit low temperature dependence, rugged performance, very soft recovery with very low loss/reverse current.

1600 V & 1700 V High Speed IGBTs

This family of 1600V/1700V IGBTs are rugged NPT devices targeted for high voltage applications, requiring 10 µs short circuit withstand capability. They are particularly suitable for high voltage switching applications. IXYS offers its fast switching "A" version 1700V NPT IGBTs in co-pack and phaseleg configurations for PWM applications with switching frequencies upwards of 50kHz. Common applications include AC motor speed control, DC servo, robot drives, DC choppers, UPS, capacitor discharge circuits, pulser circuits, switch-mode and resonant-mode power supplies.

1600 V & 1700 V High Speed IGBTs w/diode

These IGBTs are co-packed versions of the 1600 V & 1700 V high speed IGBTs. They are rugged NPT devices offering high current capabilities with simple MOS Gate-Control. They are co-packed with SONIC-FRD fast recovery diodes that feature superior soft recovery characteristics, minimizing switching noise and eliminating the need for costly snubber circuits.

Very High Voltage (2500 V - 4000 V) IGBTs

IXYS' unique offering of discrete 2500V and 4000V VHV IGBTs provide a myriad of benefits to system designers in high voltage applications. The very high voltage and current ratings of these parts coupled with simplified MOS Gate-Control greatly reduce the complexity of high voltage switching. These IGBTs vastly simplify the circuitry needed for switching in high voltage designs.

They can enable the use of a single device in systems whose circuits use multiple cascaded lower voltage switches. This device consolidation reduces the numbers of power devices, while also improving cost and efficiency by eliminating complex drive and voltage balancing components. In those applications using high voltage thyristors, designers sacrifice the ability to easily turn-off the switch without greatly increasing circuit complexity. VHV IGBTs have the ability to turn switch current on and off, enabling the designer to implement signal modulation schemes for improved efficiency and wave shaping, as well as enabling load disconnect for improved systems safety.


B-series (BiMOSFET) IGBTs


IXYS BiMOSFETs are devices, which have combined strengths of MOSFETs and IGBTs. Non-epitaxial construction and new fabrication processes were used in making BiMOSFETs a great success. BiMOSFETs have found many applications, where high voltage (above 1200V) MOSFETs are desired but unavailable. BiMOSFETs have MOSFET-like characteristics, yet have very low switching and conduction losses as compared to an equally rated MOSFET.



R-series (Reverse Blocking) IGBTs

R-series IGBTs are devices with an inherent capability to block voltage in both the forward direction and reverse direction. The IXRH40N120 can control 40A continuous and can block 1200 V and comes in the standard TO-247 package. The IXRP15N20 can control 15 A and can block 1200 V. The added feature of reverse blocking does not compromise the performance of the RIGBT as compared to state of the art standard IGBTs. The RIGBT features a low voltage drop of 2.2 V typical in the on state and can switch off.




IGBT Modules – CBI Configuration




CBI  X110 MiniPack2 Outline drawings on pages O-30...O-52 See data sheet for pin arrangement												
Type	Rectifier 3~			Inverter 3~					Brake chopper			
	V_{RRM}	I_{FAVM} $T_H = 80^\circ\text{C}$	R_{thJC} typ.	V_{CES}	I_C $T_C = 25^\circ\text{C}$	I_C $T_C = 80^\circ\text{C}$	$V_{CE(sat)}$ typ.	R_{thJC} typ.	V_{CES}	I_C $T_C = 90^\circ\text{C}$	R_{thJC} typ.	
➤ New	V	A	K/W	V	A	A	V	K/W	V	A	K/W	
600 V NPT IGBT												
➤ MIAA10WB600TMH	1600	62	2.1	600	18	13	2.1	1.8	600	13	1.8	
➤ MIAA10WF600TMH	1600	62	2.1	600	18	13	2.1	1.8	no brake chopper included			
➤ MIAA15WB600TMH	1600	62	2.1	600	23	16	2.1	1.6	600	16	1.6	
➤ MIAA20WB600TMH	1600	62	2.1	600	29	20	2.1	1.3	600	20	1.3	
600 V Trench IGBT												
➤ MITA30WB600TMH	1600	90	1.4	600	40	27	1.5	1.4	600	27	1.4	
1200 V Trench IGBT												
➤ MITA10WB1200TMH	1600	62	2.1	1200	17	12	1.9	1.9	1200	12	1.9	
➤ MITA15WB1200TMH	1600	62	2.1	1200	30	21	1.8	1.1	1200	21	1.1	
➤ MITB10WB1200TMH	1600	62	2.1	1200	17	12	1.9	1.9	1200	12	1.9	
➤ MITB15WB1200TMH	1600	62	2.1	1200	29	20	1.7	1.2	1200	20	1.2	
1200 V XPT IGBT												
➤ MIXA10WB1200TMH	1600	62	2.1	1200	tbd	tbd	1.8	tbd	1200	tbd	tbd	
➤ MIXA20WB1200TMH	1600	62	2.1	1200	tbd	tbd	1.8	tbd	1200	tbd	tbd	

CBI  X110 MiniPack2 Outline drawings on pages O-30...O-52 See data sheet for pin arrangement												
Type	Rectifier			Inverter					Brake chopper			
	V_{RRM}	I_{FAVM} $T_H = 80^\circ\text{C}$	R_{thJC} typ.	V_{CES}	I_C $T_C = 25^\circ\text{C}$	I_C $T_C = 80^\circ\text{C}$	$V_{CE(sat)}$ typ.	R_{thJC} typ.	V_{CES}	I_C $T_C = 90^\circ\text{C}$	R_{thJC} typ.	
➤ New	V	A	K/W	V	A	A	V	K/W	V	A	K/W	
600 V NPT IGBT												
➤ MIAA10WE600TMH	1600	23	2.1	600	18	13	2.1	1.8	600	13	1.8	
➤ MIAA10WD600TMH	1600	23	2.1	600	18	13	2.1	1.8	no brake chopper included			
➤ MIAA15WE600TMH	1600	23	2.1	600	23	16	2.1	1.6	600	16	1.6	
➤ MIAA15WD600TMH	1600	23	2.1	600	23	16	2.1	1.6	no brake chopper included			
➤ MIAA20WE600TMH	1600	23	2.1	600	29	20	2.1	1.3	600	20	1.3	
➤ MIAA20WD600TMH	1600	23	2.1	600	29	20	2.1	1.3	no brake chopper included			



Mechanical mounting part  IXKU 5-505  IXRB 5-506	
➤ IXKU 5-505	Screw clip
➤ IXRB 5-506	Click clip

IGBT Modules – CBI Configuration

CBI 1 IGBT Modules				X111 E1-Pack Package style Outline drawings on pages O-30...O-52 See data sheet for pin arrangement							
Type	Rectifier 3~			Inverter 3~				Brake chopper			
	V_{RRM}	I_{DAVM} $T_H = 80^\circ\text{C}$	R_{thJC} typ.	V_{CES}	I_C $T_C = 25^\circ\text{C}$	I_C $T_C = 80^\circ\text{C}$	$V_{CE(sat)}$ typ.	R_{thJC} typ.	V_{CES}	I_C $T_C = 80^\circ\text{C}$	R_{thJC} typ.
> New	V	A	K/W	V	A	A	V	K/W	V	A	K/W
600 V NPT IGBT											
MUBW 10-06A6K	1600	61	2.10	600	12	8	2.5	2.80	600	8	2.80
MUBW 15-06A6K		65	1.90		19	14	2.4	1.70		8	2.80
MUBW 20-06A6K		65	1.90		25	17	2.0	1.50		8	2.80
MUBW 25-06A6K		65	1.90		31	21	2.1	1.25		14	1.70
MUBW 35-06A6K		89	1.40		42	29	2.3	0.95		17	1.50
1200 V NPT IGBT											
MUBW 15-12A6K	1600	89	1.40	1200	19	13	3.0	1.35	1200	13	1.35
MUBW 30-12A6K		89	1.40		30	21	3.0	0.95		13	1.35
1200 V NPT³ IGBT											
MUBW 30-12E6K	1600	89	1.40	1200	30	21	3.1	0.95	1200	13	1.35
1200 V Trench IGBT											
> MUBW 45-12T6K	1600	104	1.10	1200	43	31	2.5	0.80	1200	13	1.35

CBI 2 IGBT Modules				X112 E2-Pack Package style Outline drawings on pages O-30...O-52 See data sheet for pin arrangement							
Type	Rectifier 3~			Inverter 3~				Brake chopper			
	V_{RRM}	I_{DAVM} $T_H = 80^\circ\text{C}$	R_{thJC} typ.	V_{CES}	I_C $T_C = 25^\circ\text{C}$	I_C $T_C = 80^\circ\text{C}$	$V_{CE(sat)}$ typ.	R_{thJC} typ.	V_{CES}	I_C $T_C = 80^\circ\text{C}$	R_{thJC} typ.
> New	V	A	K/W	V	A	A	V	K/W	V	A	K/W
600 V NPT IGBT											
MUBW 10-06A7	1600	18	1.50	600	20	15	1.9	1.50	600	15	1.50
MUBW 15-06A7		18	1.50		25	18	1.9	1.30		15	1.50
MUBW 20-06A7		24	1.30		35	25	1.9	1.00		18	1.40
MUBW 30-06A7		24	1.30		50	35	1.9	0.70		18	1.30
MUBW 50-06A7		29	1.10		75	50	1.9	0.50		25	1.00
1200 V NPT IGBT											
MUBW 10-12A7	1600	18	1.50	1200	20	15	2.3	1.20	1200	15	1.20
MUBW 15-12A7		24	1.30		35	25	2.0	0.70		15	1.20
MUBW 25-12A7		24	1.30		50	35	2.2	0.55		15	1.20
MUBW 35-12A7		29	1.10		50	35	2.5	0.55		25	0.70
1200 V NPT³ IGBT											
MUBW 35-12E7	1600	29	1.10	1200	52	36	2.2	0.55	1200	25	0.70
1200 V Trench IGBT											
MUBW 15-12T7	1600	24	1.30	1200	25	15	1.7	1.20	1200	15	1.20
MUBW 25-12T7		24	1.30		40	25	1.7	0.80		15	1.20
MUBW 40-12T7		29	1.10		62	44	2.0	0.60		25	0.70
1200 V XPT IGBT											
> MIXA20WB1200TED	1600	24	1.30	1200	25	19	1.8	1.26	1200	19	1.26
> MIXA40WB1200TED		29	1.10		55	40	1.8	0.64		40	0.64


IGBT Modules – CBI Configuration

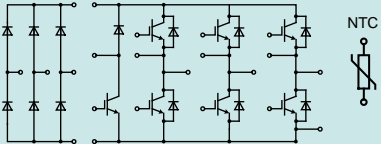CBI 3 IGBT Modules				X113 E3-Pack Package style Outline drawings on pages O-30...O-52 See data sheet for pin arrangement							
Type	Rectifier 3~			Inverter 3~				Brake chopper			
➤ New	V_{RRM} V	I_{DAVM} $T_H = 80^\circ\text{C}$ A	R_{thJC} typ. K/W	V_{CES} V	I_C $T_C = 25^\circ\text{C}$ A	I_C $T_C = 80^\circ\text{C}$ A	$V_{CE(sat)}$ typ. V	R_{thJC} typ. K/W	V_{CES} V	I_C $T_C = 80^\circ\text{C}$ A	R_{thJC} typ. K/W
600 V NPT IGBT											
MUBW 50-06A8	1600	40	1.10	600	75	50	1.9	0.50	600	25	1.00
MUBW 75-06A8		46	0.94		100	65	2.0	0.39		35	0.75
MUBW 100-06A8		60	0.73		125	85	1.9	0.30		50	0.55
1200 V NPT IGBT											
MUBW 35-12A8	1600	27	1.30	1200	50	35	2.5	0.55	1200	25	0.70
MUBW 50-12A8		46	0.94		85	60	2.2	0.35		35	0.55
1200 V NPT³ IGBT											
MUBW 50-12E8	1600	50	0.94	1200	90	62	1.9	0.35	1200	35	0.55
1200 V Trench IGBT											
MUBW 50-12T8	1600	50	0.94	1200	75	50	1.7	0.45	1200	35	0.55
MUBW 75-12T8		50	0.94		105	75	1.7	0.35		35	0.55
1200 V XPT IGBT											
➤ MIXA60WB1200TEH	1600	50	0.94	1200	85	59	1.8	0.43	1200	35	0.60
1700 V Trench IGBT											
➤ MUBW 50-17T8	2200	120	1.10	1700	74	53	2.0	0.43	1700	34	0.62
➤ MUBW 75-17T8		140	0.95		113	80	2.0	0.48		34	0.62

Gate Driver Board GDBD 4410

drives 7 Gates of a Converter – Break – Inverter IGBT Power Module for Industrial Applications


GDBD 4410 simplifies driving CBI2 and CBI3 module types. Pin locations of the driver board match that of the CBI modules. Thus it can be mounted very close to the gate control pins of the module, providing the shortest possible traces from driver to the gate and an easy routing on the main inverter board. GDBD4410 is a fast and easy to use solution and ideal for testing and small inverter series.

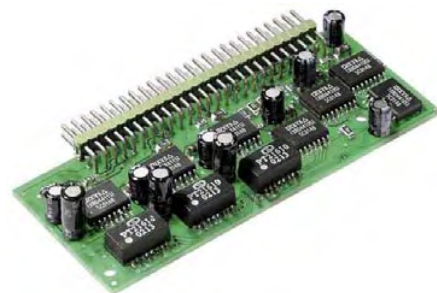


Main features are:



- Drives CBI modules up to 100A/600V and 50A/1200V
- Driver for brake IGBT included
- Design is based on IXBD4410/11 chipset
- High output gate current up to ± 2 A peak per gate
- Integrated charge pump for negative gate drive to speed up IGBT turn off and the suppress spurious gate noise triggering
- Noise immune pulse transformer for high dV/dt applications (>50 kV/ μ s)
- VCEsat sensing for short circuit protection
- Failure status signal
- Ground referenced and TTL/CMOS compatible interface for control signals
- +15V unipolar power supply required
- Operating frequency up to 25 kHz



IGBT Modules – Six-Pack configuration

Six-Pack IGBT Modules		X111 E1-Pack Package style Outline drawings on pages O-30...O-52 See data sheet for pin arrangement								
Type	V_{CES}	I_{C25} IGBT $T_C = 25^\circ\text{C}$	I_{C80} IGBT $T_C = 80^\circ\text{C}$	$V_{CE(sat)}$ typ IGBT $T_J = 25^\circ\text{C}$	E_{off} IGBT $T_J = 125^\circ\text{C}$	R_{thJC} IGBT	I_{F25} diode $T_C = 25^\circ\text{C}$	I_{F80} diode $T_C = 80^\circ\text{C}$	NTC	
> New	V	A	A	V	mJ	K/W	A	A		
600 V PT IGBT										
MWI 60-06G6K	600	60	41	2.3	0.5	0.7	48	33	•	
1200 V NPT IGBT										
MWI 15-12A6K	1200	19	13	3.0	1.1	1.37	24	16	•	
1200 V NPT³ IGBT										
MWI 30-12E6K	1200	29	21	2.5	1.8	0.95	24	16	•	
MWI 50-12E6K		51	36	2.4	2.6	0.60	49	32	•	
1200 V Trench IGBT										
MWI 45-12T6K	1200	43	31	1.9	3.4	0.80	49	32	•	
MWI 60-12T6K		58	41	1.9	4.8	0.62	49	32	•	
MWI 80-12T6K		80	56	2.0	6.5	0.46	80	51	•	



Six-Pack IGBT Modules		X112 E2-Pack Package style Outline drawings on pages O-30...O-52 See data sheet for pin arrangement								
Type	V_{CES}	I_{C25} IGBT $T_C = 25^\circ\text{C}$	I_{C80} IGBT $T_C = 80^\circ\text{C}$	$V_{CE(sat)}$ typ IGBT $T_J = 25^\circ\text{C}$	E_{off} IGBT $T_J = 125^\circ\text{C}$	R_{thJC} IGBT	I_{F25} diode $T_C = 25^\circ\text{C}$	I_{F80} diode $T_C = 80^\circ\text{C}$	NTC	
> New	V	A	A	V	mJ	K/W	A	A		
600 V NPT IGBT										
MWI 30-06A7	600	45	30	1.9	1.0	0.88	36	24		
MWI 30-06A7T		45	30	1.9	1.0	0.88	36	24	•	
MWI 50-06A7		75	50	1.9	1.7	0.55	72	45		
MWI 50-06A7T		75	50	1.9	1.7	0.55	72	45	•	
MWI 75-06A7		90	60	2.1	2.5	0.44	140	85		
MWI 75-06A7T		90	60	2.1	2.5	0.44	140	85	•	
1200 V NPT IGBT										
MWI 15-12A7	1200	30	20	1.0	1.8	0.88	25	17		
MWI 25-12A7		50	35	2.2	2.8	0.55	50	33		
MWI 25-12A7T		50	35	2.2	2.8	0.55	50	33	•	
MWI 35-12A7		62	44	2.2	4.2	0.44	50	33		
MWI 35-12A7T		62	44	2.2	4.2	0.44	50	33	•	
MWI 50-12A7		85	60	2.2	5.6	0.35	110	70		
MWI 50-12A7T		85	60	2.2	5.6	0.35	110	70	•	
1200 V NPT³ IGBT										
MWI 25-12E7	1200	52	36	1.9	2.5	0.55	50	33		
MWI 50-12E7		90	62	2.1	4.0	0.35	110	70		
1200 V Trench IGBT										
> MWI 35-12T7T	1200	60	35	1.7	4.1	0.62	50	33	•	
MWI 50-12T7T		75	50	1.7	6.5	0.49	110	70	•	
MWI 75-12T7T		105	75	1.7	9.5	0.35	150	100	•	
1200 V XPT IGBT										
> MIXA40W1200TED	1200	55	40	1.8	4.4	0.64	44	29	•	
> MIXA60W1200TED		85	59	1.8	6.0	0.43	88	59	•	



IGBT Modules – Six-Pack configuration



Six-Pack IGBT Modules 		X113 E3-Pack Package style Outline drawings on pages O-30...O-52 See data sheet for pin arrangement							
Type	V_{CES} V	I_{C25} IGBT $T_C = 25^\circ\text{C}$ A	I_{C80} IGBT $T_C = 80^\circ\text{C}$ A	$V_{CE(sat)}$ typ IGBT $T_J = 25^\circ\text{C}$ V	E_{off} IGBT $T_J = 125^\circ\text{C}$ mJ	R_{thJC} IGBT K/W	I_{F25} diode $T_C = 25^\circ\text{C}$ A	I_{F80} diode $T_C = 80^\circ\text{C}$ A	NTC
600 V NPT IGBT									
MWI 100-06A8	600	130	88	2.0	2.9	0.30	140	88	
MWI 100-06A8T		130	88	2.0	2.9	0.30	140	88	•
MWI 150-06A8		170	115	2.0	4.6	0.24	210	130	
MWI 150-06A8T		170	115	2.0	4.6	0.24	210	130	•
MWI 200-06A8		215	155	2.0	6.3	0.18	260	165	
MWI 200-06A8T		215	155	2.0	6.3	0.18	260	165	•
1200 V NPT IGBT									
MWI 75-12A8	1200	125	85	2.2	10.5	0.25	150	100	
MWI 75-12A8T		125	85	2.2	10.5	0.25	150	100	•
MWI 100-12A8		160	110	2.2	14.6	0.19	200	130	
MWI 100-12A8T		160	110	2.2	14.6	0.19	200	130	•
1200 V NPT³ IGBT									
MWI 75-12E8	1200	130	90	2.0	7.5	0.25	150	100	
MWI 100-12E8		165	115	2.0	10.0	0.19	200	130	
1200 V Trench IGBT									
MWI 75-12T8T	1200	100	75	1.7	9.5	0.35	150	100	•
MWI 100-12T8T		140	100	1.7	12.0	0.26	200	130	•
MWI 150-12T8T		200	150	1.7	17.0	0.18	tbd	tbd	•
1700 V SPT+ IGBT									
MWI 100-17E8T	1200	145	100	2.3	24.9	0.25	tbd	100	•
MWI 150-17E8T		195	150	1.3	37.9	0.17	tbd	150	•



Six-Pack IGBT Modules 		X114 E9-Pack Package style Outline drawings on pages O-30...O-52 See data sheet for pin arrangement							
Type	V_{CES} V	I_{C25} IGBT $T_C = 25^\circ\text{C}$ A	I_{C80} IGBT $T_C = 80^\circ\text{C}$ A	$V_{CE(sat)}$ typ IGBT $T_J = 25^\circ\text{C}$ V	E_{off} IGBT $T_J = 125^\circ\text{C}$ mJ	R_{thJC} IGBT K/W	I_{F80} diode $T_C = 80^\circ\text{C}$ A	NTC	
1200 V NPT³ IGBT									
MWI 225-12E9	1200	355	250	2.10	20	0.090	205	•	
MWI 300-12E9		530	375	2.00	30	0.060	300	•	
MWI 450-12E9		640	440	2.20	45	0.057	450	•	
1700 V NPT³ IGBT									
MWI 225-17E9	1700	335	235	2.50	54	0.085	200	•	
MWI 300-17E9		500	350	2.30	80	0.057	290	•	
1700 V SPT+ IGBT									
MWI 451-17E9	1700	580	475	2.25	90	0.057	450	•	

IGBT Modules – Full Bridge & Six-Pack configuration



Full Bridge IGBT Modules				X111 E1-Pack Package style Outline drawings on pages O-30...O-52 See data sheet for pin arrangement					
Type	V_{CES}	I_{C25} IGBT $T_C = 25^\circ C$	I_{C80} IGBT $T_C = 80^\circ C$	$V_{CE(sat)}$ typ IGBT $T_J = 25^\circ C$	E_{off} IGBT $T_J = 125^\circ C$	R_{thJC} IGBT	I_{F25} diode $T_C = 25^\circ C$	I_{F80} diode $T_C = 80^\circ C$	NTC
➤ New	V	A	A	V	mJ	K/W	A	A	
600 V Trench IGBT									
➤ MKI 80-06T6K	600	89	67	1.8	2.8	0.6	105	67	•



Full Bridge IGBT Modules				X112 E2-Pack Package style Outline drawings on pages O-30...O-52 See data sheet for pin arrangement					
600 V NPT IGBT									
MKI 50-06A7	600	72	50	1.9	1.7	0.55	72	45	•
MKI 50-06A7T		72	50	1.9	1.7	0.55	72	45	•
MKI 65-06A7T		100	67	2.0	2.3	0.39	140	85	•
MKI 75-06A7		90	60	2.5	6.3	0.44	140	85	•
MKI 75-06A7T		90	60	2.5	6.3	0.44	140	85	•
1200 V Fast NPT IGBT									
MKI 50-12F7	1200	65	45	3.2	2.5	0.35	110	70	
1200 V NPT³ IGBT									
MKI 50-12E7	1200	90	62	1.9	4.0	0.35	110	70	

Full Bridge IGBT Modules				X113 E3-Pack Package style Outline drawings on pages O-30...O-52 See data sheet for pin arrangement					
1200 V Fast NPT IGBT									
MKI 100-12F8	1200	65	45	3.2	2.5	0.35	110	70	
1200 V NPT³ IGBT									
MKI 75-12E8	1200	130	90	2.0	7.5	0.25	150	100	
MKI 100-12E8		150	115	2.0	10.0	0.19	200	130	

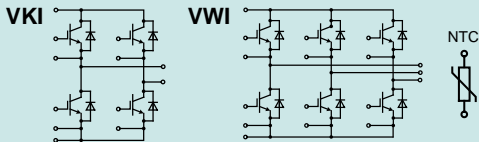Full Bridge Six-Pack IGBT Modules				X102 Package style Outline drawings on pages O-30...O-52 See data sheet for pin arrangement					
Full Bridge									
VKI 50-06P1	600	45	30	1.9	1.0	0.88	36	24	•
VKI 75-06P1	600	72	50	1.9	1.7	0.55	72	45	•
VKI 50-12P1	1200	50	35	2.5	2.8	0.55	50	35	•
Six-Pack									
VWI 20-06P1	600	19	14	1.9	0.30	1.7	21	14	•
VWI 35-06P1	600	35	25	1.9	0.68	1.0	35	24	•
VWI 15-12P1	1200	18	14	2.3	1.10	1.2	12	8	•

IGBT Modules

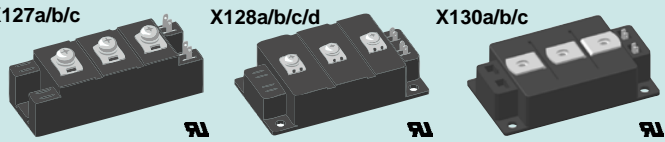
NPT IGBT Modules  Outline drawings on pages O-30...O-52 See data sheet for pin arrangement 									
Type	V _{CES}	I _{C25} IGBT T _C = 25°C	I _{C80} IGBT T _C = 80°C	V _{CE(sat)} typ IGBT T _J = 25°C	E _{off} IGBT T _J = 125°C	R _{thJC} IGBT	I _{F25} diode T _C = 25°C	I _{F80} diode T _C = 80°C	Fig. No.
➤ New	V	A	A	V	mJ	K/W	A	A	
1200 V Half Bridge, NPT									
MII 75-12A3	1200	90	60	2.2	5.6	0.33	100	60	X127a
MII 100-12A3		135	90	2.2	10.5	0.22	150	100	X128a
MII 145-12A3		160	110	2.2	15.0	0.18	150	100	
MII 150-12A4		180	120	2.2	11.5	0.17	200	130	
MII 200-12A4		270	180	2.2	21.0	0.11	300	200	
MII 300-12A4		330	220	2.2	29.0	0.09	450	270	
1200 V Boost Chopper, NPT									
MID 75-12A3	1200	90	60	2.2	5.6	0.33	100	60	X127b
MID 100-12A3		135	90	2.2	10.5	0.22	150	100	X128b
MID 145-12A3		160	110	2.2	15.0	0.18	150	100	
MID 150-12A4		180	120	2.2	11.5	0.17	200	130	
MID 200-12A4		270	180	2.2	21.0	0.11	300	200	
MID 300-12A4		330	220	2.2	29.0	0.09	450	270	
MID 550-12A4		670	460	2.3	59.0	0.05	750	460	
1200 V Buck Chopper, NPT									
MDI 75-12A3	1200	90	60	2.2	5.6	0.33	100	60	X127c
MDI 100-12A3		135	90	2.2	10.5	0.22	150	100	X128c
MDI 145-12A3		160	110	2.2	15.0	0.18	150	100	
MDI 150-12A4		180	120	2.2	11.5	0.17	200	130	
MDI 200-12A4		270	180	2.2	21.0	0.11	300	200	
MDI 300-12A4		330	220	2.2	29.0	0.09	450	270	
MDI 550-12A4		670	460	2.3	59.0	0.05	750	460	
1200 V Half Bridge, NPT³									
➤ MII 300-12E4	1200	280	200	2.0	20.0	0.11	300	190	X130a
MII 400-12E4		420	300	2.2	30.0	0.08	450	290	
1200 V Boost Chopper, NPT³									
MID 400-12E4	1200	420	300	2.2	30.0	0.08	450	290	X130b
1200 V Buck Chopper, NPT³									
MDI 400-12E4	1200	420	300	2.2	30.0	0.08	450	290	X130c

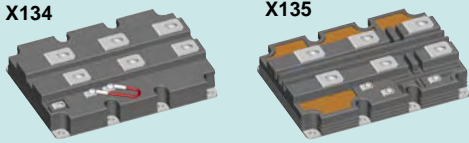High Power Single Switch  Package style Outline drawings on pages O-30...O-52 									
Type	V _{CES}	I _{C25} IGBT T _C = 25°C	I _{C80} IGBT T _C = 80°C	V _{CE(sat)} typ IGBT T _J = 25°C	E _{off} IGBT T _J = 125°C	R _{thJC} IGBT	I _{F25} diode T _C = 25°C	I _{F80} diode T _C = 80°C	Fig. No.
	V	A	A	V	mJ	K/W	A	A	
MIO 1800-17E10	1700	2500	1800	2.3	670	0,009	tbd	1800	X134
MIO 2400-17E10	1700	3300	2400	2.3	980	0,007		2400	
MIO 1200-25E10	2500	1650	1200	2.5	1250	0,009		1200	
MIO 1500-25E10	2500	2100	1500	2.7	1450	0,008		1500	
MIO 1200-33E10	3300	1650	1200	3.1	1950	0,0085		1200	
High Voltage Package with enlarged strike and creepage distance									
MIO 1200-33E11	3300	1650	1200	3.1	2000	0,0085	tbd	1200	X135
MIO 600-65E11	6500	840	600	4.2	3500	0,011		600	

IGBT Modules – Building Blocks for your ideal Converter

ISOPLUS™ Technology

- DCB base plate
- 2500 V electrical isolation
 - low thermal resistance
 - increased power & temperature cycling
 - saves space
 - replaces multiple discretes
 - reduces parasitic inductance and capacitance
 - reduces EMI
 - heat spreading

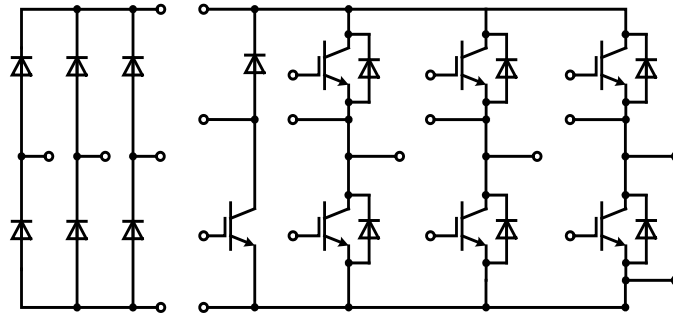


Rectifier

Brake

Converter


FBO 16-12N (line rectifier)
FBO 40-12N (line rectifier)
FBE 22-06N1 (HiPerFRED)




FID 60-06D

* PT IGBT available too
(contact factory)


FUS 45-0045B (Schottky)
FUO 22-12N (line rectifier)
FUO 22-16N (line rectifier)
FUO 50-16N (line rectifier)
FUE 30-12N1 (HiPerFRED)



FII 30-06D
FII 40-06D
FII 30-12E
FII 50-12E




IXBF 9N160G (BIMOSFET)
IXBF 40N160 (BIMOSFET)
IXLF 19N250A (IGBT only)





ISOPLUS i4-PAC™

Package




X024a Package style
Outline drawings on
pages O-30...O-52




Type	Configu- ration	Technology	V_{RRM} / V_{CES} V	I_{C25} $T_C = 25^\circ\text{C}$ A	I_{C80} $T_C = 90^\circ\text{C}$ A	$V_{CE(sat)}$ typ. $T_C = 25^\circ\text{C}$ V
➤ New						
FBO 16-12N	1~	Rectifier Bridge	1200			
FBO 40-12N	1~	Rectifier Bridge	1200			
FBE 22-06N1	1~	Rectifier Bridge	600			
FUS 45-0045B	3~	Schottky Rectifier Bridge	45			
FUO 22-12N	3~	Rectifier Bridge	1200			
FUO 22-16N	3~	Rectifier Bridge	1600			
FUO 50-16N	3~	Rectifier Bridge	1600			
FUE 30-12N1	3~	Rectifier Bridge	1200			
FID 60-06D	boost	NPT IGBT & HiPerFRED	600	65	40	1.6
FII 30-06D	phaseleg	NPT IGBT	600	30	18	1.9
FII 40-06D	phaseleg	NPT IGBT	600	40	25	1.8
FII 30-12E	phaseleg	NPT3 IGBT	1200	32	20	2.4
FII 50-12E	phaseleg	NPT3 IGBT	1200	50	32	2.0

Discrete XPT / NPT IGBT








XPT IGBT

XPT IGBT = Xtreme light Punch Through, short-circuit rated IGBTs with paralleling capabilities





Type	V _{CES}	I _{C25} IGBT T _C = 25°C	I _{C90} IGBT T _C = 90°C	V _{CEsat} typ IGBT T _J = 25°C	E _{off} IGBT T _J = 125°C	R _{thJC} IGBT	Diode	I _{F90} diode T _C = 90°C	Fig. No.	Package style
➤ New	V	A	A	V	mJ	K/W		A		Outline drawings on pages O-30...O-52
1200 V XPT IGBT										
➤ IXA12IF1200PB	1200	21	12	1.8	1.1	1.50	●	22	X005a	X005a TO-220AB Weight = 4 g 
➤ IXA17IF1200HJ		27	17	1.8	2.0	1.26	●	22	X016a	
➤ IXA20I1200PB		32	20	1.8	2.6	0.95			X005a	
➤ IXA37IF1200HJ		57	37	1.8	4.4	0.64	●	29	X016a	
➤ IXA45IF1200HB		68	45	1.8	4.4	0.48	●	29	X014a	
➤ IXA55I1200HJ		84	55	1.8	6.0	0.43			X016a	

NPT IGBT

NPT IGBT = Non-Punch Through insulated gate bipolar transistor, square RBSOA, short circuit rated


Type	V _{CES}	I _{C25} IGBT T _C = 25°C	I _{C90} IGBT T _C = 90°C	V _{CEsat} typ IGBT T _J = 25°C	E _{off} IGBT T _J = 125°C	R _{thJC} IGBT	Diode	I _{F90} diode T _C = 90°C	Fig. No.	Package style
➤ New	V	A	A	V	mJ	K/W		A		
IXDP 20N60B	600	32	20	2.2	0.4	0.90			X005a	X011b TO-263AB Weight = 2 g 
IXDP 20N60BD1		32	20	2.2	0.4	0.90	●	14	X005a	
IXDP 35N60B		60	35	2.1	0.8	0.50			X005a	
IXDH 35N60B		60	35	2.1	0.8	0.50			X014a	X014a TO-247AD Weight = 6 g 
IXDH 35N60BD1		60	35	2.1	0.8	0.50	●	21	X014a	
IXDR 35N60BD1		60	24	2.1	0.8	1.00	●	18	X016a	
IXDA 20N120AS	1200	34	25	2.8	2.4	0.63			X011b	X011b TO-263AB Weight = 2 g 
IXDH 20N120		38	25	2.4	2.4	0.63			X014a	
IXDH 20N120D1		38	25	2.4	2.4	0.63	●	20	X014a	
IXDH 30N120		60	38	2.4	3.4	0.42			X014a	X014a TO-247AD Weight = 6 g 
IXDH 30N120D1		60	38	2.4	3.4	0.42	●	35	X014a	
IXDR 30N120		50	30	2.4	3.4	0.60			X016a	
IXDR 30N120D1		50	30	2.4	3.4	0.60	●	27	X016a	X016a ISOPLUS247™ Weight = 5 g 
IXDN 55N120D1		100	62	2.3	6.2	0.28	●	60	X027a	
IXDN 75N120		150	95	2.2	10.5	0.19			X027a	








3rd Generation NPT³ IGBT lower V_{CEsat}

➤ IXER 20N120	1200	29	19	2.4	1.5	0.96			X016a	X027a SOT-227B Weight = 30 g miniBLOC 
➤ IXER 20N120D1		29	19	2.4	1.5	0.96	●	15	X016a	
IXEH 25N120		36	24	2.6	2.5	0.63			X014a	X027a SOT-227B Weight = 30 g miniBLOC 
IXEH 25N120D1		36	24	2.6	2.5	0.63	●	20	X014a	
IXER 35N120D1		50	32	2.2	2.6	0.60	●	25	X016a	X027a SOT-227B Weight = 30 g miniBLOC 
IXEH 40N120		60	40	2.4	3.0	0.42			X014a	
IXEH 40N120D1		60	40	2.4	3.0	0.42	●	35	X014a	X027a SOT-227B Weight = 30 g miniBLOC 
IXER 60N120		95	60	2.1	4.8	0.33			X016a	
IXEN 60N120		100	65	2.1	4.8	0.28			X027a	
IXEN 60N120D1		100	65	2.1	4.8	0.28	●	60	X027a	

S Series IGBTs with SCSOA Capability


Medium speed (1 kHz to 20 kHz) Single IGBT









Part Number	V _{CE(sat)} V	I _{C25} T _C = 25°C A	I _{C110} T _C = 110°C A	V _{CE(sat)} T _C = 25°C V	t _{ri} typ. T _J = 25°C ns	E _{off} typ. T _J = 125°C mJ	R _{thJC} K/W	Diode	I _{F110} Diode T _C = 110°C A	R _{thJC} Diode K/W	P _C W	Fig. No.	Package Style
													Outline drawings on pages O-30...O-52
> New													
IXSA 10N60B2D1	600	20	10	2.50	270	0.43	1.25	•	11	2.50	100	X011b	 <p>TO-220AB X005a Weight = 4 g</p>
IXSH 10N60B2D1		20	10	2.50	165	0.79	1.25	•	11	2.50	100	X014a	
IXSP 10N60B2D1		20	10	2.50	270	0.43	1.25	•	11	2.50	100	X005a	
IXSQ 10N60B2D1		20	10	2.50	165	0.79	1.25	•	11	2.50	100	X017a	
IXSA 20N60B2D1		35	20	2.50	126	0.97	0.66	•	11	2.50	190	X011b	
IXSH 20N60B2D1		35	20	2.50	126	0.97	0.21	•	21	1.60	190	X014a	
IXSP 20N60B2		35	20	2.50	126	0.97	0.66				190	X005a	
IXSP 20N60B2D1		35	20	2.50	126	0.97	0.66	•	11	2.50	190	X005a	
IXSQ 20N60B2D1		35	20	2.50	126	0.97	0.21	•	21	1.60	190	X017a	
IXSH 30N60B2D1		48	30	2.50	140	1.18	0.50	•	28	0.90	250	X014a	
IXST 30N60B2D1		48	30	2.50	234	1.18	0.50	•	28	0.90	250	X019	
IXSH 40N60B2D1		75		2.20	120	2.60	0.48	•		0.75	280	X014a	 <p>TO-247AD X014a Weight = 6 g</p>
IXST 40N60B2D1		75		2.20	120			•		0.75		X019	
													 <p>X015a PLUS247 Weight = 5 g</p>
													 <p>X016a ISOPLUS247™ Weight = 5 g</p>
xxxAxx = low V _{CE(sat)} type=, xxxBxx = medium speed type													
IXSH 24N60B	600	48	24	2.50	170	2.40	0.83				150	X014a	 <p>TO-3P X017a Weight = 5 g</p>
IXSH 24N60BD1		48	24	2.50	170	2.40	0.83	•		0.90	150	X014a	
IXSP 24N60B		48	24	2.50	170	2.40	0.83				150	X005a	
IXST 24N60B		48	24	2.50	170	2.40	0.83				150	X019	
IXSH 30N60B		55	30	2.00	140	2.50	0.62				200	X014a	
IXSH 30N60BD1		55	30	2.70	140	2.50	0.62	•		0.09	200	X014a	
IXST 30N60B		55	30	2.00	270	1.50	0.62				200	X019	
IXSH 30N60C		55	30	2.00	140	2.50	0.62				200	X014a	
IXSH 40N60B		75	40	2.20	120	1.80	0.45				280	X014a	
IXST 40N60B		75	40	2.20	120	2.00	0.45				280	X019	
IXSH 50N60B		75	50	2.50	150	4.80	0.50				250	X014a	 <p>TO-268AA X019 Weight = 5 g</p>
IXSK 80N60B		160	80	2.50	180		0.26				500	X020a	
IXSX 80N60B		160	80	2.50	180		0.26				500	X015a	
IXSH 15N120B	1200	30	15	3.40	126	3.10	0.83				150	X014a	 <p>TO-264 X020a Weight = 10 g</p>
IXST 35N120B		70	35	3.60	180	9.00	0.42					X019	
IXSR 35N120BD1		70	30	3.60	180	9.00	0.50	•		0.83	250	X016a	
IXSX 35N120BD1		70	35	3.60	180	9.00	0.42	•		0.65	300	X015a	
IXSH 45N120B		75	45	3.00	380	22.00	0.42				300	X014a	
IXST 45N120B		75	45	3.00	380	22.00	0.42				300	X019	
IXSH 35N140A	1400	70	35	4.00	200	9.50	0.42				300	X014a	

Discrete IGBT G series 2nd Generation


xxxA2xx = low V_{CEsat} type, xxxB2xx = medium speed type, xxxC2xx = high speed type







Part Type	V_{CES}	I_C		$V_{CE(sat)}$	t_{ri} typ	E_{off} typ	R_{thJC}	Diode	I_{F110} Diode	R_{thJC} Diode	P_C	Fig. No.	Package Style
		$T_C = 25^\circ C$	$T_C = 90^\circ C$										
➤ New	V	A	A	V	ns	mJ	K/W		A	K/W	W		Outline drawings on pages O-30...O-52
IXGA 16N60B2	600	40		2.30	104	0.35	0.83				150	X011b	X005a TO-220AB Weight = 4 g
IXGA 16N60B2D1		40		2.30	104	0.35	0.83	•	10	2.50	150	X011b	
IXGA 16N60C2		40		3.00	35	0.15	0.83				150	X011b	
IXGA 16N60C2D1		40		3.00	35	0.15	0.83	•	10	2.50	150	X011b	
IXGC 16N60B2		28		2.50	104	0.35	2.00				63	X010a	
IXGC 16N60B2D1		28		2.50	104	0.35	2.00	•	10	2.50	63	X010a	
IXGC 16N60C2		28		3.00	35	0.15	2.00				63	X010a	
IXGC 16N60C2D1		28		3.00	35	0.15	2.00	•	10	2.50	63	X010a	
IXGH 16N60B2D1		40		2.30	104	0.35	0.83	•	10	2.50	150	X014a	X010a ISOPLUS220™ Weight = 3 g
IXGH 16N60C2D1		40		3.00	35	0.15	0.83	•	10	2.50	150	X014a	
IXGP 16N60B2		40		2.30	104	0.35	0.83				150	X005a	
IXGP 16N60B2D1		40		2.30	104	0.35	0.83	•	10	2.50	150	X005a	
IXGP 16N60C2		40		3.00	35	0.15	0.83				150	X005a	
IXGP 16N60C2D1		40		3.00	35	0.15	0.83	•	10	2.50	150	X005a	
IXGH 30N60B2		70		1.80	82	0.90	0.65				190	X014a	
IXGH 30N60B2D1		70		1.80	82	0.90	0.65	•	30	0.90	190	X014a	
IXGH 30N60C2		70		2.70	60	0.59	0.65				190	X014a	X011b TO-263AB Weight = 2 g
IXGH 30N60C2D1		70		2.70	60	0.59	0.65	•	30	0.90	190	X014a	
IXGH 30N60C2D4		70		2.70	60	0.59	0.65	•		1.60	190	X014a	
IXGP 30N60B2		70		1.80	82	0.90	0.65				190	X005a	
IXGP 30N60C2		70		2.70	60	0.59	0.65				190	X005a	
IXGP 30N60C2D1		70		2.70	60	0.59	0.65	•	30	0.90	190	X005a	
IXGT 30N60B2		70		1.80	82	0.90	0.65				190	X019	
IXGT 30N60B2D1		70		1.80	82	0.90	0.65	•	30	0.90	190	X019	
IXGT 30N60C2		70		2.70	60	0.59	0.65				190	X019	X014a TO-247AD Weight = 6 g
IXGT 30N60C2D1		70		2.70	60	0.59	0.65	•	30	0.90	190	X019	
IXGH 40N60B2		75		1.70	82	1.10	0.42				300	X014a	
IXGH 40N60B2D1		75		1.70	82	1.10	0.42	•	30	0.90	300	X014a	
IXGH 40N60C2		75		2.70	32	0.50	0.42				300	X014a	X015a PLUS247 Weight = 5 g
IXGH 40N60C2D1		75		2.70	32	0.50	0.42	•	30	0.90	300	X014a	
IXGR 40N60B2		60		1.90	82	1.10	0.75				167	X016a	
IXGR 40N60B2D1		60		1.90	82	1.10	0.75	•	30	1.10	167	X016a	
IXGR 40N60C2		56		2.70	32	0.50	0.74				170	X016a	
IXGR 40N60C2D1		56		2.70	32	0.50	0.74	•	30	1.50	170	X016a	
IXGT 40N60B2		75		1.70	82	1.10	0.42				300	X019	
IXGT 40N60B2D1		75		1.70	82	1.10	0.42	•	30	0.90	300	X019	
IXGT 40N60C2		75		2.70	32	0.50	0.42				300	X019	X016a ISOPLUS247™ Weight = 5 g
IXGT 40N60C2D1		75		2.70	32	0.50	0.42	•	30	0.90	300	X019	
IXGH 50N60B2		75		2.00	65	1.55	0.31				400	X014a	
IXGH 50N60C2		75		2.70	48	0.74	0.31				400	X014a	
IXGK 50N60B2D1		75		2.00	65	1.55	0.31	•	60	0.65	400	X020a	X019 TO-268AA Weight = 5 g
IXGK 50N60C2D1		75		2.50	48	0.74	0.31	•	60	0.65	480	X020a	
IXGR 50N60B2		68		2.20	65	1.55	0.62				200	X016a	
IXGR 50N60B2D1		68		2.20	65	1.55	0.62	•	60	0.85	200	X016a	
IXGR 50N60C2		75		2.70	48	0.74	0.62				200	X016a	
IXGR 50N60C2D1		75		2.70	48	0.74	0.62	•	60	0.85	200	X016a	
IXGT 50N60B2		75		2.00	65	1.55	0.31				400	X019	
IXGT 50N60C2		75		2.70	48	0.74	0.31				400	X019	
IXGX 50N60B2D1		75		2.00	65	1.55	0.31	•	60	0.65	400	X015a	X020a TO-264 Weight = 10 g
IXGX 50N60C2D1		75		2.50	48	0.74	0.31	•	60	0.65	480	X015a	
IXGH 60N60B2		75		1.80	100	2.80	0.25				500	X014a	
IXGH 60N60C2		75		2.50	35	1.20	0.26				480	X014a	
IXGK 60N60B2D1		75		1.80	100	2.80	0.25	•	60	0.85	500	X020a	


Discrete IGBT G series 2nd Generation

xxxA2xx = low V_{CEsat} type, xxxB2xx = medium speed type, xxxC2xx = high speed type



Part Type	V_{CES}	I_C $T_C = 25^\circ C$	I_C $T_C = 90^\circ C$	$V_{CE(sat)}$ $T_C = 25^\circ C$	t_{fi} typ $T_J = 25^\circ C$	E_{off} typ $T_J = 125^\circ C$	R_{thJC}	Diode	I_{F110} Diode $T_C = 110^\circ C$	R_{thJC} Diode	P_C	Fig. No.	Package Style		
														V	A
➤ IXGK 60N60C2D1	600	75		2.50	35	1.20	0.26	•	60	0.85	480	X020a	TO-220AB X005a Weight = 4 g 		
IXGN 60N60C2		100		2.50	35	1.20	0.26				480	X027a			
IXGN 60N60C2D1		100		2.50	35	1.20	0.26	•	60	0.85	480	X027a			
IXGR 60N60B2		75		2.00	100	2.80	0.50				250	X016a			
IXGR 60N60B2D1		75		2.00	100	2.80	0.50	•	60	0.85	250	X016a			
IXGR 60N60C2		75		2.70	35	0.92	0.50				250	X016a			
IXGR 60N60C2D1		75		2.70	35	0.92	0.50	•	60	0.85	250	X016a			
IXGR 60N60C2G1		75		2.70	35	0.92	0.25	•	12	1.75	250	X016a			
IXGT 60N60B2	900	75		1.80	100	2.80	0.25				500	X019	TO-263AB X011b Weight = 2 g 		
IXGT 60N60C2		75		2.50	35	1.20	0.26			0.85	480	X019			
IXGT 60N60C2D1		75		2.50	35	1.20	0.26	•			480	X019			
IXGX 60N60B2D1		75		1.80	100	2.80	0.25	•	60	0.85	500	X015a			
IXGX 60N60C2D1		75		2.50	35	1.20	0.26	•	60	0.85	480	X015a			
IXGK 120N60C2		75		2.50	45	1.50	0.15				830	X020a			
IXGR 120N60C2		75		2.70	45	1.50	0.42				300	X016a			
IXGX 120N60C2		75		2.50	45	1.50	0.15				830	X015a			
IXGH 32N90B2		900	64		2.70	150	5.75	0.42				300		X014a	PLUS247 X015a Weight = 5 g 
IXGH 32N90B2D1			64		2.70	150	5.75	0.42	•	27	0.90	300		X014a	
IXGR 32N90B2D1	47			2.90	150	5.75	0.80	•	22	1.10	160	X016a			
IXGT 32N90B2	64			2.70	150	5.75	0.42				300	X019			
IXGT 32N90B2D1	64			2.70	150	5.75	0.42	•	27	0.90	300	X019			
IXGH 50N90B2	75			2.70	200	8.70	0.31				400	X014a			
IXGH 50N90B2D1	75			2.70	200	8.70	0.31	•	30	0.90	400	X014a			
IXGK 50N90B2D1	75			2.70	200	8.70	0.31	•	30	0.90	400	X020a			
IXGR 50N90B2D1	40			2.90	200	8.70	1.25	•	22	1.10	100	X016a			
IXGT 50N90B2	75			2.70	200	8.70	0.31				400	X019			
IXGT 50N90B2D1	75		2.70	200	8.70	0.31	•	30	0.90	400	X019				
IXGA 12N120A2	1200	24	12	2.40	650	7.70	1.66				75	X011b	TO-268AA X019 Weight = 5 g 		
IXGP 12N120A2		24	12	2.40	650	7.70	1.66				75	X005a			
IXGA 15N120B2		30	15	3.50	137	2.80	0.75			1.60	170	X011b			
IXGH 15N120B2D1		30	15	3.30	137	2.80	0.75	•			192	X014a			
IXGP 15N120B2		30	15	3.50	137	2.80	0.75				170	X005a			
IXGH 40N120A2		75		2.00	800	35.00	0.35				360	X014a			
IXGH 40N120B2D1		75		3.50	140	8.30	0.35	•	30	0.90	360	X014a			
IXGT 40N120A2		75		2.00	800	35.00	0.35				360	X019			
IXGT 40N120B2D1		75		3.50	140	8.30	0.35	•	30	0.90	360	X019			
IXGT 40N120B2D1		75		3.50	140	8.30	0.35	•	30	0.90	360	X019			

X020a **TO-264**
Weight = 10 g



Discrete IGBT G series

xxxB = medium speed type, xxxC = high speed type,


X027a **SOT-227B**
miniBLOC
Weight = 30 g











IXGA 7N60B	600	14		2.10	120	0.33	2.30				54	X011b
IXGP 7N60B		14		2.10	120	0.33	2.30				54	X005a
IXGA 7N60C		14	7	2.70	45	0.22	2.30				54	X011b
IXGP 7N60C		14	7	2.70	45	0.22	2.30				54	X005a
IXGH 35N120B	1200	70			160	8.00	0.42					X014a
IXGK 35N120B		70	35	3.30	160	8.00	0.35				350	X020a
IXGT 35N120B		70	35		250	10.80	0.35				360	X019



Discrete IGBT G series 3rd Generation


xxxA3xx = low $V_{CE(sat)}$ type, xxxB3xx = medium speed type, xxxC3xx = high speed type








Part Number	V_{CES}	I_{C25} $T_C = 25^\circ C$	I_{C90} $T_C = 90^\circ C$	$V_{CE(sat)}$ $T_C = 25^\circ C$	t_{fi} typ. $T_J = 25^\circ C$	E_{off} typ. $T_J = 125^\circ C$	R_{thJC}	Diode	I_{F110} Diode $T_C = 110^\circ C$	R_{thJC} Diode	P_C	Fig. No.	Package Style	
														V
➤ New													Outline drawings on pages O-30...O-52	
IXGH 42N30C3	300			1.80	65	0.28	0.56				223	X014a	TO-220AB X005a Weight = 4 g  X011b Weight = 2 g 	
IXGH 60N30C3		75		1.80	101	0.40	0.42				300	X014a		
IXGH 85N30C3		75		1.90	70		0.38				333	X014a		
IXGH 100N30C3		75		1.85	94	0.75	0.27				460	X014a		
IXGH 120N30B3		75	120	1.80			0.23				540	X014a		
IXGH 120N30C3		75		2.10	86	0.88	0.23				540	X014a		
IXGN 400N30A3		400		1.15	315		0.17					X027a		
IXGX 400N30A3		400		1.15	315		0.13				1000	X015a		
IXGH 28N60B3	600	66		1.80	100	1.00	0.66					X014a	TO-247AD X014a Weight = 6 g  PLUS247 X015a Weight = 5 g  ISOPLUS247™ X016a Weight = 5 g  TO-268AA X019 Weight = 5 g  TO-264 X020a Weight = 10 g  PLUS264 X021a Weight = 10 g  ISOPLUS264™ X022a Weight = 10 g  SOT-227B miniBLOC X027a Weight = 30 g 	
IXGH 28N60B3D1		66		1.80	100	1.00	0.66	•	10	1.00	190	X014a		
IXGH 36N60A3D4		75		1.50	325	5.30	0.56	•	10	2.50	220	X014a		
IXGH 36N60B3D1		75		1.80	100	1.50	0.50	•	10	0.90	250	X014a		
IXGH 36N60B3D4		75		1.80	100	1.50	0.56	•	10	2.50	220	X014a		
IXGA 48N60B3		75		1.80	116	1.29	0.42					300		X011b
IXGA 48N60C3		75		2.50	38	1.57	0.48					300		X011b
IXGH 48N60A3		75		1.35	224	5.60	0.42					300		X014a
IXGH 48N60A3D1		75		1.35	224	5.60	0.42	•		0.90	300	X014a		
IXGH 48N60B3		75		1.80	116	1.29	0.42					300		X014a
IXGH 48N60B3D1		75		1.80	116	1.29	0.42	•						X014a
IXGH 48N60C3		75		2.50	38	0.57	0.48					300		X014a
IXGH 48N60C3D1		75		2.50	38	0.57	0.42	•		0.90	300	X014a		
IXGP 48N60B3		75		1.80	116	1.29	0.42					300		X005a
IXGP 48N60C3		75		2.50	38	0.57	0.48					300		X005a
IXGR 48N60B3		60		2.10	116	1.30	0.83							X016a
IXGR 48N60B3D1		60		2.10	116	1.30	0.83	•	27	1.50	150	X016a		
IXGR 48N60C3D1		56		2.70	38	0.57	1.00	•		1.50	125	X016a		
IXGH 56N60B3D1		75		1.80	95	2.20	0.23	•		1.50	333	X014a		
IXGH 60N60C3		75		2.50	55	0.90	0.33					380	X014a	
IXGK 64N60B3D1		75		1.80	88	1.95	0.27	•		0.85	460	X020a		
IXGX 64N60B3D1		75		1.80	88	1.95	0.27	•		0.85	460	X015a		
IXGH 72N60A3		75		1.35	250	6.50	0.23					540	X014a	
IXGH 72N60B3		75		1.80	90	2.20	0.23					540	X014a	
XGH 72N60C3				2.50	55	0.48	0.23					540	X014a	
IXGK 72N60B3H1		75		1.80	92	2.20	0.23	•		0.30	540	X020a		
IXGN 72N60A3		150		1.30	300	9.00	0.42					300	X027a	
IXGR 72N60A3				1.35	253	3.50	0.62					200	X016a	
IXGR 72N60A3U1				1.35	253	6.50	0.62			0.65	200	X016a		
IXGR 72N60B3H1		75		1.80	92	2.20	0.62	•		0.80	200	X016a		
IXGT 72N60A3		75		1.35	250	6.50	0.23					540	X019	
IXGT 72N60B3		75		1.80	90	2.20	0.23					540	X019	
IXGX 72N60B3H1		75		1.80	92	2.20	0.23	•		0.30	540	X015a		
IXGK 120N60A3		200		1.35	260	6.60	0.16					780	X020a	
IXGX 120N60A3		200		1.35	260	6.60	0.16					780	X015a	
IXGN 120N60A3		200		1.35	260	6.60	0.21					595	X027a	
IXGN 120N60A3D1		200		1.35	260	6.60	0.21			1.60	595	X027a		
IXGB 200N60B3		75		1.50	183	4.20	0.10					1250	X021a	
IXGL 200N60B3		150		1.50	183	2.90	0.31					400	X022a	
IXGN 200N60B3		300		1.50	183	4.20	0.15					830	X027a	
IXGK 320N60A3		320		1.25	740		0.13					1000	X020a	
IXGN 320N60A3		320		1.25	740		0.17					735	X027a	
IXGX 320N60A3		320		1.25	740		0.13					1000	X015a	
IXGN 400N60A3		400		1.25	740		0.15					830	X027a	




Discrete IGBT G series 3rd Generation

xxxA3xx = low V_{CEsat} type, xxxB3xx = medium speed type, xxxC3xx = high speed type




Part Number	V_{CES}	I_{C25} $T_C = 25^\circ C$	I_{C90} $T_C = 90^\circ C$	$V_{CE(sat)}$ $T_C = 25^\circ C$	t_{fi} typ. $T_J = 25^\circ C$	E_{off} typ. $T_J = 125^\circ C$	R_{thJC}	Diode	I_{F110} Diode $T_C = 110^\circ C$	R_{thJC} Diode	P_C	Fig. No.	Package Style	
														V
IXGA 24N120C3	1200	48		4.20	110	2.00	0.50				250	X011b	TO-220AB X005a Weight = 4 g 	
IXGH 24N120C3H1		48		4.20	110	1.18	0.50	•	0.90	250	X014a			
IXGH 24N120C3		48		4.20	110	2.00	0.50			250	X014a			
IXGP 24N120C3		48		4.20	110	2.00	0.50			250	X005a			
IXGR 24N120C3D1		48		4.20	110	2.00	1.00	•	1.50	200	X016a			
IXGA 30N120B3					160						0.90	250	X011b	TO-263AB X011b Weight = 2 g 
IXGH 30N120B3D1		50		3.50		4.60	0.50			0.90	250	X014a		
IXGP 30N120B3		60		3.50		4.60	0.42			0.90	250	X005a		
IXGT 30N120B3D1		50		3.50		4.60	0.50	•		0.90	250	X019		
IXGH 32N120A3		75		2.35		1240	0.42				300	X014a		
IXGT 32N120A3		75		2.35		1240	0.42				300	X019		
IXGH 28N140B3H1	1400	60		3.60	360	6.50	0.42	•	15	0.90	300	X014a	TO-247AD X014a Weight = 6 g 	
IXGK 28N140B3H1		60		3.60	360	6.50	0.42	•	15	0.90	300	X020a		
IXGX 28N140B3H1		60		3.60	360	6.50	0.42	•	15	0.90	300	X015a		
													PLUS247 X015 Weight = 5 g 	
													ISOPLUS247™ X016a Weight = 5 g 	



Discrete IGBT G series Legacy

Part Number	V_{CES}	I_{C25} $T_C = 25^\circ C$	I_{C90} $T_C = 90^\circ C$	$V_{CE(sat)}$ $T_C = 25^\circ C$	t_{fi} typ. $T_J = 25^\circ C$	E_{off} typ. $T_J = 125^\circ C$	R_{thJC}	Diode	I_{F110} Diode $T_C = 110^\circ C$	R_{thJC} Diode	P_C	Fig. No.	Package Style	
														V
IXGN 60N60	600	100	60	1.70	360		0.50				250	X027a	TO-268AA X019 Weight = 5 g 	
IXGA 8N100	1000	16	8	2.70	390	3.70	2.30				54	X011b	TO-264 X020a Weight = 10 g 	
IXGP 8N100		16	8	2.70	390	3.70	2.30				54	X005a		
IXGA 12N100		24	12	3.50	800	6.00	1.25				100	X011b		
IXGH 12N100		24	12	3.50	800	3.50	1.25				100	X014a		
IXGP 12N100		24	12	3.50	800	6.00	1.25				100	X005a		
IXGA 20N100		40	20		280	3.50	0.83							X011b
IXGH 20N100		40	20		280	3.50	0.83							X014a
IXGP 20N100		40	20		280	3.50	0.83							X005a
IXGA 20N120	1200	40	20		280	6.50	0.83					X011b	SOT-227B miniBLOC X027a Weight = 30 g 	
IXGH 20N120		40	20		280	6.50	0.83					X014a		
IXGP 20N120		40	20		280	6.50	0.83					X005a		
IXGT 20N120		40	20		280	6.50	0.83				150	X019		
IXGH 45N120		75	45	2.50	390	25.00	0.42					300		X014a
IXGR 45N120														X016a
IXGT 45N120		75	45	2.50	390	25.00	0.42				300	X019		




1600 / 1700 V IGBT

Low saturation voltage Types





Part Type	V _{CES}	I _{C25}	I _{C90}	V _{CE(sat)}	E _{off}	R _{thJC}	Diode	Fig. No.	Package style	
		T _C = 25°C	T _C = 90°C	T _C = 25°C	typ T _J = 125°C	K/W				
➤ New	V	A	A	V	mJ	K/W			Outline drawings on pages O-30...O-52	
IXGH 25N160 IXGT 25N160	1600	75		2.7		0.42		X014a X019	TO-247AD X014a Weight = 6 g 	
IXGH 6N170 IXGT 6N170 IXGH 10N170 IXGT 10N170 IXGH 16N170 IXGT 16N170 IXGH 24N170 IXGT 24N170	1700	12	6	4.0	2.0	1.65		X014a X019 X014a X019 X014a X019 X014a X019		
IXGF 32N170		26	14	3.5	13.5	0.65		X024c		
IXGH 32N170 IXGT 32N170		55	32	5.0	13.6	0.35		X014a X019		
IXGR 32N170H1		38	20	3.5	13.6	0.65	●	X016a		
IXGX 32N170H1		75	32	3.3	14.0	0.35	●	X015a		
PLUS247 X015a Weight = 5 g 										

High Speed IGBTs


Part Type	V _{CES}	I _{C25}	I _{C90}	V _{CE(sat)}	t _{fi}	E _{off}	R _{thJC}	Diode	I _{F90}	R _{thJC}	Fig. No.
		T _C = 25°C	T _C = 90°C	T _C = 25°C	typ. T _J = 25°C	typ. T _J = 125°C	IGBT		Diode T _C = 90°C	Diode	
➤ New	V	A	A	V	ns	mJ	K/W		A	K/W	
IXGN 100N160A	1600	100	50	6.0			0.21				X027a
IXGH 6N170A IXGT 6N170A IXGH 10N170A IXGT 10N170A IXGH 16N170A IXGT 16N170A IXGH 24N170A IXGT 24N170A IXGH 32N170A IXGT 32N170A	1700	6	3	7.0	32	0.26	0.25				X014a X019 X014a X019 X014a X019 X014a X019 X014a X019
IXGH 16N170AH1		16	11	5.0	70	2.0	0.65	●	17	0.90	X014a
IXGR 16N170AH1		16	8	5.0	40	1.1	1.04	●	15	1.50	X016a
IXGT 16N170AH1 IXGH 24N170AH1 IXGT 24N170AH1 IXGH 32N170AH1		60	11	5.0	70	2.0	0.65	●	17	0.90	X019 X014a X019 X014a
IXGR 32N170AH1		26	17	5.2	50	2.4	0.65	●	14	1.50	X016a
IXGT 32N170AH1 IXGX 32N170AH1		32	21	5.0	50	3.0	0.35	●	25	0.90	X019 X015a
ISOPLUS247™ X016a Weight = 5 g 											
TO-268AA X019 Weight = 5 g 											
TO-264 X020a Weight = 10 g 											

Very High Voltage IGBTs





Low saturation voltage Types

Part Type	V _{CES}	I _{C25}	I _{C90}	V _{CE(sat)}	t _{fi}	E _{off}	R _{thJC}	P _C	Fig. No.	
		T _C = 25°C	T _C = 90°C	T _C = 25°C	typ T _J = 25°C	typ T _J = 125°C	IGBT	W		
➤ New	V	A	A	V	ns	mJ	K/W	W		
IXLF 19N250A IXGF 25N250	2500	32	19	3.9	250	30	0.5	250	X024c X024c	
IXGT 25N250 IXGK 75N250		60		2.9	200		0.5	250	X019 X020a	
IXGL 75N250 IXGX 75N250		120	60	2.5	180		0.31	400	X024c X015a	
IXGF 36N300 IXGF 30N400	3000 4000	in development								X024c
IXEL 40N400	4000	62	40	4	450	220	0.33	380	X022e	
ISOPLUS264™ X022e Weight = 10 g 										
ISOPLUS i4-PAC™ X024c Weight = 6 g 										

BiMOSFET™




High Voltage Types

Type	V _{CES}	I _{C25} T _C = 25°C	I _{C90} T _C = 90°C	V _{CE(sat)} typ T _C = 25°C	Gate drive	t _r typ T _C = 125°C	R _{thJC} max.	Fig. No.	Package style
➤ New	V	A	A	V	V	ns	K/W		Outline drawings on pages O-30...O-52
1600 V Low V_{CE(sat)}									
IXBP 5N160G	1600	5.7	3.5	4.9	10	70	1.75	X005a	X005a TO-220AB Weight = 4 g 
IXBH 5N160G		5.7	3.5	4.9	10	70	1.75	X014a	
IXBF 9N160G		7.0	5.0	4.9	10	70	1.75	X024c	
IXBH 9N160G		9.0	5.0	4.9	10	70	1.25	X014a	
IXBF 40N160		28	16	6.2	15	40	0.50	X024c	
IXBH 40N160		33	20	6.2	15	40	0.35	X014a	
1700 V High Speed									
IXBH 16N170A	1700	16.0	10.0	4.7	15	50	0.83	X014a	X011a TO-263AB Weight = 2 g 
IXBT 16N170A		16.0	10.0	4.7	15	50	0.83	X019	
IXBH 24N170A		24.0	16.0	4.5		55	0.50	X014a	
IXBT 24N170A		24.0	16.0	4.5		55	0.50	X019	
IXBH 28N170A		30.0	14.0	6.0		150	0.42	X014a	
IXBT 28N170A		30.0	14.0	6.0		150	0.42	X019	
IXBH 42N170A		30.0	21.0	6.0		50	0.35	X014a	
IXBT 42N170A		42.0	21.0	6.0	15	50	0.35	X019	
1700 V Low V_{CE(sat)}									
IXBH 6N170	1700	10.0	6.0	2.3	15	1200	1.80	X014a	X014a TO-247AD Weight = 6 g 
IXBT 6N170		10.0	6.0	2.3	15	1200	1.80	X019	
IXBH 10N170		16.0	10.0	2.3	15	1200	1.25	X014a	
IXBT 10N170		16.0	10.0	2.3	15	1200	1.25	X019	
IXBH 16N170		25.0	16.0	2.3	15	1200	0.83	X014a	
IXBT 16N170		25.0	16.0	2.3	15	1200	0.83	X019	
IXBH 24N170		50.0	24.0	3.3		360	0.50	X014a	
IXBT 24N170		50.0	24.0	3.3		360	0.50	X019	
IXBH 42N170		70.0	42.0	2.3	15	1200	0.35	X014a	
IXBT 42N170		70.0	42.0	2.3	15	1200	0.35	X019	
2500 V									
IXBK 64N250	2500	75.0		3.0		175	0.15	X020a	X016a ISOPLUS247™ Weight = 5 g 
IXBX 64N250		75.0		3.0		175	0.15	X015a	

RIGBT


IGBT with Reverse Blocking Capability

- Applications: lighting control, AC motor control, matrix converters
- No extra on state losses for reverse blocking feature




Part Type	Configuration	V _{CES} max	I _{C25} T _C = 25°C	I _{C90} T _C = 90°C	V _{CEsat} typ T _C = 25°C	t _{rr} typ T _C = 125°C	t _r typ T _C = 125°C	Fig. No.
➤ New		V	A	A	V	μs	ns	
➤ IXRA 15N120	single RIGBT	1200	25	15	2.5	0.3	46	X011a
IXRP 15N120	single RIGBT		25	15	2.5	0.3	46	X005a
IXRH 40N120	single RIGBT		55	35	2.2	1.6	46	X014a
IXRR 40N120	single RIGBT		45	28	2.2	1.6	46	X016a

X019 **TO-268AA**
Weight = 5 g



X024c **ISOPLUS i4-PAC™**
Weight = 6 g



Power MOSFETs and MOSFET Modules

Trench Power MOSFET

IXYS Trench Power MOSFETs are ideally suited for low voltage, high current applications. These MOSFETs feature an exceedingly low $R_{DS(on)}$, thus guaranteeing very low power dissipation in low voltage, high current power switching applications.

This combined with wide ranging operating junction temperature from -40°C to 175°C make them suitable candidates for automobile applications and other similar demanding applications in harsh environments.

IXYS has currently a wide portfolio of Trench Gate MOSFETs with ratings from 55V to 300V and 42A to 220A. By optimization of several parameters, IXYS Corporation has created a special higher voltage rated Trench Gate MOSFET for critical applications. Likewise, special Trench Gate MOSFET modules find variety of applications in very demanding automotive segments.

TrenchT2™ Power MOSFET

IXYS' next generation TrenchT2™ Power MOSFETs are designed and optimized to meet the thermal and electrical demands of today's power management systems with low energy losses.

Utilizing IXYS' advanced trench technology, these TrenchT2™ Power MOSFETs feature an exceedingly low on-state resistance $R_{DS(on)}$, thus guaranteeing very low power dissipation. In addition, they provide for very low conduction and switching losses, thereby making them highly efficient devices. These robust devices are rugged in unclamped inductive switching (UIS) applications and provide excellent avalanche capabilities. Additional features include fast switching speeds, low package inductance, and a 175°C junction operating temperature.

IXYS' TrenchT2™ Power MOSFETs provide designers low voltage, high current solutions for improved efficiency in automotive electronics, electrical vehicles and power management systems. Common applications include battery chargers, synchronous rectification, DC/DC converters, power train management, off-line SMPS and UPS, primary switches for 24V/48V systems, distributed power architecture, power amplifiers and brushless motor control.

Polar™ MOSFET

Polar™ MOSFETs feature a proprietary cell design and process that has resulted in a MOSFET with 30% reduction in $R_{DS(on)}$ per unit area along with a decrease in gate charge. IXYS has also reduced the wafer thickness, which substantially reduces thermal resistance. The combination of lower $R_{DS(on)}$, lower gate charge Q_g and higher power dissipation capability has resulted in a new family of MOSFETs, which will increase the cost effectiveness in switch mode power supply (SMPS) applications.

IXYS' Polar™ HiPerFET

IXYS' Polar™ HiPerFETs combine the strengths of the Polar family with a faster body diode, whose reverse recovery time (t_{rr}) is reduced to make them suitable for phase-shift bridges, motor control and uninterruptible power supply applications (UPS). This family of HiPerFETs bring to the table a win-win situation with lowest $R_{DS(on)}$, low R_{thJC} , low Q_g , and a faster body diode.

Legacy (Standard) MOSFET

Legacy (Standard) MOSFETs are designed to provide superior performance and ruggedness in high voltage switching applications. Major improvements are continuing to be made using high-cell density designs processed on thin silicon wafers for lower thermal resistance. These Power MOSFETs provide significantly higher power handling capability than industry standard MOSFETs.

Legacy HiPerFET™

IXYS' family of HiPerFET™ Power MOSFETs are optimized to provide superior intrinsic rectifier dv/dt ruggedness while eliminating the need for discrete, fast recovery "freewheeling" diodes in a broad range of power conversion and control applications.

This class of Power MOSFETs uses IXYS' HDMOSII™ process, improving the ruggedness of the FET while reducing the reverse recovery time of the intrinsic rectifier to less than 200ns. The performance of the intrinsic rectifier is comparable to discrete high voltage fast recovery rectifiers, and is tailored to minimize power dissipation and switching stress in the MOSFET.

These devices have an improved stress withstand capability in applications where the intrinsic rectifier is used as a free-wheeling diode. Both static and commutating dv/dt has been improved significantly to typically 60 V/ns and 20 V/ns, respectively. This offers a significant margin of safety in the high stress conditions found in many types of inductive power switching applications.

Q-Class Power MOSFET

Q-Class Power MOSFETs (identified by the suffix letter Q) feature a significantly low Gate Charge (Q_g) and Miller Capacitance (C_{rss}). This combination allow for a faster switching device that requires less energy for switching.

Q-Class HiPerFET™

Q-Class HiPerFET™ Power MOSFETs (identified by the suffix letter Q) are upgraded versions of the HiPerFET™ Power MOSFETs family. This Q-Class family of HiPerFETs feature a significantly reduced gate charge (Q_g) and Miller capacitance (C_{rss}) thus enabling improved switching performance of the device. Therefore, these devices have the same applications as HiPerFET™ and allow higher frequency operation. These devices are rugged in unclamped inductive switching applications and provide excellent avalanche characteristics.

Q2-Class HiPerFET™ MOSFETs (identified by the suffix letter Q2) are the result of a revolutionary new chip design, which decreases the MOSFETs total gate charge (Q_g) and the Miller capacitance (C_{rss}), while maintaining the ruggedness and fast switching intrinsic diode of the company's current HiPerFET™ product line. The result is a MOSFET with dramatically improved switching efficiencies and thus enabling higher frequency operation and smaller power supplies.

Power MOSFETs and MOSFET Modules

Linear Power MOSFET

IXYS Linear Power MOSFETs incorporate a proprietary cell design that significantly improves ruggedness and power dissipation capabilities. Optimizations were made to the fundamental planar cell design in order to maximize the power dissipation capabilities of this Linear Power MOSFET family. The forward Bias Safe Operating Area (FBSOA) characteristics is one such targeted parameter that was optimized, which essentially allowed for a larger operating "window" as dictated by the power limitations of the device. This extended power window translates to improved ruggedness and power dissipation capabilities during the high thermal stress conditions posed by the linear operating environment.

Depletion-Mode MOSFET

Fabricated using low on-resistance HDMOS™ process these Depletion-Mode Power MOSFETs operate in a 'normally-on' mode, not requiring energy or gate voltage for turn on. Unlike the regular enhancement type MOSFETs these Depletion-Mode MOSFETs require a negative gate bias to turn off. Consequently they remain on at or above zero gate bias voltage but otherwise have similar MOSFET characteristics. The operating mode, with internal diode and enhanced linear operating capability make them ideal for dynamic load applications, current control: current sources and current regulators, and biasing off the high voltage DC line in power systems.

Legacy (Standard) P-Channel MOSFET

For applications requiring load to be connected to ground/common, it is very convenient to use P-Channel MOSFETs. IXYS has a wide range of high current, high voltage P-Channel MOSFETs which find variety of applications in complementary output stage of totem pole output stages, buck converters and those configurations, in which load must be connected between source of a MOSFET and ground/common terminals.

PolarP™ P-Channel MOSFET

IXYS' Polar technology platform employed in our PolarP™ P-Channel MOSFETs utilizes a proprietary cell design that improves overall device efficiency and performance. This technology platform reduces on-state resistance by as much as 30% and gate charge by 40% compared to legacy counterparts. With such low on-state resistances, these devices offer low conduction and switching losses while maintaining a low input capacitance. The combination of low $R_{DS(on)}$ and gate charge allow for improved energy efficiency.

These P-Channel MOSFETs are dynamic dV/dt and avalanche rated making them extremely rugged in demanding operating environments and can easily be paralleled due to an on-state resistance with a positive temperature coefficient. They are ideal for 'high side' switching where a simple drive circuit referenced to ground can be used, circumventing additional 'high side' driver circuitry commonly involved when using an N-Channel MOSFET. This will help designers to reduce component count and improve reliability. Furthermore it allows for the design of a complementary power output stage, with a corresponding IXYS N-Channel MOSFET, for a power half bridge stage with a simple drive circuit.

TrenchP™ P-Channel MOSFET

This new family of P-Channel devices benefit from technological advances derived from IXYS' robust Trench cell design commonly implemented in their wide portfolio of industry recognized power devices. They feature an ultra low $R_{DS(on)}$, minimizing conduction losses, and promoting improved operating and thermal efficiencies.

These TrenchP™ P-Channel MOSFETs are suitable for 'high side' switching where a simple drive circuit referenced to ground can be employed, circumventing additional 'high side' driver circuitry commonly involved when using an N-Channel MOSFET. This enables designers to reduce component count, thereby improving drive circuit simplicity and cost structure. Furthermore it allows for the design of a complementary power output stage, with a corresponding IXYS N-Channel MOSFET, for a power half bridge stage with a simple drive circuit.

Common applications that will greatly benefit from these devices include high side switching, high current regulators, DC Choppers, CMOS high power amplifiers, push-pull amplifiers, and power solid state relays.


CoolMOS™ * Power MOSFET

The specific resistance of a conventional designed MOSFET increases by more than the square of its blocking voltage. For CoolMOS™ FETs, this relation can be reduced to a linear function making it possible to achieve extremely low on-resistances at high breakdown voltages and small chip sizes. IXYS offers CoolMOS™ performance in the industry standard SOT-227 package as well as the isolated packages: ISOPLUS247™, ISOPLUS220™ and ISOPLUS i4-PAC™. These isolated packages are also available in many MOSFET types affording greater convenience and safety.





Due to their internal DCB isolation, these devices simplify assembly and provide lower thermal resistance from junction to heatsink compared to external isolation materials. Together with the low $R_{DS(on)}$, the junction temperature could be significantly reduced, improving efficiency and reliability. At the same case temperature, the die can control higher currents, saving space and costs by utilizing a smaller number of components. CoolMOS™ devices are avalanche rated, guaranteeing rugged operation.

* CoolMOS™ is a trademark of Infineon Technologies


Trench Gate Power MOSFETs



Very Low $R_{DS(on)}$

Part Type	V_{DSS}	$I_{D(cont)}$ $T_C = 25^\circ C$	$R_{DS(on)}$ $T_C = 25^\circ C$	C_{iss} typ.	Q_g typ.	t_{rr} typ.	R_{thJC}	P_D	Fig. No.	Package style Outline drawings on pages O-30...O-52
	V	A	Ω	pF	nC	ns	K/W	W		
➤ New										
IXTP 64N055T	55	64	0.013	1420	37	31	1.15	130	X005a	X003 TO-251AA Weight = 2 g 
IXTY 64N055T		64	0.013	1420	37	31	1.15	130	X004	
➤ IXTC 220N055T		130	0.004	7200	158	47	1.00	150	X010a	
IXTC 240N055T		132	0.004	7600	170	50	1.00	150	X010a	
IXTC 280N055T		145	0.004	9800	200	54	0.96	160	X010a	
➤ IXTF 280N055T		160	0.004	9800	200	54	0.75	200	X024d	
IXTA 220N055T		220	0.004	7200	158	47	0.35	430	X011b	
IXTA 220N055T7		220	0.004	7200	158	47	0.35	430	X012c	
➤ IXTH 220N055T		220	0.004	7200	158	47	0.35	430	X014a	
IXTP 220N055T		220	0.004	7200	158	47	0.35	430	X005a	
IXTQ 220N055T		220	0.004	7200	158	47	0.35	430	X017a	
IXTA 240N055T		240	0.004	7600	170	50	0.31	480	X011b	
IXTA 240N055T7		240	0.004	7600	170	50	0.31	480	X012c	
➤ IXTH 240N055T		240	0.004	7600	170	50	0.31	480	X014a	
IXTP 240N055T		240	0.004	7600	170	50	0.31	480	X005a	
IXTQ 240N055T		240	0.004	7600	170	50	0.31	480	X017a	
IXTH 280N055T		280	0.003	9800	200	54	0.27	550	X014a	
IXTQ 280N055T		280	0.003	9800	200	54	0.27	550	X017a	
IXTV 280N055T		280	0.003	9800	200	54	0.27	550	X009a	
IXTV 280N055TS		280	0.003	9800	200	54	0.27	550	X013	
IXTU 12N06T	60	12	0.0085	256	3.4	30	4.50	33	X003	X009a PLUS220 Weight = 4 g 
IXTY 12N06T		12	0.0085	256	3.4	30	4.50	33	X004	
IXTP 55N075T	75	55	0.020	1400	33	51	1.15	130	X005a	X010a ISOPLUS220™ Weight = 3 g 
IXTY 55N075T		55	0.020	1400	33	51	1.15	130	X004	
➤ IXTC 200N075T		110	0.006	6800	160	61	1.00	150	X010a	
IXTC 220N075T		115	0.005	7700	165	62	1.00	150	X010a	
IXTC 250N075T		128	0.004	9900	200	65	0.96	160	X010a	
➤ IXTF 250N075T		140	0.004	9900	200	65	0.75	200	X024d	
IXTA 200N075T		200	0.005	6800	160	61	0.35	430	X011b	
IXTA 200N075T7		200	0.005	6800	160	61	0.35	430	X012c	
➤ IXTH 200N075T		200	0.005	6800	160	61	0.35	430	X014a	
IXTP 200N075T		200	0.005	6800	160	61	0.35	430	X005a	
IXTQ 200N075T		200	0.005	6800	160	61	0.35	430	X017a	
IXTA 220N075T		220	0.005	7700	165	62	0.31	480	X011b	
IXTA 220N075T7		220	0.005	7700	165	62	0.31	480	X012c	
➤ IXTH 220N075T		220	0.005	7700	165	62	0.31	480	X014a	
IXTP 220N075T		220	0.005	7700	165	62	0.31	480	X005a	
IXTQ 220N075T		220	0.005	7700	165	62	0.31	480	X017a	
IXTH 250N075T		250	0.004	9900	200	65	0.27	550	X014a	
IXTQ 250N075T		250	0.004	9900	200	65	0.27	550	X017a	
IXTV 250N075T		250	0.004	9900	200	65	0.27	550	X009a	
IXTV 250N075TS		250	0.004	9900	200	65	0.27	550	X013	
IXTP 50N085T	85	50	0.023	1460	34	55	1.15	130	X005a	X013 PLUS220SMD Weight = 2 g 
IXTY 50N085T		50	0.023	1460	34	55	1.15	130	X004	
➤ IXTA 70N085T		70	0.014	2570	59	56	0.85	176	X011b	
IXTP 70N085T		70	0.014	2570	59	56	0.85	176	X005a	
IXTA 88N085T		88	0.011	3140	69	57	0.65	230	X011b	
IXTA 88N085T7		88	0.011	3140	69	57	0.65	230	X012c	
IXTP 88N085T		88	0.011	3140	69	57	0.65	230	X005a	
➤ IXTC 180N085T		110	0.006	7500	170	63	1.00	150	X010a	
IXTC 200N085T		110	0.006	7600	160	64	1.00	150	X010a	
IXTC 230N085T		120	0.005	9900	187	66	0.96	160	X010a	
➤ IXTF 230N085T		130	0.005	9900	187	66	0.75	200	X024d	
IXTA 152N085T		152	0.007	5500	114	61	0.42	360	X011b	
IXTA 152N085T7		152	0.007	5500	114	61	0.42	360	X012c	
➤ IXTH 152N085T		152	0.007	5500	114	61	0.42	360	X014a	
IXTP 152N085T		152	0.007	5500	114	61	0.42	360	X005a	
IXTQ 152N085T		152	0.007	5500	114	61	0.42	360	X017a	
IXTA 180N085T		180	0.006	7500	170	63	0.35	430	X011b	
IXTA 180N085T7		180	0.006	7500	170	63	0.35	430	X012c	
➤ IXTH 180N085T		180	0.006	7500	170	63	0.35	430	X014a	
IXTP 180N085T		180	0.006	7500	170	63	0.35	430	X005a	
IXTQ 180N085T		180	0.006	7500	170	63	0.35	430	X017a	
IXTA 200N085T		200	0.005	7600	152	64	0.31	480	X011b	
IXTA 200N085T7		200	0.005	7600	152	64	0.31	480	X012c	
➤ IXTH 200N085T		200	0.005	7600	152	64	0.31	480	X014a	
IXTP 200N085T		200	0.005	7600	152	64	0.31	480	X005a	
IXTQ 200N085T		200	0.005	7600	152	64	0.31	480	X017a	
IXTH 230N085T		230	0.004	9900	187	66	0.27	550	X014a	
IXTQ 230N085T		230	0.004	9900	187	66	0.27	550	X017a	
IXTV 230N085T		230	0.004	9900	187	66	0.27	550	X009a	
IXTV 230N085TS		230	0.004	9900	187	66	0.27	550	X013	


Trench Gate Power MOSFETs






Very Low $R_{DS(on)}$

Part Type	V_{DSS}	$I_{D(cont)}$ $T_C = 25^\circ C$	$R_{DS(on)}$ $T_C = 25^\circ C$	C_{iss} typ.	Q_g typ.	t_{rr} typ.	R_{thJC}	P_D	Fig. No.	Package style Outline drawings on pages O-30...O-52
> New	V	A	Ω	pF	nC	ns	K/W	W		
IXTP 44N10T	100	44	0.030	1262	33	57	1.15	130	X005a	X004 TO-252AA Weight = 0.3 g
IXTY 44N10T		44	0.030	1262	33	57	1.15	130	X004	
> IXTA 60N10T		60	0.018	2520	49	59	0.85	176	X011b	X005a TO-220AB Weight = 4 g
IXTP 60N10T		60	0.018	2520	49	59	0.85	176	X005a	
IXTA 80N10T		80	0.014	3040	60	61	0.65	230	X011b	X010a PLUS220 Weight = 4 g
IXTA 80N10T7		80	0.014	3040	60	61	0.65	230	X012c	
IXTP 80N10T		80	0.014	3040	60	61	0.65	230	X005a	X010a ISOPLUS220™ Weight = 3 g
> IXTC 160N10T		83	0.008	6600	132	70	1.06	140	X010a	
IXTC 180N10T		90	0.007	6900	151	72	1.00	150	X010a	X011b TO-263AB Weight = 2 g
IXTC 200N10T		101	0.006	7200	220	75	0.96	160	X010a	
> IXTF 200N10T		120	0.006	8500	152	75	0.75	200	X024d	X011b TO-263(6) Weight = 2 g
IXTA 130N10T		130	0.009	4800	104	69	0.42	360	X011b	
IXTA 130N10T7		130	0.009	4800	104	69	0.42	360	X012c	X014a TO-247AD Weight = 6 g
> IXTH 130N10T		130	0.009	4800	104	69	0.42	360	X014a	
IXTP 130N10T	130	0.009	4800	104	69	0.42	360	X005a	X017a TO-3P Weight = 5 g	
IXTQ 130N10T	130	0.009	4800	104	69	0.42	360	X017a		
IXTA 160N10T	160	0.007	6600	132	70	0.35	430	X011b	X013 PLUS220SMD Weight = 2 g	
IXTA 160N10T7	160	0.007	6600	132	70	0.35	430	X012c		
> IXTH 160N10T	160	0.007	6600	132	70	0.35	430	X014a	X014a ISOPLUS i4-PAC™ Weight = 6 g	
IXTP 160N10T	160	0.007	6600	132	70	0.35	430	X005a		
IXTQ 160N10T	160	0.007	6600	132	70	0.35	430	X017a	X017a SOT-227B miniBLOC Weight = 30 g	
IXTA 180N10T	180	0.006	6900	151	72	0.31	480	X011b		
IXTA 180N10T7	180	0.006	6900	151	72	0.31	480	X012c	X014a TO-263(6) Weight = 2 g	
> IXTH 180N10T	180	0.006	6900	151	72	0.31	480	X014a		
IXTP 180N10T	180	0.006	6900	151	72	0.31	480	X005a	X017a TO-3P Weight = 5 g	
IXTQ 180N10T	180	0.006	6900	151	72	0.31	480	X017a		
IXTH 200N10T	200	0.006	8500	152	75	0.27	550	X014a	X013 PLUS220SMD Weight = 2 g	
> IXTN 200N10T	200	0.005	7200	220	75	0.30	500	X027a		
IXTQ 200N10T	200	0.006	8500	152	75	0.27	550	X017a	X013 PLUS220SMD Weight = 2 g	
IXTV 200N10T	200	0.006	8500	152	75	0.27	550	X009a		
IXTV 200N10TS	200	0.006	8500	152	75	0.27	550	X013	X013 PLUS220SMD Weight = 2 g	
> IXTN 320N10T	320	0.004	18000	325	85	0.17	880	X027a		
IXUN 350N10	350	0.002	27000	640	100	0.18	965	X027a	X013 PLUS220SMD Weight = 2 g	
> IXTA 42N15T	150	42	0.045	1730	21	100	0.75	200		X011b
IXTP 42N15T		42	0.045	1730	21	100	0.75	200	X005a	X014a TO-247AD Weight = 6 g
> IXTA 56N15T		56	0.036	2250	34	100	0.50	300	X011b	
IXTP 56N15T		56	0.036	2250	34	100	0.50	300	X005a	X017a TO-3P Weight = 5 g
> IXTA 90N15T		90	0.020	4100	80	110	0.33	455	X011b	
IXTH 90N15T		90	0.020	4100	80	110	0.33	455	X014a	X014a ISOPLUS i4-PAC™ Weight = 6 g
IXTP 90N15T		90	0.020	4100	80	110	0.33	455	X005a	
IXTQ 90N15T		90	0.020	4100	80	110	0.33	455	X017a	X017a SOT-227B miniBLOC Weight = 30 g
> IXTA 102N15T		102	0.018	4700	92	100	0.27	556	X011b	
IXTH 102N15T		102	0.018	4700	92	100	0.27	556	X014a	X014a ISOPLUS i4-PAC™ Weight = 6 g
IXTP 102N15T		102	0.018	4700	92	100	0.27	556	X005a	
IXTQ 102N15T		102	0.018	4700	92	100	0.27	556	X017a	X017a SOT-227B miniBLOC Weight = 30 g
> IXTH 130N15T		130	0.012	9800	113	100	0.20	750	X014a	
IXTQ 130N15T		130	0.012	9800	113	100	0.20	750	X017a	X013 PLUS220SMD Weight = 2 g
> IXTV 130N15TS	130	0.012	9800	113	100	0.20	750	X013		
> IXTH 160N15T	160	0.010	8800	160	115	0.18	830	X014a	X014a ISOPLUS i4-PAC™ Weight = 6 g	
> IXFH 150N17T	170	150	0.012	8800	155	96	0.18	830		X014a
IXTH 150N17T		150	0.012	8800	155	96	0.18	830	X014a	
> IXTA 32N20T	200	32	0.072	1760	38	140	0.75	200	X011b	X024d ISOPLUS i4-PAC™ Weight = 6 g
IXTP 32N20T		32	0.072	1700	38	110	0.75	200	X005a	
> IXTA 48N20T		48	0.050	3000	60	130	0.50	250	X011b	X017a SOT-227B miniBLOC Weight = 30 g
IXTH 48N20T		48	0.050	3000	60	130	0.50	250	X014a	
IXTP 48N20T		48	0.050	3000	60	130	0.50	250	X005a	X017a SOT-227B miniBLOC Weight = 30 g
> IXTQ 48N20T		48	0.050	3000	60	130	0.50	250	X017a	
> IXTC 102N20T		50	0.024	6800	114	130	0.85	176	X010a	X014a ISOPLUS i4-PAC™ Weight = 6 g
IXTA 60N20T		60	0.040	3700	90	140	0.37	400	X011b	
IXTP 60N20T		60	0.040	3700	90	140	0.37	400	X005a	X017a SOT-227B miniBLOC Weight = 30 g
IXTQ 60N20T		60	0.040	3700	90	140	0.37	400	X017a	
IXTA 86N20T		86	0.029	4500	90	140	0.31	480	X011b	X014a ISOPLUS i4-PAC™ Weight = 6 g
IXTH 86N20T		86	0.029	4500	90	140	0.31	480	X014a	
IXTP 86N20T		86	0.029	4500	90	140	0.31	480	X005a	X014a ISOPLUS i4-PAC™ Weight = 6 g


Trench Gate Power MOSFETs




Very Low $R_{DS(on)}$

Part Type	V_{DSS}	$I_{D(cont)}$ $T_C = 25^\circ C$	$R_{DS(on)}$ $T_C = 25^\circ C$	C_{iss} typ.	Q_g typ.	t_{rr} typ.	R_{thJC}	P_D	Fig. No.	Package style Outline drawings on pages O-30...O-52
➤ New	V	A	Ω	pF	nC	ns	K/W	W		
➤ IXTH 86N20T	200	86	0.029	4500	90	140	0.31	480	X017a	X005a TO-220AB Weight = 4 g 
➤ IXTH 102N20T		102	0.022	6800	114	130	0.20	750	X014a	
➤ IXTH 102N20T		102	0.022	6800	114	130	0.20	750	X017a	
➤ IXTH 102N20T		102	0.022	6800	114	130	0.20	750	X009a	
➤ IXTH 102N20TS		102	0.022	6800	114	130	0.20	750	X013	
➤ IXTH 130N20T		130	0.016	8800	150	150	0.18	830	X014a	
➤ IXTH 130N20TS		130	0.016	8800	150	150	0.15	530	X013	
➤ IXTH 50N25T	250	50	0.050	4000	78	166	0.31	400	X011b	X009a PLUS220 Weight = 4 g 
➤ IXTH 50N25T		50	0.050	4000	78	166	0.31	400	X014a	
➤ IXTH 50N25T		50	0.050	4000	78	166	0.31	400	X005a	
➤ IXTH 50N25T		50	0.050	4000	78	166	0.31	400	X017a	
➤ IXTH 110N25T		53	0.026	9300	152	200	0.69	180	X010a	
➤ IXTH 76N25T		76	0.039	4500	92	148	0.27	460	X011b	
➤ IXTH 76N25T		76	0.039	4500	92	148	0.27	460	X014a	
➤ IXTH 76N25T		76	0.039	4500	92	148	0.27	460	X005a	
➤ IXTH 76N25T		76	0.039	4500	92	148	0.27	460	X017a	
➤ IXTH 86N25T		86	0.036	5330	105	156	0.23	540	X014a	
➤ IXTH 86N25T		86	0.036	5330	105	156	0.23	540	X017a	
➤ IXTH 86N25T		86	0.036	5330	105	156	0.23	540	X009a	
➤ IXTH 96N25T		96	0.029	6100	114	158	0.20	625	X014a	
➤ IXTH 96N25T		96	0.029	6100	114	158	0.20	625	X017a	
➤ IXTH 96N25T	96	0.029	6100	114	158	0.20	625	X009a		
➤ IXTH 110N25T	110	0.024	8700	157	170	0.18	694	X014a		
➤ IXTH 110N25TS	110	0.024	8700	157	170	0.18	694	X013		
➤ IXTH 50N28T	280	50	0.060	4070	87	180	0.37	340	X011b	X010a ISOPLUS220™ Weight = 3 g 
➤ IXTH 80N28T		80	0.049	5000	115		0.25	500	X017a	




X011b **TO-263AB**
Weight = 2 g



X012c **TO-263(6)**
Weight = 2 g



TrenchT2™ Power MOSFETs

Part Type	V_{DSS}	$I_{D(cont)}$ $T_C = 25^\circ C$	$R_{DS(on)}$ $T_J = 25^\circ C$	C_{iss} typ.	Q_g typ.	t_{rr} typ.	R_{thJC}	P_D	Fig. No.	Package style Outline drawings on pages O-30...O-52
➤ New	V	A	Ω	pF	nC	ns	K/W	W		
➤ IXTH 100N04T2	40	100	0.0070	2690	25.5	34	1.00	150	X011b	X013 PLUS220SMD Weight = 2 g 
➤ IXTH 100N04T2		100	0.0070	2690	25.5	34	1.00	150	X005a	
➤ IXTH 120N04T2		120	0.0061	3240	58.0	35	0.75	200	X011b	
➤ IXTH 120N04T2		120	0.0061	3240	58.0	35	0.75	200	X005a	
➤ IXTH 220N04T2		220	0.0035	6500	112.0	45	0.42	360	X011b	
➤ IXTH 220N04T2		220	0.0035	6500	112.0	45	0.42	360	X005a	
➤ IXTH 220N04T2-7		220	0.0035	6820	112.0	45	0.42	360	X012c	
➤ IXTH 90N055T2	55	90	0.0084	2670	42.0	37	1.00	150	X011b	X014a TO-247AD Weight = 6 g 
➤ IXTH 90N055T2		90	0.0084	2670	42.0	37	1.00	150	X005a	
➤ IXTH 110N055T2		110	0.0066	3060	57.0	38	0.82	180	X011b	
➤ IXTH 110N055T2		110	0.0066	3060	57.0	38	0.82	180	X005a	
➤ IXTH 200N055T2		200	0.0042	6800	109.0	49	0.42	360	X011b	
➤ IXTH 200N055T2		200	0.0042	6800	109.0	49	0.42	360	X005a	
➤ IXTH 70N075T2	75	70	0.012	2580	46.0	48	1.00	150	X011b	X017a TO-3P Weight = 5 g 
➤ IXTH 70N075T2		70	0.012	2580	46.0	48	1.00	150	X005a	
➤ IXTH 90N075T2		90	0.010	3100	54.0	50	0.50	180	X011b	
➤ IXTH 90N075T2		90	0.010	3100	54.0	50	0.50	180	X005a	
➤ IXTH 170N075T2		170	0.0054	6500	110.0	52	0.42	360	X011b	
➤ IXTH 170N075T2		170	0.0054	6500	110.0	52	0.42	360	X005a	


















Polar™ N-Channel Power MOSFETs

Low Voltage Types

Part Type	V _{DSS}	I _{D(cont)} T _C = 25°C	R _{DS(on)} T _J = 25°C	C _{iss} typ.	Q _g typ.	t _{rr} typ.	R _{thJC}	P _D	Fig. No.	Package style Outline drawings on pages O-30...O-52
> New	V	A	Ω	pF	nC	ns	K/W	W		
IXTA 110N055P	55	110	0.014	2210	76.0	80	0.38	390	X011b	X004 Weight = 0.3 g
IXTP 110N055P		110	0.014	2210	76.0	80	0.38	390	X005a	
IXTQ 110N055P		110	0.014	2210	76.0	80	0.38	390	X017a	
IXTQ 150N06P	60	150	0.010	3000	118.0	90	0.31	480	X017a	X005a Weight = 4 g
IXTQ 200N06P		200	0.006	5400	200.0	90	0.21	714	X017a	
IXTA 75N10P	100	75	0.025	2250	74.0	120	0.42	360	X011b	X007a Weight = 5 g
IXTP 75N10P		75	0.025	2250	74.0	120	0.42	360	X005a	
IXTQ 75N10P		75	0.025	2250	74.0	120	0.42	360	X017a	
IXTQ 110N10P		110	0.015	3550	110.0	130	0.31	480	X017a	
IXTT 110N10P		110	0.015	3550	110.0	130	0.31	480	X019	
IXTR 200N10P		120	0.008	7600	235.0	100	0.50	300	X016a	
IXTQ 140N10P		140	0.011	4700	155.0	120	0.25	600	X017a	
IXTT 140N10P		140	0.011	4700	155.0	120	0.25	600	X019	
IXTK 170N10P		170	0.009	6000	198.0	120	0.21	714	X020a	
IXTK 200N10P		200	0.008	7600	240.0	100	0.18	800	X020a	
IXTA 62N15P	150	62	0.040	2250	70.0	150	0.42	350	X011b	X011b Weight = 2 g
IXTP 62N15P		62	0.040	2250	70.0	150	0.42	350	X005a	
IXTQ 62N15P		62	0.040	2250	70.0	150	0.42	350	X017a	
IXTQ 96N15P		96	0.024	3500	110.0	150	0.31	480	X017a	
IXTT 96N15P		96	0.024	3500	110.0	150	0.31	480	X019	
IXTQ 120N15P		120	0.016	4900	150.0	150	0.25	600	X017a	
IXTT 120N15P		120	0.016	4900	150.0	150	0.25	600	X019	
IXTK 150N15P		150	0.013	5800	190.0	150	0.21	714	X020a	
IXTQ 150N15P		150	0.013	5800	190.0	150	0.21	714	X017a	
IXTK 180N15P		180	0.010	7000	240.0	150	0.18	800	X020a	
IXTP 50N20PM	200	20	0.060	2250	70.0	150	2.00	90	X007a	X014a Weight = 6 g
IXTA 50N20P		50	0.060	2250	70.0	150	0.42	360	X011b	
IXTP 50N20P		50	0.060	2250	70.0	150	0.42	360	X005a	
IXTQ 50N20P		50	0.060	2250	70.0	150	0.42	360	X017a	
IXTQ 74N20P		74	0.034	3300	107.0	160	0.31	480	X017a	
IXTT 74N20P		74	0.034	3300	107.0	160	0.31	480	X019	
IXTH 96N20P		96	0.024	4800	145.0	160	0.25	600	X014a	
IXTQ 96N20P		96	0.024	4800	145.0	160	0.25	600	X017a	
IXTT 96N20P		96	0.024	4800	145.0	160	0.25	600	X019	
IXTK 120N20P		120	0.022	6000	152.0	180	0.21	714	X020a	
IXTQ 120N20P	120	0.022	6000	152.0	180	0.21	714	X017a		
IXTK 140N20P	140	0.018	7500	240.0	180	0.18	800	X020a		
IXTA 42N25P	250	42	0.084	2300	70.0	200	0.42	300	X011b	X016a Weight = 5 g
IXTP 42N25P		42	0.084	2300	70.0	200	0.42	300	X005a	
IXTQ 42N25P		42	0.084	2300	70.0	200	0.42	300	X017a	
IXTQ 64N25P		64	0.049	3450	105.0	200	0.31	400	X017a	
IXTT 64N25P		64	0.049	3450	105.0	200	0.31	400	X019	
IXTK 82N25P		82	0.035	4800	142.0	200	0.25	500	X020a	
IXTQ 82N25P		82	0.035	4800	142.0	200	0.25	500	X017a	
IXTT 82N25P		82	0.035	4800	142.0	200	0.25	500	X019	
IXTK 100N25P		100	0.027	6300	185.0	200	0.21	600	X020a	
IXTQ 100N25P		100	0.027	6300	185.0	200	0.21	600	X017a	
IXTT 100N25P	100	0.027	6300	185.0	200	0.21	600	X019		
IXTK 120N25P	120	0.024	8000	185.0	200	0.18	700	X020a		
IXTA 36N30P	300	36	0.110	2250	70.0	250	0.42	300	X011b	X019 Weight = 3 g
IXTP 36N30P		36	0.110	2250	70.0	250	0.42	300	X005a	
IXTQ 36N30P		36	0.110	2250	70.0	250	0.42	300	X017a	
IXTQ 52N30P		52	0.066	3490	110.0	250	0.31	400	X017a	
IXTT 52N30P		52	0.066	3490	110.0	250	0.31	400	X019	
IXTQ 69N30P		69	0.049	4960	156.0	250	0.25	500	X017a	
IXTT 69N30P		69	0.049	4960	156.0	250	0.25	500	X019	
IXTH 88N30P		88	0.040	6300	180.0	250	0.21	600	X014a	
IXTK 88N30P		88	0.040	6300	180.0	250	0.21	600	X020a	
IXTQ 88N30P		88	0.040	6300	180.0	250	0.21	600	X017a	
IXTT 88N30P	88	0.040	6300	180.0	250	0.21	600	X019		
IXTK 102N30P	102	0.033	7500	224.0	250	0.18	700	X020a		
IXTP 1R6N50P	500	1.6	6.500	140	3.9	400	2.90	43	X005a	X020a Weight = 10 g
IXTY 1R6N50P		1.6	6.500	140	3.9	400	2.90	43	X004	
IXTP 2R4N50P		2.4	3.750	240	6.1	400	2.25	55	X005a	
IXTY 2R4N50P		2.4	3.750	240	6.1	400	2.25	55	X004	
IXTA 3N50P		3.6	2.000	409	9.3	400	1.80	70	X011b	









Polar™ N-Channel Power MOSFETs

High Voltage Types

Part Type	V _{DSS} V	I _{D(cont)} T _C = 25°C A	R _{DS(on)} T _J = 25°C Ω	C _{iss} typ. pF	Q _g typ. nC	t _{rr} typ. ns	R _{thJC} K/W	P _D W	Fig. No.	Package style Outline drawings on pages O-30...O-52
➤ New										
IXTP 3N50P	500	3.6	2.000	409	9.3	400	1.80	70	X005a	X003 TO-251AA Weight = 2 g 
IXTY 3N50P		3.6	2.000	409	9.3	400	1.80	70	X004	
IXTP 8N50PM		4.0	0.800	1050	20.0	400	3.00	41	X007a	X004 TO-252AA Weight = 0.3 g 
IXTA 5N50P		4.8	1.400	620	12.6	400	1.40	89	X011b	
IXTP 5N50P		4.8	1.400	620	12.6	400	1.40	89	X005a	X005a TO-220AB Weight = 4 g 
➤ IXTU 5N50P		4.8	1.400	620	12.6	400	1.40	89	X003	
IXTY 5N50P		4.8	1.400	620	12.6	400	1.40	89	X004	X007a TO-220FPAB Weight = 5 g 
IXTA 6N50P		6.0	1.100	740	14.6	400	1.25	100	X011b	
IXTP 6N50P		6.0	1.100	740	14.6	400	1.25	100	X005a	X008 TO-262 i2-Pac Weight = 5 g 
IXTP 12N50PM		6.0	0.500	1690	29.0	400	tbd	50	X007a	
IXTA 8N50P		8.0	0.800	1050	20.0	400	0.83	150	X011b	X009a PLUS220 Weight = 4 g 
IXTP 8N50P		8.0	0.800	1050	20.0	400	0.83	150	X005a	
➤ IXTA 12N50P		12.0	0.500	1690	29.0	400	0.62	200	X011b	X010a ISOPLUS220™ Weight = 3 g 
IXTI 12N50P		12.0	0.500	1690	29.0	400	0.62	200	X008	
IXTP 12N50P		12.0	0.500	1690	29.0	400	0.62	200	X005a	X011b TO-263AB Weight = 2 g 
IXTC 26N50P		15.0	0.260	3600	65.0	400	0.95	130	X010a	
IXTA 16N50P		16.0	0.400	2250	43.0	400	0.42	300	X011b	X013 PLUS220SMD Weight = 2 g 
IXTP 16N50P		16.0	0.400	2250	43.0	400	0.42	300	X005a	
➤ IXTP 16N50PM		16.0	0.400	2850	43.0	400	2.50	300	X007a	X014a TO-247AD Weight = 6 g 
IXTQ 16N50P		16.0	0.400	2250	43.0	400	0.42	300	X017a	
IXTH 22N50P		22.0	0.270	2630	50.0	400	0.35	350	X014a	X017a TO-3P Weight = 5 g 
IXTQ 22N50P		22.0	0.270	2630	50.0	400	0.35	350	X017a	
IXTV 22N50P		22.0	0.270	2630	50.0	400	0.35	350	X009a	X019 TO-268AA Weight = 3 g 
IXTV 22N50PS		22.0	0.270	2630	50.0	400	0.35	350	X013	
IXTQ 26N50P		26.0	0.230	3600	65.0	300	0.31	400	X017a	X019 TO-268AA Weight = 3 g 
IXTT 26N50P		26.0	0.230	3600	65.0	300	0.31	400	X019	
IXTV 26N50P		26.0	0.230	3600	65.0	300	0.31	400	X009a	
IXTV 26N50PS		26.0	0.230	3600	65.0	300	0.31	400	X013	
IXTH 30N50P		30.0	0.200	4150	70.0	400	0.27	460	X014a	
IXTQ 30N50P		30.0	0.200	4150	70.0	400	0.27	460	X017a	
IXTT 30N50P		30.0	0.200	4150	70.0	400	0.27	460	X019	
IXTV 30N50P		30.0	0.200	4150	70.0	400	0.27	460	X009a	
IXTV 30N50PS		30.0	0.200	4150	70.0	400	0.27	460	X013	
IXTH 36N50P		36.0	0.170	5500	85.0	400	0.23	540	X014a	
IXTQ 36N50P		36.0	0.170	5500	85.0	400	0.23	540	X017a	
IXTT 36N50P		36.0	0.170	5500	85.0	400	0.23	540	X019	
IXTV 36N50P		36.0	0.170	5500	85.0	400	0.23	540	X009a	
IXTV 36N50PS		36.0	0.170	5500	85.0	400	0.23	540	X013	
IXTQ 44N50P		44.0	0.140	5440	98.0	400	0.19	650	X017a	
IXTP 1R4N60P	600	1.4	0.009	140	5.2	500	2.50	50	X005a	X013 PLUS220SMD Weight = 2 g 
IXTU 1R4N60P		1.4	0.009	140	5.2	500	2.50	50	X003	
IXTY 1R4N60P		1.4	0.009	140	5.2	500	2.50	50	X004	X014a TO-247AD Weight = 6 g 
IXTP 2N60P		2.0	5.100	240	7.0	500	2.25	55	X005a	
IXTY 2N60P		2.0	5.100	240	7.0	500	2.25	55	X004	X017a TO-3P Weight = 5 g 
IXTA 3N60P		3.0	2.900	411	9.8	500	1.80	70	X011b	
IXTP 3N60P		3.0	2.900	411	9.8	500	1.80	70	X005a	X019 TO-268AA Weight = 3 g 
IXTY 3N60P		3.0	2.900	411	9.8	500	1.80	70	X004	
IXTA 4N60P		4.0	2.000	635	13.0	500	1.41	89	X011b	
IXTP 4N60P		4.0	2.000	635	13.0	500	1.41	89	X005a	
➤ IXTU 4N60P		4.0	2.000	635	13.0	500	1.41	89	X003	
➤ IXTY 4N60P		4.0	2.000	635	13.0	500	1.41	89	X004	
➤ IXTP 7N60PM		4.0	1.100	1080	20.0	500	3.00	41	X007a	
IXTA 5N60P		5.0	1.700	750	14.2	500	1.25	100	X011b	
IXTP 5N60P		5.0	1.700	750	14.2	500	1.25	100	X005a	
IXTP 10N60PM		5.0	0.740	1610	32.0	500	2.50	50	X007a	
IXTA 7N60P		7.0	1.100	1080	20.0	500	0.83	150	X011b	
IXTP 7N60P		7.0	1.100	1080	20.0	500	0.83	150	X005a	
➤ IXTP 18N60PM		9.0	0.420	2500	49.0	500	2.00	90	X007a	
IXTA 10N60P		10	0.740	1610	32.0	500	0.62	200	X011b	
IXTI 10N60P		10	0.740	1610	32.0	500	0.62	200	X008	
IXTP 10N60P		10	0.740	1610	32.0	500	0.62	200	X005a	
➤ IXTP 14N60PM		7.0	0.550	2300	36.0	500	2.30	75	X007a	
IXTA 14N60P		14.0	0.550	2300	36.0	500	0.42	300	X011b	
IXTP 14N60P		14	0.550	2300	36.0	500	0.42	300	X005a	
IXTQ 14N60P		14	0.550	2300	36.0	500	0.42	300	X017a	







Polar™ N-Channel Power MOSFETs

High Voltage Types

Part Type	V _{DSS}	I _{D(cont)}	R _{DS(on)}	C _{iss}	Q _g	t _{rr}	R _{thJC}	P _D	Fig. No.	Package style	
> New	V	T _C = 25°C A	T _J = 25°C Ω	typ. pF	typ. nC	typ. ns	K/W	W		Outline drawings on pages O-30...O-52	
IXTQ 18N60P	600	18	0.420	2500	49.0	500	0.35	360	X017a	X003 Weight = 2 g	
> IXTV 18N60P		18	0.420	2500	49.0	500	0.35	360	X009a		
IXTV 18N60PS		18	0.420	2500	49.0	500	0.35	360	X013		
IXTQ 22N60P		22	0.350	3600	62.0	500	0.31	400	X017a		
> IXTV 22N60P		22	0.350	3600	62.0	500	0.31	400	X009a		
IXTV 22N60PS		22	0.350	3600	62.0	500	0.31	400	X013		
IXTH 26N60P		26	0.270	4150	72.0	500	0.27	460	X014a	X004 Weight = 0.3 g	
IXTQ 26N60P		26	0.270	4150	72.0	500	0.27	460	X017a		
IXTT 26N60P		26	0.270	4150	72.0	500	0.27	460	X019		
IXTV 26N60P		26	0.270	4150	72.0	500	0.27	460	X009a		
IXTV 26N60PS		26	0.270	4150	72.0	500	0.27	460	X013		
IXTH 30N60P		30	0.240	5050	82.0	500	0.23	540	X014a		
IXTQ 30N60P		30	0.240	5050	82.0	500	0.23	540	X017a	X005a Weight = 4 g	
IXTT 30N60P		30	0.240	5050	82.0	500	0.23	540	X019		
IXTV 30N60P		30	0.240	5050	82.0	500	0.23	540	X009a		
IXTV 30N60PS	30	0.240	5050	82.0	500	0.23	540	X013			
IXTA 2N80P	800	2.0	6.000	450	8.0	600	1.80	70	X011b	X009a Weight = 4 g	
IXTP 2N80P		2.0	6.000	450	8.0	600	1.80	70	X005a		
> IXTU 2N80P		2.0	6.000	450	8.0	600	1.80	70	X003		
IXTY 2N80P		2.0	6.000	450	8.0	600	1.80	70	X004		
IXTA 4N80P		3.5	3.000	750	15.0	600	1.25	100	X011b		
IXTP 4N80P		3.5	3.000	750	15.0	600	1.25	100	X005a		
> IXTA 08N100P	1000	0.8	20.000	300	11.3	750	3.00	42	X011b	X009a Weight = 4 g	
> IXTP 08N100P		0.8	20.000	300	11.3	750	3.00	42	X005a		
> IXTY 08N100P		0.8	20.000	300	11.3	750	3.00	42	X004		
> IXTA 1N100P		1.0	15.000	400	15.5	750	2.50	50	X011b	X011b Weight = 2 g	
> IXTP 1N100P		1.0	15.000	400	15.5	750	2.50	50	X005a		
> IXTY 1N100P		1.0	15.000	400	15.5	750	2.50	50	X004		
> IXTA 1R4N100P		1.4	11.000	500	17.8	750	2.00	63	X011b		
> IXTP 1R4N100P		1.4	11.000	500	17.8	750	2.00	63	X005a		
> IXTY 1R4N100P		1.4	11.000	500	17.8	750	2.00	63	X004		
> IXTA 2N100P		2.0	7.500	630	24.3	800	1.45	86	X011b	X013 Weight = 2 g	
> IXTP 2N100P		2.0	7.500	630	24.3	800	1.45	86	X005a		
> IXTY 2N100P		2.0	7.500	630	24.3	800	1.45	86	X004		
> IXTA 3N100P		3.0	4.800	1220	39.0	820	1.00	125	X011b		
> IXTH 3N100P		3.0	4.800	1220	39.0	820	1.00	125	X014a		
> IXTP 3N100P		3.0	4.800	1220	39.0	820	1.00	125	X005a		
> IXTA 06N120P	1200	0.6	32.000	270	13.3	900	3.00	42	X011b	X014a Weight = 6 g	
> IXTP 06N120P		0.6	32.000	270	13.3	900	3.00	42	X005a		
> IXTA 08N120P		0.8	25.000	370	14.0	900	2.50	50	X011b		
> IXTP 08N120P		0.8	25.000	370	14.0	900	2.50	50	X005a		
> IXTA 1N120P		1.0	20.000	550	17.6	900	2.00	63	X011b		
> IXTP 1N120P		1.0	20.000	550	17.6	900	2.00	63	X005a		
> IXTA 1R4N120P		1.4	13.000	725	24.8	900	1.45	86	X011b	X017a Weight = 5 g	
> IXTP 1R4N120P		1.4	13.000	725	24.8	900	1.45	86	X005a		
> IXTA 2R4N120P		2.4	7.500	1207	37.0	920	1.00	125	X011b		
> IXTH 2R4N120P		2.4	7.500	1207	37.0	920	1.00	125	X014a		
> IXTP 2R4N120P		2.4	7.500	1207	37.0	920	1.00	125	X005a		
											X019 Weight = 5 g
											









Polar™ N-Channel HiPerFET with Fast Intrinsic Diode

Low Voltage Types

Part Type	V _{DSS} V	I _{D(cont)} T _C = 25°C A	R _{DS(on)} T _J = 25°C Ω	C _{iss} typ. pF	Q _g typ. nC	t _{rr} ns	R _{thJC} K/W	P _D W	Fig. No.	Package style Outline drawings on pages O-30...O-52
➤ New										
IXFC 110N10P	100	60	0.017	3550	110.0	150	1.25	120	X010a	 <p>PLUS220 Weight = 4 g</p>
IXFH 110N10P		110	0.015	3550	110.0	150	0.31	480	X014a	
IXFV 110N10P		110	0.015	3550	110.0	150	0.31	480	X009a	
IXFV 110N10PS		110	0.015	3550	110.0	150	0.31	480	X013	
IXFR 200N10P		133	0.009	7600	235.0	150	0.50	300	X016a	
IXFH 140N10P		140	0.011	4700	155.0	150	0.25	600	X014a	
IXFT 140N10P		140	0.011	4700	155.0	150	0.25	600	X019	
IXFH 170N10P		170	0.009	6000	198.0	150	0.21	714	X014a	
IXFK 170N10P		170	0.009	6000	198.0	150	0.21	714	X020a	
IXFK 200N10P		200	0.008	7600	235.0	150	0.18	830	X020a	
IXFN 200N10P		200	0.008	7600	235.0	150	0.22	680	X027a	
IXFX 200N10P		200	0.008	7600	235.0	150	0.18	830	X015a	
IXFC 96N15P	150	42	0.026	3500	110.0	200	1.25	120	X010a	 <p>PLUS220SMD Weight = 2 g</p>
IXFH 96N15P		96	0.024	3500	110.0	200	0.31	480	X014a	
IXFV 96N15P		96	0.024	3500	110.0	200	0.31	480	X009a	
IXFV 96N15PS		96	0.024	3500	110.0	200	0.31	480	X013	
IXFR 180N15P		100	0.013	7000	240.0	200	0.50	300	X016a	 <p>TO-247AD Weight = 6 g</p>
IXFH 120N15P		120	0.016	4900	150.0	200	0.25	600	X014a	
IXFT 120N15P		120	0.016	4900	150.0	200	0.25	600	X019	
IXFH 150N15P		150	0.013	5800	190.0	200	0.21	714	X014a	
IXFK 150N15P		150	0.013	5800	190.0	200	0.21	714	X020a	
IXFN 180N15P		150	0.011	7000	240.0	200	0.22	680	X027a	
IXFK 180N15P		180	0.011	7000	240.0	200	0.18	830	X020a	
IXFX 180N15P		180	0.011	7000	240.0	200	0.18	830	X015a	
IXFC 74N20P	200	35	0.036	3300	107.0	200	1.25	120	X010a	
IXFH 74N20P		74	0.034	3300	107.0	200	0.31	480	X014a	
IXFV 74N20P		74	0.034	3300	107.0	200	0.31	480	X009a	
IXFV 74N20PS		74	0.034	3300	107.0	200	0.31	480	X013	
IXFR 140N20P		90	0.022	7500	240.0	200	0.50	300	X016a	
IXFH 96N20P		96	0.024	4800	145.0	200	0.25	600	X014a	
IXFT 96N20P		96	0.024	4800	145.0	200	0.25	600	X019	
IXFV 96N20P		96	0.024	4800	145.0	200	0.25	600	X009a	
IXFN 140N20P		115	0.018	7500	240.0	200	0.22	680	X027a	
IXFH 120N20P		120	0.022	6000	152.0	200	0.21	714	X014a	
IXFK 120N20P		120	0.022	6000	152.0	200	0.21	714	X020a	
IXFK 140N20P		140	0.018	7500	240.0	200	0.18	830	X020a	
IXFH 100N25P	250	100	0.027	6300	185.0	200	0.21	600	X014a	 <p>TO-268AA Weight = 5 g</p>
IXFK 120N25P		120	0.024	8000	185.0	200	0.18	700	X020a	
IXFX 120N25P		120	0.024	8000	185.0	200	0.18	700	X015a	
IXFC 52N30P	300	24	0.075	3490	110.0	200	1.25	100	X010a	 <p>TO-264 Weight = 10 g</p>
IXFH 52N30P		52	0.066	3490	110.0	200	0.31	400	X014a	
IXFV 52N30P		52	0.066	3490	110.0	200	0.31	400	X009a	
IXFV 52N30PS		52	0.066	3490	110.0	200	0.31	400	X013	
IXFR 102N30P		60	0.036	7500	224.0	200	0.50	250	X016a	
IXFH 69N30P		69	0.049	4960	156.0	200	0.25	500	X014a	
IXFT 69N30P		69	0.049	4960	156.0	200	0.25	500	X019	
IXFR 140N30P		70	0.026	14000	185.0	200	0.42	360	X016a	
IXFN 102N30P		86	0.033	7500	224.0	200	0.22	570	X027a	
IXFH 88N30P		88	0.040	6300	180.0	200	0.21	600	X014a	
IXFK 88N30P		88	0.040	6300	180.0	200	0.21	600	X020a	
IXFK 102N30P		102	0.033	7500	224.0	200	0.18	700	X020a	
IXFN 140N30P		110	0.024	14000	185.0	200	0.18	700	X027a	
IXFK 140N30P		140	0.024	14000	185.0	200	0.12	1040	X020a	
IXFX 140N30P		140	0.024	14000	185.0	200	0.12	1040	X015a	 <p>SOT-227B miniBLOC Weight = 30 g</p>



Polar™ N-Channel HiPerFET with Fast Intrinsic Diode


High Voltage Types


Part Type	V _{DSS}	I _{D(cont)} T _C = 25°C	R _{DS(on)} T _J = 25°C	C _{iss} typ.	Q _g typ.	t _{rr}	R _{thJC}	P _D	Fig. No.	Package style Outline drawings on pages O-30...O-52
> New	V	A	Ω	pF	nC	ns	K/W	W		
IXFP 3N50PM	500	2.7	2.000	409	9.3	200	3.50	36	X007a	X005a TO-220AB Weight = 4 g 
IXFP 5N50PM		3.2	1.400	620	12.6	200	3.30	38	X007a	
IXFP 8N50PM		4.4	0.800	1050	20.0	200	3.00	42	X007a	
IXFP 12N50PM		6	0.500	1690	29.0	200	2.50	50	X007a	
IXFC 16N50P		10	0.420	2250	43.0	200	1.00	125	X010a	
IXFA 12N50P		12	0.500	1690	29.0	200	0.62	200	X011b	
IXFP 12N50P		12	0.500	1690	29.0	200	0.62	200	X005a	
IXFC 26N50P		15	0.260	3600	65.0	250	0.95	130	X010a	
IXFA 16N50P		16	0.400	2250	43.0	200	0.42	300	X011b	
IXFH 16N50P		16	0.400	2250	43.0	200	0.42	300	X014a	
IXFP 16N50P	16	0.400	2250	43.0	200	0.42	300	X005a		
IXFC 36N50P		19	0.190	5500	93.0	200	0.75	156	X010a	X009a PLUS220 Weight = 4 g 
IXFR 36N50P		19	0.190	5500	93.0	200	0.75	156	X016a	
IXFH 22N50P		22	0.270	2630	50.0	200	0.35	350	X014a	
IXFV 22N50P		22	0.270	2630	50.0	200	0.35	350	X009a	
IXFV 22N50PS		22	0.270	2630	50.0	200	0.35	350	X013	
IXFR 44N50P		24	0.150	5440	98.0	200	0.60	208	X016a	
IXFH 26N50P		26	0.230	3600	60.0	200	0.31	400	X014a	
IXFV 26N50P		26	0.230	3600	60.0	200	0.31	400	X009a	
IXFV 26N50PS		26	0.230	3600	60.0	200	0.31	400	X013	
IXFH 30N50P		30	0.200	4150	70.0	200	0.27	460	X014a	
IXFT 30N50P	30	0.200	4150	70.0	200	0.27	460	X019		
IXFV 30N50P	30	0.200	4150	70.0	200	0.27	460	X009a		
IXFV 30N50PS	30	0.200	4150	70.0	200	0.27	460	X013		
IXFR 64N50P		35	0.095	8700	150.0	200	0.42	300	X016a	X011b TO-263AB Weight = 2 g 
IXFH 36N50P		36	0.170	5500	93.0	200	0.23	540	X014a	
IXFT 36N50P		36	0.170	5500	93.0	200	0.23	540	X019	
IXFV 36N50P		36	0.170	5500	93.0	200	0.23	540	X009a	
IXFV 36N50PS		36	0.170	5500	93.0	200	0.23	540	X013	
IXFH 44N50P		44	0.140	5440	98.0	200	0.19	650	X014a	
IXFK 44N50P		44	0.140	5440	98.0	200	0.19	650	X020a	
IXFT 44N50P		44	0.140	5440	98.0	200	0.19	650	X019	
IXFR 80N50P		45	0.072	12700	197.0	200	0.35	360	X016a	
IXFN 64N50P		61	0.085	8700	150.0	200	0.18	700	X027a	
IXFK 64N50P	64	0.085	8700	150.0	200	0.15	830	X020a		
IXFX 64N50P	64	0.085	8700	150.0	200	0.15	830	X015a		
IXFN 80N50P	66	0.065	12700	195.0	200	0.18	700	X027a		
IXFL 100N50P	70	0.052	20000	240.0	200	0.20	625	X022a		
IXFK 80N50P	80	0.065	12700	197.0	200	0.12	1040	X020a		
IXFX 80N50P	80	0.065	12700	197.0	200	0.12	1040	X015a		
IXFN 100N50P	90	0.049	20000	240.0	200	0.12	1040	X027a		
IXFB 100N50P	100	0.049	20000	240.0	200	0.10	1250	X021a		
IXFC 14N60P	600	8	0.630	2300	38.0	200	1.25	100	X010a	X015a PLUS247 Weight = 5 g 
IXFA 10N60P		10	0.740	1610	32.0	200	0.62	200	X011b	
IXFP 10N60P		10	0.740	1610	32.0	200	0.62	200	X005a	
IXFC 22N60P		12	0.360	4000	58.0	200	0.95	130	X010a	
IXFA 14N60P		14	0.550	2300	38.0	200	0.42	300	X011b	
IXFH 14N60P		14	0.550	2300	38.0	200	0.42	300	X014a	
IXFP 14N60P		14	0.550	2300	38.0	200	0.42	300	X005a	
IXFC 30N60P		15	0.250	3820	85.0	200	0.75	166	X010a	
IXFR 30N60P		15	0.250	3820	85.0	200	0.75	166	X016a	
IXFH 18N60P		18	0.400	2500	50.0	200	0.35	360	X014a	
IXFV 18N60P	18	0.400	2500	50.0	200	0.35	360	X009a		
IXFV 18N60PS	18	0.400	2500	50.0	200	0.35	360	X013		
IXFR 36N60P	20	0.200	5800	102.0	200	0.60	208	X016a		
IXFH 22N60P	22	0.350	3600	58.0	200	0.31	400	X014a		
X027a	SOT-227B									
Weight = 30 g	miniBLOC									
	X022a	ISOPLUS264™								
	Weight = 10 g									
	X021a	PLUS264								
	Weight = 10 g									
	X020a	TO-264								
	Weight = 10 g									


Polar™ N-Channel HiPerFET with Fast Intrinsic Diode


High Voltage Types


Part Type	V _{DSS} V	I _{D(cont)} T _C = 25°C A	R _{DS(on)} T _J = 25°C Ω	C _{iss} typ. pF	Q _g typ. nC	t _{rr} ns	R _{thJC} K/W	P _D W	Fig. No.	Package style Outline drawings on pages O-30...O-52
IXFV 22N60P	600	22	0.350	3600	58.0	200	0.31	400	X009a	X005a TO-220AB Weight = 4 g 
IXFV 22N60PS		22	0.350	3600	58.0	200	0.31	400	X013	
IXFH 26N60P		26	0.270	4150	72.0	200	0.27	460	X014a	
IXFT 26N60P		26	0.270	4150	72.0	200	0.27	460	X019	
IXFV 26N60P		26	0.270	4150	72.0	200	0.27	460	X009a	
IXFV 26N60PS		26	0.270	4150	72.0	200	0.27	460	X013	
IXFH 30N60P		30	0.240	4000	82.0	200	0.25	500	X014a	
IXFT 30N60P		30	0.240	4000	82.0	200	0.25	500	X019	
IXFV 30N60P		30	0.240	4000	82.0	200	0.25	500	X009a	
IXFV 30N60PS		30	0.240	4000	82.0	200	0.25	500	X013	
IXFR 48N60P		32	0.150	8860	150.0	200	0.42	300	X016a	
IXFH 36N60P		36	0.190	5800	102.0	200	0.19	650	X014a	
IXFK 36N60P	36	0.190	5800	102.0	200	0.19	650	X020a		
IXFT 36N60P	36	0.190	5800	102.0	200	0.19	650	X019		
IXFR 64N60P	36	0.105	12000	200.0	200	0.35	360	X016a		
IXFN 48N60P	40	0.140	8860	150.0	200	0.20	625	X027a		
IXFK 48N60P	48	0.135	8860	150.0	200	0.15	830	X020a		
IXFX 48N60P	48	0.135	8860	150.0	200	0.15	830	X015a		
IXFN 64N60P	50	0.096	12000	200.0	200	0.18	700	X027a		
IXFK 64N60P	64	0.096	12000	200.0	200	0.12	1040	X020a		
IXFX 64N60P	64	0.096	12000	200.0	200	0.12	1040	X015a		
IXFB 82N60P	82	0.750	23000	240.0	200	0.10	1250	X021a		
IXFL 82N60P	82	0.780	23000	240.0	200	0.20	625	X022a		
IXFN 82N60P	82	0.750	23000	240.0	200	0.12	1040	X027a		
IXFP 7N80PM	800	4	1.400	1500	30.0	250	3.00	50	X007a	X007a TO-263AB Weight = 3 g 
IXFC 10N80P		5	1.200	2300	40.0	250	1.25	100	X010a	
IXFA 7N80P		7	1.400	1500	30.0	250	0.62	200	X011b	
IXFI 7N80P		7	1.400	1500	30.0	250	0.62	200	X008	
IXFP 7N80P		7	1.400	1500	30.0	250	0.62	200	X005a	
IXFC 12N80P		7	0.900	3000	50.0	250	1.05	120	X010a	
IXFC 14N80P		8	0.750	3600	60.0	250	0.95	130	X010a	
IXFC 16N80P		9	0.650	4000	70.0	250	0.90	138	X010a	
IXFA 10N80P		10	1.100	2300	40.0	250	0.42	300	X011b	
IXFH 10N80P		10	1.100	2300	40.0	250	0.42	300	X014a	
IXFP 10N80P		10	1.100	2300	40.0	250	0.42	300	X005a	
IXFQ 10N80P		10	1.100	2300	40.0	250	0.42	300	X017a	
IXFC 20N80P	10	0.570	4685	86.0	250	0.80	160	X010a		
IXFR 20N80P	10	0.570	4685	86.0	250	0.80	160	X016a		
IXFH 12N80P	12	0.850	3000	50.0	250	0.35	360	X014a		
IXFQ 12N80P	12	0.850	3000	50.0	250	0.35	360	X017a		
IXFV 12N80P	12	0.850	3000	50.0	250	0.35	360	X009a		
IXFV 12N80PS	12	0.850	3000	50.0	250	0.35	360	X013		
IXFH 14N80P	14	0.700	3600	60.0	250	0.31	400	X014a		
IXFQ 14N80P	14	0.700	3600	60.0	250	0.31	400	X017a		
IXFR 24N80P	13	0.420	5800	100.0	250	0.60	208	X016a		
IXFT 14N80P	14	0.700	3600	60.0	250	0.31	400	X019		
IXFV 14N80P	14	0.700	3600	60.0	250	0.31	400	X009a		
IXFV 14N80PS	14	0.700	3600	60.0	250	0.31	400	X013		
IXFH 16N80P	16	0.600	4000	70.0	250	0.27	460	X014a		
IXFT 16N80P	16	0.600	4000	70.0	250	0.27	460	X019		
IXFV 16N80P	16	0.600	4000	70.0	250	0.27	460	X009a		
IXFV 16N80PS	16	0.600	4000	70.0	250	0.27	460	X013		
IXFH 20N80P	20	0.520	4685	86.0	250	0.25	500	X014a		
IXFT 20N80P	20	0.520	4685	86.0	250	0.25	500	X019		
IXFV 20N80P	20	0.520	4685	86.0	250	0.25	500	X009a		
IXFV 20N80PS	20	0.520	4685	86.0	250	0.25	500	X013		
IXFR 32N80P	20	0.290	8800	150.0	250	0.42	300	X016a		
IXFH 24N80P	24	0.400	5800	100.0	250	0.19	650	X014a		
IXFK 24N80P	24	0.400	5800	100.0	250	0.19	650	X020a		
IXFT 24N80P	24	0.400	5800	100.0	250	0.19	650	X019		
IXFR 44N80P	25	0.200	12000	200.0	250	0.42	300	X016a		
IXFN 32N80P	29	0.270	8820	135.0	250	0.20	625	X027a		
IXFK 32N80P	32	0.270	8800	150.0	250	0.15	830	X020a		

X027a **SOT-227B**
Weight = 30 g **miniBLOC**


X022a **ISOPLUS264™**
Weight = 10 g














X021a **PLUS264**
Weight = 10 g


X020a **TO-264**
Weight = 10 g



X019 **TO-268AA**
Weight = 5 g







Polar™ N-Channel HiPerFET with Fast Intrinsic Diode

High Voltage Types

Part Type	V _{DSS} V	I _{D(cont)} T _C = 25°C A	R _{DS(on)} T _J = 25°C Ω	C _{iss} typ. pF	Q _g typ. nC	t _{rr} ns	R _{thJC} K/W	P _D W	Fig. No.	Package style Outline drawings on pages O-30...O-52						
> New																
IXFX 32N80P	800	32	0.270	8800	150.0	250	0.15	830	X015a	X005a Weight = 4 g 						
IXFN 44N80P		39	0.190	12000	200.0	250	0.18	694	X027a							
IXFL 60N80P		40	0.150	18000	250.0	250	0.20	625	X022a							
IXFK 44N80P		44	0.190	12000	198.0	250	0.12	1040	X020a							
IXFX 44N80P		44	0.190	12000	198.0	250	0.12	1040	X015a							
IXFN 60N80P		53	0.140	18000	250.0	250	0.12	1040	X027a							
IXFB 60N80P	60	0.140	18000	250.0	250	0.10	1250	X021a								
> IXFA 4N100P	1000	4	3.000	1550	28.0	300	0.83	150	X011b	X009a Weight = 4 g 						
> IXFP 4N100P		4	3.000	1550	28.0	300	0.83	150	X005a							
> IXFA 5N100P		5	2.500	1970	35.0	300	0.62	150	X011b							
> IXFP 5N100P		5	2.500	1970	35.0	300	0.62	150	X005a							
> IXFA 7N100P		7	1.800	2770	47.0	300	0.42	300	X011b							
> IXFP 7N100P		7	1.800	2770	47.0	300	0.42	300	X005a							
> IXFR 15N100P		9	0.830	6200	97.0	300	0.62	200	X016a		X011b Weight = 2 g 					
> IXFH 10N100P		10	1.400	3420	58.0	300	0.33	380	X014a							
> IXFV 10N100P		10	1.400	3420	58.0	300	0.33	380	X009a							
> IXFV 10N100PS		10	1.400	3420	58.0	300	0.33	380	X013							
> IXFR 20N100P		11	0.640	8500	126.0	300	0.54	230	X016a							
> IXFH 12N100P		12	1.050	4720	80.0	300	0.27	463	X014a							
> IXFR 12N100P		12	1.050	4000	150.0	1000	0.42	300	X016a							
> IXFV 12N100P		12	1.050	4720	80.0	300	0.27	463	X009a							
> IXFV 12N100PS		12	1.050	4720	80.0	300	0.27	463	X013							
> IXFH 15N100P		15	0.760	6200	97.0	300	0.23	543	X014a							
> IXFV 15N100P		15	0.760	6200	97.0	300	0.23	543	X009a							
> IXFV 15N100PS		15	0.760	6200	97.0	300	0.23	543	X013							
> IXFR 26N100P		15	0.430	14000	197.0	300	0.43	290	X016a			X013 Weight = 2 g 				
> IXFR 32N100P		18	0.340	17000	225.0	300	0.39	320	X016a							
> IXFH 20N100P		20	0.570	8500	126.0	300	0.19	660	X014a							
> IXFT 20N100P		20	0.570	8500	126.0	300	0.19	660	X019							
> IXFN 26N100P		23	0.390	14000	197.0	300	0.21	595	X027a							
> IXFK 26N100P		26	0.390	14000	197.0	300	0.16	780	X020a							
> IXFX 26N100P		26	0.390	14000	197.0	300	0.16	780	X015a							
> IXFN 32N100P		27	0.320	17000	225.0	300	0.18	690	X027a							
> IXFL 38N100P		29	0.230	26000	350.0	300	0.24	520	X022e				X014a Weight = 6 g 			
> IXFK 32N100P		32	0.320	17000	225.0	300	0.13	960	X020a							
> IXFX 32N100P		32	0.320	17000	225.0	300	0.13	960	X015a							
> IXFL 44N100P		37	0.240	22000	305.0	300	0.35	357	X022e							
> IXFN 44N100P		37	0.220	22000	305.0	300	0.14	890	X027a							
> IXFN 38N100P		38	0.210	26000	350.0	300	0.125	1000	X027a							
> IXFB 44N100P		44	0.220	22000	305.0	300	0.10	1250	X021a							
> IXFR 30N110P	1100	16	0.400	16000	235.0	300	0.39	320	X016a	X015a Weight = 6 g 						
> IXFL 40N110P		21	0.280	22000	310.0	300	0.35	357	X022e							
> IXFN 30N110P		25	0.360	16000	235.0	300	0.18	695	X027a							
> IXFL 36N110P		26	0.260	27000	350.0	300	0.24	520	X022e							
> IXFK 30N110P		30	0.360	16000	235.0	300	0.13	960	X020a							
> IXFX 30N110P		30	0.360	16000	235.0	300	0.13	960	X015a							
> IXFN 40N110P		34	0.260	22000	310.0	300	0.14	890	X027a							
> IXFN 36N110P		36	0.240	27000	350.0	300	0.125	1000	X027a							
> IXFB 40N110P		40	0.260	22000	310.0	300	0.10	1250	X021a							
> IXFR 16N120P		1200	9	1.040	8000	120.0	300	0.54	230		X016a			X016a Weight = 5 g 		
> IXFH 12N120P			12	1.350	6500	103.0	300	0.23	543		X014a					
> IXFV 12N120P			12	1.350	6500	103.0	300	0.23	543		X009a					
> IXFV 12N120PS	12		1.350	6500	103.0	300	0.23	543	X013							
> IXFR 20N120P	13		0.630	12900	193.0	300	0.43	290	X016a							
> IXFR 26N120P	15		0.500	16000	225.0	300	0.39	320	X016a							
> IXFH 16N120P	16		0.950	8000	120.0	300	0.19	660	X014a							
> IXFT 16N120P	16		0.950	8000	120.0	300	0.19	660	X019							
> IXFL 30N120P	18		0.380	22500	310.0	300	0.35	357	X022e							
> IXFK 20N120P	20		0.570	12900	193.0	300	0.16	780	X020a							
> IXFX 20N120P	20		0.570	12900	193.0	300	0.16	780	X015a							
> IXFN 20N120P	20		0.570	12900	193.0	300	0.21	595	X027a							
> IXFN 26N120P	23		0.460	16000	225.0	300	0.18	695	X027a							
> IXFL 32N120P	24		0.340	27000	360.0	300	0.24	520	X022e							
> IXFK 26N120P	26		0.460	16000	225.0	300	0.13	960	X020a							
> IXFX 26N120P	26		0.460	16000	225.0	300	0.13	960	X015a							
> IXFB 30N120P	30		0.350	22500	310.0	300	0.10	1250	X021a							
> IXFN 30N120P	30		0.350	22500	310.0	300	0.14	890	X027a							
> IXFN 32N120P	32	0.310	27000	360.0	300	0.125	1000	X027a								
X020a		TO-264		X021a		PLUS264		X022a		ISOPLUS264™		X022e		ISOPLUS264™		
Weight = 10 g				Weight = 10 g				Weight = 10 g				Weight = 10 g				


Legacy (Standard) N-Channel Power MOSFET






Part Type	V _{DSS}	I _{D(cont)} T _C = 25°C	R _{DS(on)} T _J = 25°C	C _{iss} typ.	Q _g typ.	t _{rr} typ.	R _{thJC}	P _D	Fig. No.	Package style
> New	V	A	Ω	F	nC	ns	K/W	W		Outline drawings on pages O-30...O-52
IXTA 1N80	800	1	11	220	8.5	710	3.10	40	X011b	TO-251AA Weight = 2 g 
IOTP 1N80		1	11	220	8.5	710	3.10	40	X005a	
IOTY 1N80		1	11	220	8.5	710	3.10	40	X004	
IXTA 2N80		2	6.2	440	22	510	2.30	54	X011b	
IOTP 2N80		2	6.2	440	22	510	2.30	54	X005a	
IXTU 01N100	1000	0.1	80	60	8	1500	3.00	25	X003	TO-252AA Weight = 0.3 g 
IOTY 01N100		0.1	80	60	8	1500	3.00	25	X004	
IXTA 1N100		1.5	11	480	23	710	2.30	52	X011b	
IXTH 1N100		1.5	11	480	23	710	2.30	60	X014a	TO-220AB Weight = 4 g 
IOTP 1N100		1.5	11	480	23	710	2.30	54	X005a	
IXTT 1N100		1.5	11	480	23	710	2.30	60	X019	
IOTP 2N100		2	7	825	40	1000	1.25	100	X005a	TO-263AB Weight = 2 g 
IXTA 05N100		0.75	15	220	8.5	710	3.10	40	X011b	
IOTP 05N100		0.75	15	220	8.5	710	3.10	40	X005a	
IXTA 3N120	1200	3	4.5	1050	39	700	0.80	150	X011b	TO-247AD Weight = 6 g 
IXTH 3N120		3	4.5	1100	42	700	0.62	200	X014a	
IOTP 3N120		3	4.5	1050	39	700	0.80	150	X005a	
IXTH 6N120		6	2.4	1950	56	850	0.42	300	X014a	
IXTT 6N120		6	2.4	1950	56	850	0.42	300	X019	
IXTH 12N120		12	1.4	3400	95	850	0.27	460	X014a	

X014a **TO-247AD**
Weight = 6 g


X016a **ISOPLUS247™**
Weight = 5 g










HiPerFET™ Power MOSFET with Fast Intrinsic Diode


Part Type	V _{DSS}	I _{D(cont)} T _C = 25°C	R _{DS(on)} T _J = 25°C	C _{iss} typ.	Q _g typ.	t _{rr} typ.	R _{thJC}	P _D	Fig. No.	Package style
> New	V	A	Ω	F	nC	ns	K/W	W		
IXFK 180N07	70	180	0.006	9400	420	250	0.22	568	X020a	TO-268AA Weight = 5 g 
IXFN 180N07		180	0.007	9000	480	150	0.24	521	X027a	
IXFX 180N07		180	0.006	9400	420	250	0.22	568	X015a	
IXFN 340N07		340	0.004	12200	490	200	0.18	694	X027a	
IXFK 180N10	100	180	0.008	9100	360	250	0.22	568	X020a	TO-264 Weight = 10 g 
IXFN 180N10		180	0.008	9100	360	250	0.21	595	X027a	
IXFX 180N10		180	0.008	9100	360	250	0.22	568	X015a	
IXFN 230N10		230	0.007	21000	690	250	0.18	694	X027a	
IXFK 44N60	600	44	0.13	8900	330	250	0.22	568	X020a	SOT-227B miniBLOC Weight = 30 g 
IXFN 44N60		44	0.13	8900	330	250	0.22	568	X027a	
IXFR 44N60		38	0.13	8900	330	250	0.30	417	X016a	
IXFX 44N60		44	0.13	8900	330	250	0.22	568	X015a	
IXFK 24N100	1000	24	0.39	7000	250	250	0.22	568	X020a	
IXFN 24N100		24	0.39	7000	250	250	0.21	595	X027a	
IXFX 24N100		24	0.39	7000	250	250	0.22	568	X015a	
IXFN 34N100		34	0.28	9200	380	180	0.18	694	X027a	
IXFN 36N100		36	0.24	9200	380	180	0.18	694	X027a	
IXFA 3N120	1200	3	4.5	1050	39	250	0.62	200	X011b	
IXFP 3N120		3	4.5	1050	39	250	0.62	200	X005a	





Q-Class HiPerFET™ with Fast Intrinsic Diode



Part Type	V _{DSS}	I _{D(cont)} T _C = 25°C	R _{DS(on)} T _J = 25°C	C _{iss} typ.	Q _g typ.	t _{rr}	R _{thJC}	P _D	Fig. No.	Package style		
> New	V	A	Ω	F	nC	ns	K/W	W		Outline drawings on pages O-30...O-52		
IXFH 75N10Q	100	75.0	0.020	3700	140.0	200	0.42	298	X014a	X014a TO-247AD Weight = 6 g 		
IXFH 80N10Q		80.0	0.015	4500	180.0	200	0.35	357	X014a			
IXFT 80N10Q		80.0	0.015	4500	180.0	200	0.35	357	X019			
IXFH 58N20Q	200	58.0	0.040	3600	98.0	200	0.42	298	X014a	X015a PLUS247 Weight = 5 g 		
IXFR 58N20Q		58.0	0.040	3600	98.0	200	0.42	298	X016a			
IXFT 58N20Q		58.0	0.040	3600	98.0	200	0.42	298	X019			
IXFH 80N20Q		80.0	0.028	4600	180.0	200	0.35	357	X014a			
IXFK 80N20Q		80.0	0.028	4600	180.0	200	0.35	357	X020a			
IXFR 80N20Q		80.0	0.028	4600	180.0	200	0.40	313	X016a			
IXFT 80N20Q		80.0	0.028	4600	180.0	200	0.35	357	X019			
IXFH 40N30Q	300	40.0	0.080	3560	92.0	250	0.42	298	X014a	X016a ISOPLUS247™ Weight = 5 g 		
IXFT 40N30Q		40.0	0.080	3100	95.0	250	0.42	298	X019			
IXFH 52N30Q		52.0	0.060	5300	150.0	250	0.35	357	X014a			
IXFK 52N30Q		52.0	0.060	5300	150.0	250	0.35	357	X020a			
IXFT 52N30Q		52.0	0.060	5300	150.0	250	0.35	357	X019			
IXFE 73N30Q		66.0	0.046	6400	190.0	250	0.31	400	X028			
IXFK 73N30Q		73.0	0.042	3400	190.0	250	0.26	481	X020a			
IXFN 73N30Q	73.0	0.045	9000	360.0	200	0.25	500	X027a				
IXFX 73N30Q	73.0	0.042	6400	190.0	250	0.26	481	X015a	X018 TO-268 iPAK Weight = 5 g 			
IXFH 26N50Q	500	26.0	0.200	3900	95.0	250	0.50	250		X014a		
IXFR 26N50Q		24.0	0.200	3900	95.0	250	0.42	298	X016a			
IXFT 26N50Q		26.0	0.200	3900	95.0	250	0.42	298	X019			
IXFH 28N50Q		26.0	0.200	4200	135.0	250	0.42	298	X019			
IXFH 32N50Q		32.0	0.160	3950	153.0	250	0.35	357	X014a			
IXFJ 32N50Q		32.0	0.160	3950	153.0	250	0.35	357	X018			
IXFK 32N50Q		32.0	0.160	3950	150.0	250	0.30	417	X020a			
IXFR 32N50Q		30.0	0.160	3950	150.0	250	0.40	313	X016a			
IXFT 32N50Q		32.0	0.160	3950	153.0	250	0.35	357	X019			
IXFX 32N50Q		32.0	0.160	3950	150.0	250	0.30	417	X015a			
IXFE 48N50Q		41.0	0.110	6400	190.0	250	0.31	403	X028			
IXFK 48N50Q		48.0	0.100	8000	190.0	250	0.26	481	X020a			
IXFN 48N50Q		48.0	0.100	8000	190.0	250	0.26	481	X027a			
IXFR 48N50Q		40.0	0.100	6400	190.0	250	0.40	313	X016a			
IXFX 48N50Q	48.0	0.100	8000	190.0	250	0.26	481	X015a	X020a TO-264 Weight = 10 g 			
IXFH 26N60Q	600	28.0	0.250	5100	150.0	250	0.35	357		X014a		
IXFK 26N60Q		28.0	0.250	5100	150.0	250	0.35	357	X020a			
IXFR 26N60Q		23.0	0.250	5100	150.0	250	0.40	313	X016a			
IXFT 26N60Q		28.0	0.250	5100	150.0	250	0.35	357	X019			
IXFH 15N80Q	800	15.0	0.600	4300	90.0	250	0.42	298	X014a	X027a SOT-227B miniBLOC Weight = 30 g 		
IXFR 15N80Q		13.0	0.600	4300	90.0	250	0.50	250	X016a			
IXFT 15N80Q		15.0	0.600	4300	90.0	250	0.42	298	X019			
IXFH 20N80Q		20.0	0.420	5100	150.0	250	0.35	357	X014a			
IXFK 20N80Q		20.0	0.420	5100	150.0	250	0.35	357	X020a			
IXFT 20N80Q		20.0	0.420	5100	150.0	250	0.35	357	X019			
IXFK 27N80Q		27.0	0.320	7600	170.0	250	0.26	481	X020a			
IXFN 27N80Q		27.0	0.320	7600	170.0	250	0.24	521	X027a			
IXFX 27N80Q		27.0	0.320	7600	170.0	250	0.26	481	X015a			
IXFH 12N90Q		900	12.0	0.900	2900	90.0	200	0.42	298		X014a	X203a TO-204 
IXFM 12N90Q			12.0	0.900	2900	90.0	250	0.42	298		X203a	
IXFT 12N90Q	12.0		0.900	2900	90.0	200	0.42	298	X019			
IXFH 16N90Q	16.0		0.650	4000	133.0	250	0.35	357	X014a			
IXFK 16N90Q	16.0		0.650	4000	133.0	250	0.35	357	X020a			
IXFT 16N90Q	16.0		0.650	4000	133.0	250	0.35	357	X019			







Q-Class HiPerFET™ with Fast Intrinsic Diode




Part Type	V _{DSS}	I _{D(cont)} T _C = 25°C	R _{DS(on)} T _J = 25°C	C _{iss} typ.	Q _g typ.	t _{rr}	R _{thJC}	P _D	Fig. No.	Package style
➤ New	V	A	Ω	F	nC	ns	K/W	W		Outline drawings on pages O-30...O-52
IXFA 4N100Q	1000	4.0	3.000	1050	39.0	250	0.80	156	X011b	X005a TO-220AB Weight = 4 g
IXFH 4N100Q		4.0	3.000	1050	39.0	250	0.80	156	X014a	
IXFP 4N100Q		4.0	3.000	1050	39.0	250	0.80	156	X005a	
IXFR 4N100Q		3.5	3.000	1050	39.0	200	1.57	80	X016a	
IXFT 4N100Q		4.0	3.000	1050	39.0	250	0.80	156	X019	
IXFH 6N100Q		6.0	2.000	2200	48.0	250	1.90	66	X014a	X011b TO-263AB Weight = 2 g
IXFT 6N100Q		6.0	2.000	2200	48.0	250	1.90	66	X019	
IXFH 12N100Q		12.0	1.050	2900	90.0	200	0.42	300	X014a	
IXFR 12N100Q		12.0	1.050	2900	90.0	200	0.50	250	X016a	
IXFT 12N100Q		12.0	1.050	2900	90.0	200	0.42	300	X019	X015a PLUS247 Weight = 5 g
IXFH 15N100Q		15.0	0.700	4500	130.0	250	0.35	357	X014a	
IXFK 15N100Q		15.0	0.700	4500	130.0	250	0.35	357	X020a	
IXFT 15N100Q		15.0	0.700	4500	130.0	250	0.35	357	X019	
IXFK 21N100Q		21.0	0.500	5900	170.0	250	0.26	481	X020a	X014a TO-247AD Weight = 6 g
IXFN 21N100Q		21.0	0.500	5900	170.0	250	0.24	521	X027a	
IXFR 21N100Q		18.0	0.500	5900	170.0	250	0.30	417	X016a	
IXFX 21N100Q		21.0	0.500	5900	170.0	250	0.26	481	X015a	

Q2-Class HiPerFET™ with Fast Intrinsic Diode




Very High Speed

Part Type	V _{DSS}	I _{D(cont)} T _C = 25°C	R _{DS(on)} T _J = 25°C	C _{iss} typ.	Q _g typ.	t _{rr}	R _{thJC}	P _D	Fig. No.	Package style
➤ New	V	A	Ω	F	nC	ns	K/W	W		Outline drawings on pages O-30...O-52
IXFH 40N50Q2	500	40.0	0.160	4200	110.0	250	0.25	500	X014a	X020a TO-264 Weight = 10 g
IXFK 40N50Q2		40.0	0.160	4200	110.0	250	0.25	500	X020a	
IXFR 40N50Q2		29.0	0.170	4200	110.0	250	0.39	320	X016a	
IXFK 66N50Q2		66.0	0.074	6800	199.0	250	0.17	735	X020a	
IXFN 66N50Q2		66.0	0.074	6800	199.0	250	0.17	735	X027a	X021a PLUS264 Weight = 10 g
IXFR 66N50Q2		50.0	0.074	6800	199.0	250	0.30	416	X016a	
IXFX 66N50Q2		66.0	0.074	6800	199.0	250	0.17	735	X015a	
IXFB 80N50Q2		80.0	0.060	10500	260.0	250	0.14	890	X021a	
IXFF 80N50Q2		80.0	0.066	10500	260.0	250	0.33	380	X024d	X022a ISOPLUS264 Weight = 6 g
IXFL 80N50Q2		66.0	0.066	10500	260.0	250	0.33	380	X022a	
IXFN 80N50Q2		80.0	0.060	10500	260.0	250	0.14	890	X027a	
IXFK 52N60Q2	600	52.0	0.115	6800	198.0	250	0.17	735	X020a	
IXFX 52N60Q2		52.0	0.115	6800	198.0	250	0.17	735	X015a	X024d ISOPLUS i4-PAC™ Weight = 6 g
IXFB 70N60Q2		70.0	0.080	7200	265.0	250	0.14	890	X021a	
IXFN 70N60Q2		70.0	0.080	7200	265.0	250	0.14	890	X027a	
IXFK 38N80Q2	800	38.0	0.220	8340	190.0	250	0.17	735	X020a	
IXFN 38N80Q2		38.0	0.220	8340	190.0	250	0.17	735	X027a	X015a SOT-227B Weight = 30 g miniBLOC
IXFR 38N80Q2		28.0	0.300	8340	190.0	250	0.30	416	X016a	
IXFX 38N80Q2		38.0	0.220	8340	190.0	250	0.17	735	X015a	
IXFB 50N80Q2		50.0	0.150	7200	260.0	300	0.14	890	X021a	
IXFN 50N80Q2		50.0	0.150	7200	260.0	300	0.14	890	X027a	
IXFH 14N100Q2	1000	14.0	0.900	2800	83.0	250	0.31	400	X014a	
IXFR 14N100Q2		9.5	1.000	2700	83.0	250	0.62	200	X016a	X020a
IXFK 30N100Q2		30.0	0.400	8200	186.0	250	0.17	735	X020a	
IXFX 30N100Q2		30.0	0.400	8200	186.0	250	0.17	735	X015a	X021a
IXFB 38N100Q2		38.0	0.280	12600	250.0	300	0.14	893	X021a	
IXFL 38N100Q2		22.0	0.280	12600	250.0	300	0.33	380	X022a	X027a
IXFN 38N100Q2		38.0	0.250	12600	250.0	300	0.14	893	X027a	

Linear Power MOSFETs



High Voltage SOA

Part Type	V _{DSS}	I _{D(cont)} T _C = 25°C	R _{DS(on)} T _J = 25°C	C _{iss} typ.	Q _g typ.	t _{rr} typ.	R _{thJC}	P _D	Fig. No.	Package style
> New	V	A	Ω	pF	nC	ns	K/W	W		Outline drawings on pages O-30...O-52
> IXTH 30N50L2	500	30	0.20	10200	240	500	0.31	400	X014a	 TO-247AD Weight = 6 g
> IXTQ 30N50L2		30	0.20	10200	240	500	0.31	400	X017a	
> IXTT 30N50L2		30	0.20	10200	240	500	0.31	400	X019	
IXTH 24N50L		24	0.30	2500	160	500	0.31	400	X014a	
IXTK 46N50L		46	0.16	7000	260	600	0.18	700	X020a	
IXTN 46N50L		46	0.16	7000	260	600	0.18	700	X027a	
IXTX 46N50L		46	0.16	7000	260	600	0.18	700	X015a	
IXTB 62N50L		62	0.10	11500	550	500	0.156	800	X021a	
IXTN 62N50L		62	0.10	11500	550	500	0.156	800	X027a	
IXTH 12N100L		1000	12	1.30	2500	155	1000	0.31	400	
IXTK 22N100L	22		0.60	7050	270	1000	0.18	700	X020a	
IXTN 22N100L	22		0.60	7050	270	1000	0.18	700	X027a	
IXTX 22N100L	22		0.60	7050	270	1000	0.18	700	X015a	
IXTB 30N100L	30		0.45	13200	545	1000	0.156	800	X021a	
IXTN 30N100L	30		0.45	13700	545	1000	0.156	800	X027a	
> IXTK 17N120L	1200	17	0.99	8000	270	1350	0.18	700	X020a	 TO-3P Weight = 5 g
> IXTN 17N120L		17	0.99	8000	270	1350	0.18	700	X027a	
> IXTN 8N150L	1500	8	5.00	7900	250	790	0.18	700	X027a	 TO-268AA Weight = 5 g

Unlike "normal" MOSFET operation where the transistor functions like an on/off switch, linear applications will subject the transistor to high thermal stress due to the simultaneous occurrence of high drain voltage and current.

This is the reason that some types of MOSFETs are not recommended for use in linear applications. However, IXYS' new Linear Power MOSFETs have been specifically designed to handle the types of tough "linear operating conditions" that are frequently being encountered in the consumer and industrial markets.

Some common applications include linear power supplies, class A amplifiers, electronic loads, programmable resistors and motor control. Optimizations were made to the fundamental planar cell design in order to maximize the power dissipation capabilities of this Linear Power MOSFET family.

The Forward Bias Safe Operating Area (FBSOA) characteristic is one such targeted parameter that was optimized, which essentially allowed for a larger operating „window“ as dictated by the power limitations of the device.

This extended power window translates to improved ruggedness and power dissipation capabilities during the high thermal stress conditions posed by the linear operating environment. IXYS provides a wide selection of Linear Power MOSFETs.

Voltages include 500 V, 1000 V and 1200V, while currents range from 17 A to 62 A. These Power MOSFETs are offered in a number of different packages including the standard TO-247 and a variety of „plus“ sizes.

These new devices are also compatible with IXYS ISOPLUS™ packages, which provide integral backside case isolation.


X019

Weight = 5 g




X020a

Weight = 10 g



X021a

Weight = 10 g









X027a

Weight = 30 g



PolarP™ P-Channel Power MOSFETs




Part Type	V _{DSS}	I _{D(cont)} T _C = 25°C	R _{DS(on)} T _J = 25°C	C _{iss} typ.	Q _g typ.	t _{rr} typ.	R _{thJC}	P _D	Fig. No.	Package style	
➤ New	V	A	Ω	pF	nC	ns	K/W	W		Outline drawings on pages O-30...O-52	
IXTA 52P10P	-100	-52.0	0.050	2845	60	120	0.42	300	X011b	TO-220AB Weight = 4 g 	
IXTH 52P10P		-52.0	0.050	2845	60	120	0.42	300	X014a		
IXTP 52P10P		-52.0	0.050	2845	60	120	0.42	300	X005a		
IXTQ 52P10P		-52.0	0.050	2845	60	120	0.42	300	X017a		
IXTH 90P10P		-90.0	In Development								X014a
IXTT 90P10P		-90.0	In Development								X019
IXTK 170P10P		* -170.0	0.012	1260	240	176	0.14	890	X020a		
IXTN 170P10P		* -170.0	0.012	1260	240	176	0.14	890	X027a		
IXTX 170P10P		* -170.0	0.012	1260	240	176	0.14	890	X015a		
IXTA 36P15P	-150	-36.0	0.110	3100	55	228	0.42	300	X011b	TO-263AB Weight = 2 g 	
IXTP 36P15P		-36.0	0.110	3100	55	228	0.42	300	X005a		
IXTQ 36P15P		-36.0	0.110	3100	55	228	0.42	300	X017a		
IXTA 26P20P	-200	-26.0	0.170	2740	56	240	0.42	300	X011b	TO-247AD Weight = 6 g 	
IXTH 26P20P		-26.0	0.170	2740	56	240	0.42	300	X014a		
IXTP 26P20P		-26.0	0.170	2740	56	240	0.42	300	X005a		
IXTQ 26P20P		-26.0	0.170	2740	56	240	0.42	300	X017a		
IXTH 48P20P		-48.0	In Development								X014a
IXTT 48P20P		-48.0	In Development								X019
IXTK 90P20P		-90.0	0.044	12000	205	315	0.14	890	X020a		
IXTN 90P20P		-90.0	0.044	12000	205	315	0.14	890	X027a		
IXTR 90P20P		-53.0	0.048	12000	205	315	0.40	312	X016a		
IXTX 90P20P		-90.0	0.044	12000	205	315	0.14	890	X015a		
IXTA 10P50P	-500	-10.0	1.000	2670	50	414	0.50	250	X011b	ISOPLUS247™ Weight = 5 g 	
IXTH 10P50P		-10.0	1.000	2670	50	414	0.50	250	X014a		
IXTP 10P50P		-10.0	1.000	2670	50	414	0.50	250	X005a		
IXTQ 10P50P		-10.0	1.000	2670	50	414	0.50	250	X017a		
IXTH 20P50P		-20.0	In Development								X014a
IXTT 20P50P		-20.0	In Development								X019
IXTK 40P50P		-40.0	0.230	11500	205	477	0.14	890	X020a		
IXTN 40P50P		-40.0	0.230	11500	205	477	0.14	890	X027a		
IXTR 40P50P		-22.0	0.260	11500	205	477	0.40	312	X016a		
IXTX 40P50P		-40.0	0.230	11500	205	477	0.14	890	X015a		
IXTH 16P60P	-600	-16.0	In Development							X014a	TO-268AA Weight = 5 g 
IXTT 16P60P		-16.0	In Development							X019	
IXTK 32P60P		-32.0	In Development							X020a	
IXTN 32P60P		-32.0	In Development							X027a	
IXTX 32P60P		-32.0	In Development							X015a	
			In Development							X014a	

* limited by leads

TrenchP™ P-Channel Power MOSFETs

Part Number	V _{DSS}	I _D T _C = 25°C	R _{DS(on)} T _C = 25°C	C _{iss} typ.	Q _G typ.	t _{rr} typ.	R _{thJC}	P _D	Fig. No.
➤ New	V	A	mΩ	pF	nC	nS	K/W	W	
IXTA 32P05T	-50	32	36	1975	46	26	1.5	83	X011b
IXTP 32P05T	-50	32	36	1975	46	26	1.5	83	X005a
IXTA 28P065T	-65	28	45	2030	46	31	1.5	83	X011b
IXTP 28P065T	-65	28	45	2030	46	31	1.5	83	X005a
IXTA 24P085T	-85	24	65	2090	41	40	1.5	83	X011b
IXTP 24P085T	-85	24	65	2090	41	40	1.5	83	X005a
IXTA 18P10T	-100	18	120	2100	39	62	1.5	83	X011b
IXTP 18P10T	-100	18	120	2100	39	62	1.5	83	X005a

X020a **TO-264**
Weight = 10 g




X027a **SOT-227B miniBLOC**
Weight = 30 g



CoolMOS™ Power MOSFETs


CoolMOS™ is a trademark of Infineon Technologies



K Series - CoolMOS™

Part Type	V _{DSS}	I _{D(cont)} T _C = 25°C	R _{DS(on)} T _J = 25°C	Q _g typ.	R _{thJC}	V _{ISO} L RMS	Fig. No.	Package style Outline drawings on pages O-30...O-52
➤ New	V	A	Ω	nC	K/W	V		
C3 Series								
IXKC 20N60C	600	14	0.19	80	1.00	2500	X010a	X005a TO-220AB Weight = 4 g
IXKC 40N60C		24	0.096	160	0.50	2500	X010a	
IXKR 40N60C		38	0.07	250	0.45	2500	X016a	
IXKN 40N60C		40	0.07	250	0.43	2500	X027a	
IXKH 47N60C		47	0.07	250	0.30	-	X014a	
IXKN 75N60C		75	0.036	500	0.22	2500	X027a	
IXKK 85N60C		85*	0.036	540	0.18	-	X020a	X009a PLUS220 Weight = 4 g
IXKC 13N80C	800	13	0.29	85	0.96	2500	X010a	X010a ISOPLUS220™ Weight = 3 g
IXKC 25N80C		20	0.15	180	0.90	2500	X010a	
IXKR 25N80C		25	0.15	170	0.50	2500	X016a	
IXKN 45N80C		44	0.074	335	0.33	2500	X027a	
C5 Series								
➤ IXKP 10N60C5	600	10	0.385	17	1.15	-	X005a	X013 PLUS220SMD Weight = 2 g
➤ IXKP 10N60C5M		5.4	0.385	17	3.95	-	X007a	
➤ IXKP 13N60C5		13	0.3	22	0.95	-	X005a	X014a TO-247AD Weight = 6 g
➤ IXKP 13N60C5M		6.5	0.3	22	3.85	-	X007a	
➤ IXKP 20N60C5		20	0.2	32	0.60	-	X005a	X016a ISOPLUS247™ Weight = 5 g
➤ IXKP 20N60C5M		7.6	0.2	32	3.75	-	X007a	
➤ IXKH 20N60C5		20	0.2	32	0.60	-	X014a	X020a TO-264 Weight = 10 g
➤ IXKC 15N60C5		15	0.165	40	1.10	2500	X010a	
➤ IXKP 24N60C5		24	0.165	40	0.50	-	X005a	X022c ISOPLUS264 Weight = 6 g
➤ IXKP 24N60C5M		8.5	0.165	40	3.65	-	X007a	
➤ IXKH 24N60C5		24	0.165	40	0.50	-	X014a	X024a ISOPLUS i4-PAC™ Weight = 6 g
➤ IXKC 19N60C5		19	0.125	53	0.95	2500	X010a	
➤ IXKH 30N60C5		30	0.125	53	0.40	-	X014a	X024c ISOPLUS i4-PAC™ Weight = 6 g
➤ IXKC 23N60C5		23	0.1	60	0.85	2500	X010a	
IXKP 35N60C5		35	0.1	60	0.35	-	X005a	X027a SOT-227B miniBLOC Weight = 30 g
IXKH 35N60C5		35	0.1	60	0.35	-	X014a	
➤ IXKR 47N60C5		47	0.045	150	0.45	2500	X016a	
IXKH 70N60C5		70	0.045	150	0.20	-	X014a	
➤ IXKT 70N60C5		66	0.045	150	0.23	-	X019	
<p>CoolMOS™ Configurations in i4-PAC™</p> <p>IXKF FDM FMD LKK</p>								
Part Type	V _{DSS}	I _{D(cont)} T _C = 25°C	R _{DS(on)} T _J = 25°C	Q _g typ.	R _{thJC}	Config.	Fig. No.	
➤ New	V	A	Ω	nC	K/W			
IXKF 40N60SCD1	600	38	0.07	250	0.45	single	X024c	X027a SOT-227B miniBLOC Weight = 30 g
➤ FMD 15-06KC5		15	0.165	under development	under development	boost	X024a	
FMD 40-06KC		38	0.07	250	0.45	boost		
➤ FMD 47-06KC5		47	0.045	under development	under development	boost		
➤ FDM 15-06KC5	600	15	0.165	under development	under development	buck		
➤ FDM 47-06KC5		47	0.045	under development	under development	buck		
Configuration in ISOPLUS264™ Package								
➤ LKK 47-06C5	600	2 x 47	0.045	150	0.45	dual	X022c	

MOSFET Modules

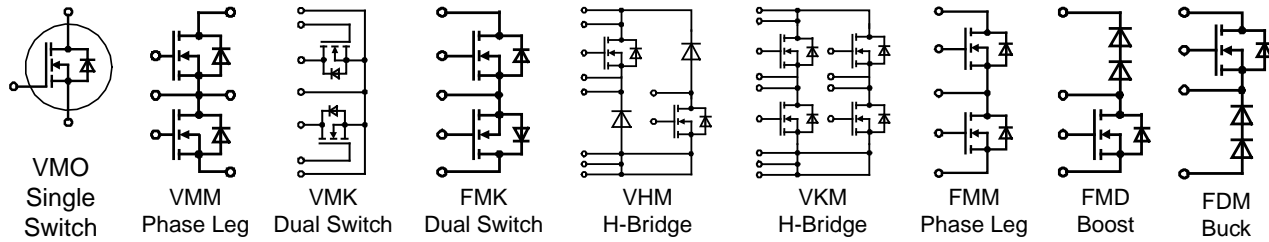

Suffix „F“ = HiPerFET™ Technology with Fast Intrinsic Diode

Part Type	V _{DSS}	I _{D25}	I _{D80}	R _{DSon} typ.	t _r	t _f	R _{thJC}	NTC	Fig. No.	Package style Outline drawings on pages O-30...O-52
➤ New	V	A	A	mΩ	ns	ns	K/W			
Single Switch Modules										
VMO 550-01F	100	590	not recommended for new designs						X128d	X024a ISOPLUS i4-PAC™ Weight = 6 g
VMO 650-01F		690						X128d		
VMO 1200-01F		1245	930	1.35	200	500	0.039	X130d		
VMO 580-02F	200	580	not recommended for new designs						X130d	X102 ECO-PAC2 Weight = 24 g
VMO 1600-02P		1900	1600	1.40			0.03	X130d		
VMO 60-05F	500	60	not recommended for new designs						X125f	
Dual Switch Modules – Common Source Configuration										
VMK 165-007T	70	165	not recommended for new designs						X125a	X125a TO-240AA Weight = 90 g
FMK 75-01F	100	75	50 / 90°C	21	60	60	0.5	X024a		
VMK 90-02T2	200	84	not recommended for new designs						X125a	
MOSFET Modules – Phase Leg Configuration										
FMM 75-01F	100	75	50 / 90°C	21	60	60	0.5		X024a	X125f TO-240AA Weight = 90 g
VMM 650-01F		680	not recommended for new designs						X130e	
VMM 45-02F	200	45	not recommended for new designs						X125g	
VMM 85-02F		84	not recommended for new designs						X127a	X125g TO-240AA Weight = 90 g
VMM 300-03F	300	290	not recommended for new designs						X128a	
VMM 90-09F	900	85	65	76	140	180	0.08		X130e	
MOSFET Modules – H Bridge Configuration										
VHM 40-06P1*	600	38	25/90°C	70	10	95	0.45		X102	X127a Y4-M5 Weight = 150 g
VKM 60-01P1	100	75	60	25	60	60	0.5			
VKM 40-06P1*	600	38	25	70	10	95	0.45			
MOSFET Modules – Boost Configuration										
FMD 21-05QC	500	21	15 / 90°C	180	16	30	1.5		X024a	X127a Y4-M5 Weight = 150 g
FMD 40-06KC *	600	38	25 / 90°C	60	contact factory					
➤ FMD 15-06KC5 *		15		165	under development					
➤ FMD 47-06KC5 *		47	32 / 90°C	40	under development					
MOSFET Modules – Buck Configuration										
➤ FDM 15-06KC5 *	600	15		165	under development				X024a	
➤ FDM 47-06KC5 *		47		45	under development					

* CoolMOS™ is a trademark of Infineon Technologies



Diodes

Diodes for High Switching Frequencies

Fast Recovery Epitaxial Diodes (HiPerFRED, FRED) and FRD (SONIC)

Power switches (IGBT, MOSFET, BJT, GTO) for applications in electronics are only as good as their associated free-wheeling diodes. At increasing switching frequencies, the proper functioning and efficiency of the power switch, aside from conduction losses, is determined by the turn-off behavior of the diode (characterized by Q_{rr} , I_{RM} and t_{rr} - Fig. 1). With optimized ultra-fast switching diodes, the development engineer has various possibilities: either higher pulse rate or higher current load or smaller heatsink or more conservative operation due to „cooler“ chips.

The reverse current characteristic following the peak reverse current I_{RM} is another very important property. The slope of the decaying reverse current di_{rr}/dt results from design parameters (technology and diffusion of the diode chips). In a circuit this current slope, in conjunction with parasitic inductances (e.g. connecting leads), causes over-voltage spikes and high frequency interference voltages. The higher the di_{rr}/dt („hard recovery“ or „snap-off“ behavior) the higher is the resulting additional stress for both the diode and the paralleled switch. A slow decay of the reverse current („soft recovery“ behavior), is the most desirable characteristic, and this is designed into all diodes. The wide range of available blocking voltages makes it possible to apply these diodes as output rectifiers in switch-mode power supplies (SMPS) as well as protective and free-wheeling diodes for power switches in inverters.

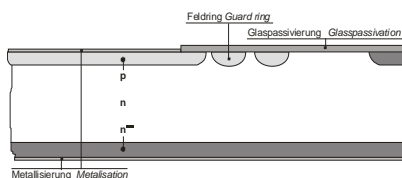


Fig. 2: Cross section of glassvated planar epitaxial diode chip with guard rings (type DWEP)

Diodes for General Purpose Applications

Rectifier Diodes

Diodes of the DS-series (anode on stud) and of the DSI-series (cathode on stud) are mainly used for rectifying 50 or 60 Hz mains currents. Discrete diodes in plastic and metal housings and also different diode bridges are available for standard line voltages (from 100 to 600 V).

Avalanche Diodes

Avalanche diodes or surge-voltage-proof rectifier diodes of the series DSA (anode on stud) and DSAI (cathode on stud) differ from standard diodes of the series DS and DSI in the following manner: the operation in avalanche breakdown above the normal reverse blocking voltage (V_{RRM}) can be tolerated as long as the power is within the specified maximum permissible non-repetitive reverse surge dissipation P_{RSM} at the specified pulse

width. In order to have technologically good control of the avalanche breakdown, it is important to ensure homogeneous doping of the middle zone of the silicon chip and suitable junction termination and passivation at the edges where PN-junctions are exposed to the surface (high field strength at the edge). Because of this ruggedness against periodically occurring short-term voltage surges in the blocking direction, the user frequently can do without protective overvoltage networks. In addition, if avalanche diodes are put in series for high voltage applications, the sharp avalanche breakdown of the blocking characteristic ensures static and dynamic voltage distribution uniformly across each device. Thus, in general, none of the series diodes will be overstressed by reverse voltages which are substantially above the avalanche voltage. All high voltage rectifier modules manufactured in quantity are assembled with avalanche diodes.

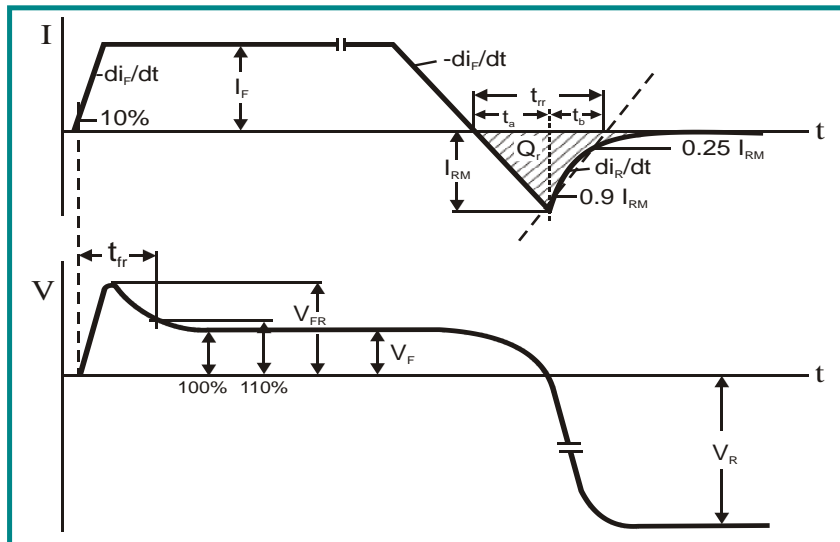


Fig. 1: Current and voltage during turn-on and turn-off switching of fast diodes


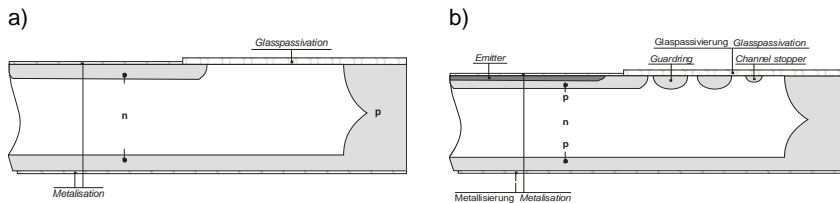



Fig. 3: Cross sections of glassvated planar diode chips with separation diffusion
 a) type DWN with Anode on bottom
 b) type DWP with Cathode on bottom

Gallium Arsenide Schottky Diodes

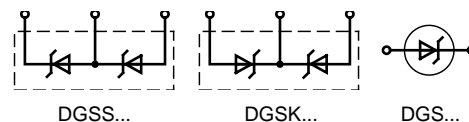


No reverse recovery


Type	V_{RRM}	I_{DC}	@ T_C	V_F	@ I_F	C_J	R_{thJC}	Fig. No.	Package style
○ Not for new designs ➤ New	V	A	°C	typ. $T_{VJ} = 125^\circ\text{C}$ V	A	pF	K/W		Outline drawings on pages O-30...O-52
○ DGS 3-018AS	180	5.0	90	0.85	2.0	8.8	8.50	X004	X004 TO-252AA Weight = 0.3 g 
○ DGS 20-018AS	180	17.0	90	0.80	7.5	33.0	3.10	X011b	
○ DGS 10-025A	250	9.0	90	1.30	5.0	18.0	4.40	X005b	
○ DGS 20-025A	250	13.0	90	1.30	7.5	26.0	3.10	X005b	
○ DGS 20-025AS	250	13.0	90	1.30	7.5	26.0	3.10	X011b	
○ DGS 3-030AS	300	3.5	90	1.60	2.0	3.7	8.50	X004	
○ DGSK 20-018A	180	11.0	90	0.80	5.0	22.0	4.40	X005a	
○ DGSK 40-025A	250	13.0	90	1.30	7.5	26.0	3.10	X005a	


Low leakage current

Second generation


Type	V_{RRM}	I_{DC}	@ T_C	V_F	@ I_F	C_J	R_{thJC}	Fig. No.
○ Not for new designs ➤ New	V	A	°C	typ. $T_{VJ} = 125^\circ\text{C}$ V	A	pF	K/W	
○ DGS 17-03CS	300	17.5	90	1.10	7.5	10.7	4.40	X004
○ DGSK 28-025CS	250	14.0	90	1.20	7.5	15.0	4.40	X011b
○ DGSK 40-025CS		20.0	90	1.10	10.0	24.0	3.10	
○ DGSK 36-03CS	300	17.5	90	1.10	7.5	10.7	4.40	
○ DGSS 10-06CC	2x 300	15.0	90	1.20	10.0	10.7	5.20	X010a
○ DGSS 20-06CC		23.0	90	1.20	20.0	16.0	3.50	

X005a **TO-220AB**
Weight = 2 g


X005b **TO-220AC**
Weight = 2 g



X010a **ISOPLUS220™**
Weight = 2 g



Silicon Carbide Schottky Diodes



No reverse recovery


Type	V_{RRM}	I_{DC}	@ T_C	V_F	@ I_F	C_J	R_{thJC}	Fig. No.
➤ New	V	A	°C	typ. $T_{VJ} = 125^\circ\text{C}$ V	A	pF	K/W	
FBS 10-0 6SC	600	3.0	90	1.70	4.0	9.0	8.00	X024a
FBS 16-06SC		5.0	90	1.50	6.0	21.0	5.60	

X011b **TO-263AB**
Weight = 2 g


X024a **ISOPLUS i4-PAC™**
Weight = 6 g


Schottky Diodes


$$I_{FAV} = 6 - 2x 200 \text{ A}$$

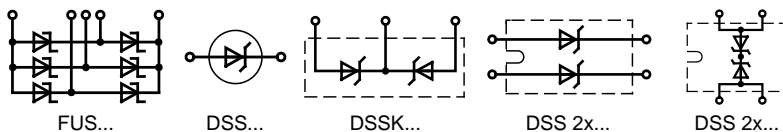

Type	V _{RRM}	I _{FAV} d = 0.5	@ T _C	V _F @ I _F T _{VJ} = 125°C	@ I _F	E _{AS}	I _{AR}	T _{VJM}	R _{thJC}	Fig. No.	Package style Outline drawings on pages O-30...O-52
➤ New	V	A	°C	V	A	mJ	A	°C	K/W		
DSS 40-0008D	8	40	135	0.23	40	80	4.0	150	0.80	X014a	X004 TO-252AA Weight = 0.3 g
DSSK 80-0008D		2x 40	135	0.23	40	80	4.0	150	0.80	X014a	
DSS 2x200-0008D ^①		2x 200	100	0.15	100	80	4.0	150	0.40	X027b	
DSS 20-0015B	15	20	135	0.33	20	tbd	tbd	150	1.40	X005b	X005a TO-220AB Weight = 2 g
DSSK 40-0015B		2x 20	135	0.32	20	tbd	tbd	150	1.40	X014a	
DSSK 70-0015B		2x 35	130	0.33	35	61	2.5	150	1.10	X014a	
DSS 6-0025BS	25	6	140	0.30	6	tbd	tbd	150	3.00	X004	X005b TO-220AC Weight = 2 g
DSS 25-0025B		25	125	0.44	25	tbd	tbd	150	1.40	X005b	
DSSK 18-0025BS		2x 10	140	0.37	10	tbd	tbd	150	1.70	X011b	
DSSK 38-0025B		2x 20	130	0.40	20	tbd	tbd	150	1.40	X005a	
DSSK 38-0025BS		2x 20	130	0.40	20	tbd	tbd	150	1.40	X011b	
DSSK 48-0025B		2x 25	130	0.35	20	tbd	tbd	150	1.20	X005a	
DSSK 50-0025B		2x 25	125	0.42	25	tbd	tbd	150	1.40	X014a	
DSSK 80-0025B		2x 40	130	0.39	40	10	6.0	150	0.80	X014a	
DSSK 48-003B		30	2x 25	130	0.35	20	tbd	tbd	150	1.20	
DSSK 48-003BS	2x 25		130	0.35	20	tbd	tbd	150	1.20	X011b	
DSSK 70-003B	2x 35		125	0.39	35	tbd	tbd	150	1.10	X014a	
DSSK 80-003B	2x 40		130	0.39	40	10	6.0	150	0.80	X014a	
DSS 6-0045AS	45	6	165	0.50	6	24	1.3	175	3.00	X004	X011b TO-263AB Weight = 2 g
DSS 10-0045B		10	135	0.46	10	24	1.3	150	1.70	X005b	
DSS 16-0045A		16	160	0.56	16	32	1.5	175	1.40	X005b	
DSS 16-0045AS		16	160	0.56	16	32	1.5	175	1.40	X011b	
DSS 25-0045A		25	155	0.56	25	46	1.8	175	1.10	X005b	
DSS 60-0045B		60	100	0.57	60	57	2.0	150	0.80	X014b	
DSSK 20-0045AM		2x 10	145	0.56	10	11	1.5	175	4.30	X007a	
DSSK 20-0045B		2x 10	135	0.45	10	24	1.3	150	1.70	X005a	
DSSK 28-0045BS		2x 15	135	0.43	15	32	1.5	150	1.40	X011b	
DSSK 60-0045A		2x 30	150	0.60	30	46	1.8	175	1.10	X014a	
DSSK 60-0045B		2x 30	120	0.44	30	46	1.8	150	1.10	X014a	
DSSK 80-0045B		2x 40	125	0.45	40	57	2.0	150	0.80	X014a	
DSS 2x61-0045A		2x 60	105	0.65	60	57	2.0	150	0.80	X027a	
DSS 2x81-0045B		2x 80	75	0.64	80	57	2.0	150	0.80	X027a	
DSS 2x121-0045B		2x 120	100	0.59	120	112	2.8	150	0.40	X027a	
DSS 2x160-0045A ^①		2x 160	100	0.73	160	112	2.8	150	0.30	X027b	
FUS 45-0045B	45	90	typ. 0.5	15	tbd	tbd	150	3.10	X024a		
DSS 10-006A	60	10	160	0.62	10	0.05	0.1	175	1.60	X005b	X016a ISOPLUS247™ Weight = 5 g
DSSK 28-006BS		2x 15	135	0.52	15	5	1.0	150	1.40	X011b	
DSSK 40-006B		2x 20	130	0.46	20	20	2.0	150	1.10	X014a	
DSSK 80-006B		2x 40	120	0.51	40	20	2.0	150	0.80	X014a	
DSSK 80-006BR		2x 40	120	0.51	40	20	2.0	150	0.80	X016a	

① non isolated base plate

X024a **ISOPLUS i4-PAC™**
Weight = 6 g















X027a/b **SOT-227B/UI miniBLOC**
Weight = 30 g



Schottky Diodes

$$I_{FAV} = 6 - 2 \times 160 \text{ A}$$

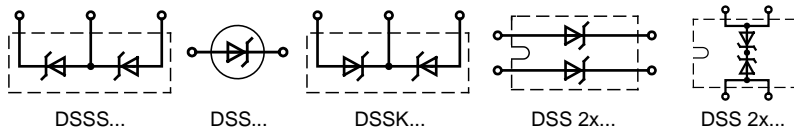


Type	V_{RRM}	I_{FAV}	@ T_C	V_F	@ I_F	E_{AS}	I_{AR}	T_{VJM}	R_{thJC}	Fig. No.	Package style
> New	V	A	$d = 0.5$ °C	$T_{VJ} = 125^\circ\text{C}$ V	A	mJ	A	°C	K/W		Outline drawings on pages O-30...O-52
DSSK 40-008B	80	2x 20	130	0.52	20	20.0	2.0	150	1.10	X014a	X004 Weight = 0.3 g 
DSSS 35-008AR	2x 80	35	150	0.68	35	60.0	2.0	175	0.80	X016a	
DSSK 70-008A		2x 35	150	0.64	35	tbd	tbd	175	0.80	X014a	
DSSK 70-008AR		2x 35	150	0.64	35	61.0	3.5	175	0.80	X016a	
DSS 2x111-008A		2x 110	105	0.72	100	19.0	1.4	150	0.40	X027a	
DSS 10-01A	100	10	160	0.66	10	1.3	0.8	175	1.70	X005b	X005a Weight = 2 g 
DSS 10-01AS		10	160	0.66	10	1.3	0.8	175	1.70	X011b	
DSS 16-01A		16	155	0.65	16	5.0	1.0	175	1.40	X005b	X005b Weight = 2 g 
DSS 16-01AS		16	155	0.65	16	5.0	1.0	175	1.40	X011b	
DSS 20-01AC		20	140	0.76	20	7.0	0.8	175	1.70	X010b	
DSSS 30-01AR		2x 100	30	155	0.63	30	11.0	1.5	175	0.80	
DSSK 16-01A		2x 8	165	0.63	8	1.3	0.8	175	1.70	X005a	X005a Weight = 2 g 
DSSK 16-01AS		2x 8	165	0.63	8	1.3	0.8	175	1.70	X011b	
DSSK 28-01A		2x 15	160	0.64	15	5.0	1.0	175	1.40	X005a	X010a Weight = 2 g 
DSSK 28-01AS		2x 15	160	0.64	15	5.0	1.0	175	1.40	X011b	
DSSK 30-01A		2x 15	160	0.63	15	5.0	1.0	175	1.40	X014a	X027a Weight = 2 g 
DSSK 50-01A		2x 25	155	0.64	25	5.0	1.0	175	1.10	X014a	
DSS 2x41-01A		2x 40	110	0.70	40	5.0	1.0	150	1.10	X027a	X011b Weight = 2 g 
DSS 2x61-01A		2x 60	105	0.74	60	11.0	1.5	150	0.80	X027a	
DSS 2x160-01A ①		2x 160	95	0.81	160	11.0	1.5	150	0.30	X027b	X014a Weight = 6 g 
DSS 6-015AS	150	6	160	0.62	6	0.05	0.1	175	3.00	X004	
DSSK 20-015A		2x 10	165	0.65	10	0.2	0.2	175	1.40	X005a	
DSSK 50-015A		2x 25	150	0.68	25	tbd	tbd	175	1.10	X014a	
DSSK 60-015A		2x 30	155	0.66	30	0.8	0.4	175	0.80	X014a	
DSSK 60-015AR		2x 30	155	0.66	30	0.8	0.4	175	0.80	X016a	X016a Weight = 5 g 
DSS 2x101-015A		2x 100	110	0.77	100	0.8	0.4	150	0.40	X027a	
DSSK 10-018A	180	2x 5	165	0.62	5	tbd	tbd	175	1.70	X005a	X014a Weight = 6 g 
DSSK 30-018A		2x 15	150	0.72	15	tbd	tbd	175	1.70	X014a	
DSSK 60-02A	200	2x 30	155	0.70	30	0.8	0.4	175	0.80	X014a	X027a/b Weight = 30 g SOT-227B/UI miniBLOC 
DSSK 60-02AR		2x 30	155	0.70	30	0.8	0.4	175	0.80	X016a	
DSS 2x101-02A		2x 100	105	0.84	100	tbd	tbd	150	0.40	X027a	

Data per diode unless otherwise specified

① non isolated base plate

Schottky Gen² Diodes



DS...IM...

DS...I...


DS...C...


$I_{FAV} = 1 - 2x 60 A$

Type	V_{RRM}	I_{FAV}	@ T_C	V_F	@ I_F	T_{VJM}	R_{thJC}	Fig. No.	Package style	
➤ New	V	A	d = 0.5 °C	$T_{VJ} = 125^\circ C$	A	°C	K/W		Outline drawings on pages O-30...O-52	
DSB 20I15PA	15	20	130	0.39	20	150	1.75	X005b	X001 SMA (DO-214AC) Weight = 0.07 g	
DSB 40C15PB		2x 20	130	0.39	20		1.75	X005a		
DSB 30C30PB	30	2x 15	130	0.44	15	150	1.75	X005a	X002 SMB (DO-214AA) Weight = 0.1 g	
➤ DSB 60C30PB		2x 30	130	0.49	30		0.85	X005a		
DSB 60C30HB		2x 30	125	0.47	30		0.95	X014a		
DSB 1140SA	40	1	125	0.40	1	150	$R_{thJL} 40$	X001		
DSB 2140SB		2	125	0.42	2		$R_{thJL} 25$	X002	X005a TO-220AB Weight = 2 g	
DSB 10I45PM	45	10	115	0.53	10	150	4.50	X007b		
DSA 20C45PB		2x 10	155	0.62	10	175	2.60	X005a	X005b TO-220AC Weight = 2 g	
DSA 15I45PA		15	155	0.63	15	175	1.75	X005b		
DSA 15IM45IB		15	155	0.63	15	175	1.75	X008		
DSB 15IM45IB		15	125	0.55	15	150	1.75	X008		
DSA 30C45PB		2x 15	155	0.63	15	175	1.75	X005a		
DSB 30C45PB		2x 15	125	0.55	15	150	1.75	X005a		
DSA 30C45HB		2x 15	155	0.62	15	175	1.75	X014a		
DSB 30C45HB		2x 15	125	0.54	15	150	1.75	X014a		
DSA 60C45PB		2x 30	150	0.67	30	175	0.85	X005a		
DSB 60C45PB		2x 30	125	0.60	30	150	0.85	X005a		
DSA 60C45HB		2x 30	150	0.66	30	175	0.95	X014a		
DSB 60C45HB		2x 30	125	0.58	30	150	0.95	X014a		
DSA 80C45HB		2x 40	150	0.67	40	175	0.70	X014a		
DSB 80C45HB		2x 40	125	0.58	40	150	0.70	X014a		
DSB 1160SA	60	1	125	0.50	1	150	$R_{thJL} 40$	X001		X007a TO-220ABFP Weight = 2 g
DSB 2160SB		2	125	0.52	2	150	$R_{thJL} 25$	X002		
DSA 20C60PN		2x 10	140	0.68	10	175	4.50	X007a	X007b TO-220ACFP Weight = 2 g	
DSB 20C60PN		2x 10	115	0.63	10	150	4.50	X007a		
DSA 30C60PB		2x 15	150	0.70	15	175	1.75	X005a		
DSB 30C60PB		2x 15	125	0.69	15	150	1.75	X005a		
DSA 60C60PB		2x 30	150	0.74	30	175	0.85	X005a		
DSB 60C60PB		2x 30	125	0.69	30	150	0.85	X005a		
DSA 60C60HB		2x 30	150	0.72	30	175	0.95	X014a		
DSB 60C60HB		2x 30	125	0.67	30	150	0.95	X014a		
DSA 11100SA	100	1	125	0.65	1	175	$R_{thJL} 40$	X001		
DSA 21100SB		2	125	0.65	2	175	$R_{thJL} 25$	X002		
➤ DSA 10I100PM		10	140	0.72	10	175	4.50	X007b	X008 TO-262AA (i2-PAC) Weight = 2 g	
DSA 20C100PB		2x 10	150	0.72	10	175	2.60	X005a		
DSA 20C100PN		2x 10	140	0.72	10	175	4.50	X007a		
DSA 30C100PB		2x 15	150	0.73	15	175	1.75	X005a		
DSA 30C100PN		2x 15	120	0.73	15	175	4.20	X007a		
➤ DSA 30C100HB		2x 15	150	0.72	15	175	1.75	X014a		
DSA 30C100QB		2x 15	150	0.72	15	175	1.75	X017a		
DSA 50C100HB		2x 25	155	0.72	25	175	0.95	X014a		
DSA 50C100QB		2x 25	155	0.72	25	175	0.95	X017a		
➤ DSA 30I100PA		30	150	0.78	30	175	0.85	X005b		
DSA 60C100PB		2x 30	150	0.78	30	175	0.85	X005a	X014a TO-247AD Weight = 6 g	
DSA 70C100HB		2x 35	150	0.74	35	175	0.70	X014a		
DSA 80C100PB		2x 40	150	0.73	40	175	0.60	X005a		
DSA 20C150PB	150	2x 10	150	0.74	10	175	2.60	X005a		
DSA 20C150PN		2x 10	140	0.74	10	175	4.50	X007a	X017a TO-3P Weight = 5 g	
DSA 30C150PB		2x 15	150	0.75	15	175	1.75	X005a		
➤ DSA 30C150HB		2x 15	150	0.74	15	175	1.75	X014a		
DSA 50C150HB		2x 25	155	0.74	25	175	0.95	X014a		
➤ DSA 30I150PA		30	150	0.80	30	175	0.85	X005b		
DSA 70C150HB		2x 35	150	0.74	35	175	0.70	X014a		
DSA 120C150QB		2x 60	150	0.80	60	175	0.40	X017a		
➤ DSA 30C200PB	200	2x 15	150	0.88	15	175	1.75	X005a		
DSA 90C200HB		2x 45	150	0.88	45	175	0.55	X014a		

HiPerDyn™ FRED

Series connected diodes for high switching frequencies;
packages isolated (2500 V_{RMS})

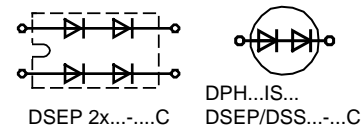


Type	V _{RRM}	I _{FAV}	@ T _C	V _F	@ T _{VJ}	t _{rr}	I _{RM}	@	T _{VJM}	R _{thJC}	Fig. No.	Package style
			d = 0.5		I _F = I _{FAV}	typ. T _{VJ} = 25°C	typ. T _{VJ} = 100°C	-di/dt				Outline drawings on pages O-30...O-52
> New	V	A	°C	V	°C	ns	A	A/μs	°C	K/W		
DSS 17-06CR *	600	17	95	2.71	125	45	4.0	100	175	1.40	X016b	X010a ISOPLUS220™ Weight = 2 g 
> DPH 30IS600HI		30	135	1.89	150	30	2.0	200	175	0.55		
DSEP 15-12CR	1200	15	130	2.67	150	20	4.0	100	175	1.00		
DSEP 30-12CR		30	115	3.10	150	20	4.0	100	175	0.60		
DSEP 2x25-12 C	1200	2x 25	90	3.00	125	20	3.0	100	150	0.60	X027a	

* series connected Schottky Diodes





Dual Ultrafast Diodes

Series connected diodes for high switching frequencies
with middle connection; packages isolated (2500 V_{RMS})




Type	V _{RRM}	I _{FAV}	@ T _C	V _F	@ T _{VJ}	t _{rr}	I _{RM}	@	T _{VJM}	R _{thJC}	Fig. No.
			d = 0.5		I _F = I _{FAV}	typ. T _{VJ} = 25°C	typ. T _{VJ} = 100°C	-di/ dt			
○ Not for new designs											
> New	V	A	°C	V	°C	ns	A	A/μs	°C	K/W	
> DPG 30P300PJ	2x 300	30	135	0.98	150	35	3	200	175	1.05	X010a
> DPG 10P400PJ	2x 400	10	150	1.02	150	45	4	200	175	2.05	
○ DSEE 8-08CC		10	130	1.12	125	30	2.0	100	175	2.75	
DSEE 15-12CC	2x 600	15	100	1.50	125	35	4.0	100	175	1.60	
DSEE 29-12CC		30	90	1.75	125	30	4.0	100	175	0.90	
DSEE 30-12A ①		30	90	1.78	125	30	4.0	100	175	0.90	X014a
DSEE 55-24N1F	2x 1200	55	90	1.50	125	220 125°C	79.0 125°C	750	150	0.63	X024b

① Non isolated base plate



HiPerFRED™ Diodes

$$I_{FAV} = 8 - 2x 120 A$$

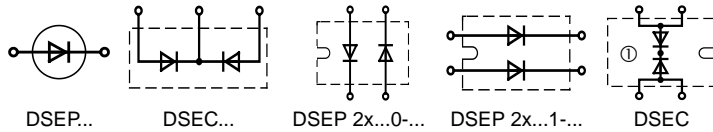


Type	V _{RRM}	I _{FAV}	T _C	I _{FSM}	V _F	@ I _F	t _{rr}	I _{RM}	-di/dt	T _{VJM}	R _{thJC}	Fig. No.	Package style
○ Not for new designs				10 ms				typ.	typ.				Outline drawings on pages O-30...O-52
➤ New	V	A	°C	45°C	V	A	ns	A	A/μs	°C	K/W		
○ DSEP 8-03AS	300	8	152	60	1.13	8	30	2.4	100	175	2.50	X004	X004 Weight = 0.3 g
➤ DSEP 30-03AS		30	135	300	1.02	30	35	3.0	200	175	0.85	X011b	
➤ DSEP 40-03AS		40	120	300	1.11	40	35	3.5	200	175	0.85	X011b	
○ DSEP 6-06AS	600	6	152	40	1.33	6	20	4.4	200	175	2.80	X004	X005a Weight = 2 g
➤ DSEP 6-06BS		6	140	40	1.74	6	15	4.4	200	175	2.80	X004	
DSEP 8-06A		10	135	50	1.42	10	35	4.4	100	175	2.50	X005b	
DSEP 8-06B		10	125	50	1.66	10	30	2.4	100	175	2.50	X005b	
DSEP 15-06A		15	140	110	1.35	15	35	4.9	100	175	1.60	X005b	
DSEP 15-06B		15	130	110	1.55	15	25	2.6	100	175	1.60	X005b	
DSEP 29-06A		30	135	250	1.26	30	35	6.0	100	175	0.90	X005b	
DSEP 29-06AS		30	135	250	1.26	30	35	6.0	100	175	0.90	X011b	
DSEP 29-06B		30	125	200	1.58	30	30	4.0	100	175	0.90	X005b	
DSEP 30-06A		30	135	250	1.25	30	35	6.0	100	175	0.90	X014b	
DSEP 30-06B		30	125	250	1.56	30	30	4.0	100	175	0.90	X014b	
DSEP 30-06BR		30	115	250	1.56	30	30	4.0	100	175	1.10	X016b	X005b Weight = 2 g
DSEP 60-06A		60	110	600	1.39	60	35	8.3	100	175	0.65	X014b	
DSEP 60-06AT		60	110	600	1.39	60	35	8.3	100	175	0.65	X019	
DSEP 8-12A	1200	10	115	40	1.96	10	40	4.0	100	175	2.50	X005b	X010a Weight = 2 g
DSEP 12-12A		15	125	90	1.79	15	40	4.5	100	175	1.60	X005b	
DSEP 12-12B		15	125	90	2.20	15	35	3.7	100	175	1.60	X005b	
DSEP 29-12A		30	115	200	1.81	30	40	8.5	100	175	0.90	X005b	
DSEP 30-12A		30	115	200	1.79	30	40	8.5	100	175	0.90	X014b	
DSEP 30-12AR		30	110	200	1.79	30	40	8.5	100	175	1.10	X016b	
DSEP 60-12A		60	90	500	1.74	60	40	8.5	100	175	0.65	X014b	
DSEP 60-12AR		60	85	500	1.74	60	40	8.5	100	175	0.65	X016b	
DSEC 16-06A	600	2x 10	135	50	1.42	10	35	3.5	100	175	2.50	X005a	X011b Weight = 2 g
DSEC 16-06AC		2x 8	85	50	1.20	10	35	3.5	100	175	3.00	X010a	
DSEC 29-06AC		2x 15	140	110	1.34	15	35	4.0	100	175	1.60	X010a	X014a Weight = 6 g
DSEC 30-06A		2x 15	140	110	1.34	15	35	4.0	100	175	1.60	X014a	
DSEC 30-06B		2x 15	125	110	1.59	15	25	2.0	100	175	1.60	X014a	
DSEC 59-06BC		2x 30	105	200	1.56	30	30	4.0	100	175	1.10	X010a	X014a Weight = 6 g
DSEC 60-06A		2x 30	135	250	1.25	30	35	6.0	100	175	0.90	X014a	
DSEC 60-06B		2x 30	125	250	1.56	30	30	4.0	100	175	0.90	X014a	
DSEC 16-12A	1200	2x 10	115	40	1.96	10	40	4.0	100	175	2.50	X005a	X014b Weight = 6 g
➤ DSEC 16-12AS		2x 10	115	40	1.96	10	40	4.0	100	175	2.50	X011b	
DSEC 30-12A		2x 15	125	90	1.78	15	40	4.5	100	175	1.60	X014a	
DSEC 60-12A		2x 30	115	200	1.78	30	40	8.5	100	175	0.90	X014a	
DSEC 120-12AK		2x 60	90	500	1.74	60	40	7.0	100	175	0.65	X020a	
○ DSEP 2x31-03A	300	2x 30	110	300	0.96 125°C	30	30	4.5	100	150	1.15	X027a	X016b Weight = 5 g
○ DSEP 2x61-03A		2x 60	75	600	1.26	60	30	4.0	100	150	0.85		
○ DSEP 2x91-03A		2x 90	65	1000	1.30	90	30	4.5	100	150	0.60		
○ DSEP 2x31-04A	400	2x 30	105	280	1.15	30	30	5.5	100	150	1.15		X016b Weight = 5 g
DSEP 2x31-06A	600	2x 30	95	250	1.30	30	35	6.0	100	150	1.15		
DSEP 2x31-06B		2x 30	85	250	1.73	30	30	4.0	100	150	1.15		
DSEP 2x61-06A		2x 60	65	600	1.48	60	35	6.5	100	150	0.85		
DSEP 2x91-06A		2x 90	55	1000	1.52	90	35	6.0	100	150	0.60		
DSEP 2x31-12A	1200	2x 30	70	200	1.96	30	40	8.5	100	150	1.15		X019 Weight = 5 g
DSEP 2x60-12A		2x 60	80	800	1.70	60	40	8.0	100	150	0.60		
DSEP 2x61-12A		2x 60	80	800	1.70	60	40	8.0	100	150	0.60		
○ DSEP 2x101-04A	400	2x 100	60	1000	1.24	125	30	5.5	100	150	0.60		X027b
○ DSEC 240-04A ①		2x 120	115	2000	1.07	120	30	5.5	100	150	0.20		
DSEC 240-06A ①	600	2x 120	105	2000	1.39	120	35	6.0	100	150	0.20		

① Non isolated base plate

X027a/b SOT-227B/UI
Weight = 30 g miniBLOC




HiPerFRED² Diodes

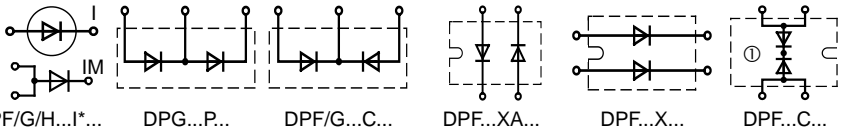

$I_{FAV} = 10 - 2x 200 A$


Type	V _{RRM}	I _{FAV}	@ T _C	I _{FSM}	V _F	@ I _F	t _{rr}	I _{RM}	-di/dt	T _{VJM}	R _{thJC}	Fig. No.	Package style		
		d = 0.5		10 ms	T _{VJ} = 150°C		T _{VJ} = 25°C	typ.	typ.				Outline drawings on pages O-30...O-52		
> New	V	A	°C	A	V	A	ns	A	A/μs	°C	K/W				
DPG 10I200PA	200	10	145	100	0.98	10	35	3.0	200	175	2.30	X005b	TO-252AA Weight = 0.3 g		
DPG 10I200PM		10	125	100	0.98	10	35	3.0	200	175	4.40	X007b			
DPG 20C200PB		2x 10	145	100	0.98	10	35	3.0	200	175	2.30	X005a			
DPG 20C200PN		2x 10	125	100	0.98	10	35	3.0	200	175	4.40	X007a			
DPG 15I200PA		15	140	150	1.01	15	35	3.0	200	175	1.70	X005b			
DPG 30C200PB		2x 15	140	150	1.01	15	35	3.0	200	175	1.70	X005a			
> DPG 30C200PC		2x 15	140	150	1.01	15	35	3.0	200	175	1.70	X011b		TO-220AB Weight = 2 g	
DPG 30C200HB		2x 15	140	150	1.00	15	35	3.0	200	175	1.70	X014a			
> DPF 60C200HB		2x 30	tbd	tbd	tbd	30	tbd	tbd	200	175	0.95	X014a		TO-220AC Weight = 2 g	
DPG 60C200HB		2x 30	135	300	1.06	30	35	3.0	200	175	0.95	X014a			
DPG 60C200QB		2x 30	135	300	1.06	30	35	3.0	200	175	0.95	X017a		TO-220AC Weight = 2 g	
> DPF 60I200HA		60	tbd	tbd	tbd	60	tbd	tbd	200	175	0.55	X014b			
> DPF 120X200NA		2x 60	tbd	tbd	tbd	60	tbd	tbd	200	175	0.60	X027a		TO-220AC Weight = 2 g	
> DPF 240X200NA		2x 120	tbd	tbd	tbd	120	tbd	tbd	200	175	0.45	X027a			
DPG 10I300PA	300	10	140	100	0.98	10	35	3.0	200	175	2.30	X005b	TO-220ABFP Weight = 2 g		
> DPG 10IM300UC		10	150	100	0.98	10	35	3.0	200	175	2.30	X004			
DPG 20C300PB		2x 10	145	100	0.98	10	35	3.0	200	175	2.30	X005a			
DPG 20C300PN		2x 10	125	100	0.98	10	35	3.0	200	175	4.40	X007a			
DPG 15I300PA		15	140	150	1.00	15	35	3.0	200	175	1.70	X005b			
DPG 30C300PB		2x 15	140	150	1.00	15	35	3.0	200	175	1.70	X005a			
DPG 30C300PC		2x 15	140	150	1.00	15	35	3.0	200	175	1.70	X011b			
DPG 30C300HB		2x 15	140	150	1.00	15	35	3.0	200	175	1.70	X014a			
> DPG 30I300HA		30	135	300	1.06	30	35	3.0	200	175	0.95	X014b		TO-220ACFP Weight = 2 g	
> DPG 30I300PA		30	140	300	1.08	30	35	3.0	200	175	0.85	X005b			
> DPG 30P300PJ		2x 300	30	135	450	0.98	30	35	3.0	200	175	1.50		X010a	TO-263AB Weight = 2 g
DPG 60C300HB		2x 30	135	300	1.06	30	35	3.0	200	175	0.95	X014a			
> DPG 60C300HJ		2x 30	140	450	0.96	30	35	3.0	200	175	1.05	X016a		TO-247AD Weight = 6 g	
> DPG 60C300PC		2x 30	140	150	1.06	30	35	3.0	200	175	0.85	X011b			
DPG 60C300QB	2x 30	135	300	1.06	30	35	3.0	200	175	0.95	X017a	TO-247AD Weight = 6 g			
> DPG 80C300HB	2x 40	135	450	1.07	40	35	3.0	200	175	0.70	X014a				
> DPG 60I300HA	60	125	550	1.10	60	35	3.0	200	175	0.55	X014b	TO-247AD Weight = 6 g			
DPG 60IM300PC	60	135	550	1.10	60	35	3.0	200	175	0.45	X011b				
DPG 120C300QB	2x 60	125	550	1.10	60	35	3.0	200	175	0.55	X017a	TO-247AD Weight = 6 g			
DPG 10I400PA	400	10	145	100	1.04	10	45	4.0	200	175	2.30		X005b	TO-247AD Weight = 6 g	
DPG 10I400PM		10	120	100	1.04	10	45	4.0	200	175	4.40	X007b			
> DPG 10P400PJ		2x 400	10	150	130	1.02	10	45	4.0	200	175	2.05	X010a		
DPG 20C400PB		2x 10	145	100	1.04	10	45	4.0	200	175	2.30	X005a			
> DPG 20C400PN		2x 10	120	100	1.04	10	45	4.0	200	175	4.40	X007a			
> DPG 15I400PM		15	130	130	1.08	15	45	4.0	200	175	4.20	X007b			
> DPG 30C400PB		2x 15	140	150	1.08	15	45	4.0	200	175	1.70	X005a			
DPG 30C400HB		2x 15	140	150	1.07	15	45	4.0	200	175	1.70	X014a			
> DPG 30I400HA		30	135	300	1.13	30	45	4.0	200	175	0.95	X014b	ISOPLUS247™ Weight = 5 g		
> DPF 60XA400NA		2x 30	tbd	tbd	tbd	30	60	6.0	200	175	1.15	X027a			
> DPG 60C400HB		2x 30	135	300	1.13	30	45	4.0	200	175	0.95	X014a	ISOPLUS247™ Weight = 5 g		
DPG 60C400QB		2x 30	135	300	1.13	30	45	4.0	200	175	0.95	X017a			
> DPG 80C400HB		2x 40	135	450	1.14	40	45	4.0	200	175	0.70	X014a	ISOPLUS247™ Weight = 5 g		
DPG 60I400HA		60	120	600	1.22	60	45	4.0	200	175	0.55	X014b			
> DPF 60IM400HB	60	130	600	1.09	60	60	6.0	200	175	0.55	X014a	TO-3P Weight = 5 g			
DPG 60IM400QB	60	120	600	1.22	60	45	4.0	200	175	0.55	X017a				
> DPF 120X400NA	2x 60	tbd	tbd	tbd	60	60	6.0	200	175	0.60	X027a	TO-3P Weight = 5 g			
> DPF 240X400NA	2x 120	tbd	tbd	tbd	120	60	6.0	200	175	0.45	X027a				
> DPF 400C400NB ^①	2x 200	tbd	tbd	tbd	200	60	6.0	200	175	tbd	X027b	SOT-227B/UI Weight = 30 g miniBLOC			
> DPH 30IS600HI	600	30	135	140	1.89	30	30	2.0	200	175	0.55		X016b		















① Non isolated base plate



SONIC-FRD™ Diodes

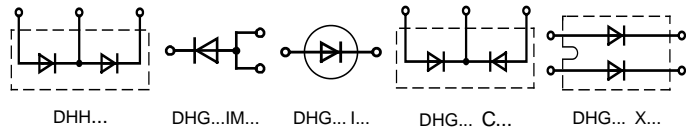$I_{FAV} = 5 - 2x 60 A$ • ultrasoft and fast recovery
• very low temperature dependence




Type	V_{RRM}	I_{FAV}	@ T_C	I_{FSM}	V_F	@ I_F	t_{rr}	I_{RM}	$-di/dt$	T_{VJM}	R_{thJC}	Fig. No.	Package style
		$d = 0.5$		10 ms 45°C		$T_{VJ} = 150^\circ C$	$T_{VJ} = 25^\circ C$	typ.	typ.				Outline drawings on pages O-30...O-52
➤ New	V	A	°C	A	V	A	ns	A	A/ μs	°C	K/W		
➤ DHG 5I600PA	600	5	105	40	2.09	5	35	2.0	100	150	3.15	X005b	TO-220AB X005a Weight = 2 g 
➤ DHG 5I600PM		5	90	40	2.09	5		2.0	100		4.20	X007b	
➤ DHG 10C600PB		2x 5	105	40	2.09	5		2.0	100		3.15	X005a	
➤ DHG 10I600PA		10	95	100	2.21	10		4.0	200		1.80	X005b	
➤ DHG 10I600PM		10	30	100	2.21	10		4.0	200		4.00	X007b	
➤ DHG 20C600PB		2x 10	95	100	2.21	10		4.0	200		1.80	X005a	TO-220AC X005b Weight = 2 g 
➤ DHG 20C600QB		2x 10	100	100	2.20	10		4.0	200		1.80	X017a	
➤ DHG 20I600PA		20	100	150	2.15	20		8.0	400		0.80	X005b	TO-220ACFP X007b Weight = 2 g 
➤ DHG 20I600HA		20	100	150	2.14	20		8.0	400		0.90	X014b	
➤ DHG 40C600PB		2x 20	100	150	2.15	20		8.0	400		0.80	X005a	X014a Weight = 2 g 
➤ DHG 40C600HB		2x 20	100	150	2.14	20		8.0	400		0.90	X014a	
➤ DHG 50X600NA		2x 25	70	200	2.03	25		12.0	600		1.20	X027a	TO-263AB X011b Weight = 2 g 
➤ DHG 30I600PA		30	95	200	2.22	30		12.0	600		0.60	X005b	
➤ DHG 30I600PC		30	95	200	2.20	30		12.0	600		0.60	X011b	X014b Weight = 2 g 
➤ DHG 30I600HA		30	85	200	2.20	30		12.0	600		0.70	X014b	
➤ DHG 60C600HB		2x 30	85	200	2.20	30		12.0	600		0.70	X014a	TO-247AD X014a Weight = 6 g 
➤ DHG 100X600NA	2x 50	80	430	2.00	50		20.0	1200		0.60	X027a		
➤ DHG 60I600HA	60	95	430	2.10	60		24.0	1200		0.30	X014b	X014b Weight = 6 g 	
➤ DHG 10I1200PA	1200	10	95	70	2.37	10	75	8.5	350	150	1.80		X005b
➤ DHG 10I1200PM		10	30	70	2.37	10		8.5	350		4.00	X007b	
➤ DHG 20C1200PB		2x 10	95	70	2.37	10		8.5	350		1.80	X005a	TO-247AD X014b Weight = 6 g 
➤ DHG 20I1200PA		20	100	135	2.31	20		19.0	750		0.80	X005b	
➤ DHG 20I1200HA		20	95	135	2.30	20		19.0	750		0.90	X014b	
➤ DHG 40C1200HB		2x 20	95	135	2.30	20		19.0	750		0.90	X014a	X027a Weight = 6 g 
➤ DHG 50X1200NA		2x 25	65	180	2.24	25		25.0	1000		1.20	X027a	
➤ DHG 30I1200HA		30	85	180	2.40	30		25.0	1000		0.70	X014b	ISOPLUS i4-PAC™ X024a Weight = 6 g 
➤ DHG 100X1200NA		2x 50	70	430	2.20	50		50.0	2500		0.60	X027a	
➤ DHG 60I1200HA		60	95	430	2.29	60		50.0	2500		0.30	X014b	
DH 20-18A	1800	20	80	150	2.94	20	150	16.0	200	150	0.90	X014b	
DH 40-18A	1800	40	85	350	2.69	40		33.0	400		0.45	X014b	
DH 60-14A	1400	60	80	650	2.65	60		50.0	600		0.30	X014b	
DH 60-16A	1600	60	80	650	2.65	60		50.0	600		0.30	X014b	
DH 60-18A	1800	60	80	650	2.65	60		50.0	600		0.30	X014b	
DHG 55-36N1F	2x 1800	60	80	650	2.65	60		50.0	600		0.30	X024b	X017a Weight = 5 g 
DH 2x61-18A	1800	2x 60	25	650	2.61	60		50.0	600		0.60	X027a	
													X027a SOT-227B Weight = 30 g miniBLOC 

FRED Diodes

Fast Recovery Epitaxial Diodes

$I_{FAV} = 8 - 2x 165 A$

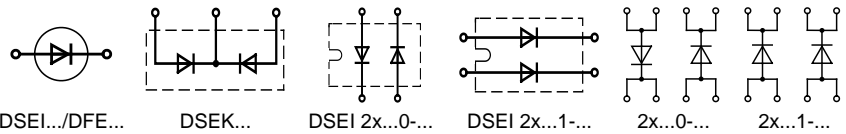




Type	V_{RRM}	I_{FAV}	@ T_C	I_{FRMS}	I_{FSM}	V_F	@ I_F	t_{rr}	I_{RM}	$-di/dt$	R_{thJC}	Fig. No.	Package style
			$d = 0.5$		10 ms 45°C	$T_{VJ} = 150°C$		typ. $T_{VJ} = 25°C$	typ. $T_{VJ} = 100°C$	typ.			Outline drawings on pages O-30...O-52
> New	V	A	°C	A	A	V	A	ns	A	A/ μ s	K/W		
DSEI 8-06A	600	8	115	16	100	1.30	8	35	2.5	64	2.50	X005b	X005b Weight = 2 g
DSEI 8-06AS	600	8	115	16	100	1.30	8	35	2.5	64	2.50	X011b	
> DFE 10I600PM	600	10	100	16	100	1.30	10	35	2.5	64	4.20	X007b	X007b Weight = 2 g
DSEI 12-06A	600	14	100	25	100	1.50	16	35	4.0	100	2.00	X005b	
DSEI 12-10A	1000	12	100	25	75	2.10	12	50	6.5	100	1.60		X007b Weight = 2 g
DSEI 12-12A	1200	11	100	25	75	2.20	12	50	6.5	100	1.60		
DSEI 20-12A	1200	17	85	70	130	1.87	12	40	7.0	100	1.60	X005b	X007b Weight = 2 g
DSEI 19-06AS	600	20	65	25	100	1.50	16	35	4.0	100	2.00	X011b	
DSEI 36-06AS	600	37	85	70	300	1.40	37	35	10.0	240	1.00	X011b	X011b Weight = 2 g
DSEI 30-06A	600	37	85	70	300	1.40	37	35	10.0	240	1.00	X014b	
DSEI 30-10A	1000	30	85	70	200	2.00	36	35	16.0	240	0.90		X014a Weight = 6 g
DSEI 30-10AR	1000	30	85	70	200	2.00	36	35	16.0	240	0.90	X016b	
DSEI 30-12A	1200	26	85	70	200	2.20	30	40	16.0	240	0.90	X014b	X014a Weight = 6 g
DSEI 60-02A	200	69	85	98	600	0.88	60	35	8.0	200	0.75	X014b	
DSEI 60-06A	600	60	70	100	550	1.50	70	35	19.0	480	0.75		X014b Weight = 6 g
DSEI 60-10A	1000	60	60	100	500	1.80	60	35	32.0	480	0.66		
DSEI 60-12A	1200	52	60	100	500	2.00	60	40	32.0	480	0.66		X014b Weight = 6 g
DSEI 120-06A	600	126	70	100	600	1.12	70	35	17.0	200	0.35	X014b	
DSEI 120-12A	1200	109	60	100	600	1.55	70	40	25.0	200	0.35		X014a Weight = 6 g
DSEK 60-02A	200	2x 34	115	50	325	0.85	30	35	4.0	100	1.00	X014a	
DSEK 60-02AR	200	2x 34	115	50	325	0.85	30	35	4.0	100	1.00	X016a	X016a Weight = 5 g
DSEK 60-06A	600	2x 30	85	50	300	1.40	37	35	10.0	240	1.00	X014a	
DSEK 60-12A	1200	2x 26	85	50	200	2.20	30	40	16.0	240	0.90		X027a Weight = 30 g
DSEI 2x30-04C	400	2x 30	85	70	300	1.40	30	35	10.0	240	1.25	X027a	
DSEI 2x30-06C	600	2x 30	85	70	300	1.40	30	35	10.0	240	1.25		X027a Weight = 30 g
DSEI 2x30-10B	1000	2x 30	50	70	200	2.00	30	35	16.0	240	1.25		
DSEI 2x30-12B	1200	2x 28	50	70	200	2.20	30	40	16.0	240	1.25		X027a Weight = 30 g
DSEI 2x31-06P	600	2x 30	85	70	300	1.40	30	35	10.0	240	1.25	X101	
DSEI 2x31-10P	1000	2x 30	50	70	200	2.00	30	35	16.0	240	1.25		X027a
DSEI 2x31-12P	1200	2x 28	50	70	200	2.20	30	40	16.0	240	1.25		
DSEI 2x31-04C	400	2x 30	85	70	300	1.40	30	35	10.0	240	1.25		X027a
DSEI 2x31-06C	600	2x 30	85	70	300	1.40	30	35	10.0	240	1.25		
DSEI 2x31-10B	1000	2x 30	50	70	200	2.00	30	35	16.0	240	1.25		X027a
DSEI 2x31-12B	1200	2x 28	50	70	200	2.20	30	40	16.0	240	1.25		
DSEI 2x61-06P	600	2x 60	70	100	550	1.50	60	35	19.0	480	0.70	X101	X101 Weight = 19 g
DSEI 2x61-10P	1000	2x 60	50	100	500	1.80	60	35	32.0	480	0.70		
DSEI 2x61-12P	1200	2x 52	50	100	450	2.15	60	40	32.0	540	0.70		X027a
DSEI 2x61-02A	200	2x 71	85	100	950	0.88	60	35	8.0	200	0.80		
DSEI 2x61-04C	400	2x 60	70	100	550	1.50	60	35	19.0	480	0.70		X027a
DSEI 2x61-06C	600	2x 60	70	100	550	1.50	60	35	19.0	480	0.70		
DSEI 2x61-10B	1000	2x 60	50	100	500	1.80	60	35	32.0	480	0.70		X027a
DSEI 2x61-12B	1200	2x 52	50	100	450	2.15	60	40	32.0	480	0.70		
DSEI 2x121-02A	200	2x 123	70	150	1200	0.95	120	35	12.0	200	0.50	X027a	X102 Weight = 24 g
DSEI 2x101-06P	600	2x 96	70	150	1200	1.17	100	40	19.0	200	0.50	X102	
DSEI 2x101-12P	1200	2x 91	50	130	900	1.61	100	40	24.0	200	0.50		X027a
DSEI 2x101-06A	600	2x 96	70	150	1200	1.17	100	35	19.0	200	0.50		
DSEI 2x101-12A	1200	2x 91	50	130	900	1.61	100	40	24.0	200	0.50		X102
DSEI 2x161-02P	200	2x 165	70	270	1200	1.05	200	35	20.0	200	0.29		
DSEI 2x161-06P	600	2x 147	70	270	1200	1.40	200	35	45.0	200	0.29		X102
DSEI 2x161-12P	1200	2x 128	70	270	1200	1.75	200	40	48.0	200	0.29		

Data according to IEC 60747 and refer to a single diode or thyristor unless otherwise stated.


FRED & HiPerFRED™ Modules

$$I_{FAV} = 75 - 582 \text{ A}$$


Type	V_{RRM}	I_{FAV}	@ T_C	I_{FRMS}	I_{FSM}	V_F	@ I_F	t_{rr}	I_{RM}	-di/dt	R_{thJC}	P_{tot}	Fig. No.	Package style
➤ New	V	A	°C	A	A	V	A	ns	A	A/ μ s	K/W	W		Outline drawings on pages O-30...O-52
		$d = 0.5$			10 ms 45°C	$T_{VJ} = 125^\circ\text{C}$		typ. $T_{VJ} = 25^\circ\text{C}$		$T_{VJ} = 100^\circ\text{C}$				
FRED														
MEO 550-02DA	200	582	75	822	4800	1.08	520	150	15	200	0.071	1750	X126d	X125e TO-240 Weight = 90 g 
MEO 500-06DA	600	514	75	726		1.41	520	250	132	800		1750		
MEO 450-12DA	1200	453	75	640		1.76	520	450	165	800		1750		
MEK 75-12DA	1200	2x 75	75	107	1200	1.85	100	250	33	200	0.45	280	X125e	
MEA 75-12DA	1200	2x 75	75											
MEE 75-12DA	2x 1200	75	75											
MEK 95-06DA	600	2x 95	75	142	1200	1.36	100	250	21	200	0.45	280		X126c Y4 Weight = 150 g 
MEA 95-06DA	600	2x 95	75											
MEE 95-06DA	2x 600	95	75											
MEK 350-02DA	200	2x 356	75	503	2400	0.92	260	150	15	200	0.143	875	X126c	
MEK 300-06DA	600	2x 304	75	430		1.19	260	250	66	400				
MEK 250-12DA	1200	2x 260	75	367		1.54	260	450	83	400				
MEE 300-06DA	2x 600	304	75	430	2400	1.19	260	250	66	400	0.143	875		X126d Y4 Weight = 150 g 
MEE 250-12DA	2x 1200	260	75	367		1.54	260	450	83	400				
MEA 300-06DA	600	2x 304	75	430	2400	1.19	260	250	66	400	0.143	875		
MEA 250-12DA	1200	2x 260	75	367		1.54	260	450	83	400				
HiPerFRED														
MEK 150-04DA	400	2x 150	100	200	1200	1.40*	300	300	typ. 11	100	0.35	360	X125e	
MEK 600-04DA	400	2x 575	80	800	3000	1.10	400	220	typ. 80	900	0.11	1100	X126c	
MPK 95-06DA	600	2x 95	110	200	1200	1.40	100	35	5.5	100	0.575	215	X125e	

* $T_{VJM} = 150^\circ\text{C}$


Diode connections for Fig. X125 (TO-240)



MEE




MEA




MEK / MPK


Diode connections for Fig. X126 (Y-4: 34 mm package)




MEO



MEE




MEK



MEA

Rectifier Diodes

$I_{FAV} = 2 - 2 \times 56 \text{ A}$,
Std. (DS...,DLA...) & Avalanche Diodes (DSA...)



DSIK

DSI 2x...


DLA...IM...

DS/DSA/DSI...

DSP





Type	V_{RRM}	I_{FAV} $T_C = 100^\circ\text{C}$	P_{RSM}	I_{FRMS}	I_{FSM} 10 ms 45°C	V_{TO}	r_T	T_{VJM}	R_{thJC}	R_{thCH}	Fig. No.	Package style Outline drawings on pages O-30...O-52				
➤ New	V	A	kW	A	A	V	mΩ	°C	K/W	K/W						
DS 1-12D	1200	2.3 $T_{amb} = 45^\circ\text{C}$	-	7	110	0.80	67	150	$R_{thJA} = 80$		X201	X200 Metal-can Weight = 1.5 g				
DSA 1-12D	1200		1.6	7	110	0.80	67	150				X201 Weight = 0.8 g				
DSA 1-16D	1600															
DSA 1-18D	1800															
DS 2-08A	800	3.6 $T_{amb} = 45^\circ\text{C}$	-	7	120	0.85	43	180	$R_{thJA} = 30$		X200	X201 Weight = 0.8 g				
DS 2-12A	1200		2.5	7	120	0.85	43	180				X004 TO-252AA Weight = 0.3 g				
DSA 2-12A	1200															
DSA 2-16A	1600															
DSA 2-18A	1800															
DSP 8-08S	2x 800	11	-	17	100	0.80	40	180	3.50	0.60	X011b	X005a TO-220AB Weight = 2 g				
DSP 8-12S	2x 1200		11	-	17	100	0.80	40					180	3.50	0.60	X011a
DSP 8-08A	2x 800															
DSP 8-12A	2x 1200															
DSP 8-08AS	2x 800	11	-	17	100	0.80	40	180	3.50	0.60	X011a	X010a ISOPLUS220™ Weight = 2 g				
DSP 8-12AS	2x 1200		11	-	17	100	0.80	40					180	3.50	0.60	X010a
DSP 8-12AC ①	2x 1200															
DSP 25-12A	2x 1200	28	-	43	300	0.80	15	180	1.50	0.40	X014a	X005b Weight = 2 g				
DSP 25-16A	2x 1600		28	-	43	300	0.80	15					180	1.50	0.40	X016a
DSP 25-16AR ①	2x 1600															
DSP 25-12AT	2x 1200	28	-	43	300	0.80	15	180	1.50	0.40	X019	X010a ISOPLUS220™ Weight = 2 g				
DSP 25-16AT	2x 1600		28	-	43	300	0.80	15					180	1.50	0.40	X010a
DSP 45-12A	2x 1200															
DSP 45-16A	2x 1600	45 $T_C = 130^\circ\text{C}$	-	70	480	0.80	11	180	0.55	0.20	X014a	X010a ISOPLUS220™ Weight = 2 g				
DSP 45-16AR ①	2x 1600	2x43	-	70	480	0.80	11	150	0.70	0.20	X016a					
➤ DLA 10IM800UC	800	10		16	80	0.80	22	150	3.15	0.50	X004					
➤ DLA 20IM800PC	800	20		31	200	0.80	19	150	1.80	0.25	X011b					
DSI 30-08A	800	30 $T_C = 125^\circ\text{C}$	-	-	300	0.85	13	150	1.00	0.50	X005b	X010b ISOPLUS220™ Weight = 2 g				
DSI 30-12A	1200		30	-	-	300	0.85	13	150	1.00	0.50	X011b	X011a TO-263AA Weight = 2 g			
DSI 30-16A	1600															
DSI 30-08AS	800	30	-	-	300	0.85	13	150	1.00	0.50	X011b	X011a TO-263AA Weight = 2 g				
DSI 30-12AS	1200		30	-	-	300	0.85	13	150	1.00	0.50	X010b	X011b TO-263AB Weight = 2 g			
DSI 30-16AS	1600															
DSI 30-08AC ①	800	48 $T_C = 105^\circ\text{C}$	-	-	475	0.80	8	150	0.55	0.20	X014b	X011b TO-263AB Weight = 2 g				
DSI 45-08A	800		48	-	-	475	0.80	8	150	0.55	0.20	X016b	X016a ISOPLUS247™ Weight = 5 g			
DSI 45-12A	1200															
DSI 45-16A	1600															
DSI 45-16AR ①	1600	2x 45 $T_C = 80^\circ\text{C}$	-	120	650	0.80	8	150	0.65	0.10	X016b	X014a TO-247AD Weight = 6 g				
DSIK 45-16AR ①	1600		2x 45	-	120	650	0.80	8	150	0.65	0.10	X027a	X016a ISOPLUS247™ Weight = 5 g			
DSI 2x55-12A	1200															
DSI 2x55-16A	1600															
① Isolated 2500 V_{RMS}												X027a Weight = 30 g	SOT-227B miniBLOC			
												X016b Weight = 2 g	ISOPLUS247™			
												X016a Weight = 5 g	ISOPLUS247™			

Rectifier Diodes



$I_{FAV} = 11 - 110 \text{ A}$, Standard Diodes (DS..), Avalanche Diodes (DSA..)

DSI/DSAI.. DS/DSA..

Type	V_{RRM}	I_{FAV} $T_C = 100^\circ\text{C}$	P_{RSM}	I_{FRMS}	I_{FSM} 10 ms 45°C	V_{T0}	r_T	T_{VJM}	R_{thJC}	R_{thCH}	Symbol	Fig. No.	Package style Outline drawings on pages O-30...O-52
> New	V	A	kW	A	A	V	mΩ	°C	K/W	K/W			
DS 9-08F DS 9-12F	800 1200	11	-	18	250	0.85	15.0	180	2.00	1.00	⌞	X204	X204 DO-203AA (DO-4) M5 Weight = 5 g 
DSA 9-12F DSA 9-16F DSA 9-18F	1200 1600 1800	11	4.5	18	250	0.85	15.0	180	2.00	1.00			
DS 17-08A DS 17-12A	800 1200	25 $T_C = 125^\circ\text{C}$	- 7	40 40	370 370	0.85 0.85	8.0 8.0	180 180	1.50 1.50	0.60 0.60			
DSA 17-12A DSA 17-16A DSA 17-18A	1200 1600 1800	25 $T_C = 125^\circ\text{C}$											
DSI 17-08A DSI 17-12A	800 1200	25 $T_C = 125^\circ\text{C}$	-	40	370	0.85	8.0	180	1.50	0.60	⌞	X205	X205 DO-203AA (DO-4) 10-32 UNF Weight = 6 g 
DSAI 17-12A DSAI 17-16A DSAI 17-18A	1200 1600 1800	25	7	40	370	0.85	8.0	180	1.50	0.60			
DS 35-08A DS 35-12A	800 1200	49	-	80	650	0.85	4.5	180	1.05	0.20			
DSA 35-12A DSA 35-16A DSA 35-18A	1200 1600 1800	49	11	80	650	0.85	4.5	180	1.05	0.20	⌞	X206a	X206a DO-203AB (DO-5) Weight = 15 g 
DSI 35-08A DSI 35-12A	800 1200	49	-	80	650	0.85	4.5	180	1.05	0.20			
DSAI 35-12A DSAI 35-16A DSAI 35-18A	1200 1600 1800	49	11	80	650	0.85	4.5	180	1.05	0.20	⌞	X206a	
DS 75-08B DS 75-12B	800 1200	110	-	160	1400	0.75	2.0	180	0.50	0.40			
DSA 75-12B DSA 75-16B DSA 75-18B	1200 1600 1800	110	20	160	1400	0.75	2.0	180	0.50	0.40	⌞	X207	X207 DO-203AB (DO-5) Weight = 21 g 
DSI 75-08B DSI 75-12B	800 1200	110	-	160	1400	0.75	2.0	180	0.50	0.40			
DSAI 75-12B DSAI 75-16B DSAI 75-18B	1200 1600 1800	110	20	160	1400	0.75	2.0	180	0.50	0.40			

Thyristors, SCRs


(SCR = Silicon Controlled Rectifier)

Phase Control Thyristors

Thyristors are very rugged devices. Compared to all other controlled semi-conductor components, they feature the highest current capacity per chip area, especially at high voltage. They are mainly used as control devices in 50 and 60 Hz AC mains equipment. Principal applications are static converter circuits for speed control of DC-drives, or switching and control functions for temperature, lighting, soft-start, etc. in single-phase and three-phase AC switch configurations. Phase control thyristors are designed for optimal forward conduction and reverse blocking characteristics, due to only moderate requirements for turn-on and turn-off parameters.

Phase Control Thyristors

$I_{TAV} = 13 - 63 \text{ A}$



Type	V_{RRM} V_{DRM}	I_{TAV} $T_C = 85^\circ\text{C}$	$I_{T(RMS)}$	I_{TSM} 45°C 10 ms	$(dv/dt)_{cr}$	V_{TO}	r_T	T_{VJM}	R_{thJC}	R_{thCH}	Fig. No.	Package style Outline drawings on pages O-30...O-52
> New	V	A	A	A	V/ μs	V	m Ω	°C	K/W	K/W		
CS 8-08 io2 CS 8-12 io2	800 1200	16	25	250	1000	1.00	18.0	125	1.50	1.00	X208	X005a TO-220AB Weight = 2 g
CS 19-08 ho1 CS 19-12 ho1 CS 19-08 ho1S CS 19-12 ho1S	800 1200 800 1200	19	29	160	500	0.85	27.0	125	1.00	0.25	X005a X011b	X007a TO-220ABFP Weight = 2 g
CS 19-08 ho1C ① CS 19-12 ho1C ①	800 1200	13	35	100	500	0.87	29.0	125	1.70	0.60	X010a	X010a ISOPLUS220™ Weight = 2 g
CS 20-12 io1 CS 20-14 io1 CS 20-16 io1	1200 1400 1600	19	30	200	1000	1.10	40.0	125	0.62	0.20	X014a	X010a ISOPLUS220™ Weight = 2 g
CS 20-22 moF1 ① > CS 20-25 mo1F ①	2200 2500	18 18		200 200	2500 2500			125 125	0.92 0.92	0.15 0.15	X024c X024c	X011b TO-263AB Weight = 2 g
CS 22-08 io1M CS 22-12 io1M	800 1200	22	30	300	500	0.90	18.0	150	2.50	0.50	X007a	X015a PLUS247 Weight = 6 g
CS 23-08 io2 CS 23-12 io2 CS 23-16 io2	800 1200 1600	25	50	450	1000	1.00	10.0	125	1.00	0.60	X209	X016a ISOPLUS247™ Weight = 5 g
CS 29-08 io1C ① CS 29-12 io1C ①	800 1200	23 $T_C = 95^\circ\text{C}$	35	200	1000	0.82	16.5	150	1.20	0.60	X010a	X019 TO-268AA Weight = 5 g
> CMA 30E1600PB > CMA 30E1600PN	1600 1600	30 $T_C = 115^\circ\text{C}$ 30 $T_C = 40^\circ\text{C}$	50	260	500	0.92	18.0	150	0.75 2.50	0.50	X005a X007a	X024a ISOPLUS i4-PAC™ Weight = 6 g
> CMA 30P1600FC	1600	30 $T_C = 90^\circ\text{C}$	47	300	1000	0.90	13.8	150	1.05	0.25	X024a	X024a ISOPLUS i4-PAC™ Weight = 6 g
CS 30-12 io1 CS 30-14 io1 CS 30-16 io1	1200 1400 1600	31	49	300	1000	0.90	15.0	125	0.62	0.20	X014a	X019 TO-268AA Weight = 5 g
CS 35-08 io4 CS 35-12 io4 CS 35-14 io4	800 1200 1400	63	120	1200	1000	0.85	3.5	125	0.40	0.20	X210	X024a ISOPLUS i4-PAC™ Weight = 6 g
CS 45-08 io1 CS 45-12 io1 CS 45-16 io1 CS 45-16 io1R ①	800 1200 1600 1600	48 $T_C = 75^\circ\text{C}$	75	520	1000	0.85	11.0	140	0.62	0.20	X014a X016a	X019 TO-268AA Weight = 5 g
> CLA 50E1200HB > CLA 50E1200TC	1200 1200	50 $T_C = 125^\circ\text{C}$	75	550	1000	0.92	7.8	150	0.40	0.25	X014a X019	X024a ISOPLUS i4-PAC™ Weight = 6 g
> CMA 50P1600FC	1600	50 $T_C = 90^\circ\text{C}$	79	800	1000	0.92	6.3	150	0.65	0.25	X024a	X024a ISOPLUS i4-PAC™ Weight = 6 g
CS 60-12 io1 CS 60-14 io1 CS 60-16 io1	1200 1400 1600	48 $T_C = 105^\circ\text{C}$	75	1500	1000	0.85	3.7	140	0.32	0.15	X015a	X024c ISOPLUS i4-PAC™ Weight = 6 g

① Isolated 2500 V_{RMS}

X210 **TO-208AC (TO-65)**
Weight = 20 g




X209 **TO-208AC (TO-48)**
Weight = 12 g



X208 **TO-64**
Weight = 6 g



X024c **ISOPLUS i4-PAC™**
Weight = 6 g



Thyristor / Diode Modules


One of the essential advantages of power semiconductor modules compared to discrete designs is the electrical isolation between the baseplate of the module and the parts subject to voltage (3.6 kV_{RMS} tested). This makes possible the mount-down of any number of the same or different modules on a common heatsink. It is feasible to use standard housings with appropriate accessories for designing compact power converter operating from AC mains up to 690 V.

Plastic Housing with DCB Substrate

IXYS has succeeded in simplifying the conventional multilayer module construction by the DCB (Direct Copper Bonding) technique.

Other features are:

- top-side electrical terminals with captured nuts;
- series-connected diode/diode, thyristor/diode and thyristor/thyristor modules;
- easy assembly.

All thyristor modules with DCB ceramic base contacts are available in volume with two standardized twin plugs (2.8 mm x 0.8 mm) for gate and auxiliary cathode control terminals (version 1). Modules in TO-240 housing of the version 8 are delivered with gate plugs only (without auxiliary cathode terminal; mounting screws available on request). The module housing is designed for adequate clearance and creepage distance resulting in  recognition by Underwriters Laboratories, Inc., USA for all types.

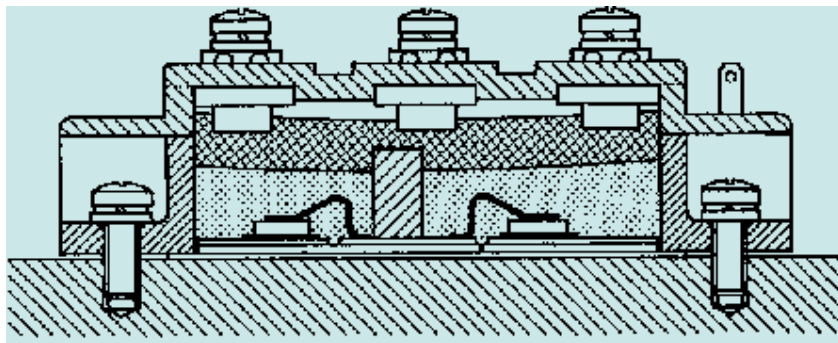


Fig. 2: Principal cross section of an IXYS module with DCB technology

New Generation Silicon Chips

The figures 1 a-c show cross sections of the used thyristor and diode chips in the passivation area. All chips are designed by applying separation diffusion processes such that the zones responsible for the surface field strength are located at the upper chip side. This results in the capability of soldering the entire chip area onto the DCB ceramic substrate without a molybdenum strain buffer, which in turn leads to good stability of the chips as well as to large area heat dissipation if a load is applied. All zones at the edges which are decisive for the blocking stability are coated with passivation glasses the coefficient of expansion of which match that of silicon. Silicon chips increasingly use planar technology with guard rings and channel stoppers to reduce electrical surface fields. This chip design supercedes the design of thyristor chips which were fabricated with passivation moats so that modules of the new series designed with the updated state-of-the-art utilize planar passivated chips processed by separation diffusion techniques. The contact areas of the chips possess physical vapor deposited metal layers. For the user the improved properties are:

- Excellent long-term stability of blocking currents and blocking voltages,
- increased life time of the internal soldered connections,
- high power cycling capability ($\geq 50\ 000$).

The thyristor/diode chips have been optimized with regard to their turn-off parameters: decreasing the carrier lifetime results in reduced stored charges QS, which in turn significantly reduces requirements for RC-snubbers for over-voltage protection. Cost reduction and improved efficiency are the benefits of these characteristics. By re-developing the silicon chips, improvements of the firing characteristics were achieved by specifying a higher „gate current not to fire“ IGD resulting in substantially less susceptibility to misfiring. This leads to greater safety of operation and higher reliability of the equipment.


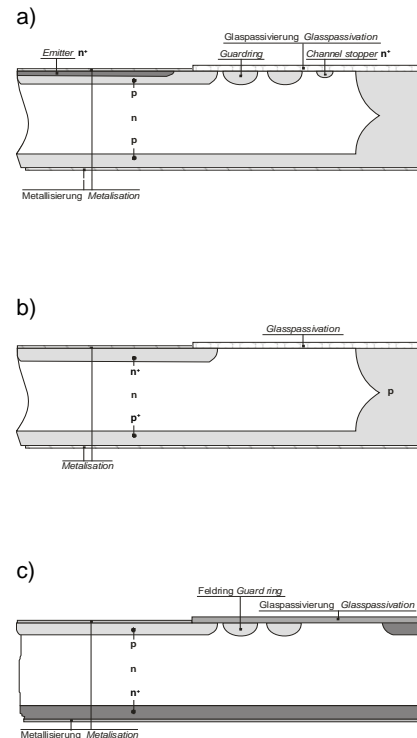


Fig. 1a-c: Cross sections of thyristor and diode chips in the passivation area


- a) glassivated planar thyristor chip with separation diffusion, type CWP
- b) glassivated planar diode chip with separation diffusion, type DWN
- c) glassivated planar diode chip, type DWP (reverse polarity of DWN chips)

Diode Modules, Dual

$$I_{FAV} = 36 - 224 \text{ A}$$




MDD...

Type	V_{RRM}	I_{FAV}	T_C	$I_{F(RMS)}$	I_{FSM}	V_{TO}	r_T	T_{VJM}	R_{thJC}	R_{thCH}	Fig. No.	Package style Outline drawings on pages O-30...O-52		
	V	A	°C	A	A	V	mΩ	°C	K/W	K/W				
> New MDD 26-08N1B MDD 26-12N1B MDD 26-14N1B MDD 26-16N1B MDD 26-18N1B	800 1200 1400 1600 1800	36	100	60	650	0.80	6.10	150	1.00	0.20	X125e	TO-240AA Weight = 90 g  		
MDD 44-08N1B MDD 44-12N1B MDD 44-14N1B MDD 44-16N1B MDD 44-18N1B	800 1200 1400 1600 1800	59	100	100	1150	0.80	4.30	150	0.59	0.20				
MDD 56-08N1B MDD 56-12N1B MDD 56-14N1B MDD 56-16N1B MDD 56-18N1B	800 1200 1400 1600 1800	71	100	150	1400	0.80	3.00	150	0.51	0.20				
MDD 72-08N1B MDD 72-12N1B MDD 72-14N1B MDD 72-16N1B MDD 72-18N1B	800 1200 1400 1600 1800	99	100	180	1700	0.80	2.30	150	0.35	0.20				
MDD 95-08N1B MDD 95-12N1B MDD 95-14N1B MDD 95-16N1B MDD 95-18N1B MDD 95-20N1B MDD 95-22N1B	800 1200 1400 1600 1800 2000 2200	120	105	180	2800	0.75	1.95	150	0.26	0.20				
MDD 142-08N1 MDD 142-12N1 MDD 142-14N1 MDD 142-16N1 MDD 142-18N1	800 1200 1400 1600 1800	165	100	300	4700	0.80	1.30	150	0.21	0.10			X126c	 Weight = 150 g 
MDD 172-08N1 MDD 172-12N1 MDD 172-14N1 MDD 172-16N1 MDD 172-18N1	800 1200 1400 1600 1800	190	100	300	6600	0.80	0.80	150	0.21	0.10				
MDD 200-14N1 MDD 200-16N1 MDD 200-18N1 MDD 200-22N1	1400 1600 1800 2200	224	100	350	10500	0.80	0.60	150	0.13	0.10				

Diode Modules, Single and Dual

$I_{FAV} = 270 - 950 \text{ A}$

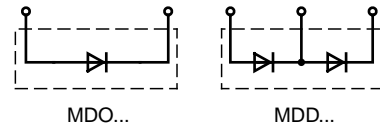


Type	V_{RRM}	I_{FAV}	T_C	$I_{F(RMS)}$	I_{FSM} 45°C 10 ms	V_{T0}	r_T	T_{VJM}	R_{thJC}	R_{thCH}	Fig. No.	Package style
➤ New	V	A	°C	A	A	V	mΩ	°C	per Chip			Outline drawings on pages O-30...O-52
									K/W	K/W		
➤ MDD 175-28N1	2800	175	100	450	4500	0.90	1.80	150	0.14	0.07	X131c	X129c Weight = 210 g
➤ MDD 175-34N1	3400											
MDD 220-08N1	800	270	100	450	8500	0.75	0.90	150	0.129	0.04	X129c	 Y2
MDD 220-12N1	1200											
MDD 220-14N1	1400											
MDD 220-16N1	1600											
MDD 220-18N1	1800											
MDD 250-08N1	800	290	100	450	11000	0.75	0.75	150	0.129	0.04		
MDD 250-12N1	1200										X131c Weight = 750 g	Y1
MDD 250-14N1	1400											
MDD 250-16N1	1600											
MDD 250-18N1	1800											
MDD 255-12N1	1200	270	100	450	9500	0.80	0.60	150	0.14	0.04	X131c	 Y2
MDD 255-14N1	1400											
MDD 255-16N1	1600											
MDD 255-18N1	1800											
MDD 255-20N1	2000											
MDD 255-22N1	2200											
MDD 310-08N1	800	305	100	480	11500	0.75	0.63	150	0.129	0.04	X129c	X132b Weight = 730 g
MDD 310-12N1	1200											
MDD 310-14N1	1400											
MDD 310-16N1	1600											
MDD 310-18N1	1800											
MDD 310-20N1	2000											
MDD 310-22N1	2200											
MDD 312-12N1	1200	310	100	520	10500	0.80	0.60	150	0.12	0.04	X131c	X136d Weight = 1550 g
MDD 312-14N1	1400											
MDD 312-16N1	1600											
MDD 312-18N1	1800											
MDD 312-20N1	2000											
MDD 312-22N1	2200											
MDD 600-12N1*	1200	600	111	1818	24000	0.75	0.20	150	0.062	0.02	X136d	 Y2
MDD 600-16N1	1600				150°C							
MDD 600-18N1	1800											
MDD 600-22N1	2200											
MDD 950-12N1W*	1200	950	$T_w = 45°C$	1773	2400	0.75	0.20	150	$R_{thJW} = 0.09$	-	X137d	X137d Weight = 2100 g
MDD 950-16N1W	1600				150°C							
MDD 950-18N1W	1800											
MDD 950-22N1W	2200											
MDO 500-12N1	1200	560	85	880	15000	0.80	0.38	140	0.072	0.024	X132b	 Y2
MDO 500-14N1	1400											
MDO 500-16N1	1600											
MDO 500-18N1	1800											
MDO 500-20N1	2000											
MDO 500-22N1	2200											
➤ MDO 1200-20N1	2000	1200	102	3557	40000	0.87	0.11	160	0.04	0.01	X140b	X140b Weight = 2200 g
➤ MDO 1200-22N1	2200											


* for other configurations please contact factory



Thyristor / Diode Modules



MCD...io1




MCD...io8/...io6

$$I_{TAV} = 27 - 116 \text{ A}$$

Type	V_{RRM}	I_{FAV}	T_C	$I_{T(RMS)}$	I_{FSM} 45°C 10 ms	V_{TO}	r_T	T_{VJM}	R_{thJC}	R_{thCH}	Fig. No.	Package style Outline drawings on pages O-30...O-52	
	V_{DRM}												per Chip
➤ New	V	A	°C	A	A	V	mΩ	°C	K/W	K/W			
MCD 26-08io1B MCD 26-12io1B MCD 26-14io1B MCD 26-16io1B	800 1200 1400 1600	27	85	50	520	0.85	11.0	125	0.88	0.2	X125b	 <p>X027a SOT-227B miniBLOC Weight = 30 g</p>  <p>X125b TO-240AA Weight = 90 g</p>  <p>X125d TO-240 Weight = 90 g</p>	
MCD 26-08io8B MCD 26-12io8B MCD 26-14io8B MCD 26-16io8B	800 1200 1400 1600	27	85	50	520	0.85	11.0	125	0.88	0.2	X125d		
MCD 40-12io6 MCD 40-16io6	1200 1600	38	85	60	500	0.85	9.5	125	0.60	0.1	X027a		
MCD 44-08io1B MCD 44-12io1B MCD 44-14io1B MCD 44-16io1B MCD 44-18io1B	800 1200 1400 1200 1600	49	85	80	1150	0.85	5.3	125	0.53	0.2	X125b		
MCD 44-08io8B MCD 44-12io8B MCD 44-14io8B MCD 44-16io8B MCD 44-18io8B	800 1200 1400 1600 1800	49	85	80	1150	0.85	5.3	125	0.53	0.2	X125d		
MCD 56-08io1B MCD 56-12io1B MCD 56-14io1B MCD 56-16io1B MCD 56-18io1B	800 1200 1400 1600 1800	60	85	100	1500	0.85	3.7	125	0.45	0.2	X125b		
MCD 56-08io8B MCD 56-12io8B MCD 56-14io8B MCD 56-16io8B MCD 56-18io8B	800 1200 1400 1600 1800	60	85	100	1500	0.85	3.7	125	0.45	0.2	X125d		
MCD 72-08io1B MCD 72-12io1B MCD 72-14io1B MCD 72-16io1B MCD 72-18io1B	800 1200 1400 1600 1800	85	85	180	1700	0.85	3.2	125	0.30	0.2	X125b		
MCD 72-08io8B MCD 72-12io8B MCD 72-14io8B MCD 72-16io8B MCD 72-18io8B	800 1200 1400 1600 1800	85	85	180	1700	0.85	3.2	125	0.30	0.2	X125d		
MCD 94-20io1B MCD 94-22io1B	2000 2200	104	85	180	1700	0.85	3.2	125	0.22	0.2	X125b		
MCD 95-08io1B MCD 95-12io1B MCD 95-14io1B MCD 95-16io1B MCD 95-18io1B	800 1200 1400 1600 1800	116	85	180	2250	0.80	2.4	125	0.22	0.2			
MCD 95-08io8B MCD 95-12io8B MCD 95-14io8B MCD 95-16io8B MCD 95-18io8B	800 1200 1400 1600 1800	116	85	180	2250	0.80	2.4	125	0.22	0.2			X125d

Thyristor / Diode Modules



MCD...io1

$I_{TAV} = 130 - 700 \text{ A}$

Type	V_{RRM} V_{DRM}	I_{FAV}	T_C	$I_{T(RMS)}$	I_{FSM} 45°C 10 ms	V_{TO}	r_T	T_{VJM}	R_{thJC}	R_{thCH}	Fig. No.	Package style
➤ New	V	A	°C	A	A	V	mΩ	°C	K/W	K/W		Outline drawings on pages O-30...O-52
MCD 132-08io1 MCD 132-12io1 MCD 132-14io1 MCD 132-16io1 MCD 132-18io1	800 1200 1400 1600 1800	130	85	300	4750	0.80	1.50	125	0.230	0.10	X126b	X126b Weight = 150 g  Y4
MCD 161-20io1 MCD 161-22io1	2000 2200	165	85	300	6000	0.80	1.60	125	0.155	0.07		
MCD 162-08io1 MCD 162-12io1 MCD 162-14io1 MCD 162-16io1 MCD 162-18io1	800 1200 1400 1600 1800	181	85	300	6000	0.88	1.15	125	0.155	0.07	X126b	X129b Weight = 210 g  Y2
MCD 200-14io1 MCD 200-16io1 MCD 200-18io1	1400 1600 1800	216	85	340	8000	0.80	1.00	125	0.130	0.05		
MCD 224-20io1 MCD 224-22io1	2000 2200	240	85	400	8000	0.80	0.76	130	0.139	0.04	X131b	 Y1
MCD 220-08io1 MCD 220-12io1 MCD 220-14io1 MCD 220-16io1	800 1200 1400 1600	250	85	400	8500	0.90	1.00	140	0.139	0.04	X129b	X131b Weight = 750 g  Y1
MCD 225-12io1 MCD 225-14io1 MCD 225-16io1 MCD 225-18io1	1200 1400 1600 1800	221	85	400	8000	0.80	0.76	130	0.157	0.04	X131b	
MCD 250-08io1 MCD 250-12io1 MCD 250-14io1 MCD 250-16io1 MCD 250-18io1	800 1200 1400 1600 1800	287	85	450	9000	0.85	0.82	140	0.129	0.04	X129b	 WC-500
MCD 255-12io1 MCD 255-14io1 MCD 255-16io1 MCD 255-18io1	1200 1400 1600 1800	250	85	450	9000	0.80	0.68	130	0.140	0.04	X131b	X136b Weight = 1550 g  WC-500
MCD 310-08io1 MCD 310-12io1 MCD 310-14io1 MCD 310-16io1 MCD 310-18io1	800 1200 1400 1600 1800	320	85	500	9200	0.80	0.82	140	0.112	0.04	X129b	
MCD 310-20io1 MCD 310-22io1	2000 2200	320	85	500	8000	0.80	0.82	140	0.112	0.04	X129b	X137b Weight = 2100 g  WC-500
MCD 312-12io1 MCD 312-14io1 MCD 312-16io1 MCD 312-18io1	1200 1400 1600 1800	320	85	520	9200	0.80	0.68	140	0.120	0.04	X131b	
MCD 500-12io1* MCD 500-16io1 MCD 500-18io1 MCD 500-22io1	1200 1600 1800 2200	500 500	89 80	1294 1071	18200 15400 125°C	0.85 0.88	0.27 0.46	125 125	0.062 0.062	0.02 0.02	X136b	
MCD 501-12io1* MCD 501-14io1 MCD 501-16io1 MCD 501-18io1	1200 1400 1600 1800	503	85	1195	16000 125°C	0.85	0.30	125	0.062	0.02	X138b	X138b Weight = 1500 g  WC-501
MCD 700-12io1W* MCD 700-16io1W MCD 700-18io1W	1200 1600 1800	700	$T_w = 42^\circ\text{C}$	1331	18200 125°C	0.85	0.27	125	0.062	$R_{thJW} = 0.09$	X137b	

* for other configurations please contact factory

Thyristor Modules


$I_{TAV} = 105 - 180 \text{ A}$

Type	V_{RRM} V_{DRM}	I_{FAV}	T_C	$I_{T(RMS)}$	I_{FSM} 45°C 10 ms	V_{TO}	r_T	T_{VJM}	R_{thJC}	R_{thCH}	Fig. No.	Package style
> New	V	A	°C	A	A	V	mΩ	°C	K/W	K/W		Outline drawings on pages O-30...O-52
VCK 105-08io7 VCK 105-12io7 VCK 105-14io7 VCK 105-16io7 VCK 105-18io7	800 1200 1400 1600 1800	105	85	180	2250	0.80	2.40	125	0.26	0.20	X102	
VCA 105-08io7 VCA 105-12io7 VCA 105-14io7 VCA 105-16io7 VCA 105-18io7	800 1200 1400 1600 1800	105	85	180	2250	0.80	2.40	125	0.26	0.20		
VCD 105-08io7 VCD 105-12io7 VCD 105-14io7 VCD 105-16io7 VCD 105-18io7	800 1200 1400 1600 1800	105	85	180	2250	0.80	2.40	125	0.26	0.20		
VCC 105-08io7 VCC 105-12io7 VCC 105-14io7 VCC 105-16io7 VCC 105-18io7	800 1200 1400 1600 1800	105	85	180	2250	0.80	2.40	125	0.26	0.20		
VCC 2x105-08io7 VCC 2x105-12io7 VCC 2x105-14io7 VCC 2x105-16io7 VCC 2x105-18io7	800 1200 1400 1600 1800	105	85	180	2250	0.80	2.40	125	0.26	0.20		
VCO 132-08io7 VCO 132-12io7 VCO 132-14io7 VCO 132-16io7 VCO 132-18io7	800 1200 1400 1600 1800	130	85	200	3600	0.80	1.65	150	0.25	0.10		
VCO 180-08io7 VCO 180-12io7 VCO 180-14io7 VCO 180-16io7 VCO 180-18io7	800 1200 1400 1600 1800	180	90	280	4500	0.75	1.23	150	0.17	0.06		


X102 **ECO-PAC 2**
Weight = 24 g




See data sheet for pin arrangement




VCK...




VCA...




VCD...



VCC...





VCC... 2x105



VCO...

Thyristor Modules, Dual




MCC...io1B

MCC...io8B

$I_{TAV} = 18 - 116 \text{ A}$

Type	V_{RRM} V_{DRM}	I_{FAV}	T_C	$I_{T(RMS)}$	I_{FSM} 45°C 10 ms	V_{TO}	r_T	T_{VJM}	R_{thJC}	R_{thCH}	Fig. No.	Package style Outline drawings on pages O-30...O-52
> New	V	A	°C	A	A	V	mΩ	°C	K/W	K/W		
MCC 19-08io1B	800	18	85	40	400	0.85	18.0	125	1.30	0.2	X125a	 <p>X125a Weight = 90 g</p>
MCC 19-12io1B	1200											
MCC 19-14io1B	1400											
MCC 19-16io1B	1600											
MCC 19-08io8B	800	18	85	40	400	0.85	18.0	125	1.30	0.2	X125c	
MCC 19-12io8B	1200											
MCC 19-14io8B	1400											
MCC 19-16io8B	1600											
MCC 21-08io8B	800	21	85	33	320	0.85	15.0	125	1.10	0.2	X125c	
MCC 21-12io8B	1200											
MCC 21-14io8B	1400											
MCC 21-16io8B	1600											
MCC 26-08io1B	800	27	85	50	520	0.85	11.0	125	0.88	0.2	X125a	
MCC 26-12io1B	1200											
MCC 26-14io1B	1400											
MCC 26-16io1B	1600											
MCC 26-08io8B	800	27	85	50	520	0.85	11.0	125	0.88	0.2	X125c	
MCC 26-12io8B	1200											
MCC 26-14io8B	1400											
MCC 26-16io8B	1600											
MCC 44-08io1B	800	49	85	80	1150	0.85	5.3	125	0.53	0.2	X125a	 <p>X125c Weight = 90 g</p>
MCC 44-12io1B	1200											
MCC 44-14io1B	1400											
MCC 44-16io1B	1600											
MCC 44-18io1B	1800											
MCC 44-08io8B	800	49	85	80	1150	0.85	5.3	125	0.53	0.2	X125c	
MCC 44-12io8B	1200											
MCC 44-14io8B	1400											
MCC 44-16io8B	1600											
MCC 44-18io8B	1800											
MCC 56-08io1B	800	60	85	100	1500	0.85	3.7	125	0.45	0.2	X125a	
MCC 56-12io1B	1200											
MCC 56-14io1B	1400											
MCC 56-16io1B	1600											
MCC 56-18io1B	1800											
MCC 56-08io8B	800	60	85	100	1500	0.85	3.7	125	0.45	0.2	X125c	
MCC 56-12io8B	1200											
MCC 56-14io8B	1400											
MCC 56-16io8B	1600											
MCC 56-18io8B	1800											
MCC 72-08io1B	800	85	85	180	1700	0.85	3.2	125	0.30	0.2	X125a	
MCC 72-12io1B	1200											
MCC 72-14io1B	1400											
MCC 72-16io1B	1600											
MCC 72-18io1B	1800											
MCC 72-08io8B	800	85	85	180	1700	0.85	3.2	125	0.30	0.2	X125c	
MCC 72-12io8B	1200											
MCC 72-14io8B	1400											
MCC 72-16io8B	1600											
MCC 72-18io8B	1800											
MCC 94-20io1B	2000	104	85	180	1700	0.85	3.2	125	0.22	0.2	X125a	
MCC 94-22io1B	2200											
MCC 95-08io1B	800	116	85	180	2250	0.80	2.4	125	0.22	0.2	X125a	
MCC 95-12io1B	1200											
MCC 95-14io1B	1400											
MCC 95-16io1B	1600											
MCC 95-18io1B	1800											
MCC 95-08io8B	800	116	85	180	2250	0.80	2.4	125	0.22	0.2	X125c	
MCC 95-12io8B	1200											
MCC 95-14io8B	1400											
MCC 95-16io8B	1600											
MCC 95-18io8B	1800											








Thyristor Modules, Dual



MCC...io1B

MCC...io8B


$I_{TAV} = 130 - 700 \text{ A}$

Type	V_{RRM}	I_{FAV}	T_C	$I_{T(RMS)}$	I_{FSM} 45°C 10 ms	V_{TO}	r_T	T_{VJM}	per Chip		Fig. No.	Package style Outline drawings on pages O-30...O-52
	V_{DRM}								R_{thJC}	R_{thCH}		
> New	V	A	°C	A	A	V	mΩ	°C	K/W	K/W		
MCC 132-08io1	800	130	85	300	4750	0.80	1.50	125	0.230	0.10	X126a	X126a Weight = 150 g 
MCC 132-12io1	1200											
MCC 132-14io1	1400											
MCC 132-16io1	1600											
MCC 132-18io1	1800											
MCC 161-20io1	2000	165	85	300	6000	0.80	1.60	125	0.155	0.07	X126a	X129a Weight = 750 g 
MCC 161-22io1	2200											
MCC 162-08io1	800	181	85	300	6000	0.88	1.15	125	0.155	0.07	X126a	X129a Weight = 750 g 
MCC 162-12io1	1200											
MCC 162-14io1	1400											
MCC 162-16io1	1600											
MCC 162-18io1	1800											
MCC 200-14io1	1400	216	85	340	8000	0.80	1.00	125	0.130	0.05	X126a	X129a Weight = 750 g 
MCC 200-16io1	1600											
MCC 200-18io1	1800											
MCC 220-08io1	800	250	85	400	8500	0.90	1.00	140	0.139	0.04	X129a	X131a Weight = 750 g 
MCC 220-12io1	1200											
MCC 220-14io1	1400											
MCC 220-16io1	1600											
MCC 220-18io1	1800											
MCC 224-20io1	2000	240	85	400	8000	0.80	0.76	130	0.139	0.04	X131a	X136a Weight = 1550 g 
MCC 224-22io1	2200											
MCC 225-12io1	1200	221	85	400	8000	0.80	0.76	130	0.157	0.04	X129a	X136a Weight = 1550 g 
MCC 225-14io1	1400											
MCC 225-16io1	1600											
MCC 225-18io1	1800											
MCC 250-08io1	800	287	85	450	9000	0.85	0.82	140	0.129	0.04	X129a	X136a Weight = 1550 g
MCC 250-12io1	1200											
MCC 250-14io1	1400											
MCC 250-16io1	1600											
MCC 250-18io1	1800											
MCC 255-12io1	1200	250	85	450	9000	0.80	0.68	130	0.140	0.04	X131a	X137a Weight = 2100 g
MCC 255-14io1	1400											
MCC 255-16io1	1600											
MCC 255-18io1	1800											
MCC 310-08io1	800	320	85	500	9200	0.80	0.82	140	0.112	0.04	X129a	X138a Weight = 1500 g
MCC 310-12io1	1200											
MCC 310-14io1	1400											
MCC 310-16io1	1600											
MCC 310-18io1	1800											
MCC 312-12io1	1200	320	85	520	9200	0.80	0.68	140	0.120	0.04	X131a	X138a Weight = 1500 g
MCC 312-14io1	1400											
MCC 312-16io1	1600											
MCC 312-18io1	1800											
MCC 500-12io1*	1200	500	89	785	18200 125°C	0.85	0.27	125	0.062	0.02	X136a	X138a Weight = 1500 g
MCC 500-14io1	1400											
MCC 500-16io1	1600		80	1071	15400	0.88 125°C	0.46	125	0.062	0.02	X136a	X138a Weight = 1500 g
MCC 500-18io1	1800											
MCC 500-22io1*	2200											
MCC 501-12io1*	1200	503	85	1195	16000 125°C	0.85	0.30	125	0.062	0.02	X138a	X138a Weight = 1500 g
MCC 501-14io1	1400											
MCC 501-16io1	1600											
MCC 501-18io1	1800											
MCC 700-12io1W	1200	700	$T_w = 42^\circ\text{C}$	1331	18200 125°C	0.85	0.27	125	0.062	$R_{thJW} = 0.09$	X137a	X137a Weight = 1500 g
MCC 700-16io1W	1600											
MCC 700-18io1W	1800											



* for other configurations please contact factory

Thyristor Modules, Single






$I_{TAV} = 31 - 800 \text{ A}$



MCO

Type	V_{RRM}	I_{FAV}	T_C	$I_{T(RMS)}$	I_{FSM}	V_{TO}	r_T	T_{VJM}	per Chip		Fig. No.	Package style Outline drawings on pages O-30...O-52
	V_{DRM}								R_{thJC}	R_{thCH}		
➤ New	V	A	°C	A	A	V	mΩ	°C	K/W	K/W		
MCO 25-12io1 MCO 25-16io1	1200 1600	31	80	49	370	0.85	14.00	150	1.10	0.50	X027a	SOT-227B miniBLOC X027a Weight = 30 g 
MCO 50-12io1 MCO 50-16io1	1200 1600	54	80	85	740	0.90	5.80	150	0.72	0.40		
➤ MCO 75-12io1 ➤ MCO 75-16io1	1200 1600	77	80	121	1070	0.85	5.50	150	0.45	0.20		
MCO 100-12io1 MCO 100-16io1	1200 1600	99	80	156	1400	0.85	4.50	150	0.35	0.15		
MCO 150-12io1 MCO 150-16io1	1200 1600	149	80	234	2000	0.80	3.80	150	0.20	0.10		
MCO 450-20io1 MCO 450-22io1	2000 2200	464	85	750	15000	0.77	0.42	130	0.072	0.024		
MCO 500-12io1 MCO 500-14io1 MCO 500-16io1 MCO 500-18io1	1200 1400 1600 1800	560	85	880	17000	0.80	0.38	140	0.072	0.024		
MCO 600-16io1 MCO 600-18io1 MCO 600-20io1 MCO 600-22io1	1600 1800 2000 2200	600	85	928	15000	0.77	0.42	140	0.065	0.02		
MCO 740-20io1 MCO 740-22io1	2000 2200	740	88	2389	36000	0.833	0.210	125	0.04	0.01		
MCO 800-16io1 MCO 800-18io1	1600 1800	800	88	2564	36000	0.890	0.154	125	0.04	0.01		
											X140a	WC-800 X140a Weight = 2200 g 

Optional Accessories for Thyristor / Diode Modules

For module-types MCC 19, 26, 44, 56, 72, 94 and 95 version 1:
Keyed Gate Cathode twin plugs with wire length = 350 mm;
gate = yellow, cathode = red




Type **ZY 200 L** (L = Left for pin pair 4/5)
Type **ZY 200 R** (R = Right for pin pair 6/7)

For ZY 180 and ZY 200: UL Styles 1385

For module types MCC/MCD/MCO 132, 161, 162, 200, 220, 224, 225, 250, 255, 310, 312, 500 and MII 400 (for MCD/MCO only L-type):
Keyed Gate Cathode twin plugs with wire length = 350 mm
gate = yellow, cathode = red

Type **ZY 180 L** (L = Left for pin pair 4/5)
Type **ZY 180 R** (R = Right for pin pair 6/7)

For module types MCC/MCD/MDD 220, 250, 310
Threaded spacer for higher Anode / Cathode construction:
Type **ZY 250** (material brass)

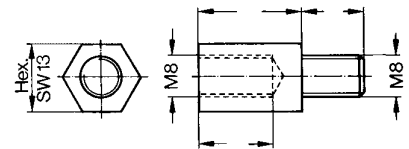Design Information

For Thyristors, Diodes, Thyristor / Diode Modules and Rectifier Bridges

Surge current

Limiting I^2t

Forward current

The 60 Hz value of I_{TSM} is 10% higher than the 50 Hz value
The I_{TSM} value at T_{VJM} is 10% to 15% lower than the 45°C value

50 Hz: $I^2t [A^2s] = I_{TSM} [A] \cdot I_{TSM} [A] \cdot 0.005 [s]$; use rated I_{TSM} value (10 ms)
60 Hz: $I^2t [A^2s] = I_{TSM} [A] \cdot I_{TSM} [A] \cdot 0.0042 [s]$; use 60-Hz-value of I_{TSM}

The average current ratings in tables are mostly specified for temperature conditions of: $T_A = 45^\circ C$, $T_C = 85^\circ C$ or $T_C = 100^\circ C$.
For other temperature conditions, the current ratings can be calculated using the following formulas, applicable up to 400 Hz.

$$I_{TAV} = \frac{-V_{TO} + \sqrt{V_{TO}^2 + 4 \cdot k^2 \cdot r_T \cdot P}}{2 \cdot k^2 \cdot r_T}$$

where

$P = \frac{T_{VJM} - T_C}{R_{thJC}}$

or

$P = \frac{T_{VJM} - T_A}{R_{thJA}}$

$I_{TAV} [A], P [W]; V_{TO} [V]; r_T [W]; T_{VJM} [^\circ C], T_C [^\circ C], T_A [^\circ C]$
 $R_{thJC} [K/W], R_{thJA} [K/W]$


$k^2 = 1$ for DC current
 $k^2 = 2.5$ for sinusoidal half wave current
 $k^2 = 3$ for 120° rectangular current
 $k^2 = 6$ for 60° rectangular current



The average forward current is limited by the RMS current value $I_{T(RMS)}$. When the **calculated** value I_{TAV} is higher than $I_{T(RMS)} / k$, replace it by $I_{TAV} = I_{T(RMS)} / k$.

Rectifier Bridges for Power Factor Correction

Power Stage for Boost Converters (Power Factor Correction)

1-phase PFC

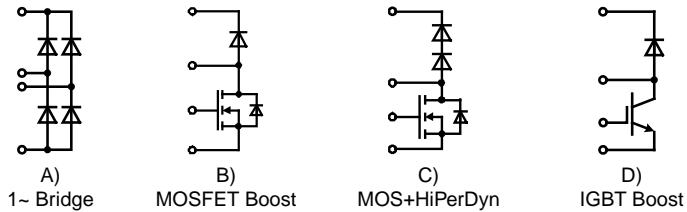

Type	Circuit	V_{DSS} max	I_D $T_C = 25^\circ\text{C}$	$R_{DS(on)}$ max	V_{RRM} Boost Diode	V_{RRM} Rectifier Diodes	Fig. No.	Package style
> New		V	A	Ω	V	V		Outline drawings on pages O-30...O52
MOSFET								
FMD 21-05QC	C	500	21	0.220	600	-	X024a	X024a ISOPLUS i4-PAC™ Weight = 6 g 
> FMD 15-06KC5	C, CoolMOS™ ¹⁾	600	15	0.165	under development			
FMD 40-06KC	C, CoolMOS™ ¹⁾	600	38	0.070	contact factory			
> FMD 47-06KC5	C, CoolMOS™ ¹⁾	600	47	0.045	600	-		
VUM 24-05N	A + B	500	35	0.120	600	800	X105b	
VUM 33-05N	A + B	500	47	0.120	600	800		
Type	Circuit	V_{CES} max	I_D $T_C = 25^\circ\text{C}$	V_{CEsat} @ I_C		V_{RRM} Boost Diode	V_{RRM} Rectifier Diodes	Fig. No.
> New		V	A	V	A	V	V	
IGBT								
FID 60-06D	D	600	65	1.6	30	600	-	X024a
X105b V1-B-Pack Weight = 28 g 								
Type	Circuit	V_{RRM} V	I_{DAV} A	@ T_C $^\circ\text{C}$		Fig. No.		
> New		V	A	$^\circ\text{C}$				
Rectifier								
FBO 16-12N *	A	1200	22	90		X024a		
FBO 40-12N *	A	1200	40	90				


* Recommended in combination with types FMD and FID



¹⁾ CoolMOS™ is a trademark of Infineon Technologies

3-phase PFC

“Vienna Rectifier” circuit

- wide input voltage range
- sinusoidal mains input currents in phase with mains
- boost converter operation:
 - input: three phase AC mains without neutral conductor
 - output: stabilized DC link with center point
- one module used per phase

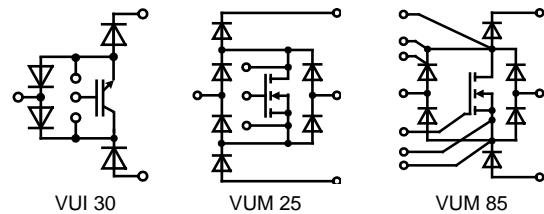


Type	PN / kW	Configuration	Fig. No.	Package style
> New	3 ~ 400V $T_C = 80^\circ\text{C}$			Outline drawings on pages O-30...O-52
VUM 25-05E ①	10	Vienna rectifier current	X103	X103 V1-A-Pack Weight = 35 g 
VUM 85-05A ①	30	Vienna rectifier current	X104	X104 V2-Pack Weight = 80 g 
VUI 30-12N1 ①	15	IGBT stage for buck @ boost PWM converter	X103	

① contact factory

MOS / IGBT AC Switch


- Fast AC switch
- Easy to turn-off like a MOSFET or IGBT
- Applications
 - lighting control
 - AC motor control
 - matrix inverter

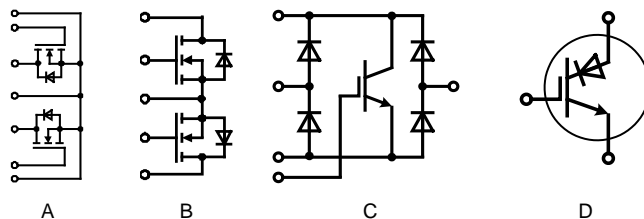

Type	Configuration	B _V voltage ± V	Rated current T _C = 25°C A	Circuit	Fig. No.	Package style Outline drawings on pages O-30...O-52
○ Not for new designs						
➤ New						
○ VMK 165-007T	MOSFET in common source	70	165	A	X125a	X005a TO-220AB Weight = 2 g
FMK 75-01F	MOSFET in common source	100	75	B	X024a	
VMK 90-02T2 ①	MOSFET in common source	200	83	A	X125a	
➤ IXRA 15N120	single RIGBT *	1200	25	D	X011a	
IXRP 15N120	single RIGBT *	1200	25	D	X005a	
IXRH 40N120	single RIGBT *	1200	55	D	X014a	
IXRR 40N120	single RIGBT *	1200	45	D	X016a	X014a TO-247AD Weight = 6 g
FIO 50-12BD	IGBT and Diode Bridge	1200	50	C	X024a	

* Single IGBT die with reverse blocking capability
① contact factory

Module with HiPerFET™ H-Bridge and Single Phase Mains Rectifier Bridge



Type	V _{DSS}	I _D T _C = 25°C	I _D T _C = 80°C	R _{DSon} max T _C = 25°C	V _{DRM} rectifier diode	I _{DAVM} @ T _C	Fig. No.	Package style Outline drawings on pages O-30...O-52
➤ New	V	A	A	mΩ	V	A	°C	
VBH 40-05B	500	40	30	116	1200	33	80	X104

X104 **V2-Pack**
Weight = 80 g

Rectifier Bridges with Fast Diodes

Rectifier Bridges with Superfast Recovery Diodes

1-phase, B2U




Type	V _{RRM}	I _{dAV}	@ T _C	I _{FSM} 45°C 10 ms	V _{T0}	r _T	T _{VJM}	R _{thJC} per Chip	R _{thCH} typ	Fig. No.	Package style Outline drawings on pages O-30...O-52
> New	V	A	°C	A	V	mΩ	°C	K/W	K/W		
VBE 17-06NO7	600	27	85	50	1.18	22.0	150	2.50	0.30	X101	X024a ISOPLUS i4-PAC™ Weight = 6 g
VBE 17-12NO7	1200	19	85	40	1.32	30.0	150	2.50	0.30		
VBE 20-20NO1	2000	20	65	75	3.30	93.0	150	1.70	0.30	X103	X027a SOT-227B Weight = 30 g miniBLOC
VBE 26-06NO7	600	44	85	110	1.13	13.0	150	1.60	0.30	X101	
VBE 26-12NO7	1200	32	85	90	1.32	30.0	150	1.60	0.30		
VBE 55-06NO7	600	68	100	250	0.98	8.0	150	0.90	0.30		
VBE 55-12NO7	1200	59	85	200	1.31	15.0	150	0.90	0.30		
VBE 60-06A	600	60	90	250	0.98	6.8	150	1.15	0.10	X027a	
FBE 22-06N1	600	20	90	40	-	-	150	3.50	0.15	X024a	X102
VBE 100-06NO7	600	100	85	600	1.09	4.3	150	0.80	0.20		
VBE 100-12NO7	1200	100	70	500	1.07	8.2	150	0.80	0.20		
FBS 10-06SC*	600	6.6	90	12	-	-	175	8.00	3.50	X024a	X024a
FBS 16-06SC*	600	11	90	20	-	-	175	5.60	3.00		


* SiC-Diodes

3-phase, B6U

FUS 45-0045B	45	20	90	150	-	-	150	3.10	0.15	X024a
VUE 50-12NO1	1200	50	85	200	1.65	18.2	150	1.20	0.30	X103
VUE 30-20NO1	2000	30	65	75	3.30	93.0	150	1.70	0.30	
VUE 22-06NO7	600	34	85	50	1.18	22.0	150	2.50	0.30	X101
VUE 22-12NO7	1200	24	85	40	1.39	55.0	150	2.50	0.30	
VUE 35-06NO7	600	56	85	110	1.13	13.0	150	1.60	0.30	
VUE 35-12NO7	1200	40	85	90	1.32	30.0	150	1.60	0.30	
VUE 75-06NO7	600	86	100	250	0.98	8.0	150	0.90	0.30	
VUE 75-12NO7	1200	74	85	200	1.31	15.0	150	0.90	0.30	
FUE 30-12N1	1200	30	90	80	-	-	150	2.30	0.15	X024a
VUE 130-06NO7	600	130	85	600	1.09	4.3	150	0.80	0.20	X102
VUE 130-12NO7	1200	130	70	500	1.07	8.2	150	0.80	0.20	




X101 **ECO-PAC 1**
Weight = 19 g



See data sheet for pin arrangement

X102 **ECO-PAC 2**
Weight = 24 g



See data sheet for pin arrangement

X103 **V1-A-Pack**
Weight = 35 g



Rectifier Bridges incorporating Fast Diodes

Power switching semiconductors are used in inverter systems with DC-Link. Due to high switching frequencies, harmonics and line distortion may be generated. It is important that the new designs reduce these influences and fulfill the EMI filtering requirements according to EMI/EMC VDE 0871 and other.


The noise level can be reduced by up to **10dB** when the input rectifier is equipped with semi-fast diodes and is therefore optimised for turn off; resulting in a lower peak recovery current compared to non-optimised and normal rectifier diodes.

The noise level can be further reduced approximately by another **5dB** when using rectifier bridges equipped with Fast Recovery Epitaxial Diodes (FRED) like module types VBE (single phase bridge) or VUE (three phase bridge). However these are more expensive but may be necessary in some applications to fulfill the VDE or other standards.



This behaviour has a direct influence on the design of the EMI filter networks with its capacitors and inductors of which the size and costs can be reduced.

More detailed information is available in the IXYS application note D98005E „Input Rectifiers with Semi-fast Diodes for DC Link“ on www.ixys.com.







1~ Rectifier Bridges




1~ Rectifier Bridges with Avalanche Diodes, B2U

Type	V _{RRM}	V _{VRMS}	I _{DAV}	@ T _C	I _{FSM} 45°C 10 ms	V _{T0}	r _T	T _{VJM}	R _{thJC} per Chip K/W	R _{thJH} per Chip K/W	P _{RSM} per Chip kW	Fig. No.	Package style Outline drawings on pages O-30...O-52
○ Not for new designs ➤ New	V	V	A	°C	A	V	mΩ	°C					
VBO 13-12AO2	1200	400	18	85	220	0.85	17.0	150	5.60	6.00	2.5	X115	X024a ISOPLUS i4-PAC™ Weight = 6 g 
VBO 13-14AO2	1400	500											
VBO 13-16AO2	1600	500											
VBO 20-12AO2	1200	400	31	85	300	0.85	14.0	150	3.00	3.40	3.4	X025a Weight = 7 g 	GBFP
VBO 20-14AO2	1400	440											
VBO 20-16AO2	1600	500											
VBO 25-12AO2	1200	400	38	85	370	0.85	8.0	150	2.80	3.20	3.4		
VBO 25-14AO2	1400	440											
VBO 25-16AO2	1600	500											

1~ Rectifier Bridges with Standard Diodes, B2U

VBO 13-08NO2	800	250	18	85	220	0.85	17.0	150	5.60	6.00	-	X115	X027a SOT-227B miniBLOC Weight = 30 g 
VBO 13-12NO2	1200	400											
VBO 13-14NO2	1200	400											
VBO 13-16NO2	1600	500											
FBO 16-12N	1200	400	22	90	100	0.83	28.0	150	4.00	5.00	-	X024a	
○ VBO 19-08NO7	800	250	21	100	100	0.80	40.0	150	2.30	2.80	-	X100	Slim-Pack Weight = 17 g 
○ VBO 19-12NO7	1200	400											
VBO 20-08NO2	800	250	31	85	300	0.85	14.0	150	3.00	3.40	-	X115	
VBO 20-12NO2	1200	400											
VBO 20-14NO2	1400	440											
VBO 20-16NO2	1600	500											
VBO 21-08NO7	800	250	21	100	100	0.80	40.0	150	2.30	2.80		X101	
VBO 21-12NO7	1200	400											
VBO 22-08NO8	800	250	17	85	380	0.85	12.0	150	8.20	9.40	-	X116b	See data sheet for pin arrangement 
VBO 22-12NO8	1200	400											
VBO 22-14NO8	1400	440											
VBO 22-16NO8	1600	500											
VBO 22-18NO8	1800	575											
GBO 25-12NO1	1200	400	25	80	370	0.89	12.2	150	4.30	4.80	-	X025a	
GBO 25-16NO1	1600	500											
VBO 25-08NO2	800	250	38	85	370	0.85	8.0	150	2.80	3.20	-	X115	See data sheet for pin arrangement 
VBO 25-12NO2	1200	400											
VBO 25-14NO2	1400	440											
VBO 25-16NO2	1600	500											
VBO 30-08NO7	800	250	35	85	400	0.85	12.0	150	2.80	3.40	-	X119b	Weight = 15 g 
VBO 30-12NO7	1200	400											
VBO 30-14NO7	1400	440											
VBO 30-16NO7	1600	500											
VBO 30-18NO7	1800	575											
VBO 36-08NO8	800	250	23	85	550	0.80	5.8	150	6.20	7.40	-	X116b	Weight = 22 g 
VBO 36-12NO8	1200	400											
VBO 36-14NO8	1400	440											
VBO 36-16NO8	1600	500											
VBO 36-18NO8	1800	575											
FBO 40-12N	1200	400	40	90	250	0.83	10.0	150	2.30	2.90	-	X024a	
VBO 40-08NO6	800	250	40	100	300	0.80	13.0	150	1.70	2.00	-	X027a	Weight = 100 g 
VBO 40-12NO6	1200	400											
VBO 40-16NO6	1600	500											
○ VBO 45-08NO7	800	250	45	100	550	0.80	8.0	150	1.45	1.90	-	X118h	
○ VBO 45-12NO7	1200	400											
○ VBO 45-14NO7	1400	440											
○ VBO 45-16NO7	1600	500											
○ VBO 45-18NO7	1800	575											







1~ Rectifier Bridges






1~ Rectifier Bridges with Avalanche Diodes, B2U


Type ○ Not for new design ➤ New	V _{RRM} V	V _{VRMS} V	I _{dAV} A	@ T _C °C	I _{FSM} 45°C 10 ms A	V _{T0} V	r _T mΩ	T _{VJM} °C	R _{thJC} per Chip K/W	R _{thJH} per Chip K/W	Fig. No.	Package style Outline drawings on pages O-30...O-52
VBO 50-08NO7 VBO 50-12NO7 VBO 50-14NO7 VBO 50-16NO7 VBO 50-18NO7	800 1200 1400 1600 1800	250 400 440 500 575	50	64	750	0.85	8.0	150	2.60	2.84	X120b	X101 ECO-PAC 1 Weight = 19 g 
VBO 52-08NO7 VBO 52-12NO7 VBO 52-14NO7 VBO 52-16NO7 VBO 52-18NO7	800 1200 1400 1600 1800	250 400 440 500 575	52	100	550	0.80	8.0	150	1.45	1.87	X122b	 See data sheet for pin arrangement
VBO 54-08NO7 VBO 54-12NO7 VBO 54-14NO7 VBO 54-16NO7	800 1200 1400 1600	250 400 440 500	54	100	300	0.80	13.0	150	1.10	1.60	X101	X102 ECO-PAC 2 Weight = 24 g
○ VBO 65-08NO7 ○ VBO 65-12NO7 ○ VBO 65-14NO7 ○ VBO 65-16NO7 ○ VBO 65-18NO7	800 1200 1400 1600 1800	250 400 440 500 575	65	100	1000	0.80	5.0	150	1.12	1.50	X118h	
VBO 68-08NO7 VBO 68-12NO7 VBO 68-14NO7 VBO 68-16NO7	800 1200 1400 1600	250 400 440 500	68	90	530	0.80	7.5	150	1.20	1.50	X101	See data sheet for pin arrangement
VBO 72-08NO7 VBO 72-12NO7 VBO 72-14NO7 VBO 72-16NO7 VBO 72-18NO7	800 1200 1400 1600 1800	250 400 440 500 575	72	100	750	0.80	5.0	150	1.10	1.52	X122b	X118h FO-T-A Weight = 100 g
VBO 78-08NO7 VBO 78-12NO7 VBO 78-14NO7 VBO 78-16NO7 VBO 78-18NO7	800 1200 1400 1600 1800	250 400 440 500 575	78	100	750	0.80	6.0	150	1.20	1.50	X102	
VBO 88-08NO7 VBO 88-12NO7 VBO 88-14NO7 VBO 88-16NO7 VBO 88-18NO7	800 1200 1400 1600 1800	250 400 440 500 575	92	100	900	0.80	4.0	150	0.85	1.15	X102	X120b PWS-B Weight = 260 g
VBO 105-08NO7 VBO 105-12NO7 VBO 105-14NO7 VBO 105-16NO7 VBO 105-18NO7	800 1200 1400 1600 1800	250 400 440 500 575	107	85	1500	0.80	5.0	150	0.83	1.13	X121b	
VBO 125-08NO7 VBO 125-12NO7 VBO 125-14NO7 VBO 125-16NO7 VBO 125-18NO7	800 1200 1400 1600 1800	250 400 440 500 575	124	85	1800	0.80	3.0	150	0.83	1.13	X121b	X121b PWS-C Weight = 225 g
VBO 130-08NO7 VBO 130-12NO7 VBO 130-14NO7 VBO 130-16NO7 VBO 130-18NO7	800 1200 1400 1600 1800	250 400 440 500 575	122	100	1800	0.80	3.0	150	0.65	0.83	X123e	
VBO 160-08NO7 VBO 160-12NO7 VBO 160-14NO7 VBO 160-16NO7 VBO 160-18NO7	800 1200 1400 1600 1800	250 400 440 500 575	174	100	2800	0.80	2.2	150	0.45	0.60	X123e	X122b PWS-D Weight = 160 g
												X123e PWS-E Weight = 300 g 

1~ Rectifier Bridges




Type	V_{RRM}	V_{VRMS}	I_{dAV}	@ T_H	I_{FSM}	V_{T0}	r_T	T_{VJM}	R_{thJC}	R_{thJH}	Fig. No.	Package style
○ Not for new design	V	V	A	°C	A	V	mΩ	°C	per Chip	K/W		Outline drawings on pages O-30...O-52
> New	V	V	A	°C	A	V	mΩ	°C	K/W	K/W		
1~ Half Controlled Rectifier Bridges with free wheeling diode, B2HKF												
VHF 15-08io5	800	250	15	85	190	1.00	40.0	125	2.40	3.00	X117a	X101 ECO-PAC 1 Weight = 19 g  See data sheet for pin arrangement
VHF 15-12io5	1200	400										
VHF 15-14io5	1400	440										
VHF 15-16io5	1600	500										
VHF 25-08io7	800	250	32	$T_c = 85^\circ\text{C}$	200	0.85	27.0	125	1.30	1.80	X101	X103 V1-A-Pack Weight = 35 g 
VHF 25-12io7	1200	400										
VHF 28-08io5	800	250	28	85	300	0.90	15.0	125	1.40	2.00	X117a	
VHF 28-12io5	1200	400										
VHF 28-14io5	1400	440										X118g 
VHF 28-16io5	1600	500										
VHF 36-08io5	800	250	36	85	320	0.85	13.0	125	1.15	1.55	X117a	
VHF 36-12io5	1200	400										
VHF 36-14io5	1400	440										X123d 
VHF 36-16io5	1600	500										
VHF 55-08io7	800	250	53	85	550	0.85	11.0	125	0.90	1.10	X118g	
VHF 55-12io7	1200	400										
VHF 55-14io7	1400	440										X123d X117a Weight = 50 g 
VHF 55-16io7	1600	500										
VHF 85-12io7	1200	400	82	85	1150	0.85	6.0	125	0.65	0.80	X123d	
VHF 85-14io7	1400	440										
VHF 125-12io7	1200	400	123	85	1500	0.85	3.5	125	0.46	0.55	X123d	X103 
VHF 125-14io7	1400	440										
VHF 125-16io7	1600	500										
VHFD 16-08io1	800	250	16	85	150	1.00	40.0	125	2.40	3.00	X103	
VHFD 16-12io1	1200	400										X103 
VHFD 16-14io1	1400	440										
VHFD 16-16io1	1600	500										
VHFD 29-08io1	800	250	28	85	300	0.90	15.0	125	1.40	2.00	X103	
VHFD 29-12io1	1200	400										X118e FO-T-A Weight = 100 g
VHFD 29-14io1	1400	440										
VHFD 29-16io1	1600	500										
VHFD 37-08io1	800	250	36	85	320	0.85	13.0	125	1.20	1.55	X103	
VHFD 37-12io1	1200	400										X118g FO-T-A Weight = 100 g
VHFD 37-14io1	1400	440										
VHFD 37-16io1	1600	500										
1~ Half Controlled Rectifier Bridge, B2HK												
○ VHO 55-08io7	800	250	53	85	550	0.85	11.0	125	0.90	1.10	X118g	X118g FO-T-A Weight = 100 g
○ VHO 55-12io7	1200	400										
○ VHO 55-14io7	1400	440										
○ VHO 55-16io7	1600	500										
1~ Full Controlled Rectifier Bridge, B2C												
○ VKO 55-08io7	800	250	53	85	550	0.85	11.0	125	0.90	1.10	X118e	X123d PWS-E Weight = 300 g
○ VKO 55-12io7	1200	400										
○ VKO 55-14io7	1400	440										
○ VKO 55-16io7	1600	500										
1~ Full Controlled Rectifier Bridge, B2CF												
○ VKF 55-08io7	800	250	53	85	550	0.85	11.0	125	0.90	1.10	X118e	X123d PWS-E Weight = 300 g
○ VKF 55-12io7	1200	400										
○ VKF 55-14io7	1400	440										
○ VKF 55-16io7	1600	500										
1~ Half Controlled Rectifier Bridge, B2HZ												
VGO 36-08io7	800	250	36	85	320	0.85	13.0	125	1.40	2.00	X101	X101
VGO 36-12io7	1200	400										
VGO 36-14io7	1400	440										
VGO 36-16io7	1600	500										

3~ Rectifier Bridges, B6U



Type	V _{RRM}	V _{VRMS}	I _{dAV}	@ T _C	I _{FSM} 45°C 10 ms	V _{T0}	r _T	T _{VJM}	R _{thJC} per Chip K/W	R _{thJH} per Chip K/W	Fig. No.	Package style Outline drawings on pages O-30...O-52
○ Not for new design ➤ New	V	V	A	°C	A	V	mΩ	°C				
VUO 16-08NO1 VUO 16-12NO1 VUO 16-14NO1 VUO 16-16NO1 VUO 16-18NO1	800 1200 1400 1600 1800	250 400 440 500 575	15	90	100	0.80	50.0	130	-	4.50	X103	X024a ISOPLUS i4-PAC™ Weight = 6 g 
FUO 22-12N FUO 22-16N	1200 1600	400 500	27	90	100	0.83	28.0	150	4.00	5.00	X024a	X025b GUPP Weight = 6 g 
VUO 22-08NO1 VUO 22-12NO1 VUO 22-14NO1 VUO 22-16NO1 VUO 22-18NO1	800 1200 1400 1600 1800	250 400 440 500 575	22	90	100	0.80	40.0	130	-	3.10	X103	X100 Slim-Pack Weight = 17 g 
VUO 25-08NO8 VUO 25-12NO8 VUO 25-14NO8 VUO 25-16NO8 VUO 25-18NO8	800 1200 1400 1600 1800	250 400 440 500 575	20	85	380	0.85	12.0	150	9.30	10.20	X116a	X101 ECO-PAC 1 Weight = 19 g 
○ VUO 27-08NO7 ○ VUO 27-12NO7	800 1200	250 400	28	100	100	0.80	40.0	150	2.30	2.80	X100	See data sheet for pin arrangement
VUO 28-08NO7 VUO 28-12NO7	800 1200	250 400	28	100	100	0.80	40.0	150	2.30	2.80	X101	See data sheet for pin arrangement
VUO 36-08NO8 VUO 36-12NO8 VUO 36-14NO8 VUO 36-16NO8 VUO 36-18NO8	800 1200 1400 1600 1800	250 400 440 500 575	27	85	550	0.80	7.4	150	7.50	8.40	X116a	X103 V1-A-Pack Weight = 35 g 
VUO 34-08NO1 VUO 34-12NO1 VUO 34-14NO1 VUO 34-16NO1 VUO 34-18NO1	800 1200 1400 1600 1800	250 400 440 500 575	36	90	300	0.80	15.0	130	-	2.50	X103	See data sheet for pin arrangement
VUO 30-08NO3 VUO 30-12NO3 VUO 30-14NO3 VUO 30-16NO3 VUO 30-18NO3	800 1200 1400 1600 1800	250 400 440 500 575	37	85	300	0.90	11.0	125	2.40	3.00	X117b	X116a FO-B Weight = 22 g 
VUO 35-08NO7 VUO 35-12NO7 VUO 35-14NO7 VUO 35-16NO7 VUO 35-18NO7	800 1200 1400 1600 1800	250 400 440 500 575	38	85	400	0.85	12.0	150	4.20	4.80	X119a	X117b FO-F-B Weight = 50 g 
➤ GUO 40-08NO1 ➤ GUO 40-12NO1 ➤ GUO 40-16NO1	800 1200 1600	250 400 500	40	85	370	0.86	12.9	175	4.30	5.00	X025b	X119a PWS-A Weight = 135 g 
FUO 50-16N	1600	500	50	90	200	0.86	14.8	150	2.10	3.20	X024a	X120a PWS-B Weight = 260 g 
VUO 52-08NO1 VUO 52-12NO1 VUO 52-14NO1 VUO 52-16NO1 VUO 52-18NO1 VUO 52-20NO1	800 1200 1400 1600 1600 1800	250 400 440 500 500 575	54	90	350	0.80	12.5	130	-	1.50	X103	X117b
VUO 50-08NO3 VUO 50-12NO3 VUO 50-14NO3 VUO 50-16NO3 VUO 50-18NO3	800 1200 1400 1600 1800	250 400 440 500 575	58	85	500	0.90	6.0	125	1.62	2.22	X117b	
VUO 55-12NO7 VUO 55-14NO7 VUO 55-16NO7 VUO 55-18NO7	1200 1400 1600 1800	400 440 500 575	58	85	750	0.85	8.0	150	2.70	3.06	X120a	
VUO 60-12NO3 VUO 60-14NO3 VUO 60-16NO3 VUO 60-18NO3	800 1400 1600 1800	250 440 500 575	72	85	600	0.80	6.5	125	1.20	1.60	X117b	


3~ Rectifier Bridges, B6U








Type	V _{RRM}	V _{VRMS}	I _{dAV}	@ T _C	I _{FSM} 45°C 10 ms	V _{TO}	r _T	T _{VJM}	R _{thJC} per Chip	R _{thJH} per Chip	Fig. No.	Package style Outline drawings on pages O-30...O-52
○ Not for new design ➤ New	V	V	A	°C	A	V	mΩ	°C	K/W	K/W		
VUO 62-08NO7 VUO 62-12NO7 VUO 62-14NO7 VUO 62-16NO7 VUO 62-18NO7	800 1200 1400 1600 1800	250 400 440 500 575	63	110	550	0.80	8.0	150	1.45	1.87	X122a	X101 ECO-PAC 1 Weight = 19 g 
VUO 68-08NO7 VUO 68-12NO7 VUO 68-14NO7 VUO 68-16NO7	800 1200 1400 1600	250 400 440 500	68	100	300	0.80	13.0	150	1.10	1.60	X101	X102 ECO-PAC 2 Weight = 24 g 
VUO 70-08NO7 VUO 70-12NO7 VUO 70-14NO7 VUO 70-16NO7	800 1200 1400 1600	250 400 440 500	70	100	550	0.80	8.0	150	1.45	1.90	X118d	X103 V1-A-Pack Weight = 35 g 
VUO 80-08NO1 VUO 80-12NO1 VUO 80-14NO1 VUO 80-16NO1 VUO 80-18NO1	800 1200 1400 1600 1800	250 400 440 500 575	82	T _H = 90°C	600	0.80	7.5	150	-	1.42	X103	See data sheet for pin arrangement
VUO 82-08NO7 VUO 82-12NO7 VUO 82-14NO7 VUO 82-16NO7 VUO 82-18NO7	800 1200 1400 1600 1800	250 400 440 500 575	88	110	750	0.80	5.0	150	1.10	1.52	X122a	
○ VUO 85-08NO7 ○ VUO 85-12NO7 ○ VUO 85-14NO7 ○ VUO 85-16NO7	800 1200 1400 1600	250 400 440 500	85	100	750	0.80	6.0	150	1.30	1.60	X118d	X118d FO-T-A Weight = 100 g 
VUO 86-08NO7 VUO 86-12NO7 VUO 86-14NO7 VUO 86-16NO7	600 1200 1400 1600	125 400 440 500	86	90	530	0.80	7.5	150	1.20	1.50	X101	X121a PWS-C Weight = 225 g 
VUO 98-08NO7 VUO 98-12NO7 VUO 98-14NO7 VUO 98-16NO7	800 1200 1400 1600	250 400 440 500	95	85	750	0.80	6.0	150	1.20	1.50	X102	
○ VUO 100-08NO7 ○ VUO 100-12NO7 ○ VUO 100-14NO7 ○ VUO 100-16NO7	800 1200 1400 1600	250 400 440 500	100	100	1000	0.80	5.0	150	1.12	1.50	X118d	X122a PWS-D Weight = 160 g 
VUO 105-12NO7 VUO 105-14NO7 VUO 105-16NO7 VUO 105-18NO7	1200 1400 1600 1800	400 440 500 575	140	85	1500	0.80	5.0	150	0.83	1.13	X121a	X123c PWS-E Weight = 300 g 
VUO 110-08NO7 VUO 110-12NO7 VUO 110-14NO7 VUO 110-16NO7 VUO 110-18NO7	800 1200 1400 1600 1800	250 400 440 500 575	127	110	1200	0.80	4.0	150	0.90	1.08	X123c	

Data according to IEC 60747 and refer to a single diode or thyristor unless otherwise stated.


3~ Rectifier Bridges, B6U




Type	V _{RRM}	V _{VRMS}	I _{dAV}	@ T _C	I _{FSM} 45°C 10 ms	V _{T0}	r _T	T _{VJM}	R _{thJC} per Chip	R _{thJH} per Chip	Fig. No.	Package style
➤ New	V	V	A	°C	A	V	mΩ	°C	K/W	K/W		Outline drawings on pages O-30...O-52
VUO 120-12NO1	1200	1200	121	75	650	0.80	6.1	150	1.00	1.30	X104	X102 ECO-PAC 2 Weight = 24 g
VUO 120-16NO1	1600	1600										
VUO 121-16NO1	1600	575	118	100	650	0.80	5.0	150	0.80	0.90	X112	 <p>See data sheet for pin arrangement</p>
VUO 122-08NO7	800	250	117	100	900	0.80	4.0	150	0.85	1.15	X102	
VUO 122-12NO7	1200	400										
VUO 122-14NO7	1400	440										
VUO 122-16NO7	1600	500										
VUO 122-18NO7	1800	575										
VUO 122-18NO7	1800	575										
VUO 155-12NO1	1200	1200	157	75	850	0.75	4.6	150	0.80	1.10	X104	X104 V2-Pack Weight = 80 g
VUO 155-16NO1	1600	1600										
VUO 160-08NO7	800	250	175	90	1800	0.80	3.0	150	0.65	0.83	X123c	 <p>See data sheet for pin arrangement</p>
VUO 160-12NO7	1200	400										
VUO 160-14NO7	1400	440										
VUO 160-16NO7	1600	500										
VUO 160-18NO7	1800	575										
VUO 125-12NO7	1200	400	166	85	1800	0.80	3.0	150	0.83	1.13	X121a	 <p>See data sheet for pin arrangement</p>
VUO 125-14NO7	1400	440										
VUO 125-16NO7	1600	500										
VUO 125-18NO7	1800	575										
VUO 190-08NO7	800	250	248	110	2800	0.80	2.2	150	0.45	0.60	X123c	 <p>See data sheet for pin arrangement</p>
VUO 190-12NO7	1200	400										
VUO 190-14NO7	1400	440										
VUO 190-16NO7	1600	500										
VUO 190-18NO7	1800	575										
												 <p>See data sheet for pin arrangement</p>

3~ Rectifier Bridges

with IGBT and Fast Diode for Brake Unit




Type ➤ New	Rectifier			IGBT		Fast Diode			Fig. No.	Package style Outline drawings on pages O-30...O-52
	V_{RRM} V	I_{dAV} A	@ T_C °C	V_{CES} V	I_{C80} A	V_{RRM} V	$I_{F(AV)}$ A	t_{rr} ns		
VUB 50-12PO1 VUB 50-16PO1	1200 1600	56	100	1200	14	1200	10	110	X102	<p>X102 ECO-PAC 2 Weight = 24 g</p>  <p>See data sheet for pin arrangement</p>
VUB 72-12NO1 VUB 72-16NO1	1200 1600	110	80	1200	35	1200	15	130	X103	
VUB 116-16NO1	1600	116	100	1200	67	1200	27	40	X112	
VUB 120-12NO2 VUB 120-16NO2	1200 1600	188	80	1200	100	1200	34	40	X104	
VUB 135-22NO1 VUB 145-16NO1	2200 1600	135 145	100	1700 1200	50 100	1800 1200	50 27	40 40	X112	
VUB 160-12NO2 VUB 160-16NO2	1200 1600	188	80	1200	125	1200	34	40	X104	

X103 **V1-A-Pack**
Weight = 35 g





3~ Half Controlled Rectifier Bridges

with IGBT and Fast Diode for Brake Unit




X104 **V2-Pack**
Weight = 80 g





Type ➤ New	Rectifier			IGBT		Fast Diode			Fig. No.	Package style Outline drawings on pages O-30...O-52
	V_{RRM} V	I_{dAV} A	@ T_C °C	V_{CES} V	I_{C80} A	V_{RRM} V	$I_{F(AV)}$ A	t_{rr} ns		
VVZB 120-12io2 VVZB 120-16io2	1200 1600	120	80	1200	100	1200	27	40	X104	<p>X112 E2-Pack Weight = 180 g</p> 
VVZB 135-16NO1 VVZB 170-16NO1	1600 1600	135 170	85	1200	67 100	1200	27	40	X112	

X112 **E2-Pack**
Weight = 180 g




3~ Rectifier Bridges

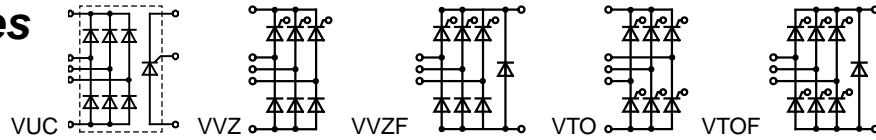


Type	V_{RRM}	V_{VRMS}	I_{dAVM}	@ T_H	I_{FSM}	V_{T0}	r_T	T_{VJM}	R_{thJC}	R_{thJH}	Fig. No.	Package style
○ Not for new design	V	V	A	°C	A	V	mΩ	°C	per Chip	per Chip		Outline drawings on pages O-30...O-52
➤ New	V	V	A	°C	A	V	mΩ	°C	K/W	K/W		
3~ Rectifier Bridges with Fast Diodes ($t_{tr} = 1.5$ ms) & Integrated Softstart Thyristor												
VUC 25-12go2	1200	400	25	85	Dio.	300	1.20	18.0	125	2.30	2.90	X105a ECO-PAC 1 Weight = 19 g  See data sheet for pin arrangement
VUC 25-14go2	1400	440			Thyr.	330	1.10	11.0	125	0.90	1.10	
VUC 25-16go2	1600	500										
VUC 36-12go2	1200	400	34	85	Dio.	300	1.20	16.0	125	1.40	2.00	
VUC 36-14go2	1400	440			Thyr.	400	0.85	10.0	125	0.90	1.10	
VUC 36-16go2	1600	500										
3~ Half Controlled Rectifier Bridges, B6HK												
VVZ 12-12io1	1200	400	15			1.10	30.0	125	2.50	3.10	X105a	 V1-B-Pack Weight = 28 g
VVZ 12-14io1	1400	440		$T_H = 100^\circ C$								
VVZ 12-16io1	1600	500										
VVZ 24-12io1	1200	400	21		300	1.00	16.0	125	2.10	2.70	X118a Weight = 100 g	 FO-T-A
VVZ 24-14io1	1400	440		$T_H = 100^\circ C$								
VVZ 24-16io1	1600	500										
VVZ 39-08ho7	800	250	39		200	0.85	27.0	125	1.30	1.80	X101	 FO-T-A
VVZ 39-12ho7	1200	400										
VVZ 40-12io1	1200	400	34		320	0.85	15.0	125	1.00	1.60	X105a	 FO-T-A
VVZ 40-14io1	1400	440		$T_H = 100^\circ C$								
VVZ 40-16io1	1600	500										
VVZ 70-08io7	800	250	70		550	0.85	11.0	125	0.90	1.10	X118c	 FO-T-A Weight = 100 g
VVZ 70-12io7	1200	400										
VVZ 70-14io7	1400	440										
VVZ 70-16io7	1600	500										
VVZ 110-12io7	1200	400	110		1150	0.85	6.0	125	0.65	0.80	X123b	 FO-T-A
VVZ 110-14io7	1400	440										
VVZ 175-12io7	1200	400	167		1500	0.85	3.5	125	0.46	0.55		
VVZ 175-14io7	1400	440										 PWS-E Weight = 300 g
VVZ 175-16io7	1600	500										
3~ Half Controlled Rectifier Bridges with free wheeling diode, B6HKF												
VVZF 70-08io7	800	250	70		550	0.85	11.0	125	0.90	1.10	X118c	 PWS-E Weight = 300 g
VVZF 70-12io7	1200	400										
VVZF 70-14io7	1400	440										
VVZF 70-16io7	1600	500										
3~ Full Controlled Rectifier Bridges, B6C												
VTO 39-08ho7	800	250	39		200	0.85	27.0	125	1.30	1.80	X101	 PWS-E
VTO 39-12ho7	1200	400										
○ VTO 70-08io7	800	250	70		550	0.85	11.0	125	0.90	1.10	X118a	 PWS-E
○ VTO 70-12io7	1200	400										
○ VTO 70-14io7	1400	440										
○ VTO 70-16io7	1600	500										
VTO 110-12io7	1200	400	110		1150	0.85	6.0	125	0.65	0.80	X123a	 PWS-E Weight = 160 g
VTO 110-14io7	1400	440	$T_C = 100^\circ C$									
VTO 175-12io7	1200	400	167		1500	0.85	3.5	125	0.46	0.55		
VTO 175-14io7	1400	440	$T_C = 100^\circ C$									
VTO 175-16io7	1600	500										
3~ Full Controlled Rectifier Bridge with free wheeling diode, B6CF												
○ VTOF 70-08io7	800	250	70		550	0.85	11.0	125	0.90	1.10	X118a	 PWS-E
○ VTOF 70-12io7	1200	400	$T_C = 85^\circ C$									
○ VTOF 70-14io7	1400	440										
○ VTOF 70-16io7	1600	500										

AC Controller 1~ / 2~ / 3~


$I_{RMS} = 30 - 230 \text{ A}$



MMO



VW 2x...




VVO

Type	V_{RRM}	V_{VRMS}	I_{dAV} $T_c = 85^\circ\text{C}$	I_{FSM} 45°C	V_{T0}	r_T	T_{VJM}	R_{thJC} per Chip	R_{thJH}	Fig. No.	Package style Outline drawings on pages O-30...O-52	
> New	V	V	A	A	V	mΩ	°C	K/W	K/W			
1~	MMO 62-12io6	1200	400	54	400	0.85	12.0	125	0.91	1.01	X027a	SOT-227B miniBLOC Weight = 30 g
	MMO 62-16io6	1600	500	$T_c = 110^\circ\text{C}$								
	MMO 74-12io6	1200	400	74	600	0.85	8.4	150	0.71	0.81		
	MMO 74-16io6	1600	500	$T_c = 110^\circ\text{C}$								
	MMO 90-12io6	1200	400	90	800	0.90	5.8	150	0.60	0.70		
	MMO 90-14io6	1400	440	$T_c = 110^\circ\text{C}$							X101	ECO-PAC 1 Weight = 19 g
	MMO 90-16io6	1600	500									
	MMO 110-08io7	800	250	112	1000	0.85	5.6	150	0.80	0.92		
	MMO 110-12io7	1200	400									
	MMO 110-14io7	1400	440									
	MMO 140-08io7	800	250	130	1150	0.85	5.2	150	0.70	0.82	X102	ECO-PAC 2 Weight = 19 g
	MMO 140-12io7	1200	400									
	MMO 140-16io7	1600	500									
	MMO 175-08io7	800	250	175	1500	0.85	3.7	150	0.50	0.62	X102	ECO-PAC 2 Weight = 19 g
	MMO 175-12io7	1200	400									
MMO 175-16io7	1600	500										
MMO 230-08io7	800	250	230	2250	0.80	2.4	125	0.26	0.46			
MMO 230-12io7	1200	400										
2~	MMO 230-14io7	1400	440								X103	ECO-PAC 2 Weight = 24 g
	MMO 230-16io7	1600	500									
	MMO 230-18io7	1800	575									
	VW 2x30-12io1	1200	400	2x 30	200	0.80	25.0	125	1.70	2.00		
	VW 2x30-14io1	1400	440									
	VW 2x30-16io1	1600	500									
3~	VW 2x45-12io1	1200	400	2x 45	300	0.85	15.0	125	1.25	1.55	X103	V1-A-Pack Weight = 35 g
	VW 2x45-14io1	1400	440									
	VW 2x45-16io1	1600	500									
	VW 2x60-12io1	1200	400	2x 60	520	0.85	11.0	125	0.92	1.22		
	VW 2x60-14io1	1400	440									
	VW 2x60-16io1	1600	500									
	VVO 35-08ho7	800	250	3x 35	200	0.85	27.0	125	1.30	1.80	X101	V1-A-Pack Weight = 35 g
	VVO 35-12ho7	1200	400									
	VVO 36-12io7	1200	400	3x 39	320	0.85	13.0	125	1.30	1.50		
	VVO 36-14io7	1400	440	$T_H = 85^\circ\text{C}$							X118b	FO-T-A Weight = 100 g
	VVO 36-16io7	1600	500									
	VVO 40-12io7	1200	400	3x 40	400	0.85	15.0	125	1.43	1.53		
	VVO 40-14io7	1400	440								X124	PWS-F Weight = 300 g
	VVO 40-16io7	1600	500									
	VVO 50-12io7	1200	400	3x 50	520	0.85	11.0	125	1.20	1.31		
	VVO 50-14io7	1400	440								X104	PWS-F Weight = 300 g
	VVO 50-16io7	1600	500									
	VVO 60-12io7	1200	400	3x 60	550	0.85	11.0	125	0.90	1.10		
VVO 60-14io7	1400	440	$T_H = 85^\circ\text{C}$							X118b	FO-T-A Weight = 100 g	
VVO 60-16io7	1600	500										
VVO 85-12io1	1200	400	3x 83	520	0.85	11.0	150	0.92	1.22			
VVO 85-14io1	1400	440								X104	PWS-F Weight = 300 g	
VVO 85-16io1	1600	500										
VVO 80-12io7	1200	400	3x 82	1000	0.85	5.2	125	0.81	1.00			
VVO 80-14io7	1400	440								X124	PWS-F Weight = 300 g	
VVO 95-12io7	1200	400	3x 96	1150	0.85	4.8	125	0.66	0.93			
VVO 95-14io7	1400	440										
VVO 140-12io1	1200	400	3x 143	1150	0.85	5.2	150	0.60	0.70	X104	PWS-F Weight = 300 g	
VVO 140-14io1	1400	440										
VVO 140-16io1	1600	500										

Data according to IEC 60747 and refer to a single diode or thyristor unless otherwise stated.

1~ / 3~ High Voltage Rectifier Modules


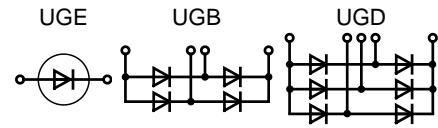


Type	V_{RRM}	I_{dAV} ① / ②	I_{FSM} 45°C 10 ms	V_{T0}	r_T	T_{VJM}	R_{thJA1} ①	R_{thJA2} ②	Fig. No.	Package style
> New	V	A	A	V	mΩ	°C	K/W	K/W		Outline drawings on pages O-30...O-52
UGE 0421 AY4	3200	23 / 7.4	300	1.70	16	150	1.9	7.1	X251	
UGE 0221 AY4	4800	10 / 3.8	180	2.55	90	150	1.7	8.0		
UGE 1112 AY4	8000	4.2 / 2.0	120	4.25	215	150	4.2	10.0		
UGE 3126 AY4	24000	2.0 / 0.8	70	12.00	1800	150	2.7	8.7		
UGB 3132 AD	4800	1.3	60	-	-	150	-	-	X252	
UGB 6124 AG	10500	1.0	50	-	-	150	-	-	X253	
UGD 6123 AG	7200	1.8	50	-	-	150	-	-		
UGD 8124 AG	10500	1.2	50	-	-	150	-	-		


Data according to IEC 60747-2/6

① for oil-cooling with cooling plate, $T_A = 35^\circ\text{C}$


② for natural air cooling without cooling plate, $T_A = 45^\circ\text{C}$




Braking Rectifier Assemblies



VGF 0136 AH






VGF 0136 AB



VGB 0124 AY7


Type	V_{VRMS} typ. V	V_{dAV} typ. V	I_{dAVM} typ. A	I_{dAVM} max. A	V_{RRM} max. V	I_{FSM} max. A	I^2t max. A ² s	Fig. No.	Package style
> New	V	V	A	A	V	A	A ² s		Outline drawings on pages O-30...O-52
VGB 0124 AY7a	380	340	1.0	1.0	1400	60	28	X254	
VGF 0136 AB	1000	440	1.2	1.5	2800	80	40	X255	
VGF 0136 AH	1000	440	0.6	1.1	1400	60	28	X256	





Break-Over Diodes



Version R



Version RD

Type	V _{Bo}	I _{Bo} T _{VJ} = 25 °C	I _b T _{VJ} = 125 °C	I _H T _{VJ} = 25 °C	V _H T _{VJ} = 25 °C	I _{AVM} ① T _{amb} = 50 °C	I _{SM} T _{amb} = 50 °C	dv/dt	R _{thJA}	Fig. No.	Package style	
> New	V	mA	µA	mA	V	A	A	V/µs	K/W		Outline drawings on pages O-30...O-52	
IXBOD 1-06	600 ±50	< 15	20	30	4-8	0.90	200	>1000	60	X201	 X201 FP-Case (oil proof) Weight = 0.8 g	
IXBOD 1-07	700											
IXBOD 1-08	800		0.8 x VBO									
IXBOD 1-09	900											
IXBOD 1-10	1000											
IXBOD 1-12 R	1200 ±50	< 15	100	30	4-8	1.25	200	>1000	20	X202		 X202 BOD-Package Weight = 14 g
IXBOD 1-12 RD												
IXBOD 1-13 R	1300											
IXBOD 1-13 RD			0.8 x VBO									
IXBOD 1-14 R	1400											
IXBOD 1-14 RD												
IXBOD 1-15 R	1500											
IXBOD 1-15 RD												
IXBOD 1-16 R	1600 ±50	< 15	100	30	4-8	1.25	200	>1500	20			
IXBOD 1-16 RD												
IXBOD 1-17 R	1700											
IXBOD 1-17 RD												
IXBOD 1-18 R	1800											
IXBOD 1-18 RD												
IXBOD 1-19 R	1900											
IXBOD 1-19 RD												
IXBOD 1-20 R	2000 ±50	< 15	100	30	4-8	0.90	200	>1500	20			
IXBOD 1-20 RD												
IXBOD 1-21 R	2100 ±50	< 15	100	30	4-8	0.90	200	>2000	20			
IXBOD 1-21 RD												
IXBOD 1-22 R	2200											
IXBOD 1-22 RD												
IXBOD 1-23 R	2300											
IXBOD 1-23 RD												
IXBOD 1-24 R	2400											
IXBOD 1-24 RD												
IXBOD 1-25 R	2500											
IXBOD 1-25 RD												
IXBOD 1-26 R	2600 ±100	< 15	100	30	4-8	0.70	200	>2500	20			
IXBOD 1-26 RD												
IXBOD 1-28 R	2800											
IXBOD 1-28 RD												
IXBOD 1-30 R	3000											
IXBOD 1-30 RD												
IXBOD 1-32 R	3200 ±100	< 15	100	30	4-8	0.70	200	>3000	20			
IXBOD 1-32 RD												
IXBOD 1-34 R	3400											
IXBOD 1-36 R	3600 ±100	< 15	100	30	4-8	0.70	200	>3500	20			
IXBOD 1-38 R	3800											
IXBOD 1-40 R	4000											
IXBOD 1-42 R	4200											

① Leads soldered on PCB board, T_{stg} and T_{VJ} = -40 ... +125°C

Break-Over-Diodes Sets

We deliver also:

- Special selection of more than 2 pcs IXBOD1-... for every break down voltage of VBO > 2000 V

- Example

type designation IXBOD Set SA05/00

VBO = 4700 V ±100 V

(we deliver 5 pcs single selected IXBOD1-... in one plastic bag)

Customers use these products on PCB connected in series with parallel resistor R = 10 MΩ across each IXBOD

Integrated Circuits

Ultra-fast Power MOSFET / IGBT Drivers

These ultra-fast high current drivers are optimized for high efficiency performance in the motor drive and power conversion applications. They are designed to switch largest MOSFETs and IGBTs with minimum switching times at frequencies to 10 MHz. These MOSFET / IGBT drivers are manufactured in industry standard outlines, which include TO-263, TO-220 and many IC packages offering superior thermal performance.

Features




- Wide operating voltage range from 4.5 V to 35 V
- Rated for -55°C to +125°C operation
- Very Low output impedance
- No internal cross conduction which allows operating frequency to 10 MHz
- Latch-up protected to rated reverse current
- Output Current - up to 30 A peak

- Very low thermal impedance for TO-263 and TO-220 packages
- Matched rise and fall times
- ENABLE pin for emergency shutdown
- TTL or CMOS input signals
- Grounded base tab in 8-Pin SOIC-CT, 14-Pin SOIC-CT, 16-PIN SOIC-CT and 28 Pin SOIC-CT packages for PC board cooling.

Applications







- Inverters
- SMPS Class D Amplifiers
- Power Factor Correction
- Motor drives
- Line drivers
- Traction
- Radiology and laser technology

Low Side MOSFET / IGBT Gate Driver Selection Guide

Part Number	Output Type	I_{PK} $T_C = 25^\circ C$ A	Output Resistance Ω	Logic Configuration	Enable Function	Package	Fig. No.	Outline drawings on pages O-30...O-52
IXDF 402SI IXDF 402SI-16 IXDF 402SIA-16 IXDF 502D1 IXDF 502PI IXDF 502SIA IXDI 402SI IXDI 402SI-16 IXDI 402SIA-16 IXDI 502D1 IXDI 502PI IXDI 502SIA IXDN 402SI IXDN 402SI-16 IXDN4 02SIA-16 IXDN 502D1 IXDN 502PI IXDN 502SIA	Dual	2	4	Non-Inverting & Inverting Non-Inverting & Inverting Non-Inverting & Inverting Non-Inverting & Inverting Non-Inverting & Inverting Inverting Inverting Inverting Inverting Inverting Non-Inverting Non-Inverting Non-Inverting Non-Inverting Non-Inverting Non-Inverting		8-pin SOIC-CT 16-pin SOIC-CT(W) 16-pin SOIC(W) 6-pin DFN 4x5 8-pin DIP 8-pin SOIC 8-pin SOIC-CT 16-pin SOIC-CT(W) 16-pin SOIC(W) 6-pin DFN 4x5 8-pin DIP 8-pin SOIC 8-pin SOIC-CT 16-pin SOIC-CT(W) 16-pin SOIC(W) 6-pin DFN 8-pin DIP 8-pin SOIC	X512a X515a X515 X531 X502 X512 X512a X515a X515 X531 X502 X512 X512a X515a X515 X531 X502 X512	<p>X502 8-pin DIP</p>  <p>X512(a) 8-pin SOIC</p> 
IXDR 502D1B IXDS 502D1B	Single	2	4	Inverting Non-Inverting OR Inverting		6-pin DFN 2x2 6-pin DFN 2x2	X530 X530	
IXDD 404SI IXDD 404SI-16 IXDD 404SIA-16 IXDD 504D2 IXDD 504PI IXDD 504SIA IXDE 504D2 IXDE 504PI IXDE 504SIA IXDF 404SI IXDF 404SI-16 IXDF 404SIA-16 IXDF 504D1 IXDF 504PI	Dual	4	2.5	Non-Inverting Non-Inverting Non-Inverting Non-Inverting Non-Inverting Non-Inverting Inverting Inverting Inverting Non-Inverting & Inverting Non-Inverting & Inverting Non-Inverting & Inverting Non-Inverting & Inverting Non-Inverting & Inverting	<ul style="list-style-type: none"> • • • • • • • • • • • • • • 	8-pin SOIC-CT 16-pin SOP-CT(W) 16-pin SOP(W) 8-pin DFN 4x5 8-pin DIP 8-pin SOIC 8-pin DFN 4x5 8-pin DIP 8-pin SOIC	X512a X515a X515 X532 X502 X512 X532 X502 X512 X512a X515a X515 X531 X502	<p>X515(a) 16-pin SOIC-CT(W)</p> 





Integrated Circuits

Ultra-fast Power MOSFET / IGBT Drivers

Part Number	Output Type	I_{PK} $T_C = 25^\circ\text{C}$ A	Output Resistance Ω	Logic Configuration	Enable Function	Package	Fig. No.	Outline drawings on pages O-30...O-52
IXDF 504SIA IXDI 404SI IXDI 404SI-16 IXDI 404SIA-16 IXDI 504D1 IXDI 504PI IXDI 504SIA IXDN 404SI IXDN 404SI-16 IXDN 404SIA-16 IXDN 504D1 IXDN 504PI IXDN 504SIA	Dual	4	2.5	Non-Inverting & Inverting Inverting Inverting Inverting Inverting Inverting Non-Inverting Non-Inverting Non-Inverting Non-Inverting Non-Inverting Non-Inverting		8-pin SOIC 8-pin SOIC-CT 16-pin SOIC-CT(W) 16-pin SOIC(W) 6-pin DFN 4x5 8-pin DIP 8-pin SOIC 8-pin SOIC-CT 16-pin SOIC-CT(W) 16-pin SOIC(W) 6-pin DFN 4x5 8-pin DIP 8-pin SOIC	X512 X512a X515a X515 X531 X502 X512 X512a X515a X515 X531 X502 X512	X006 TO-220  X012a TO-263 
IXDD 408CI IXDD 408PI IXDD 408SI IXDD 408YI	Single	8	1.5	Non-Inverting Non-Inverting Non-Inverting Non-Inverting	<ul style="list-style-type: none">● 5-pin TO-220● 8-pin DIP● 8-pin SIOC● 5-pin TO-263	5-pin TO-220 8-pin DIP 8-pin SIOC 5-pin TO-263	X006 X502 X512 X012a	
IXDD 509D1 IXDD 509PI IXDD 509SIA IXDE 509D1 IXDE 509PI IXDE 509SIA IXDI 409CI IXDI 409SI IXDI 409YI IXDI 509D1 IXDI 509PI IXDI 509SIA IXDN 409CI IXDN 409SI IXDN 409YI IXDN 509D1 IXDN 509PI IXDN 509SIA	Single	9	1 1 1 1 1 1 1.5 1.5 1.5 1 1 1 1.5 1.5 1.5 1 1 1	Non-Inverting Non-Inverting Non-Inverting Inverting Inverting Inverting Inverting Inverting Inverting Non-Inverting Non-Inverting Non-Inverting Non-Inverting Non-Inverting Non-Inverting Non-Inverting Non-Inverting	<ul style="list-style-type: none">● 6-pin DFN 4x5● 8-pin DIP● 8-pin SOIC● 6-pin DFN● 8-pin DIP● 8-pin SOIC	6-pin DFN 4x5 8-pin DIP 8-pin SOIC 6-pin DFN 8-pin DIP 8-pin SOIC 5-pin TO-220 8-pin SOIC 5-pin TO-263 6-pin DFN 4x5 8-pin DIP 8-pin SOIC 5-pin TO-220 8-pin SOIC 5-pin TO-263 6-pin DFN 4x5 8-pin DIP 8-pin SOIC	X531 X502 X512 X531 X502 X512 X006 X512 X012a X531 X502 X512 X006 X512 X012a X531 X502 X512	X502 8-pin DIP  X512(a) 8-pin SOP/SOIC(-CT) 
IXDD 414CI IXDD 414SI IXDD 414YI IXDD 514D1 IXDD 514PI IXDD 514SIA IXDE 514D1 IXDE 514PI IXDE 514SIA IXDI 414CI IXDI 414SI IXDI 414YI IXDI 514D1 IXDI 514PI IXDI 514SIA IXDN 414CI	Single	14	1	Non-Inverting Non-Inverting Non-Inverting Non-Inverting Non-Inverting Non-Inverting Inverting Inverting Inverting Inverting Inverting Inverting Inverting Non-Inverting	<ul style="list-style-type: none">● 5-pin TO-220● 14-pin SOIC● 5-pin TO-263● 6-pin DFN 4x5● 8-pin DIP● 8-pin SOIC● 8-pin SOIC● 6-pin DFN 4x5● 8-pin DIP● 8-pin SOIC	5-pin TO-220 14-pin SOIC 5-pin TO-263 6-pin DFN 4x5 8-pin DIP 8-pin SOIC 8-pin SOIC 6-pin DFN 4x5 8-pin DIP 8-pin SOIC 5-pin TO-220 14-pin SOIC 5-pin TO-263 6-pin DFN 4x5 8-pin DIP 8-pin SOIC 5-pin TO-220	X006 X514 X012a X531 X502 X512 X512 X531 X502 X512 X006 X514 X012a X531 X502 X512 X006	X515(a) 16-pin SPO/SOIC(-CT) 

Integrated Circuits

Ultra-fast Power MOSFET / IGBT Drivers

Part Number	Output Type	I_{PK} $T_C = 25^\circ C$ A	Output Resistance Ω	Logic Configuration	Enable Function	Package	Fig. No.	Outline drawings on pages O-30...O-52
IXDN 414SI IXDN 414YI IXDN 514D1 IXDN 514PI IXDN 514SIA	Single	14	1	Non-Inverting Non-Inverting Non-Inverting Non-Inverting Non-Inverting		14-pin SOIC 5-pin TO-263 6-pin DFN 4x5 8-pin DIP 8-pin SOIC	X514 X012a X531 X502 X512	X006 TO-220 
IXDD 415SI	Dual	15	1	Non-Inverting	●	28-pin SOIC-CT(W)	X529a	
IXDD 430CI IXDD 430MCI IXDD 430MYI IXDD 430YI IXDI 430CI IXDI 430MCI IXDI 430MYI IXDI 430YI IXDN 430CI IXDN 430MCI IXDN 430MYI IXDN 430YI IXDS 430SI	Single Single Single Single Single Single Single Single Single Single Single Single Single	30	0.4	Non-Inverting Non-Inverting Non-Inverting Non-Inverting Inverting Inverting Inverting Inverting Non-Inverting Non-Inverting Non-Inverting Non-Inverting Non-Inverting OR Inverting	● ● ● ● ● ● ● ● ● ● ● ● ●	5-pin TO-220 5-pin TO-220 5-pin TO-263 5-pin TO-263 5-pin TO-220 5-pin TO-220 5-pin TO-263 5-pin TO-263 5-pin TO-220 5-pin TO-220 5-pin TO-263 5-pin TO-263 28-pin SOIC-CT(W)	X006 X006 X012a X012a X006 X006 X012a X012a X006 X006 X012a X012a X529a	X012a TO-263  X502 8-pin DIP  X529 28-pin SOIC-CT(W) 

Ultra-fast Power MOSFET / IGBT Drivers

Drivers from 0.6 A to 6.0 A with Superior Noise Immunity and Higher Power Handling Capability for Critical applications.

IXYS 600V Half-Bridge Driver IC Product Line is a family of surface mount and leaded ICs optimized for gate drive applications up to 600 V. This family provides a complete spectrum of solutions with 0.6 A peak to 6.0 A peak output drive current capability for applications ranging from 1 kHz to 1MHz. These Drivers draw upon a newly optimized architecture first introduced with the IX6R11, building on and enhancing the superior performance and high-end current handling capability of the IX6R11. As with the original IX6R11, IXYS 600 V Driver IC Family gives better matching of propagation delays, enhanced fault tolerance and reliability, with improved efficiency and cooler operation.

This Half-Bridge Driver Family provides compatibility with similar Drivers from other suppliers, while offering the superior performance of our architecture. The Family also provides unique Customer options in packaging and configurations. Several Drivers are offered in packages that offer small size (16-Pin SOIC, 48-Pin SSLGA) or thermal advantages (18-Pin SOIC-CT). A unique product configuration is the IX6S11, offered for split-rail circuit configurations (+300V/-200V), with control logic ground referenced.

Performance advantages common to IXYS Half-Bridge Driver ICs include 50 V/ns dV/dt noise immunity and 200V negative voltage transient immunity, 8 times that of competing Half-Bridge Drivers. Noise immunity is further enhanced by the use of non-latching level translation. IXYS level translation technique exhibits lower power dissipation versus techniques using high-voltage transistors typical of competing Half-Bridge Drivers. Lower dissipation enables the use of IXYS Drivers for larger loads, at higher bus voltages, and for higher switching frequencies. Lower dissipation means also that IXYS Drivers can be pushed to higher temperatures.

This Family of Drivers offers a wide mix of user options for input logic types, output current ratings and packages. The high peak current capability of the IX6R11 enables one to drive larger MOSFET and IGBT die sizes at higher frequency without additional discrete transistors and components. 600 mA Drivers, such as the IXD611, are used in lower power/lower frequency applications such as small power tools. Other user options covered by this Family include fixed and programmable delays, shutdown options, protection features, as well as high and low side under voltage protection. Other performance advantages include extended voltage range operation, and extended temperature operation from -40°C to +125°C.

IXYS is a global leader in Power Semiconductors, Gate Drive ICs and RF Power Devices. With over 20 years experience, IXYS products are designed to meet the demands of the power market for best-in-class Performance, Quality and Reliability.

Applications

- Welding
- Power Factor Correction
- Offline Power Conversion
- UPS
- Appliance
- Battery Chargers
- Automotive
- Motor Drive

Features

- Floating High Side Driver with bootstrap Power supply along with a Low Side Driver.
- $I_{PK} = 0.6 \text{ A to } 6 \text{ A}$
- Full operation to 600 V BUS
- $\pm 50 \text{ V/ns dV/dt}$ noise immunity
- Gate drive voltage range of 10 V to 35 V
- Non-latching level translation
- -200 V high side drive signal negative transient immunity (8x greater than competitor)
- Versions including undervoltage protection, enable / shutdown functions, fixed and programmable delays, cross-conduction prevention and programmable current limits
- Heat-sinkable versions, such as the 18-Pin SOIC-CT, $R_{thJC} = 3^\circ\text{C/W}$
- High Density SMD and Hybrid Package Options
- Extended temperature: -40°C to +125°C
- Rail to rail gate drive voltage swing
- Immune to negative voltage transients
- Separate Logic power supply range: 3.3 V to V_{CL}

Benefits

- Higher switching frequency with larger devices
- Replaces multiple ICs and discrete components
- Full operation to 600V BUS
- Fault tolerant due to non-latching architecture

Integrated Circuits

MOSFET / IGBT Half-Bridge Gate Drivers


Outline drawings
on pages O-30...O-52

Part Number ○ Not for new design ➤ New	Closest I _R Cross	I _{PK} T _C = 25°C A	Shutdown	Inputs / Keying	Protection Features	Deadtime	Package (Note 1)	Fig. No.
○ IXA 611P7 ②	IR2112	0.6	Yes (High)	Dual/In Phase	No	Not for new design	14-pin PDIP	X504
○ IXA 611S3 ②	IR2112S		Yes (High)	Dual/In Phase	No		16-pin SOP(W)	X525
○ IXB 611P1 ②	IR2103		No	Dual/High-In Phase/Low-Inv	Cross-Conduct		8-pin PDIP	X502
○ IXB 611S1 ②	IR2103S		No	Dual/High-In Phase/Low-Inv	Cross-Conduct		8-pin SOP	X512
○ IXC 611P1 ②	IR2111		No	Single/High Side	Cross-Conduct		8-pin PDIP	X502
○ IXC 611S1 ②	IR2111S		No	Single/High Side	Cross-Conduct		8-pin SOP	X512
○ IXD 611P1 ②	IR2106		No	Dual/In Phase	No		8-pin PDIP	X502
○ IXD 611P7 ②	IR2106		No	Dual/In Phase	No		14-pin PDIP	X504
○ IXD 611S1 ②	IR2106S		No	Dual/In Phase	No		8-pin SOP	X512
○ IXD 611S7 ②	IR2106S		No	Dual/In Phase	No		14-pin SOP	X514
○ IXE 611P1 ③	IR2301		No	Dual/In Phase	No		8-pin PDIP	X502
○ IXE 611S1 ③	IR2301S		No	Dual/In Phase	No		8-pin SOP	X512
○ IXF 611P1 ③	IR2302		Yes (Low)	Single/High Side	Cross-Conduct		8-pin PDIP	X502
○ IXF 611S1 ③	IR2302S		Yes (Low)	Single/High Side	Cross-Conduct		8-pin SOP	X512
○ IXG 611P1 ②	IR2304		No	Dual/In Phase	Cross-Conduct		8-pin PDIP	X502
○ IXG 611S1 ②	IR2304S		No	Dual/In Phase	Cross-Conduct		8-pin SOP	X512
○ IXH 611P1 ②	IR2308		No	Dual/In Phase	Cross-Conduct		8-pin PDIP	X502
○ IXH 611S1 ②	IR2308S		No	Dual/In Phase	Cross-Conduct		8-pin SOP	X512
○ IXJ 611P1 ②	IR2101		No	Dual/In Phase	No		8-pin PDIP	X502
○ IXJ 611S1 ②	IR2101S		No	Dual/In Phase	No		8-pin SOP	X512
○ IXK 611P1 ②	IR2102	No	Dual/Out of Phase	No	8-pin PDIP	X502		
○ IXK 611S1 ②	IR2102S	No	Dual/Out of Phase	No	8-pin SOP	X512		
○ IX 2A11P1 ②	IR2184	2	Yes (Low)	Single/High Side	Cross-Conduct	Not for new design	8-pin PDIP	X502
○ IX 2A11S1 ②	IR2184S		Yes (Low)	Single/High Side	Cross-Conduct		8-pin SOP	X512
○ IX 2B11P7 ②	IR21844		Yes (Low)	Single/High Side	Cross-Conduct		14-pin PDIP	X504
○ IX 2B11S7 ②	IR21844S		Yes (Low)	Single/High Side	Cross-Conduct		14-pin SOP	X514
○ IX 2C11P1 ②	IR2181		No	Dual/In Phase	No		8-pin PDIP	X502
○ IX 2C11S1 ②	IR2181S		No	Dual/In Phase	No		8-pin SOP	X512
○ IX 2D11P7 ②	IR21814		No	Dual/In Phase	No		14-pin PDIP	X504
○ IX 2D11S7 ②	IR21814S		No	Dual/In Phase	No		14-pin SOP	X514
○ IX 2R11P7 ②	IR2113		Yes (High)	Dual/In Phase	No		14-pin PDIP	X504
○ IX 2R11S3 ②	IR2113S		Yes (High)	Dual/In Phase	No		16-pin SOP(W)	X525
○ IX 4R11P7 ②	IR2113	4	Yes (High)	Dual/In Phase	No	14-pin PDIP	X504	
○ IX 4R11S3 ②	IR2113S			Dual/In Phase	No	16-pin SOP(W)	X525	
○ IX 6S11S6 ②	None	6	No	Dual/In Phase	No	18-pin SOIC-CT(W)	X526a	
IX 6R11P7 ②	IR2113	6	Yes (High)	Dual/In Phase	No	No	14-pin PDIP	X504
IX 6R11S3 ②	IR2113S		Yes (High)	Dual/In Phase			16-pin SOP(W)	X525
IX 6R11S6 ②	IR2113S		Yes (High)	Dual/In Phase			18-pin SOIC-CT(W)	X526a


② UVLO Level for MOSFETs
③ UVLO Level for Logic

Note 1: SOIC packages with suffix letter 'CT' have a grounded base solder tab.

X504 14-pin PDIP



X512 8-pin SOP/SOIC



Integrated Circuits

ISOSMART® Half Bridge Driver Chipset: IXBD4410/4411 and TX02-4400 Pulse Transformer

Features

- 1200 V or greater low- to high-side isolation
- Drives power systems operating from industrial AC mains
- dv/dt immunity of greater than 50 V/ns
- Proprietary low- to high-side level-translation & communication
- On-chip negative gate-drive supply to ensure power MOSFET or IGBT turn-off under all conditions
- 5 V logic compatible HCMOS input logic with hysteresis
- 20 ns switching time with 1000 pF load: 100 ns switching time with 10 000 pF load
- 100 ns propagation delay time
- 2 A peak output drive capability
- Self shut-down of output in reponse to over-current or short-circuit
- Under-voltage lockout protection
- Protection from cross conduction of the half bridge
- Logic compatible fault indication from both low and high side driver


Applications

- 1-, 2- or 3-phase motor control
- Switch mode power supplies (SMPS)
- 1- or 3-phase UPS systems
- Induction heating and welding
- Switching amplifiers
- General power conversion circuits


These chipsets are intended to drive the gates of a pair of power MOSFETs or IGBTs connected in the totem-pole (phase leg) configuration used in PWM inverter bridges for variable speed AC motor drives, or in any other application requiring half bridge power circuits.

Each chipset consists of a pair of DIP ICs interconnected by two TX02-4400 signal pulse transformers. Proprietary voltage translation techniques permit the transmission of ground (0-Volt) referenced gate-control signals for both the upper half of the phase leg with its high-side floating source/emitter, and to the 0-Volt referenced low-side.

The chipset is noise immunized to commutation dv/dts of 50 V/ns between the two halves. The IXBD4410/11 outputs an on-chip

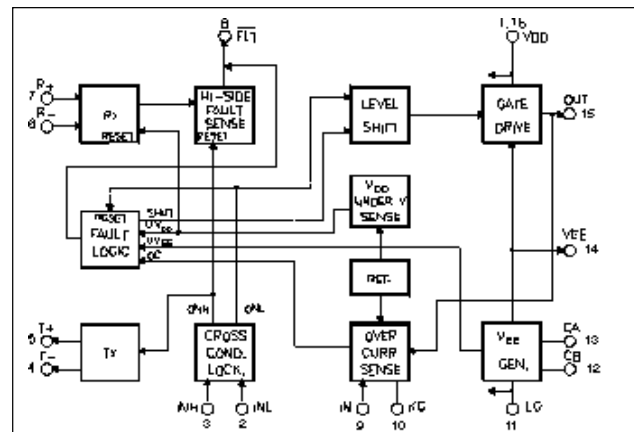

Block diagram IXBD4410

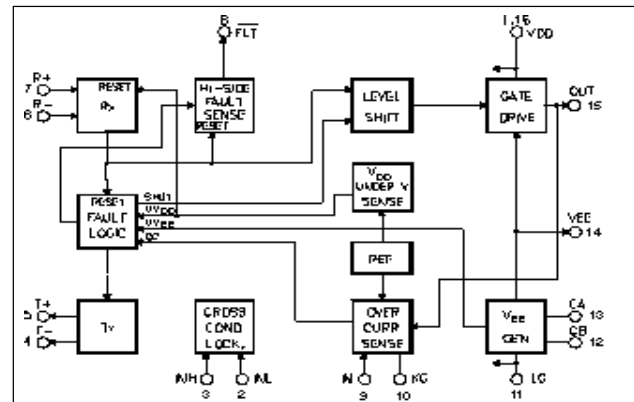

Block diagram IXBD 4411

generated negative gate voltage to inhibit possible Miller-induced IGBT turn on created by free-wheel diode commutations. This version also features a 0-Volt referenced fault-signal flag monitoring both high and low side drivers for sophisticated system protection. Both models incorporate shut-down circuitry to disable gate driver signals when an overcurrent is detected, either through desaturation of the driven power switch or by direct measurement of the switch current. Simultaneous conduction of upper and lower signal input logic. C-MOS technology reduces stand-by currents drawn from the single external power supply to low levels, and chipset operation to over 20 kHz is possible. The EVBD4400 evaluation board is also available to facilitate design-in activity.

Type	Description	Package	Temperature Range	Outline drawings on pages O-30...O-52
IXBD 4410PI IXBD 4411PI	Full-Feature Low-Side Driver Full-Feature High-Side Driver	16-pin PDIP	-40 to +85°C	X505
IXBD 4410SI IXBD 4411SI	Full-Feature Low-Side Driver Full-Feature High-Side Driver	16-pin SOP-CT(W)	-40 to +85°C	X525a
TX 02-4400JI TX 02-4400PI	Isolation transformer	8-pin PDIP-SM 8-pin PDIP	-55 to -125°C	X502b X502

Gate Drive Evaluation Boards

MOSFET/IGBT Gate Drive Modules/Gate Drive IC Evaluation Boards


The EV-Series MOSFET Gate Drive Modules are general purpose gate drive circuits designed to drive the DE-Series RF POWER MOSFETs, as well as industry-standard MOSFETs and IGBTs. Designed using IXYS/Colorado gate drive ICs, they serve as a system development tool for the design engineer, and as a convenient platform for the evaluation of the DE-Series RF MOSFET transistors. The EVDD415 and EVIC420 are designed to drive DE-Series RF MOSFETs. The EVDI402, EVDD404, EVDD409, EVDI409 and EVDD414 gate drive modules are designed to drive MOSFETs or IGBTs in various package types, including TO-220, TO-247, TO-264 or SOT-227 packages.

The evaluation board design allows the MOSFET or IGBT to be attached to a heat sink, and in so doing the board assembly can be used as a ground referenced, low side power switch for both single-ended and push-pull configurations. They may be used as pulse width agile, high power switching modules in pulse generators, RF generators, pulsed laser diode drivers and other high voltage, high speed applications.

By utilizing design techniques developed by DEI, the EVDD 415 and EVIC 420 gate drive modules can drive DE-Series MOSFET transistors at frequencies up to 45 MHz, provide continuously variable output pulse widths from ~5 ns to DC, and rise times of <3 ns (actual performance is dependent upon the specific gate drive module and the MOSFET device used).



EVDD404 with IXDD404PI *

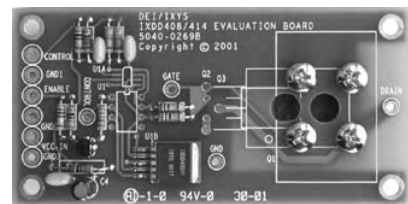


EVDD409 with IXDD409YI *


Gate Drive Module / Evaluation Board Selection Guide

Gate Drive Module New	Installed Device	Connectable Package *
EVDD 430CI	IXDD 430CI	TO-247, TO-268, SOT-227
EVDD 430MCI	IXDD 430MCI	TO-247, TO-268, SOT-227
EVDD 430YI	IXDD 430YI	TO-247, TO-268, SOT-227
EVDD 430MYI	IXDD 430MYI	TO-247, TO-268, SOT-227
EVDI 430CI	IXDI 430CI	TO-247, TO-268, SOT-227
EVDI 430MCI	IXDI 430MCI	TO-247, TO-268, SOT-227
EVDI 430YI	IXDI 430YI	TO-247, TO-268, SOT-227
EVDI 430MYI	IXDI 430MYI	TO-247, TO-268, SOT-227
EVDN 430CI	IXDN 430CI	TO-247, TO-268, SOT-227
EVDN 430MCI	IXDN 430MCI	TO-247, TO-268, SOT-227
EVDN 430YI	IXDN 430YI	TO-247, TO-268, SOT-227
EVDN 430MYI	IXDN 430MYI	TO-247, TO-268, SOT-227
EVDS 430SI	IXDS 430SI	TO-247, TO-268, SOT-227
EVBD 4400	IXBD 4400 Chip Set	TO-247, TO-264
EVDI 402	IXDI 402PI	TO-220, TO-247, TO-264, SOT-227
EVD N402	IXDN 402PI	TO-220, TO-247, TO-264, SOT-227
EVDD 404	IXDD 404PI	TO-220, TO-247, TO-264, SOT-227
EVDI 404	IXDI 404PI	TO-220, TO-247, TO-264, SOT-227
EVDN 404	IXDN 404PI	TO-220, TO-247, TO-264, SOT-227
EVDI 409	IXDI 409YI	TO-220, TO-247, TO-264, SOT-227
EVDN 409	IXDN 409YI	TO-220, TO-247, TO-264, SOT-227
EVDD 414	IXDD 414YI	TO-220, TO-247, TO-264, SOT-227
EVDI 414	IXDI 414YI	TO-220, TO-247, TO-264, SOT-227
EVDN 414	IXDN 414YI	TO-220, TO-247, TO-264, SOT-227
EVDD 415	IXDD 415SI	DEI DE-150, DEI DE-275
EVIC 420A	DEIC 420	DEI DE-150, DEI DE-275
EVIC 420B	DEIC 420	DEI DE-375, DEI DE-475
EV 6R11S3	IX 6R11S3	TO-247, TO-264
EV 6R11S7	IX 6R11S7	TO-247, TO-264


* Connectable Power MOSFET or IGBT is not included

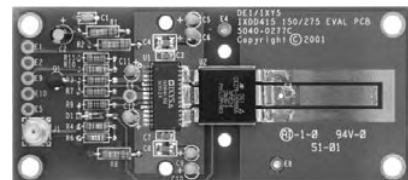

EVDD415 with IXDD415SI *

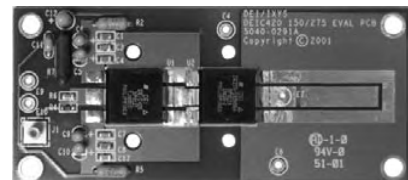

EVIC420A with DEIC420 *

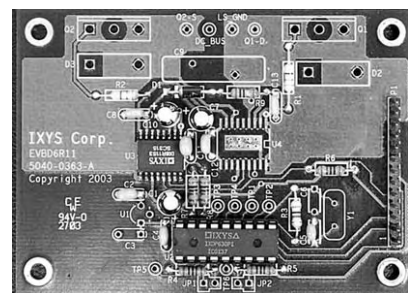

EV6R11 with IX6R11S3 *

Integrated Circuits

High Voltage Current Regulators

Features

- Extremely stable current characteristics 50 ppm/K
- Minimum of 450 V breakdown
- 40 W continuous dissipation

Applications

- Start-up circuits for SMPS
- PABX current sources
- Telephone line terminations
- Surge limiters and protection
- Waveform synthesizers
- Soft start-up circuits


Non-switchable Regulators



This is a family of extremely stable, 450 Volt (min.) current regulators. Temperature stability is based on a threshold compensation technique and uses IXYS' most recently developed high voltage process. Some specific applications include PABX current sources and line terminations, high stability voltage sources, surge limiters, fast reacting non-destruct fuses and start-up circuits. These regulators also replace power resistors in house-keeping supplies derived from the AC mains, dramatically reducing power consumption while permitting universal use from 110 - 240 V AC without part changes.

Switchable Regulators

The IXCP 10M45S is an enhanced version of IXYS' family of high voltage current regulators. It is similar in all respects to the standard product, except that it can be switched off by applying a negative voltage to its control pin. Minimum breakdown voltage is increased to 450 V. For additional versatility, output current may be programmed by inserting a resistor between the negative output and control pins. A prime application to the switchable regulator is in house-keeping power supplies for switch-mode-power-supplies (SMPS), where shutting the regulator down once the SMPS is up and running reduces standby power consumption virtually to zero.

Characteristic

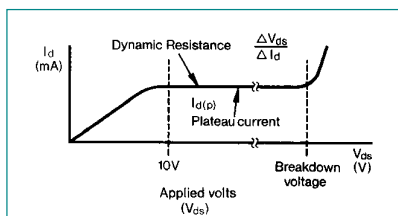

Current regulator	BV _{DS} min. V	I _{D(P)} typ. mA	X005a TO-220 AB 	X004 TO-252 AA 
DC Non-switchable	450	60	IXCP 60M45	IXCY 60M45
		50	IXCP 50M45	IXCY 50M45
		40	IXCP 40M45	IXCY 30M45
		20	IXCP 20M45	IXCY 20M45
		11	IXCP 10M45	IXCY 10M45
		2.2	IXCP 02M45	IXCY 02M45
Switchable	450	10	IXCP 10M45S	IXCY 10M45S
Gate Controlled	900	10	IXCP 10M90S	IXCY 10M90S

Outline drawings on pages O-30...O-52

Integrated Circuits


Bus compatible Digital PWM Controller, IXDP610/IXDP610 / IGBT Half-Bridge Gate Drivers

Features

- Microcomputer bus compatible
- Two complementary outputs for direct control of switching power bridge
- Dynamically programmable pulse width ranges from 0 to 100%
- Two modules of operation: 7-bit or 8-bit resolution
- Switching frequency range up to 300 kHz
- Programmable Dead-time Counter prevents switching overlap
- Cycle-by-cycle disable input to protect against over-current, over-temperature, etc.
- Outputs may be disabled under software control
- Special locking bit prevents damage to the power stage in the event of a software failure

The IXDP610 Digital Pulse Width Modulator (DPWM) is a programmable CMOS LSI device which accepts digital pulse width data from a microprocessor and generates two complementary non-overlapping pulse width modulated signals for direct digital control of a switching power bridge. The DPWM is designed to be operated under the direct control of

Basis system Configuration

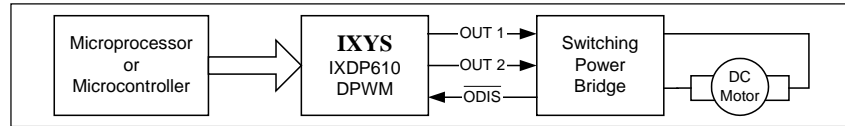

a microprocessor and interfaces easily with most standard microprocessor and microcomputer buses. The PWM waveform generated by the IXDP610 results from comparing the output of the Pulse Width Counter to the number stored in the Pulse Width Latch. A programmable 'dead-time' is incorporated into the PWM waveform. The Dead-time Logic disables both outputs on each transition of the Comparator output for the required dead-time interval. The output stage provides complementary PWM output signals capable of sinking and sourcing 20 mA at TTL voltage levels. The Output Disable Logic can be activated either by software or hardware. The facilitates cycle-by-cycle current-limit, short-circuit, overtemperature, and desaturation

protection schemes. The IXDP610 is capable of operating at PWM frequencies from zero to 300 kHz, the dead-time is programmable from zero to 14 clock cycles (0 to 11 % of the PWM cycle), which allows operation with fast power MOSFETs, MOSIGBTs, and bipolar power transistors. A trade-off between PWM frequency and resolution is provided by selecting the counter resolution to be 7-bit or 8-bit. The 20 mA output drive makes the IXDP 610 capable of directly driving opto isolators and Smart-power devices. The fast response to pulse width commands is achieved by instantaneous change of the outputs to correspond to the new command. This eliminates the one-cycle delay usually associated with digital PWM implementations.

Type	Package	Temperature Range °C	Package Outline drawings on pages O-30...O-52
IXDP 610PI	18-pin PDIP	-40 to 85	X506

Digital Deadtime Generator, IXDP630 / 631

Features

- 5 Volt HCMOS logic implementation maintains low power at high speed
- Schmitt trigger inputs and CMOS logic levels improve noise immunity
- Simultaneously injects equal deadtime in up to three output phases
- Replaces 10-12 standard SSI/MSI logic devices
- Allows a wide range of PWM modulation strategies
- Directly drives high speed optocouplers

This 5 Volt HCMOS integrated circuit is intended primarily for application in three-phase sinusoidally commutated brushless motor, induction motor, AC servomotor or UPS PWM modulator control systems. It injects the required deadtime to convert a single phase leg PWM command the two separate logic signals required to drive the upper and lower semiconductor switches in a PWM inverter. It also provides facilities for output disable, fast overcurrent, and fault condition shutdown.

In the IXDP630 the dead time is set by controlling frequency of the internal oscillator using an external R.C. network. In the IXDP631 the dead time is achieved by use of an external crystal oscillator. An alternative programming means for both the IXDP630/631 is by an externally provided clock signal. Because of its flexibility, the IXDP630/631 is easily utilized in a variety of brushed DC, trapezoidally commutated brushless DC, hybrid and VR step, or other more exotic PWM motor drive power and control circuit designs.

Type	Configuration	Package	Temperature Range °C	Package Outline drawings on pages O-30...O-52
IXDP 630PI	RC Oscillator	18-pin PDIP	-40 to 85	X506
IXDP 631PI	Crystal Oscillator			

Integrated Circuits

XS839 / IXS839A / IXS839B

Synchronous Buck MOSFET Driver

(MOSFET Driver for High Efficiency DC to DC Power Converter Applications)

The IXS839 / IXS839A / IXS839B are 2 A source / 4 A sink synchronous buck MOSFET drivers. These synchronous buck MOSFET drivers are specifically designed to drive two N-channel power MOSFETs in a synchronous buck converter. The high side driver is powered via a bootstrapped power connection. The driver is capable of 20 ns high-side output, and 18 ns low-side output transition times driving a 3000 pF load. The IXS839 and IXS839B incorporate an under voltage lockout to prevent unintentional gate drive output during low voltage conditions. The IXS839A/B includes external shutdown and low-side drive shutdown features.

Simultaneous shutdown of both outputs prevents rapid output capacitor discharge. The high-side turn-on delay is adjustable with an external capacitor added at the DLY pin. The IXS839 / 839A / 839B are designed to operate over a temperature range of -40°C to +85°C. The IXS839 is available in an 8-lead SOIC, the IXS839A and the IXS839B in a 10-pin QFN.

Features

- Logic level gate drive compatible
- 2 A source, 4 A sink peak drive current
- Programmable high-side driver turn-on delay

- Supports floating voltage for top driver up to 24 V
- IXS839 / 839B: under voltage sockout
- IXS839A/B: output shutdown, low side shutdown inputs
- 10 μ A shut down current
- 2 mA quiescent current (non-switching)
- Bootstrapped high side driver
- Cross-conduction protection


Applications

- Multiphase desktop CPU supplies
- Mobile CPU core voltage supplies
- High current / low voltage DC/DC synchronous Buck Converters

Synchronous Buck Gate

Part Number	Analog Supply Voltage V	I _{PK} Source A	I _{PK} Sink A	Floating Supply Voltage V	Under Voltage Lockout	Shutdown	Protection Features	Delay	Package	Fig. No.
> New									Outlines on O-30...O-52	
IXS 839S1	5.5	2	4	24	Yes		Over Lap, Cross Conduction Protection	Programmable High-Side Driver Turn-on Delay	8-pin SOP	X512
IXS 839AQ2	5.5	2	4	24		Driver Shutdown & Low Side Shutdown			10-pin QFN	X543
IXS 839BQ2	5.5	2	4	24	Yes				10-pin QFN	X543

X512 8-pin SOP



MX841 White LED Step-Up Converter

The MX841 is a fixed frequency, constant current source step-up DC/DC converter. The output current is directly regulated making the MX841 ideal for driving series connected white light emitting diodes (LED's) in backlight applications. The MX841 powers up to 3 series white LED's at 1.1 V, and 20 series / parallel white LED's at 5.0 V. The MX841 features a 1.0 MHz switching frequency to accommodate the use of small capacitors and a small inductors necessary in

size sensitive portable applications. Light intensity and shutdown are conveniently controlled by a single analog voltage. Power efficiency and battery life are extended through the use of a high voltage, low R_{DS(ON)} N-channel MOSFET switch. The MX841 is designed to operate over a temperature range of -40°C to +85°C, and is available in an SOIC-8 Package, with or without an Exposed Pad in Tube or on Tape and Reel. (Alternate package types available upon request).

Features

- 1.1 V to 5.5 V Input Range
- 2 Amp Peak Switch Current
- High Efficiency > 80%
- 20 V Maximum Output with Over-Voltage Protection
- LED Intensity Control
- 1.0 MHz Fixed Frequency Switching
- 8 Lead SOIC Package

Applications

- White LED Display Backlighting
 - Low Voltage: Mobile Phones, PDA's, MP3 Players, Digital Cameras
 - High Drive Current: Vehicle Instrumentation Panels

LED Driver

Part Number	Supply Voltage V	Switch Current Peak A	f _{osc} typ MHz	Duty Cycle %	Switching Voltage Range V _{DD} - V _{SCHOTTKY} V	Package	Fig. No.
> New						Outlines on O-30...O-52	
MX 841	5.5	2	1	72.5	20	8-Pin SOP	X512

Integrated Circuits

IXI858 / IXI859

Gate Driver with VReg and Charge Pump Regulator

The IXI858 and IXI859 Gate Driver / Regulator ICs are part of IXYS growing family of interface products. These ICs are designed to provide the needed analog functions required by microcontrollers to implement offline digital power supply control, such as in Power Factor Correction (PFC).

The IXI858 / 859 combine a power gate drive, low voltage linear regulator and a charge pump function for drive voltage generation as needed in these applications. These features make the IXI858 / 859 invaluable for implementing microcontroller based PFC systems. The IXI858 / 859 can be used in combination with a Depletion-Mode Power MOSFET such as IXTY02N50D, which can be used to create a constant current source to provide offline standby power at lower cost with lower high line power consumption.

The IXI858 is designed to support 5.0 V digital systems with an on board 5.0 V linear regulator, while the IXI859 features a 3.3 V linear regulator for lower voltage systems. In addition, both versions feature logic level input signal compatibility, 60 mA source and 120 mA sink gate drive output and a charge pump section meant to generate 13 V gate drive voltage.

The growing trend of digital power management, with the use of standard microcontroller in motor control, power supply, and PFC circuits require the interface, voltage gain and drive of the IXI858 / 859 for the digital power management. The IXI858 / 859 were optimized for cost and efficiency to support high volume applications such as dimmable ballast, non-dimmable ballast and High Intensity Discharge (HID) lighting systems.

The IXI858 / 859 are offered in a small 8-Lead SOIC surface mount package, with rated operation of -25°C to $+125^{\circ}\text{C}$.

Features

- Logic Level Gate Drive Compatible
- 60 mA Source / 120 mA Sink Minimum Gate Drive
- 5.0 V or 3.3 V Voltage Regulator
- Charge Pump Regulator Stabilizes VCC Power Supply at 13 V
- UVLO Protection


Applications

- μ Controller based off-line applications

Gate Driver with VReg

Part Number	V _{CC}	I _{peak} +/-	V _{in}	V _{out} , Reg.	V _{CPRon} turn-on level	V _{CPRoff} turn-off level	I _{SINK} min V _{Gate} = 6 V	I _{SRC} min V _{Gate} = 3 V	t _{MINPW} C _{Gate} = 10 pF	t _{PD} C _{Gate} = 10 pF	Package	Fig. No.
➤ New	V	A	V	V	V	V	mA	mA	ns	ns	Outlines on O-30...O-52	
IXI 858S1	20	1	6	3.3	13.15	12.85	120	60	80	200	8-pin SOP	X512
IXI 859S1	20	1	6	5	13.15	12.85	120	60	80	200	8-pin SOP	X512

X512 8-pin SOP



IXI848 / IXI848A

High-Side Current Monitor

The IXI848 / IXI848A is precision high side current sense monitor. High side power-line monitoring offers the advantage of allowing the ground plane to remain undisturbed when sensing load currents.

An external sense resistor sets the range of the amplified ground-referenced output monitoring voltage. The output voltage is amplified by a selectable fixed

gain of either 10 or 50. With an input voltage range up to 40 V for IXI848 and 60 V for IXI848A, and output gain of up to 50, the IXI848 / IXI848A are designed to address a wide variety of current sense applications.

The IXI848 / IXI848A operates over a temperature range of -40°C to $+85^{\circ}\text{C}$. The IXI848 / IXI848A are available in an 8-Lead SOIC package.

Features

- High-Side Current Sense Amplifier
- IXI848: 2.7 V to 40 V Input Range
- IXI848A: 2.7 V to 60 V Input Range
- 0.7% Typical Full Scale Accuracy
- Scalable Output Voltage
- SOIC Package

Applications

- Power Management Systems
- Smart Battery Packs
- Battery Chargers
- Battery Powered Portable Equipment
- DC Motor Control


High-Side Current Monitor

Part Number	V _{IN}	I _{IN}	V _{SENSE} typ.	Full Scale Accuracy	Input Offset Voltage, typ.	Gain Accuracy	Temp. Range min.	Temp. Range max.	Package	Fig. No.
➤ New	V	mA	mV	%	V	%	$^{\circ}\text{C}$	$^{\circ}\text{C}$	Outlines on O-30...O-52	
IXI 848S1	40	0.13	150	± 0.7	± 0.5	± 0.5	-40	85	8-Pin SOP	X512
IXI 848AS1	60	0.13	150	± 0.7	± 0.5	± 0.5	-40	85	8-Pin SOP	X512

Power Semiconductor Chips

IXYS offers a wide range of dice for a multitude of applications.

IGBT Chips	V_{CES}	I_C	$V_{CE(sat)}$
G series , Low $V_{CE(sat)}$ type	300 - 1200 V	10 - 60 A	1.6 - 3.5 V
G series , High Speed type	300 - 1200 V	10 - 100 A	2.5 - 4.0 V
S series , Low $V_{CE(sat)}$ type	600 - 1200 V	20 - 45 A	2.5 - 3.5 V
S series , High Speed type	600 - 1400 V	20 - 40 A	2.7 - 4.0 V
MOSFET Chips	V_{DSS}	$R_{DS(on)}$	t_{rr}
HiPerFET™ Power MOSFET	70 - 1200 V	0.005 - 4.5 W	150 - 250 ns
Standard Power MOSFET	55 - 1100 V	0.013 - 4.5 W	-
Fast Recovery Diodes, Rectifier Diodes and Thyristor Chips in Planar Design			
Bipolar Chips	V_{RRM} / V_{DRM}	$I_{F(AV)M} / I_{T(AV)M}$	t_{rr}
Ultrafast FRED Chips	200 - 1200 V	8 - 162 A	35 - 50 ns
Low Leakage ultrafast FRED Chips	200 - 1200 V	15 - 143 A	-
Fast Recovery Diode Chips	1200 - 1600 V	17 - 48 A	35 - 40 ns
Rectifier Diodes	1200 - 1800 V	15 - 400 A	-
Phase Control Thyristors	800 - 2200 V	19 - 250 A	-
Schottky Diodes	8 - 180 V	10 - 200 A	-
GaAs Diodes		Contact Factory	
Silicon Chip Resistors	1 - 10 Ω		
Sonic Fast Recovery Diode Chips	600 - 1800 V	15 - 90 A	tbd

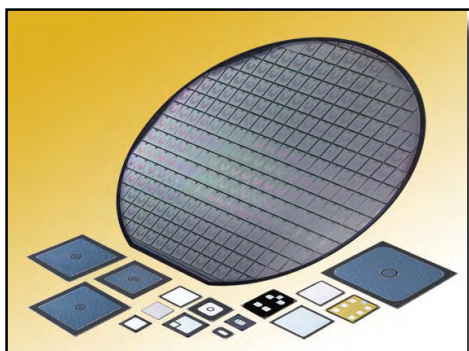

The most important features of planar technology are:

- no PN junction termination in the underside or to the edges; thus non-critical handling and simplified mounting
- fabricated using isolation diffusion with guard rings, channel stoppers and thick glass passivation to assure high electrical reliability and stability
- important electrical parameters 100% tested on the chips
- thyristor chips with center or corner gate construction
- chips with solderable or bondable metallization
- new standard 125 mm (5 inch) diameter wafers

IXYS can ship chips as follows:

Chips in wafer form, unsawed, electrically tested, rejects are inked

Chips in sawed wafer on foil, electrically tested, rejects are inked

Chips in tray (Waffle Pack), electrically tested

IXOLAR™ High Efficiency Solar Cells

Technical Information

Description

IXOLAR™ Solar Cells are IXYS' monocrystalline, high efficiency solar cell technology products incorporating an enhanced light trapping surface. There are 4 different standard cell sizes available: 36 mm², 120 mm², 342 mm², and 676 mm².

The IXOLAR™ Solar Cells are ideal for charging various battery powered and handheld consumer products such as mobile phones, cameras, PDAs, MP3-Players and toys. They are also suitable for industrial applications such as wireless sensors, portable instrumentation and for charging emergency backup batteries.


With an efficiency of typically 17%, these solar cells give the ability to extend run time even in „low light“ conditions and increase battery life and run time in a small footprint, which can be easily accommodated in the design of Portable Products.

IXOLAR™ products have a very good response over a wide wavelength range and therefore can be used in both indoor and outdoor applications.

Product and Ordering Information

Part Number	X [mm]	Y [mm]	Open Circuit Voltage [mV]	Short Circuit Current [mA]	Peak Power [mW]
XOD17-04B	6	6	630	12	6
XOD17-12B	6	20	630	42	20
XOD17-34B	18.5	18.5	630	120	56
XOD17-68B	26	26	630	236	112

B-suffix: wire bondable front-side metallization (non solderable)



Front-side contact (-)
Back-side contact (+)

Electrical Characteristics

Symbol	Cell Parameter	Typical Ratings *)	Units
V _{oc}	open circuit voltage	630	mV
J _{sc}	short circuit current density	35	mA/cm ²
V _{mpp}	voltage at max. power point	505	mV
J _{mpp}	current density at max. power point	32.5	mA/cm ²
P _{mpp}	maximum peak power	16.6	mW/cm ²
FF	fill factor	> 75	%
η	efficiency	17	%
ΔV _{oc} /ΔT	open circuit voltage temp. coefficient	-2.1	mV/K
ΔJ _{sc} /ΔT	short circuit current temp. coefficient	0.12	mA/(cm ² K)
t	cell thickness	250	μm

*) All values measured at Standard Condition: 1 sun (= 100 mW/cm²), Air Mass 1.5, 25°C

Features

- Monocrystalline silicon technology
- High efficiency
- Enhanced light trapping surface texturization


Applications

- Battery chargers for portables such as cell phones, PDAs, GPS-Systems, ...
- „Green“ electricity generation
- Power backup for UPS, Sensors, Wearables


Advantages

- Long life and stable output
- Solderable back-side metallization
- Bondable front-side metallization
- Available in die and wafer form

Prototype Solar Battery Charger for AA batteries
„IXOLAR Charger 1“ IXSC-1AA

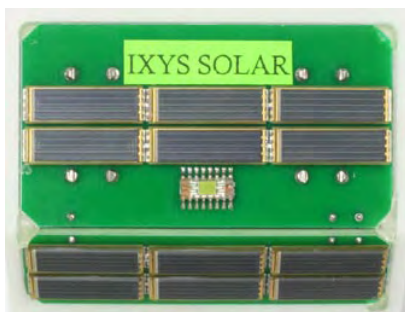

IXOLAR

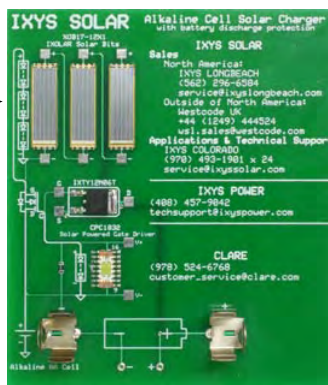

Solar Charger reference design for AA batteries

„EVXOBA-12XI“

IXOLAR™ High Efficiency Solar Bits

Description

IXOLAR™ Solar Bits are IXYS' product line of coated monocrystalline, high efficiency solar cell products using IXYS' XOD17 bondable solar cell dies. Solar Bits have reflow solderable surface mount packages, they are available in tape and reel packages and can be automatically pick and place mounted. There are 2 different Solar Bits available with different voltage and current output.

The IXOLAR™ Solar Bits are ideal for charging various battery powered and handheld consumer products such as mobile phones, cameras, PDAs, MP3-Players and toys. They are also suitable for industrial applications such as wireless sensors, portable instrumentation and for charging emergency backup batteries.

With a cell efficiency of typically 17%, Solar Bits give the ability to extend run time even in „low light“ conditions and increase battery life and run time in a small footprint, which can be easily accommodated in the design of Portable Products. The design allows to flexibly connect Solar Bits in series and/or parallel to perfectly meet the application's power requirements.

IXOLAR™ products have a very good response over a wide wavelength range and therefore can be used in both indoor and outdoor applications.

Product and Ordering Information

Part Number ➤ New	Open Circuit Voltage [V]	Short Circuit Current [mA]	Typ. Voltage @ P _{mpp} [V]	Typ. Current @ P _{mpp} [mA]
➤ XOB17-12 x 1	0.63	42	0.51	39
➤ XOB17-04 x 3	1.89	12.6	1.53	11.7

(all parameters given are typical values)

Dimensions (L x W x H): 22 x 7 x 1.4 [mm]

Solar Bit Weight: 0.5 grams


Solar Bits are compliant to the RoHS Norm.



Solar Cell Electrical Characteristics

Symbol	Cell Parameter	Typical Ratings *)	Units
V _{OC}	open circuit voltage	630	mV
J _{SC}	short circuit current density	35	mA/cm ²
V _{mpp}	voltage at max. power point	505	mV
J _{mpp}	current density at max. power point	32.5	mA/cm ²
P _{mpp}	maximum peak power	16.6	mW/cm ²
FF	fill factor	> 75	%
h	efficiency	17	%
ΔV _{OC} /ΔT	open circuit voltage temp. coefficient	-2.1	mV/K
ΔJ _{SC} /ΔT	short circuit current temp. coefficient	0.12	mA/(cm ² K)

*) All values measured at Standard Condition: 1 sun (= 1000 W/m²), Air Mass 1.5, 25°C

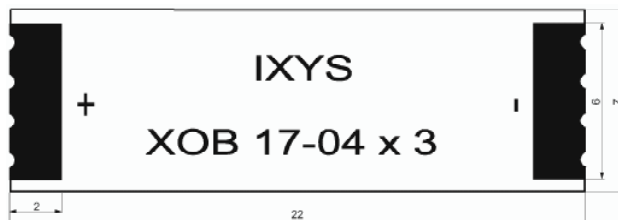

Features

- Monocrystalline silicon technology
- High efficiency outdoor and indoor
- Long life and stable output
- Sealed Package
- Surface Mount Package
- Reflow Solderable
- Very high mechanical robustness

Applications

- Battery chargers for portables such as cell phones, PDAs, GPS-Systems, ...
- "Green" electricity generation
- Power backup for UPS, Sensors, Wearables

Advantages

- Automatic Pick & Place Mounting
- One Product for Multiple Applications
- Flexible Integration into the Application

Direct Copper Bonded Ceramic Substrates

DCB Ceramic Substrates (Al₂O₃ or AlN)

IXYS manufactures Direct Copper Bonded substrates on aluminum oxide (Al₂O₃) or aluminum nitride (AlN) base. DCB ceramic substrates form the basis for new product ideas and electronic developments with a high degree of integration.



Standard bonded DCB panel dimensions are:

Unclad aluminum oxide ceramic			
Al ₂ O ₃ content		> 96	%
dimensions		128 x 210, 138 x 190.5, 115 x 165*	mm
usable area	max.	130 x 180, 130 x 200, 107 x 156*	mm
thickness		1.00, 0.63, 0.38, 0.25	mm
arc through voltage		10	kV
thermal conductivity		> 24	W/m · K
Conduction layers - both sides			
copper thickness		0.3 (< 0.3 on request)	mm
conductor width	min.	0.3 + / - 0.2	mm
conductor spacing	min.	0.4 + / - 0.2	mm
spacing conductor/edge of ceramic	min.	0.35 + / - 0.2	mm
surface finishes available		bare copper; nickel plated; nickel + gold plated	
peel-off resistance (DIN 532282)	min.	9	N/mm
DCB ceramic substrate			
application temperature range		-55...+850	°C
resistant to hydrogen	max. up to	400	°C
thermal expansion coefficient	typical	7.4 x 10 ⁻⁶	K ⁻¹
dimensions according to customer specific drawing			

- DCB parts are available as:
- bonded plate
 - bonded and patterned plate
 - prelasered, unbroken plate
 - individuelle substrates

ALN - DCB on request

* = (for 0.25 mm thk.)

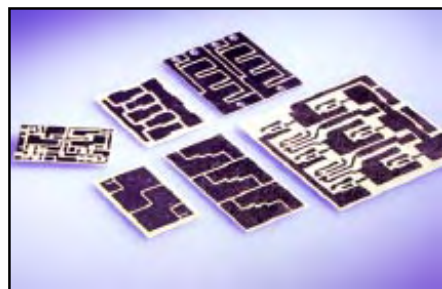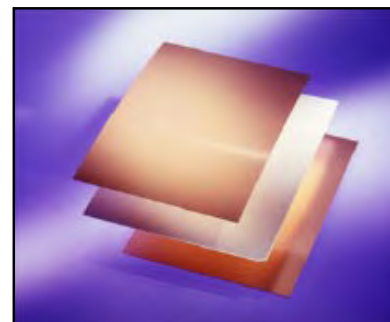







Patterned DCB substrates can be manufactured to customers' drawings.

DCB ceramic substrates fulfill several functions:

- carriers for the semiconductor chips and connection clips
- circuits similar to that on a PC board
- electrical isolator for separating the „current paths“ from the „heat paths“
- transfer medium for the heat dissipation from the active parts into the heat sink.

Available from www.westcode.com

- Application dependent gate trigger requirements of GTO thyristors
- The implementation of gate turn-off thyristors as high voltage turn-on switches for pulse power applications
- Improved semiconductor switches for pulse power applications
- Integrated 30 kV Solid-State Switch for Pulse Power Applications
- Press-Pack IGBTs, Semiconductor Switches for Pulse Power
- The application of pressure contact IGBTs in pulse power
- Design concepts of a bondless pressure-contact IGBT
- Electromechanical characteristics of a bondless pressure contact IGBT
- Pressure Contacted IGBTs
- Pressure contact IGBT, the ideal switch for high power applications
- Pressure contact IGBT, testing for reliability
- New high current press-pack IGBTs
- Magazine Feature: Positive Development in high reliability completely bond free pressure contact IGBTs
- Application of Press-pack IGBTs in Traction Refurbishment
- New 5.2 kV Extra Fast Recovery Diodes for IGBT and IGCT Applications
- New family of 4.5 kV Press-Pack IGBTs
- New Extra Fast Soft Recovery Diodes and their Applications
- Managing power semiconductor obsolescence by press-pack IGBT substitution
- Westcode Product Nomenclatures (Capsules, Studs, and Pulse Thyristors)
- Terms & Symbols
- Mounting Instructions
- Press Releases












Type		V _{RRM}	I _{FAV} T _C = 55°C	I _{FSM}	I ² t 10 ms ½ sine V _R ≤ 60% V _{RRM}	V _{TO}	r _T @T _{JM}	T _{JM}	R _{thJC}		Fig. No.	Package style
Part No. New	Old Part No.	V	A	A	A ² s	V	mΩ	°C	d.c. 180° sine K/W	120° Rect. K/W		Outlines on pages O-01...O-24
W0428RE250	WX171RE250	2500	428	5500	151 x 10 ³	0.926	0.739	150	0.13	0.15	W39	  <p>W23 Weight 250 g</p>  <p>W24 Weight 250 g</p>  <p>W26 Weight 200 g</p>  <p>W27 Weight 200 g</p>  <p>W39 Weight 250 g</p>
W0428RE280	WX171RE280	2800	428	5500	151 x 10 ³	0.926	0.739	150	0.13	0.15	W39	
W0428RE320	WX171RE320	3200	428	5500	151 x 10 ³	0.926	0.739	150	0.13	0.15	W39	
W0428RF250	WX171RF250	2500	428	5500	151 x 10 ³	0.926	0.739	150	0.13	0.15	W24	
W0428RF280	WX171RF280	2800	428	5500	151 x 10 ³	0.926	0.739	150	0.13	0.15	W24	
W0428RF320	WX171RF320	3200	428	5500	151 x 10 ³	0.926	0.739	150	0.13	0.15	W24	
W0428SE250	WX171SE250	2500	428	5500	151 x 10 ³	0.926	0.739	150	0.13	0.15	W39	
W0428SE280	WX171SE280	2800	428	5500	151 x 10 ³	0.926	0.739	150	0.13	0.15	W39	
W0428SE320	WX171SE320	3200	428	5500	151 x 10 ³	0.926	0.739	150	0.13	0.15	W39	
W0428SF250	WX171SF250	2500	428	5500	151 x 10 ³	0.926	0.739	150	0.13	0.15	W24	
W0428SF280	WX171SF280	2800	428	5500	151 x 10 ³	0.926	0.739	150	0.13	0.15	W24	
W0428SF320	WX171SF320	3200	428	5500	151 x 10 ³	0.926	0.739	150	0.13	0.15	W24	
W0438RC160	SW16PHR320	1600	438	4000	80 x 10 ³	1.000	0.830	180	0.15	0.16	W24	
W0438RC200	SW20PHR320	2000	438	4000	80 x 10 ³	1.000	0.830	180	0.15	0.16	W24	
W0438RC240	SW24PHR320	2400	438	4000	80 x 10 ³	1.000	0.830	180	0.15	0.16	W24	
W0438SC160	SW16PHN320	1600	438	4000	80 x 10 ³	1.000	0.830	180	0.15	0.16	W24	
W0438SC200	SW20PHN320	2000	438	4000	80 x 10 ³	1.000	0.830	180	0.15	0.16	W24	
W0438SC240	SW24PHN320	2400	438	4000	80 x 10 ³	1.000	0.830	180	0.15	0.16	W24	
W0438RD160	SW16HHR320	1600	438	4000	80 x 10 ³	1.000	0.830	180	0.15	0.16	W26	
W0438RD200	SW20HHR320	2000	438	4000	80 x 10 ³	1.000	0.830	180	0.15	0.16	W26	
W0438RD240	SW24HHR320	2400	438	4000	80 x 10 ³	1.000	0.830	180	0.15	0.16	W26	
W0438SD160	SW16HHN320	1600	438	4000	80 x 10 ³	1.000	0.830	180	0.15	0.16	W26	
W0438SD200	SW20HHN320	2000	438	4000	80 x 10 ³	1.000	0.830	180	0.15	0.16	W26	
W0438SD240	SW24HHN320	2400	438	4000	80 x 10 ³	1.000	0.830	180	0.15	0.16	W26	
W0503RC160	SW16PHR380	1600	503	5500	151 x 10 ³	0.990	0.740	180	0.13	0.14	W24	
W0503RC200	SW20PHR380	2000	503	5500	151 x 10 ³	0.990	0.740	180	0.13	0.14	W24	
W0503RC240	SW24PHR380	2400	503	5500	151 x 10 ³	0.990	0.740	180	0.13	0.14	W24	
W0503SC160	SW16PHN380	1600	503	5500	151 x 10 ³	0.990	0.740	180	0.13	0.14	W24	
W0503SC200	SW20PHN380	2000	503	5500	151 x 10 ³	0.990	0.740	180	0.13	0.14	W24	
W0503SC240	SW24PHN380	2400	503	5500	151 x 10 ³	0.990	0.740	180	0.13	0.14	W24	
W0503RD160	SW16HHR380	1600	503	5500	151 x 10 ³	0.990	0.740	180	0.13	0.14	W26	
W0503RD200	SW20HHR380	2000	503	5500	151 x 10 ³	0.990	0.740	180	0.13	0.14	W26	
W0503RD240	SW24HHR380	2400	503	5500	151 x 10 ³	0.990	0.740	180	0.13	0.14	W26	
W0503SD160	SW16HHN380	1600	503	5500	151 x 10 ³	0.990	0.740	180	0.13	0.14	W26	
W0503SD200	SW20HHN380	2000	503	5500	151 x 10 ³	0.990	0.740	180	0.13	0.14	W26	
W0503SD240	SW24HHN380	2400	503	5500	151 x 10 ³	0.990	0.740	180	0.13	0.14	W26	
W0508RA040	SW04PHR300	400	508	5500	151 x 10 ³	0.950	0.750	180	0.13	0.14	W23	
W0508RA120	SW12PHR300	1200	508	5500	151 x 10 ³	0.950	0.750	180	0.13	0.14	W23	
W0508RA150	SW15PHR300	1500	508	5500	151 x 10 ³	0.950	0.750	180	0.13	0.14	W23	
W0508SA040	SW04PHN300	400	508	5500	151 x 10 ³	0.950	0.750	180	0.13	0.14	W23	
W0508SA120	SW12PHN300	1200	508	5500	151 x 10 ³	0.950	0.750	180	0.13	0.14	W23	
W0508SA150	SW15PHN300	1500	508	5500	151 x 10 ³	0.950	0.750	180	0.13	0.14	W23	
W0508RB040	SW04HHR300	400	508	5500	151 x 10 ³	0.950	0.750	180	0.13	0.14	W27	
W0508RB120	SW12HHR300	1200	508	5500	151 x 10 ³	0.950	0.750	180	0.13	0.14	W27	
W0508RB150	SW15HHR300	1500	508	5500	151 x 10 ³	0.950	0.750	180	0.13	0.14	W27	
W0508SB040	SW04HHN300	400	508	5500	151 x 10 ³	0.950	0.750	180	0.13	0.14	W27	
W0508SB120	SW12HHN300	1200	508	5500	151 x 10 ³	0.950	0.750	180	0.13	0.14	W27	
W0508SB150	SW15HHN300	1500	508	5500	151 x 10 ³	0.950	0.750	180	0.13	0.14	W27	
W0628RA040	SW04PHR400	400	628	7500	280 x 10 ³	0.800	0.550	190	0.13	0.14	W23	
W0628RA120	SW12PHR400	1200	628	7500	280 x 10 ³	0.800	0.550	190	0.13	0.14	W23	
W0628RA150	SW15PHR400	1500	628	7500	280 x 10 ³	0.800	0.550	190	0.13	0.14	W23	
W0628SA040	SW04PHN400	400	628	7500	280 x 10 ³	0.800	0.550	190	0.13	0.14	W23	
W0628SA120	SW12PHN400	1200	628	7500	280 x 10 ³	0.800	0.550	190	0.13	0.14	W23	
W0628SA150	SW15PHN400	1500	628	7500	280 x 10 ³	0.800	0.550	190	0.13	0.14	W23	
W0628RB040	SW04HHR400	400	628	7500	280 x 10 ³	0.800	0.550	190	0.13	0.14	W27	
W0628RB120	SW12HHR400	1200	628	7500	280 x 10 ³	0.800	0.550	190	0.13	0.14	W27	
W0628RB150	SW15HHR400	1500	628	7500	280 x 10 ³	0.800	0.550	190	0.13	0.14	W27	
W0628SB040	SW04HHN400	400	628	7500	280 x 10 ³	0.800	0.550	190	0.13	0.14	W27	
W0628SB120	SW12HHN400	1200	628	7500	280 x 10 ³	0.800	0.550	190	0.13	0.14	W27	
W0628SB150	SW15HHN400	1500	628	7500	280 x 10 ³	0.800	0.550	190	0.13	0.14	W27	
W0735RA040	SW04PHR470	400	735	9000	405 x 10 ³	0.790	0.342	190	0.13	0.14	W23	
W0735RA120	SW12PHR470	1200	735	9000	405 x 10 ³	0.790	0.342	190	0.13	0.14	W23	
W0735RA150	SW15PHR470	1500	735	9000	405 x 10 ³	0.790	0.342	190	0.13	0.14	W23	
W0735SA040	SW04PHN470	400	735	9000	405 x 10 ³	0.790	0.342	190	0.13	0.14	W23	
W0735SA120	SW12PHN470	1200	735	9000	405 x 10 ³	0.790	0.342	190	0.13	0.14	W23	
W0735SA150	SW15PHN470	1500	735	9000	405 x 10 ³	0.790	0.342	190	0.13	0.14	W23	
W0735RB040	SW04HHR470	400	735	9000	405 x 10 ³	0.790	0.342	190	0.13	0.14	W27	
W0735RB120	SW12HHR470	1200	735	9000	405 x 10 ³	0.790	0.342	190	0.13	0.14	W27	
W0735RB150	SW15HHR470	1500	735	9000	405 x 10 ³	0.790	0.342	190	0.13	0.14	W27	
W0735SB040	SW04HHN470	400	735	9000	405 x 10 ³	0.790	0.342	190	0.13	0.14	W27	
W0735SB120	SW12HHN470	1200	735	9000	405 x 10 ³	0.790	0.342	190	0.13	0.14	W27	
W0735SB150	SW15HHN470	1500	735	9000	405 x 10 ³	0.790	0.342	190	0.13	0.14	W27	











Rectifier Diodes - Capsule Types










WESTCODE

Our comprehensive range of rectifier diodes offers class leading performance and reliability. Devices with blocking voltages from 400V up to 6kV are available making them ideal for applications with line voltages up to 2 kV. Optimised to offer low conduction losses, these devices are ideally suited to line frequency applications including input rectifiers for variable speed drives, traction converters, trackside substations, welding and DC power supplies. Featuring compression bonded, alloyed Silicon wafer construction, these devices feature low thermal impedance and high overload capacity and are designed to survive even the most arduous applications.

The latest additions to the Westcode Rectifier Diode family are two new 56 mm Ø Si Rectifier Diodes. The new package designs have proven alloyed technology for better transient thermal and surge ratings. Two new products have been launched offering approximately 40% more current rating than existing products in the same space envelope; 4.8 kV device W2899MC480 and 2.8 kV device W3842MC280.

Type		V _{RRM}	I _{FAV} T _K = 55°C	I _{FSM} 10 ms ½ sine V _R ≤ 60% V _{RRM}	I ² t	V _{TO}	r _T	T _{JM}	R _{thJK}		Fig. No.	Package style
Part No. ➤ New	Old Part No.	V	A	A	A ² s	V	mΩ	°C	180° Sine K/W	120° Rect. K/W		Outlines on pages O-01...O-24
W0507YH360	SW36HXC270	3600	507	7600	289 x 10 ³	0.970	0.880	160	0.100	0.117	W3	
W0507YH450	SW45HXC270	4500	507	7600	289 x 10 ³	0.970	0.880	160	0.100	0.117	W3	
W0614WC160	SW16CXC320	1600	614	4000	80 x 10 ³	1.000	0.830	180	0.090	0.098	W1	
W0614WC200	SW20CXC320	2000	614	4000	80 x 10 ³	1.000	0.830	180	0.090	0.098	W1	
W0614WC240	SW24CXC320	2400	614	4000	80 x 10 ³	1.000	0.830	180	0.090	0.098	W1	
W0642WC160	SW16CXC380	1600	680	5500	151 x 10 ³	0.990	0.740	180	0.090	0.098	W1	
W0642WC200	SW20CXC380	2000	680	5500	151 x 10 ³	0.990	0.740	180	0.090	0.098	W1	
W0642WC240	SW24CXC380	2400	680	5500	151 x 10 ³	0.990	0.740	180	0.090	0.098	W1	
W0646WC060	SW06CXC300	600	646	5500	151 x 10 ³	1.070	0.676	190	0.090	0.098	W1	
W0646WC120	SW12CXC300	1200	646	5500	151 x 10 ³	1.070	0.676	190	0.090	0.098	W1	
W0646WC150	SW15CXC300	1500	646	5500	151 x 10 ³	1.070	0.676	190	0.090	0.098	W1	
W0797WC040	SW04CXC400	400	797	7500	281 x 10 ³	0.800	0.550	190	0.090	0.098	W1	
W0797WC120	SW12CXC400	1200	797	7500	281 x 10 ³	0.800	0.550	190	0.090	0.098	W1	
W0797WC150	SW15CXC400	1500	797	7500	281 x 10 ³	0.800	0.550	190	0.090	0.098	W1	
W0944WC040	SW04CXC470	400	944	9000	405 x 10 ³	0.790	0.342	190	0.090	0.098	W1	
W0944WC120	SW12CXC470	1200	944	9000	405 x 10 ³	0.790	0.342	190	0.090	0.098	W1	
W0944WC150	SW15CXC470	1500	944	9000	405 x 10 ³	0.790	0.342	190	0.090	0.098	W1	
W1032LC500	SW50CXC350	5000	1032	7200	259 x 10 ³	1.000	0.702	150	0.033	0.040	W4	
W1032LC560	SW56CXC350	5600	1032	7200	259 x 10 ³	1.000	0.702	150	0.033	0.040	W4	
W1032LC600	N/A	6000	1032	7200	259 x 10 ³	1.000	0.702	150	0.033	0.040	W4	
W1074YC200	SW20CXC445	2000	1074	10800	583 x 10 ³	0.920	0.390	160	0.050	0.061	W2	
W1074YC320	SW32CXC445	3200	1074	10800	583 x 10 ³	0.920	0.390	160	0.050	0.061	W2	
W1074YH200	SW20HXC445	2000	1074	10800	583 x 10 ³	0.920	0.390	160	0.050	0.061	W3	
W1074YH320	SW32HXC445	3200	1074	10800	583 x 10 ³	0.920	0.390	160	0.050	0.061	W3	
W1185LC300	SW30CXC515	3000	1185	9200	423 x 10 ³	1.000	0.575	160	0.033	0.040	W4	
W1185LC380	SW38CXC515	3800	1185	9200	423 x 10 ³	1.000	0.575	160	0.033	0.040	W4	
W1185LC450	SW45CXC515	4500	1185	9200	423 x 10 ³	1.000	0.575	160	0.033	0.040	W4	
W1263YC160	SW16CXC565	1600	1263	11700	684 x 10 ³	0.870	0.330	175	0.050	0.061	W2	
W1263YC200	SW20CXC565	2000	1263	11700	684 x 10 ³	0.870	0.330	175	0.050	0.061	W2	
W1263YC250	SW25CXC565	2500	1263	11700	684 x 10 ³	0.870	0.330	175	0.050	0.061	W2	
W1263YH160	SW16HXC565	1600	1263	11700	684 x 10 ³	0.870	0.330	175	0.050	0.061	W3	
W1263YH200	SW20HXC565	2000	1263	11700	684 x 10 ³	0.870	0.330	175	0.050	0.061	W3	
W1263YH250	SW25HXC565	2500	1263	11700	684 x 10 ³	0.870	0.330	175	0.050	0.061	W3	
W1294NC500	SW50CXC500	5000	1294	10000	500 x 10 ³	1.150	0.684	150	0.022	0.026	W5*	
W1294NC600	SW60CXC500	6000	1294	10000	500 x 10 ³	1.150	0.684	150	0.022	0.026	W5*	
W1294ND500	SW50DXC500	5000	1294	10000	500 x 10 ³	1.150	0.684	150	0.022	0.026	W37	
W1294ND600	SW60DXC500	6000	1294	10000	500 x 10 ³	1.150	0.684	150	0.022	0.026	W37	
W1411LC300	SW30CXC595	3000	1411	10600	562 x 10 ³	0.900	0.388	160	0.033	0.040	W4	
W1411LC360	SW36CXC595	3600	1411	10600	562 x 10 ³	0.900	0.388	160	0.033	0.040	W4	
W1520NC500	SW50CXC620	5000	1478	12000	720 x 10 ³	0.904	0.552	150	0.022	0.026	W5*	
W1520NC600	SW60CXC620	6000	1478	12000	720 x 10 ³	0.904	0.552	150	0.022	0.026	W5*	
W1524LC240	SW24CXC635	2400	1524	12700	810 x 10 ³	0.870	0.323	160	0.033	0.040	W4	
W1524LC300	SW30CXC635	3000	1524	12700	810 x 10 ³	0.870	0.323	160	0.033	0.040	W4	
W1608NC400	SW40CXC680	4000	1608	13000	845 x 10 ³	0.975	0.501	160	0.022	0.026	W5*	
W1608NC500	SW50CXC680	5000	1608	13000	845 x 10 ³	0.975	0.501	160	0.022	0.026	W5*	
W1748LC080	SW08CXC805	800	1748	15400	1.19 x 10 ⁶	0.870	0.280	175	0.033	0.040	W4	
W1748LC180	SW18CXC805	1800	1748	15400	1.19 x 10 ⁶	0.870	0.280	175	0.033	0.040	W4	
W1748LC220	SW22CXC805	2200	1748	15400	1.19 x 10 ⁶	0.870	0.280	175	0.033	0.040	W4	
W1748LC250	SW25CXC805	2500	1748	15400	1.19 x 10 ⁶	0.870	0.280	175	0.033	0.040	W4	
W1856NC400	SW40CXC815	4000	1856	16000	1.28 x 10 ⁶	0.975	0.348	160	0.022	0.026	W5*	
W1856NC500	SW50CXC815	5000	1856	16000	1.28 x 10 ⁶	0.975	0.348	160	0.022	0.026	W5*	
W2020NC360	SW36CXC818	3600	2020	18000	1.62 x 10 ⁶	1.000	0.320	160	0.020	0.022	W5*	
W2020NC450	SW45CXC818	4500	2020	18000	1.62 x 10 ⁶	1.000	0.320	160	0.020	0.022	W5*	
W2052NC300	SW30CXC820	3000	2052	19500	1.90 x 10 ⁶	0.865	0.288	160	0.022	0.026	W5*	
W2052NC400	SW40CXC820	4000	2052	19500	1.90 x 10 ⁶	0.865	0.288	160	0.022	0.026	W5*	
W2054NC360	SW36CXC920	3600	2054	19000	1.81 x 10 ⁶	0.800	0.300	160	0.022	0.026	W5*	
W2054NC450	SW45CXC920	4500	2054	19000	1.81 x 10 ⁶	0.800	0.300	160	0.022	0.026	W5*	
W2058LC020	SW02CXC935	200	2058	19500	1.90 x 10 ⁶	0.790	0.192	175	0.033	0.040	W4	
W2058LC100	SW10CXC935	1000	2058	19500	1.90 x 10 ⁶	0.790	0.192	175	0.033	0.040	W4	
W2058LC120	SW12CXC935	1200	2058	19500	1.90 x 10 ⁶	0.790	0.192	175	0.033	0.040	W4	
W2058LC140	SW14CXC935	1400	2058	19500	1.90 x 10 ⁶	0.790	0.192	175	0.033	0.040	W4	
W2134NC300	SW30CXC930	3000	2134	20000	2.00 x 10 ⁶	0.865	0.260	160	0.022	0.026	W5*	
W2134NC400	SW40CXC930	4000	2134	20000	2.00 x 10 ⁶	0.865	0.260	160	0.022	0.026	W5*	

Type		V _{RRM}	I _{FAV} T _K = 55°C	I _{FSM}	I _{pt} 10 ms ½ sine V _R ≤ 60% V _{RRM}	V _{T0}	r _T	T _{JM}	R _{thJK}		Fig. No.	Package style
Part No.	Old Part No.	V	A	A	A's	V	mΩ	°C	180° Sine K/W	120° Rect. K/W		Outlines on pages O-01...O-24
➤ New												
W2416NC160	SW16CXC950	1600	2416	25500	3.25 x 10 ⁶	0.780	0.200	160	0.022	0.026	W5*	
W2416NC200	SW20CXC950	2000	2416	25500	3.25 x 10 ⁶	0.780	0.200	160	0.022	0.026	W5*	
W2416NC250	SW25CXC950	2500	2416	25500	3.25 x 10 ⁶	0.780	0.200	160	0.022	0.026	W5*	
W2624NC160	SW16CXC11C	1600	2624	28000	3.92 x 10 ⁶	0.780	0.160	160	0.022	0.026	W5*	
W2624NC200	SW20CXC11C	2000	2624	28000	3.92 x 10 ⁶	0.780	0.160	160	0.022	0.026	W5*	
W2624NC250	SW25CXC11C	2500	2624	28000	3.92 x 10 ⁶	0.780	0.160	160	0.022	0.026	W5*	
W2664NC300	SW30CXC1170	3000	2664	26500	3.51 x 10 ⁶	0.824	0.174	160	0.020	0.022	W5*	
W2664NC400	SW40CXC1170	4000	2664	26500	3.51 x 10 ⁶	0.824	0.174	160	0.020	0.022	W5*	
W2820VC360	SW36CXC1100	3600	2820	26200	3.43 x 10 ⁶	1.300	0.147	160	0.016	0.018	W6	W5 Weight 510 g <i>*Not recommended for new design</i>
W2820VC450	SW45CXC1100	4500	2820	26200	3.43 x 10 ⁶	1.300	0.147	160	0.016	0.018	W6	
W2820VF360	SW36FXC1100	3600	2820	26200	3.43 x 10 ⁶	1.300	0.147	160	0.016	0.018	W43	
W2820VF450	SW45FXC1100	4500	2820	26200	3.43 x 10 ⁶	1.300	0.147	160	0.016	0.018	W43	
➤ W2899MC320	WX166MC320	3200	2899	25400	3.23 x 10 ⁶	0.996	0.222	160	0.014	0.016	W54	
➤ W2899MC360	WX166MC360	3600	2899	25400	3.23 x 10 ⁶	0.996	0.222	160	0.014	0.016	W54	
➤ W2899MC400	WX166MC400	4000	2899	25400	3.23 x 10 ⁶	0.996	0.222	160	0.014	0.016	W54	
➤ W2899MC420	WX166MC420	4200	2899	25400	3.23 x 10 ⁶	0.996	0.222	160	0.014	0.016	W54	
➤ W2899MC480	WX166MC480	4800	2899	25400	3.23 x 10 ⁶	0.996	0.222	160	0.014	0.016	W54	
W2958NC280	SW28CXC12C	2800	2958	28000	3.92 x 10 ⁶	0.807	0.167	175	0.020	0.022	W5*	
W2958NC350	SW35CXC12C	3500	2958	28000	3.92 x 10 ⁶	0.807	0.167	175	0.020	0.022	W5*	
➤ W3082MC420	WX253MC420	4200	3082	TBA	TBA	0.947	0.195	160	0.014	0.016	W54	W6 Weight 1000 g
➤ W3082MC450	WX253MC450	4500	3082	TBA	TBA	0.947	0.195	160	0.014	0.016	W54	
W3128VC300	SW30CXC13C	3000	3128	30000	4.50 x 10 ⁶	0.875	0.158	160	0.016	0.018	W6	
W3128VC400	SW40CXC13C	4000	3128	30000	4.50 x 10 ⁶	0.875	0.158	160	0.016	0.018	W6	
W3128VF300	SW30FXC13C	3000	3128	30000	4.50 x 10 ⁶	0.875	0.158	160	0.016	0.018	W43	
W3128VF400	SW40FXC13C	4000	3128	30000	4.50 x 10 ⁶	0.875	0.158	160	0.016	0.018	W43	
W3270NC080	SW08CXC14C	800	3270	30400	4.62 x 10 ⁶	0.826	0.104	175	0.022	0.026	W5*	
W3270NC160	SW16CXC14C	1600	3270	30400	4.62 x 10 ⁶	0.826	0.104	175	0.022	0.026	W5*	
W3270NC200	SW20CXC14C	2000	3270	30400	4.62 x 10 ⁶	0.826	0.104	175	0.022	0.026	W5*	
W3270NC220	SW22CXC14C	2200	3270	30400	4.62 x 10 ⁶	0.826	0.104	175	0.022	0.026	W5*	
➤ W3477MC360	WX252MC360	3600	3477	TBA	TBA	0.918	0.144	160	0.014	0.016	W54	W7 Weight 1700 g
➤ W3477MC400	WX252MC400	4000	3477	TBA	TBA	0.918	0.144	160	0.014	0.016	W54	
W3697VC160	SW16CXC16C	1600	3697	40000	8.00 x 10 ⁶	0.860	0.100	160	0.016	0.018	W6	
W3697VC220	SW22CXC16C	2200	3697	40000	8.00 x 10 ⁶	0.860	0.100	160	0.016	0.018	W6	
W3697VC280	SW28CXC16C	2800	3697	40000	8.00 x 10 ⁶	0.860	0.100	160	0.016	0.018	W6	
W3697VF160	SW16FXC16C	1600	3697	40000	8.00 x 10 ⁶	0.860	0.100	160	0.016	0.018	W43	
W3697VF220	SW22FXC16C	2200	3697	40000	8.00 x 10 ⁶	0.860	0.100	160	0.016	0.018	W43	
W3697VF280	SW28FXC16C	2800	3697	40000	8.00 x 10 ⁶	0.860	0.100	160	0.016	0.018	W43	
➤ W3708MC320	WX251MC320	3200	3708	TBA	TBA	0.894	0.123	160	0.014	0.016	W54	
➤ W3708MC350	WX251MC350	3500	3708	TBA	TBA	0.894	0.123	160	0.014	0.016	W54	
W3743ZC400	SW40CXC15C	4000	3743	35000	6.13 x 10 ⁶	0.976	0.170	160	0.011	0.012	W7	W37 Weight 510 g
W3743ZC450	SW45CXC15C	4500	3743	35000	6.13 x 10 ⁶	0.976	0.170	160	0.011	0.012	W7	
W3743ZC500	SW50CXC15C	5000	3743	35000	6.13 x 10 ⁶	0.976	0.170	160	0.011	0.012	W7	
W3743ZD400	SW40DXC15C	4000	3743	35000	6.13 x 10 ⁶	0.976	0.170	160	0.011	0.012	W42	
W3743ZD450	SW45DXC15C	4500	3743	35000	6.13 x 10 ⁶	0.976	0.170	160	0.011	0.012	W42	
W3743ZD500	SW50DXC15C	5000	3743	35000	6.13 x 10 ⁶	0.976	0.170	160	0.011	0.012	W42	
W3841VC300	SW30CXC17C	3000	3841	39800	7.92 x 10 ⁶	0.860	0.115	175	0.016	0.018	W6	
W3841VC340	SW34CXC17C	3400	3841	39800	7.92 x 10 ⁶	0.860	0.115	175	0.016	0.018	W6	
W3841VF300	SW30FXC17C	3000	3841	39800	7.92 x 10 ⁶	0.860	0.115	175	0.016	0.018	W43	
W3841VF340	SW34FXC17C	3400	3841	39800	7.92 x 10 ⁶	0.860	0.115	175	0.016	0.018	W43	
➤ W3842MC160	WX199MC160	1600	3842	35100	6.16 x 10 ⁶	0.831	0.118	160	0.014	0.016	W54	W42 Weight 1200 g
➤ W3842MC200	WX199MC200	2000	3842	35100	6.16 x 10 ⁶	0.831	0.118	160	0.014	0.016	W54	
➤ W3842MC240	WX199MC240	2400	3842	35100	6.16 x 10 ⁶	0.831	0.118	160	0.014	0.016	W54	
➤ W3842MC280	WX199MC280	2800	3842	35100	6.16 x 10 ⁶	0.831	0.118	160	0.014	0.016	W54	
W4096ZC340	SW34CXC1870	3400	4096	41700	8.70 x 10 ⁶	0.730	0.158	160	0.011	0.012	W7	
W4096ZC450	SW45CXC1870	4500	4096	41700	8.70 x 10 ⁶	0.730	0.158	160	0.011	0.012	W7	
W4096ZD340	SW34DXC1870	3400	4096	41700	8.70 x 10 ⁶	0.730	0.158	160	0.011	0.012	W42	
W4096ZD450	SW45DXC1870	4500	4096	41700	8.70 x 10 ⁶	0.730	0.158	160	0.011	0.012	W42	
W4307ZC200	SW20CXC20C	2000	4307	55000	15.1 x 10 ⁶	0.800	0.133	160	0.011	0.012	W7	W43 Weight 800 g
W4307ZC240	SW24CXC20C	2400	4307	55000	15.1 x 10 ⁶	0.800	0.133	160	0.011	0.012	W7	
W4307ZC300	SW30CXC20C	3000	4307	55000	15.1 x 10 ⁶	0.800	0.133	160	0.011	0.012	W7	
W4307ZD200	SW20DXC20C	2000	4307	55000	15.1 x 10 ⁶	0.800	0.133	160	0.011	0.012	W42	
W4307ZD240	SW24DXC20C	2400	4307	55000	15.1 x 10 ⁶	0.800	0.133	160	0.011	0.012	W42	
W4307ZD300	SW30DXC20C	3000	4307	55000	15.1 x 10 ⁶	0.800	0.133	160	0.011	0.012	W42	
W4534NC020	SW02CXC19C	200	4543	40000	8.00 x 10 ⁶	0.765	0.052	190	0.022	0.026	W5*	
W4534NC060	SW06CXC19C	600	4543	40000	8.00 x 10 ⁶	0.765	0.052	190	0.022	0.026	W5*	
➤ W4534ND020	SW02DXC19C	200	4543	40000	8.00 x 10 ⁶	0.765	0.052	190	0.022	0.026	W37	
➤ W4534ND060	SW06DXC19C	600	4543	40000	8.00 x 10 ⁶	0.765	0.052	190	0.022	0.026	W37	
W5092ZC240	SW24CXC18C	2400	5092	58000	16.8 x 10 ⁶	0.874	0.079	160	0.011	0.012	W7	
W5092ZC280	SW28CXC18C	2800	5092	58000	16.8 x 10 ⁶	0.874	0.079	160	0.011	0.012	W7	W54 Weight 530 g
W5092ZC320	SW32CXC18C	3200	5092	58000	16.8 x 10 ⁶	0.874	0.079	160	0.011	0.012	W7	

Type		V _{RRM}	I _{FAV} T _K = 55°C	I _{FSM}	I ² t 10ms ½ sine V _R ≤ 60% V _{RRM}	V _{TO}	r _T	T _{JM}	R _{thJK}		Fig. No.	Package style Outlines on pages O-01...O-24
Part No. ➤ New	Old Part No.	V	A	A	A ² s	V	mΩ	°C	180° Sine K/W	120° Rect. K/W		
W5092ZC350	SW35CXC18C	3500	5092	58000	16.8 x 10 ⁶	0.874	0.079	160	0.011	0.012	W7	
W5092ZD240	SW24DXC18C	2400	5092	58000	16.8 x 10 ⁶	0.874	0.079	160	0.011	0.012	W42	
W5092ZD280	SW28DXC18C	2800	5092	58000	16.8 x 10 ⁶	0.874	0.079	160	0.011	0.012	W42	
W5092ZD320	SW32DXC18C	3200	5092	58000	16.8 x 10 ⁶	0.874	0.079	160	0.011	0.012	W42	
W5092ZD350	SW35DXC18C	3500	5092	58000	16.8 x 10 ⁶	0.874	0.079	160	0.011	0.012	W42	
W5282ZC200	SW20CXC21C	2000	5282	60000	18.0 x 10 ⁶	0.970	0.064	160	0.011	0.012	W7	
W5282ZC240	SW24CXC21C	2400	5282	60000	18.0 x 10 ⁶	0.970	0.064	160	0.011	0.012	W7	
W5282ZC300	SW30CXC21C	3000	5282	60000	18.0 x 10 ⁶	0.970	0.064	160	0.011	0.012	W7	
W5282ZD200	SW20DXC21C	2000	5282	60000	18.0 x 10 ⁶	0.970	0.064	160	0.011	0.012	W42	
W5282ZD240	SW24DXC21C	2400	5282	60000	18.0 x 10 ⁶	0.970	0.064	160	0.011	0.012	W42	
W5282ZD300	SW30DXC21C	3000	5282	60000	18.0 x 10 ⁶	0.970	0.064	160	0.011	0.012	W42	
W5292TC500	WX043TC500	5000	5292	52700	13.9 x 10 ⁶	1.027	0.111	160	0.008	0.009	W28	
W5292TC560	WX043TC560	5600	5292	52700	13.9 x 10 ⁶	1.027	0.111	160	0.008	0.009	W28	
W5292TD500	WX043TD500	5000	5292	52700	13.9 x 10 ⁶	1.027	0.111	160	0.008	0.009	W29	
W5292TD560	WX043TD560	5600	5292	52700	13.9 x 10 ⁶	1.027	0.111	160	0.008	0.009	W29	
W5439VC020	SW02CXC22C	200	5439	52000	13.5 x 10 ⁶	0.650	0.067	190	0.016	0.018	W6	
W5439VC100	SW10CXC22C	1000	5439	52000	13.5 x 10 ⁶	0.650	0.067	190	0.016	0.018	W6	
W5439VC140	SW14CXC22C	1400	5439	52000	13.5 x 10 ⁶	0.650	0.067	190	0.016	0.018	W6	
W5439VF020	SW02FXC22C	200	5439	52000	13.5 x 10 ⁶	0.650	0.067	190	0.016	0.018	W43	
W5439VF100	SW10FXC22C	1000	5439	52000	13.5 x 10 ⁶	0.650	0.067	190	0.016	0.018	W43	
W5439VF140	SW14FXC22C	1400	5439	52000	13.5 x 10 ⁶	0.650	0.067	190	0.016	0.018	W43	
W5696VC020	SW02CXC27C	200	5696	53000	14.0 x 10 ⁶	0.650	0.059	190	0.016	0.018	W6	
W5696VC100	SW10CXC27C	1000	5696	53000	14.0 x 10 ⁶	0.650	0.059	190	0.016	0.018	W6	
W5696VC140	SW14CXC27C	1400	5696	53000	14.0 x 10 ⁶	0.650	0.059	190	0.016	0.018	W6	
W5696VF020	SW02FXC27C	200	5696	53000	14.0 x 10 ⁶	0.650	0.059	190	0.016	0.018	W43	
W5696VF100	SW10FXC27C	1000	5696	53000	14.0 x 10 ⁶	0.650	0.059	190	0.016	0.018	W43	
W5696VF140	SW14FXC27C	1400	5696	53000	14.0 x 10 ⁶	0.650	0.059	190	0.016	0.018	W43	
W5838ZC120	SW12CXC26C	1200	5838	64000	20.5 x 10 ⁶	0.800	0.074	175	0.011	0.012	W7	
W5838ZC180	SW18CXC26C	1800	5838	64000	20.5 x 10 ⁶	0.800	0.074	175	0.011	0.012	W7	
W5838ZC220	SW22CXC26C	2200	5838	64000	20.5 x 10 ⁶	0.800	0.074	175	0.011	0.012	W7	
W5838ZD120	SW12DXC26C	1200	5838	64000	20.5 x 10 ⁶	0.800	0.074	175	0.011	0.012	W42	
W5838ZD180	SW18DXC26C	1800	5838	64000	20.5 x 10 ⁶	0.800	0.074	175	0.011	0.012	W42	
W5838ZD220	SW22DXC26C	2200	5838	64000	20.5 x 10 ⁶	0.800	0.074	175	0.011	0.012	W42	
W6262ZC120	SW12CXC2850	1200	6262	67000	22.4 x 10 ⁶	0.740	0.065	175	0.011	0.012	W7	
W6262ZC200	SW20CXC2850	2000	6262	67000	22.4 x 10 ⁶	0.740	0.065	175	0.011	0.012	W7	
W6262ZC240	SW24CXC2850	2400	6262	67000	22.4 x 10 ⁶	0.740	0.065	175	0.011	0.012	W7	
W6262ZD120	SW12DXC2850	1200	6262	67000	22.4 x 10 ⁶	0.740	0.065	175	0.011	0.012	W42	
W6262ZD200	SW20DXC2850	2000	6262	67000	22.4 x 10 ⁶	0.740	0.065	175	0.011	0.012	W42	
W6262ZD240	SW24DXC2850	2400	6262	67000	22.4 x 10 ⁶	0.740	0.065	175	0.011	0.012	W42	
W6908FC450	N/A	4500	6908	70000	24.5 x 10 ⁶	0.767	0.092	160	0.0065	0.0069	W52	
W6908FC500	N/A	5000	6908	70000	24.5 x 10 ⁶	0.767	0.092	160	0.0065	0.0069	W52	
W6908FD450	N/A	4500	6908	70000	24.5 x 10 ⁶	0.767	0.092	160	0.0065	0.0069	W59	
W6908FD500	N/A	5000	6908	70000	24.5 x 10 ⁶	0.767	0.092	160	0.0065	0.0069	W59	
W7675ZC020	SW02CXC30C	200	7675	68000	23.1 x 10 ⁶	0.650	0.050	190	0.011	0.012	W7	
W7675ZC100	SW10CXC30C	1000	7675	68000	23.1 x 10 ⁶	0.650	0.050	190	0.011	0.012	W7	
W7675ZC140	SW14CXC30C	1400	7675	68000	23.1 x 10 ⁶	0.650	0.050	190	0.011	0.012	W7	
W7675ZD020	SW02DXC30C	200	7675	68000	23.1 x 10 ⁶	0.650	0.050	190	0.011	0.012	W42	
W7675ZD100	SW10DXC30C	1000	7675	68000	23.1 x 10 ⁶	0.650	0.050	190	0.011	0.012	W42	
W7675ZD140	SW14DXC30C	1400	7675	68000	23.1 x 10 ⁶	0.650	0.050	190	0.011	0.012	W42	
W8405ZC020	SW02CXC32C	200	8405	72000	25.9 x 10 ⁶	0.670	0.038	190	0.011	0.012	W7	
W8405ZC100	SW10CXC32C	1000	8405	72000	25.9 x 10 ⁶	0.670	0.038	190	0.011	0.012	W7	
W8405ZC140	SW14CXC32C	1400	8405	72000	25.9 x 10 ⁶	0.670	0.038	190	0.011	0.012	W7	
W8405ZD020	SW02DXC32C	200	8405	72000	25.9 x 10 ⁶	0.670	0.038	190	0.011	0.012	W42	
W8405ZD100	SW10DXC32C	1000	8405	72000	25.9 x 10 ⁶	0.670	0.038	190	0.011	0.012	W42	
W8405ZD140	SW14DXC32C	1400	8405	72000	25.9 x 10 ⁶	0.670	0.038	190	0.011	0.012	W42	
W104CFC200 **	N/A	2000	10434	83700	35.0 x 10 ⁶	0.711	0.041	175	0.0065	0.0069	W52	
W104CFC220 **	N/A	2200	10434	83700	35.0 x 10 ⁶	0.711	0.041	175	0.0065	0.0069	W52	
W104CFD200 **	N/A	2000	10434	83700	35.0 x 10 ⁶	0.711	0.041	175	0.0065	0.0069	W59	
W104CFD220 **	N/A	2200	10434	83700	35.0 x 10 ⁶	0.711	0.041	175	0.0065	0.0069	W59	
WX248MC030	N/A	300							0.014	0.016	W54	
WX248MC060	N/A	600							0.014	0.016	W54	
WX249MC120	N/A	1200							0.014	0.016	W54	
WX249MC150	N/A	1500							0.014	0.016	W54	
WX250MC180	N/A	1800							0.014	0.016	W54	
WX250MC220	N/A	2200							0.014	0.016	W54	
WX254MC520	N/A	5200							0.014	0.016	W54	
WX254MC600	N/A	6000							0.014	0.016	W54	

* Outline reference W5 is not recommended for new designs as new improved products are in development. Please refer to Chippenham Factory for further advice.

** For current ratings greater than 9999 amperes, a current multiplier replaces the fifth digit of the part number. I.e. C = x 100, D = x 1000 and E = x 10000.


New Products in development,
refer to Chippenham Factory

Welding Diodes

Using ground-breaking new silicon technology, Westcode has launched a new Welding Diode that offers a low voltage rating of 200 V.

The new 8 mm thick, 44.4 mm pole face \varnothing diode is a fully hermetic, press-pack ceramic walled package and is mechanically compatible with industry standard outlines.








Samples and data sheet for the first 200 V device, W7023DB200, are available now with new larger 200 V and 400 V versions currently in development.

Type		V_{RRM}	I_{FAV}	I_{FSM}	I^2t	V_{TO}	r_T	T_{JM}	R_{thJK}		Fig. No.	Package style Outlines on pages O-01...O-24	
Part No.	Old Part No.	V	$T_K = 55^\circ C$ A	10 ms 1/2 sine $V_R \leq 60\% V_{RRM}$ A	A^2s	@ T_{JM} V m Ω		$^\circ C$	180° Sine K/W	120° Rect. K/W			
➤ W7032DB008	WX173DB008	80	7032	50000	12.5×10^6	0.807	0.027	170	0.013	0.016	W49	W38 in development  W49 Weight 120 g	
➤ W7032DB012	WX173DB012	120	7032	50000	12.5×10^6	0.807	0.027	170	0.013	0.016	W49		
➤ W7032DB020	WX173DB020	200	7032	50000	12.5×10^6	0.807	0.027	170	0.013	0.016	W49		
➤ WX198PB008	N/A	80	New Products in Development, refer to Chippenham Factory								W38	W38	W38
➤ WX198PB012	N/A	120											
➤ WX198PB020	N/A	200											

Introducing a new range of Rectifier Diodes using the innovative slimline WESPACK housing to provide devices with the maximum power rating for weight and volume without compromising on quality and reliability.

Two of the new devices are available in 38 mm pole face diameter housings, and one in a 50 mm pole face diameter housing, mounted in a low profile 14 mm cold weld capsule. WESPACK Rectifier Diodes have a maximum voltage rating of 2.8 kV or 3.5 kV and will be available in the four outlines currently offered in our Phase Control Thyristor WESPACK range.

Typical applications include: input rectifiers and bridges, Welding, DC power supplies, chemical power supplies, battery charges, etc.

Type		V_{RRM}	I_{FAV}	I_{FSM}	I^2t	V_{T0}	r_T	T_{JM}	$R_{th,JK}$		Fig. No.	Package style
Part No. ➤ New	Old Part No.	V	$T_K = 55^\circ C$ A	A	10 ms ½ sine $V_R \leq 60\% V_{RRM}$ A ² s	V	mΩ	°C	180° Sine K/W	120° Rect. K/W		
TBA	N/A	TBA	FUTURE DEVELOPMENT					TBA	TBA	TBA	WD1 WD1	WD1 in development
➤ W3455QK200	WX181QK200	2000	3455	20000	2.0×10^6	0.940	0.139	180	0.017	0.021	WD2	
➤ W3455QK220	WX181QK220	2200	3455	20000	2.0×10^6	0.940	0.139	180	0.017	0.021	WD2	
➤ W4693QK050	WX183QK050	500	4693	31500	4.98×10^6	0.904	0.057	180	0.017	0.021	WD2	WD2 Weight 200 g
➤ W4693QK080	WX183QK080	800	4693	31500	4.98×10^6	0.904	0.057	180	0.017	0.021	WD2	
➤ W4713HL300	WX207HL300	3000	4713	56000	15.7×10^6	0.807	0.090	160	0.012	0.013	WD5	
➤ W4713HL350	WX207HL350	3500	4713	56000	15.7×10^6	0.807	0.090	160	0.012	0.013	WD5	
➤ W4713HM300	WX207HM300	3000	4713	56000	15.7×10^6	0.807	0.090	160	0.012	0.013	WD6	
➤ W4713HM350	WX207HM350	3500	4713	56000	15.7×10^6	0.807	0.090	160	0.012	0.013	WD6	
➤ W5334MK200	W4987MK200	2000	5334	46800	10.95×10^6	0.892	0.069	180	0.013	0.015	WD3	WD3 Weight 270 g
➤ W5334MK220	W4987MK220	2200	5334	46800	10.95×10^6	0.892	0.069	180	0.013	0.015	WD3	
WX210MK050	N/A	500	IN DEVELOPMENT					180	0.013	0.015	WD3	
WX210MK080	N/A	800	IN DEVELOPMENT					180	0.013	0.015	WD3	
TBA	N/A	TBA	FUTURE DEVELOPMENT					TBA	TBA	TBA	WD4 WD4	WD4 Weight 550 g
<p>For additional voltages, please contact the Chippenham Factory.</p> <p></p>												
												WD5 Weight 1200 g
												
												WD6 Weight 1500 g

Fast Recovery Diodes - Stud Types

WESTCODE


Fast Recovery Diodes are an essential complement to any switching device and are more often than not the limiting factor in the design and performance of modern power converters. To address the needs of our customers, we have developed an unparalleled range of Fast Recovery Diodes.

These diodes are available with blocking voltages up to 6 kV making them suitable for operation with DC link voltages up to 3.3 kV and average current ratings to 4 kA depending upon type. The devices utilise compression bonding along with both alloyed and floating silicon technologies to deliver robust devices that you can rely on in demanding applications.


This range has been re-classified as follows to aid appropriate device selection; **Fast Recovery, Soft Recovery, Extra Fast Recovery Diodes and HP Sonic-FRDs™.**

Fast Recovery Diodes: These parts are particularly suitable for use as anti-parallel diodes in Gate Turn-Off thyristors and Fast Thyristor inverters, and as series and freewheel diodes for choppers.

Type		V _{RRM}	I _{FAV}	I _{FSM}	I _t	Typ. Reverse Recovery Parameters				V _{T0}	r _T	T _{JM}	R _{thJC}	Fig. No.
Part No. ➤ New	Old Part No.	V	A	A	10 ms ½ sine V _R ≤ 60% V _{RRM} A ² s	T _{JM} (50% Chord)				@ T _{JM}	mΩ	°C	d.c. 180° sine K/W	
						t _{rr}	Q _{ra}	@ I _{FM}	@ -di _p /dt	V				
M0130RL200	SM20MCR094	2000	130	2240	25 × 10 ³	2.60	240	1000	150	1.290	1.540	125	0.300	W20
M0130RL250	SM25MCR094	2500	130	2240	25 × 10 ³	2.60	240	1000	150	1.290	1.540	125	0.300	W20
M0130SL200	SM20MCN094	2000	130	2240	25 × 10 ³	2.60	240	1000	150	1.290	1.540	125	0.300	W20
M0130SL250	SM25MCN094	2500	130	2240	25 × 10 ³	2.60	240	1000	150	1.290	1.540	125	0.300	W20
M0130RM200	N/A	2000	130	2240	25 × 10 ³	2.60	240	1000	150	1.290	1.540	125	0.300	W21
M0130RM250	N/A	2500	130	2240	25 × 10 ³	2.60	240	1000	150	1.290	1.540	125	0.300	W21
M0130SM200	N/A	2000	130	2240	25 × 10 ³	2.60	240	1000	150	1.290	1.540	125	0.300	W21
M0130SM250	N/A	2500	130	2240	25 × 10 ³	2.60	240	1000	150	1.290	1.540	125	0.300	W21
M0139RL120	N/A	1200	139	2450	30 × 10 ³	1.00	70	1000	100	1.240	1.280	125	0.300	W20
M0139RL180	N/A	1800	139	2450	30 × 10 ³	1.00	70	1000	100	1.240	1.280	125	0.300	W20
M0139SL120	N/A	1200	139	2450	30 × 10 ³	1.00	70	1000	100	1.240	1.280	125	0.300	W20
M0139SL180	N/A	1800	139	2450	30 × 10 ³	1.00	70	1000	100	1.240	1.280	125	0.300	W20
M0139RM120	SM12PHR100	1200	139	2450	30 × 10 ³	1.00	70	1000	100	1.240	1.280	125	0.300	W21
M0139RM180	SM18PHR100	1800	139	2450	30 × 10 ³	1.00	70	1000	100	1.240	1.280	125	0.300	W21
M0139SM120	SM12PHN100	1200	139	2450	30 × 10 ³	1.00	70	1000	100	1.240	1.280	125	0.300	W21
M0139SM180	SM18PHN100	1800	139	2450	30 × 10 ³	1.00	70	1000	100	1.240	1.280	125	0.300	W21
M0268RC200	SM20PHR134	2000	268	4250	90.3 × 10 ³	2.80	230	1000	150	1.210	1.200	125	0.130	W24
M0268RC250	SM25PHR134	2500	268	4250	90.3 × 10 ³	2.80	230	1000	150	1.210	1.200	125	0.130	W24
M0268SC200	SM20PHN134	2000	268	4250	90.3 × 10 ³	2.80	230	1000	150	1.210	1.200	125	0.130	W24
M0268SC250	SM25PHN134	2500	268	4250	90.3 × 10 ³	2.80	230	1000	150	1.210	1.200	125	0.130	W24
M0268RJ200	SM20PCR134	2000	268	4250	90.3 × 10 ³	2.80	230	1000	150	1.210	1.200	125	0.130	W22
M0268RJ250	SM25PCR134	2500	268	4250	90.3 × 10 ³	2.80	230	1000	150	1.210	1.200	125	0.130	W22
M0268SJ200	SM20PCN134	2000	268	4250	90.3 × 10 ³	2.80	230	1000	150	1.210	1.200	125	0.130	W22
M0268SJ250	SM25PCN134	2500	268	4250	90.3 × 10 ³	2.80	230	1000	150	1.210	1.200	125	0.130	W22
M0280RC200	SM20PHR144	2000	280	4500	100 × 10 ³	2.80	342	1000	150	1.280	0.920	125	0.130	W24
M0280RC250	SM25PHR144	2500	280	4500	100 × 10 ³	2.80	342	1000	150	1.280	0.920	125	0.130	W24
M0280SC200	SM20PHN144	2000	280	4500	100 × 10 ³	2.80	342	1000	150	1.280	0.920	125	0.130	W24
M0280SC250	SM25PHN144	2500	280	4500	100 × 10 ³	2.80	342	1000	150	1.280	0.920	125	0.130	W24
M0280RJ200	SM20PCR144	2000	280	4500	100 × 10 ³	2.80	342	1000	150	1.280	0.920	125	0.130	W22
M0280RJ250	SM25PCR144	2500	280	4500	100 × 10 ³	2.80	342	1000	150	1.280	0.920	125	0.130	W22
M0280SJ200	SM20PCN144	2000	280	4500	100 × 10 ³	2.80	342	1000	150	1.280	0.920	125	0.130	W22
M0280SJ250	SM25PCN144	2500	280	4500	100 × 10 ³	2.80	342	1000	150	1.280	0.920	125	0.130	W22
M0334RC120	SM12PHR174	1200	334	4500	101 × 10 ³	3.50	160	550	40	1.000	0.740	125	0.130	W24
M0334RC200	SM20PHR174	2000	334	4500	101 × 10 ³	3.50	160	550	40	1.000	0.740	125	0.130	W24
M0334SC120	SM12PHN174	1200	334	4500	101 × 10 ³	3.50	160	550	40	1.000	0.740	125	0.130	W24
M0334SC200	SM20PHN174	2000	334	4500	101 × 10 ³	3.50	160	550	40	1.000	0.740	125	0.130	W24
M0334RJ120	N/A	1200	334	4500	101 × 10 ³	3.50	160	550	40	1.000	0.740	125	0.130	W22
M0334RJ200	N/A	2000	334	4500	101 × 10 ³	3.50	160	550	40	1.000	0.740	125	0.130	W22
M0334SJ120	N/A	1200	334	4500	101 × 10 ³	3.50	160	550	40	1.000	0.740	125	0.130	W22
M0334SJ200	N/A	2000	334	4500	101 × 10 ³	3.50	160	550	40	1.000	0.740	125	0.130	W22
M0336RA120	SM12PHR170	1200	336	4500	101 × 10 ³	3.00	75	550	40	1.020	0.700	125	0.130	W23
M0336RA140	SM14PHR170	1400	336	4500	101 × 10 ³	3.00	75	550	40	1.020	0.700	125	0.130	W23
M0336SA120	SM12PHN170	1200	336	4500	101 × 10 ³	3.00	75	550	40	1.020	0.700	125	0.130	W23
M0336SA140	SM14PHN170	1400	336	4500	101 × 10 ³	3.00	75	550	40	1.020	0.700	125	0.130	W23



Outlines on pages O-01...O-24

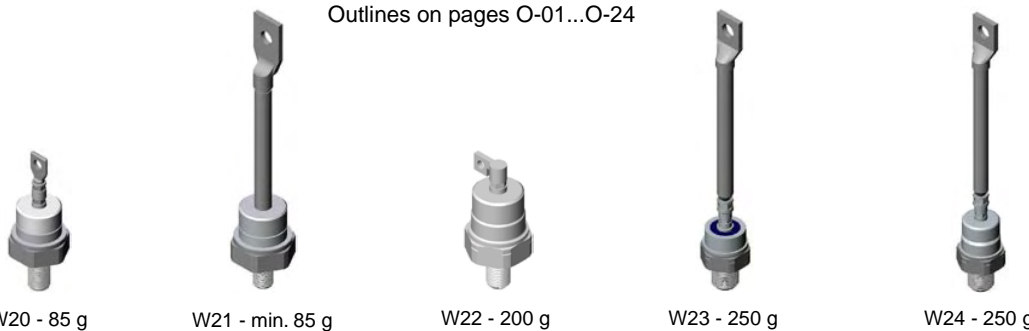

Fast Recovery Diodes - Capsule Types

WESTCODE

Fast Recovery Diodes are an essential partner to all fast switching devices. Our soft recovery diodes are available with a range of reverse recovery characteristics tailored to meet the requirements of both freewheeling and snubber applications. These devices are available with blocking voltages up to 6 kV and average currents up to 3770 A. 38 mm - 75 mm diameter silicon slices.

Outlines on pages O-01...O-24

Type		V _{RRM}	I _{FAV} T _K = 55°C	I _{FSM}	I ² t 10 ms ½ sine V _R ≤ 60% V _{RRM}	Typ. Reverse Recovery Parameters T _{JM} (50% Chord)				V _{TO} @T _{JM}	r _T @T _{JM}	T _{JM} °C	R _{thJK} d.c. 180° sine K/W	Fig. No.
Part No. New	Old Part No.					t _{rr} µs	Q _{rr} µC	@I _{FM} A	@-di _F /dt A/µs					
M0588LC400	SM40CXC344	4000	588	3955	78.2 × 10 ³	3.5	200	1000	60	2.320	1.770	150	0.033	W4
M0588LC450	SM45CXC344	4500	588	3955	78.2 × 10 ³	3.5	200	1000	60	2.320	1.770	150	0.033	W4
M0790YC200	SM20CXC294	2000	790	9000	405 × 10 ³	4.0	300	1000	60	1.272	0.584	150	0.050	W2
M0790YC250	SM25CXC294	2500	790	9000	405 × 10 ³	4.0	300	1000	60	1.272	0.584	150	0.050	W2
M0790YH200	N/A	2000	790	9000	405 × 10 ³	4.0	300	1000	60	1.272	0.584	150	0.050	W3
M0790YH250	N/A	2500	790	9000	405 × 10 ³	4.0	300	1000	60	1.272	0.584	150	0.050	W3
M0914LC200	SM20CXC804	2000	914	8500	361 × 10 ³	3.2	170	1000	60	1.768	0.653	150	0.032	W4
M0914LC250	SM25CXC804	2500	914	8500	361 × 10 ³	3.2	170	1000	60	1.768	0.653	150	0.032	W4
M1010NC400	SM40CXC604	4000	1010	9600	461 × 10 ³	3.2	700	1000	200	1.700	1.030	150	0.022	W5
M1010NC450	SM45CXC604	4500	1010	9600	461 × 10 ³	3.2	700	1000	200	1.700	1.030	150	0.022	W5
M1163NC400	SM40CXC614	4000	1163	10800	583 × 10 ³	6.4	700	1000	60	1.500	0.770	150	0.022	W5
M1163NC450	SM45CXC614	4500	1163	10800	583 × 10 ³	6.4	700	1000	60	1.500	0.770	150	0.022	W5
M1502NC200	SM20CXC334	2000	1502	17000	1.45 × 10 ⁶	3.5	220	1000	60	1.240	0.440	150	0.022	W5
M1502NC250	SM25CXC334	2500	1502	17000	1.45 × 10 ⁶	3.5	220	1000	60	1.240	0.440	150	0.022	W5
M1502ND200	N/A	2000	1502	17000	1.45 × 10 ⁶	3.5	220	1000	60	1.240	0.440	150	0.022	W37
M1502ND250	N/A	2500	1502	17000	1.45 × 10 ⁶	3.5	220	1000	60	1.240	0.440	150	0.022	W37
M1583VC400	SM40CXC864	4000	1583	24800	3.08 × 10 ⁶	5.0	1100	1000	200	1.693	0.525	150	0.016	W6
M1583VC450	SM45CXC864	4500	1583	24800	3.08 × 10 ⁶	5.0	1100	1000	200	1.693	0.525	150	0.016	W6
M1583VF400	SM40FXC864	4000	1583	24800	3.08 × 10 ⁶	5.0	1100	1000	200	1.693	0.525	150	0.016	W43
M1583VF450	SM45FXC864	4500	1583	24800	3.08 × 10 ⁶	5.0	1100	1000	200	1.693	0.525	150	0.016	W43
M1609NC200	SM20CXC915	2000	1609	17500	1.53 × 10 ⁶	3.2	600	1000	200	1.310	0.345	150	0.022	W5
M1609NC260	SM26CXC915	2600	1609	17500	1.53 × 10 ⁶	3.2	600	1000	200	1.310	0.345	150	0.022	W5
M2273VC300	N/A	3000	2273	28000	3.92 × 10 ⁶	8.5	1300	1000	60	1.239	0.244	150	0.016	W6
M2273VC360	N/A	3600	2273	28000	3.92 × 10 ⁶	8.5	1300	1000	60	1.239	0.244	150	0.016	W6
M2273VF300	N/A	3000	2273	28000	3.92 × 10 ⁶	8.5	1300	1000	60	1.239	0.244	150	0.016	W43
M2273VF360	N/A	3600	2273	28000	3.92 × 10 ⁶	8.5	1300	1000	60	1.239	0.244	150	0.016	W43
M2408NC020	SM02CXC504	200	2408	24000	2.88 × 10 ⁶	1.9	160	1000	200	1.065	0.122	150	0.022	W5
M2408NC060	SM06CXC504	600	2408	24000	2.88 × 10 ⁶	1.9	160	1000	200	1.065	0.122	150	0.022	W5
M2408ND020	N/A	200	2408	24000	2.88 × 10 ⁶	1.9	160	1000	200	1.065	0.122	150	0.022	W37
M2408ND060	N/A	600	2408	24000	2.88 × 10 ⁶	1.9	160	1000	200	1.065	0.122	150	0.022	W37
M2639ZC360	SM36CXC954	3600	2639	27520	3.79 × 10 ⁶	8.5	1200	1000	60	1.380	0.290	150	0.011	W7
M2639ZC420	SM42CXC954	4200	2639	27520	3.79 × 10 ⁶	8.5	1200	1000	60	1.380	0.290	150	0.011	W7
M2639ZC450	SM45CXC954	4500	2639	27520	3.79 × 10 ⁶	8.5	1200	1000	60	1.380	0.290	150	0.011	W7
M2639ZD360	SM36DXC954	3600	2639	27520	3.79 × 10 ⁶	8.5	1200	1000	60	1.380	0.290	150	0.011	W42
M2639ZD420	SM42DXC954	4200	2639	27520	3.79 × 10 ⁶	8.5	1200	1000	60	1.380	0.290	150	0.011	W42
M2639ZD450	SM45DXC954	4500	2639	27520	3.79 × 10 ⁶	8.5	1200	1000	60	1.380	0.290	150	0.011	W42
M2698ZC250	SM25CXC964	2500	2698	27800	3.86 × 10 ⁶	6.2	620	1000	60	1.000	0.330	150	0.011	W7
M2698ZC280	SM28CXC964	2800	2698	27800	3.86 × 10 ⁶	6.2	620	1000	60	1.000	0.330	150	0.011	W7
M2698ZC350	SM35CXC964	3500	2698	27800	3.86 × 10 ⁶	6.2	620	1000	60	1.000	0.330	150	0.011	W7
M2698ZD250	SM25DXC964	2500	2698	27800	3.86 × 10 ⁶	6.2	620	1000	60	1.000	0.330	150	0.011	W42
M2698ZD280	SM28DXC964	2800	2698	27800	3.86 × 10 ⁶	6.2	620	1000	60	1.000	0.330	150	0.011	W42
M2698ZD350	SM35DXC964	3500	2698	27800	3.86 × 10 ⁶	6.2	620	1000	60	1.000	0.330	150	0.011	W42
M2837VC180	SM18CXC968	1800	2837	31800	5.1 × 10 ⁶	7.0	1100	1000	60	0.900	0.170	150	0.016	W6
M2837VC250	SM25CXC968	2500	2837	31800	5.1 × 10 ⁶	7.0	1100	1000	60	0.900	0.170	150	0.016	W6
M2837VF180	SM18FXC968	1800	2837	31800	5.1 × 10 ⁶	7.0	1100	1000	60	0.900	0.170	150	0.016	W43
M2837VF250	SM25FXC968	2500	2837	31800	5.1 × 10 ⁶	7.0	1100	1000	60	0.900	0.170	150	0.016	W43
M3770ZC200	SM20CXC974	2000	3770	44000	9.68 × 10 ⁶	7.0	1100	1000	60	1.190	1.180	150	0.011	W7
M3770ZC240	SM24CXC974	2400	3770	44000	9.68 × 10 ⁶	7.0	1100	1000	60	1.190	1.180	150	0.011	W7
M3770ZC300	SM30CXC974	3000	3770	44000	9.68 × 10 ⁶	7.0	1100	1000	60	1.190	1.180	150	0.011	W7
M3770ZD200	SM20DXC974	2000	3770	44000	9.68 × 10 ⁶	7.0	1100	1000	60	1.190	1.180	150	0.011	W42
M3770ZD240	SM24DXC974	2400	3770	44000	9.68 × 10 ⁶	7.0	1100	1000	60	1.190	1.180	150	0.011	W42
M3770ZD300	SM30DXC974	3000	3770	44000	9.68 × 10 ⁶	7.0	1100	1000	60	1.190	1.180	150	0.011	W42



Outlines on pages O-01...O-24

Soft Recovery Diodes - Capsule Types

WESTCODE

These parts are particularly suitable where soft recovery is required, such as RCD snubbers, voltage clamping and snubberless applications.

Type		V_{RRM}	I_{FAV}	I_{FSM}	I_{PT}	Typ. Reverse Recovery Parameters				V_{TO}	r_T	T_{JM}	R_{thJK}	Fig. No.
Part No. New	Old Part No.	V	A	A	A ² s	T_{JM} (50% Chord)				@ T_{JM}		d.c. 180° sine K/W		
			$T_K = 55^\circ C$	10 ms ½ sine $V_R \leq 60\% V_{RRM}$		t_{rr}	Q_{rr}	@ I_{FM}	@ -di/dt	V	mΩ	°C		
M0225YH300	SM30HXC084	3000	225	2000	20×10^3	3.00	100	550	40	1.900	4.160	150	0.100	W3
M0225YH360	SM36HXC084	3600	225	2000	20×10^3	3.00	100	550	40	1.900	4.160	150	0.100	W3
M0225YH450	SM45HXC084	4500	225	2000	20×10^3	3.00	100	550	40	1.900	4.160	150	0.100	W3
M0310YH300	SM30HXC103	3000	310	4590	105×10^3	2.80	210	1000	100	1.490	2.060	150	0.100	W3
M0310YH350	SM35HXC103	3500	310	4590	105×10^3	2.80	210	1000	100	1.490	2.060	150	0.100	W3
M0347WC160	SM16CXC134	1600	347	4250	90.3×10^3	2.80	60	550	40	1.210	1.200	125	0.090	W1
M0347WC200	SM20CXC134	2000	347	4250	90.3×10^3	2.80	60	550	40	1.210	1.200	125	0.090	W1
M0347WC250	SM25CXC134	2500	347	4250	90.3×10^3	2.80	60	550	40	1.210	1.200	125	0.090	W1
M0358WC120	SM12CXC100	1200	358	2450	30×10^3	1.40	65	1000	100	1.460	0.800	125	0.090	W1
M0358WC180	SM18CXC100	1800	358	2450	30×10^3	1.40	65	1000	100	1.460	0.800	125	0.090	W1
M0367WC140	SM14CXC144	1400	367	4500	101×10^3	3.30	120	550	40	1.280	0.920	125	0.090	W1
M0367WC220	SM22CXC144	2200	367	4500	101×10^3	3.30	120	550	40	1.280	0.920	125	0.090	W1
M0367WC280	SM28CXC144	2800	367	4500	101×10^3	3.30	120	550	40	1.280	0.920	125	0.090	W1
M0371YH350	SM35HXC164	3500	371	4900	120×10^3	3.20	625	1000	200	1.050	1.650	150	0.100	W3
M0371YH450	SM45HXC164	4500	371	4900	120×10^3	3.20	625	1000	200	1.050	1.650	150	0.100	W3
M0433WC120	SM12CXC174	1200	433	4500	101×10^3	3.50	120	550	40	1.000	0.740	125	0.090	W1
M0433WC160	SM16CXC174	1600	433	4500	101×10^3	3.50	120	550	40	1.000	0.740	125	0.090	W1
M0433WC200	SM20CXC174	2000	433	4500	101×10^3	3.50	120	550	40	1.000	0.740	125	0.090	W1
M0437WC080	SM08CXC170	800	437	4500	101×10^3	3.00	75	550	40	1.020	0.700	125	0.090	W1
M0437WC140	SM14CXC170	1400	437	4500	101×10^3	3.00	75	550	40	1.020	0.700	125	0.090	W1
M0451YC120	SM12CXC176	1200	451	4500	101×10^3	2.80	120	550	40	1.000	0.740	125	0.085	W2
M0451YC160	SM16CXC176	1600	451	4500	101×10^3	2.80	120	550	40	1.000	0.740	125	0.085	W2
M0451YC200	SM20CXC176	2000	451	4500	101×10^3	2.80	120	550	40	1.000	0.740	125	0.085	W2
M0451YH120	N/A	1200	451	4500	101×10^3	2.80	120	550	40	1.000	0.740	125	0.085	W3
M0451YH160	N/A	1600	451	4500	101×10^3	2.80	120	550	40	1.000	0.740	125	0.085	W3
M0451YH200	N/A	2000	451	4500	101×10^3	2.80	120	550	40	1.000	0.740	125	0.085	W3
M0659LC400	SM40CXC364	4000	659	7620	290×10^3	4.20	270	1000	60	1.710	0.925	125	0.033	W4
M0659LC450	SM45CXC364	4500	659	7620	290×10^3	4.20	270	1000	60	1.710	0.925	125	0.033	W4
M0710LC560	SM56CXC274	5600	710	8400	353×10^3	4.00	1000	1000	200	1.450	0.875	125	0.033	W4
M0710LC600	SM60CXC274	6000	710	8400	353×10^3	4.00	1000	1000	200	1.450	0.875	125	0.033	W4
M0736LC400	SM40CXC374	4000	736	9000	405×10^3	5.20	450	1000	60	1.606	0.700	125	0.033	W4
M0736LC450	SM45CXC374	4500	736	9000	405×10^3	5.20	450	1000	60	1.606	0.700	125	0.033	W4
M0759YC040	SM04CXC190	400	759	9500	450×10^3	2.00	45	550	50	1.130	0.380	125	0.050	W2
M0759YC120	SM12CXC190	1200	759	9500	450×10^3	2.00	45	550	50	1.130	0.380	125	0.050	W2
M0759YC160	SM16CXC190	1600	759	9500	450×10^3	2.00	45	550	50	1.130	0.380	125	0.050	W2
M0759YH040	N/A	400	759	9500	450×10^3	2.00	45	550	50	1.130	0.380	125	0.050	W3
M0759YH120	N/A	1200	759	9500	450×10^3	2.00	45	550	50	1.130	0.380	125	0.050	W3
M0759YH160	N/A	1600	759	9500	450×10^3	2.00	45	550	50	1.130	0.380	125	0.050	W3
M0859LC140	SM14CXC220	1400	859	10000	500×10^3	3.00	110	800	50	1.170	0.320	125	0.044	W4
M0859LC160	SM16CXC220	1600	859	10000	500×10^3	3.00	110	800	50	1.170	0.320	125	0.044	W4
M0863LC260	SM26CXC474	2600	863	10000	500×10^3	4.80	370	1000	60	1.308	0.538	125	0.033	W4
M0863LC300	SM30CXC474	3000	863	10000	500×10^3	4.80	370	1000	60	1.308	0.538	125	0.033	W4
M0863LC360	SM36CXC474	3600	863	10000	500×10^3	4.80	370	1000	60	1.308	0.538	125	0.033	W4
M0872LC140	SM14CXC224	1400	872	10000	500×10^3	4.00	280	1000	60	1.090	0.340	125	0.044	W4
M0872LC180	SM18CXC224	1800	872	10000	500×10^3	4.00	280	1000	60	1.090	0.340	125	0.044	W4
M0872LC210	SM21CXC224	2100	872	10000	500×10^3	4.00	280	1000	60	1.090	0.340	125	0.044	W4



W1 Weight 70 g



W2 Weight 80 g



W3 Weight 140 g



W4 Weight 340 g

Outlines on pages O-01...O-24

Type		V_{RRM}	I_{FAV}	I_{FSM}	I^2t	Typ. Reverse Recovery Parameters T_{JM} (50% Chord)				V_{TO}	r_T	T_{JM}	R_{thJK}	Fig. No.
Part No. New	Old Part No.	V	A	A	A ² s	t_{rr}	Q_{ra}	@ I_{FM}	@ $-di_F/dt$	@ T_{JM}		d.c. 180° sine		
		$T_K = 55^\circ C$		10 ms 1/2 sine $V_R \leq 60\% V_{RRM}$		μs	μC	A	A/ μs	V	m Ω	°C	K/W	
M0955LC200	SM20CXC524	2000	955	11700	684×10^3	3.40	175	1000	60	1.440	0.330	125	0.033	W4
M0955LC250	SM25CXC524	2500	955	11700	684×10^3	3.40	175	1000	60	1.440	0.330	125	0.033	W4
M1022LC120	SM12CXC724	1200	1022	14000	980×10^3	3.00	140	1000	60	1.240	0.330	125	0.033	W4
M1022LC160	SM16CXC724	1600	1022	14000	980×10^3	3.00	140	1000	60	1.240	0.330	125	0.033	W4
M1022LC200	SM20CXC724	2000	1022	14000	980×10^3	3.00	140	1000	60	1.240	0.330	125	0.033	W4
M1080LC100	SM10CXC314	1000	1080	13500	910×10^3	1.90	50	1000	60	1.125	0.314	125	0.033	W4
M1080LC120	SM12CXC314	1200	1080	13500	910×10^3	1.90	50	1000	60	1.125	0.314	125	0.033	W4
M1102NC500	SM50CXC574	5000	1102	13000	845×10^3	5.50	1500	1000	200	1.360	0.557	125	0.022	W5
M1102NC600	SM60CXC574	6000	1102	13000	845×10^3	5.50	1500	1000	200	1.360	0.557	125	0.022	W5
M1104NC400	SM40CXC624	4000	1104	13000	845×10^3	6.00	800	1000	60	1.370	0.553	125	0.022	W5
M1104NC450	SM45CXC624	4500	1104	13000	845×10^3	6.00	800	1000	60	1.370	0.553	125	0.022	W5
M1242NC260	SM26CXC824	2600	1242	16400	1.34×10^6	6.00	600	1000	60	1.270	0.420	125	0.022	W5
M1242NC360	SM36CXC824	3600	1242	16400	1.34×10^6	6.00	600	1000	60	1.270	0.420	125	0.022	W5
M1242ND260	SM26CXC824	2600	1242	16400	1.34×10^6	6.00	600	1000	60	1.270	0.420	125	0.022	W37
M1242ND360	SM36CXC824	3600	1242	16400	1.34×10^6	6.00	600	1000	60	1.270	0.420	125	0.022	W37
M1494NC160	SM16CXC924	1600	1494	19600	1.92×10^6	3.90	275	1000	60	1.150	0.265	125	0.022	W5
M1494NC250	SM25CXC924	2500	1494	19600	1.92×10^6	3.90	275	1000	60	1.150	0.265	125	0.022	W5
M1565VC400	SM40CXC394	4000	1565	19700	1.94×10^6	5.00	1550	1000	200	1.090	0.360	125	0.018	W6
M1565VC450	SM45CXC394	4500	1565	19700	1.94×10^6	5.00	1550	1000	200	1.090	0.360	125	0.018	W6
M1565VF400	SM40FXC394	4000	1565	19700	1.94×10^6	5.00	1550	1000	200	1.090	0.360	125	0.018	W43
M1565VF450	SM45FXC394	4500	1565	19700	1.94×10^6	5.00	1550	1000	200	1.090	0.360	125	0.018	W43
M1858NC120	SM12CXC514	1200	1858	25000	3.25×10^6	2.50	50	1000	60	1.127	0.127	125	0.022	W5
M1858NC160	SM16CXC514	1600	1858	25000	3.25×10^6	2.50	50	1000	60	1.127	0.127	125	0.022	W5
M2322ZC300	SM30CXC384	3000	2322	23000	2.64×10^6	6.50	1450	1000	150	1.670	0.186	125	0.011	W7
M2322ZC400	SM40CXC384	4000	2322	23000	2.64×10^6	6.50	1450	1000	150	1.670	0.186	125	0.011	W7
M2322ZD300	SM30DXC384	3000	2322	23000	2.64×10^6	6.50	1450	1000	150	1.670	0.186	125	0.011	W42
M2322ZD400	SM40DXC384	4000	2322	23000	2.64×10^6	6.50	1450	1000	150	1.670	0.186	125	0.011	W42
M2413VC200	MX070VC200	2000	2413	32000	5.12×10^6	5.00	1275	1000	200	1.090	0.121	125	0.016	W6
M2413VC250	MX070VC250	2500	2413	32000	5.12×10^6	5.00	1275	1000	200	1.090	0.121	125	0.016	W6
M2413VF200	N/A	2000	2413	32000	5.12×10^6	5.00	1275	1000	200	1.090	0.121	125	0.016	W43
M2413VF250	N/A	2500	2413	32000	5.12×10^6	5.00	1275	1000	200	1.090	0.121	125	0.016	W43



W4 Weight 340 g



W5 Weight 510 g




W6 Weight 1000 g



W7 Weight 1700 g



W37 Weight 510 g



W42 Weight 1200 g



W43 Weight 800 g

Outlines on pages O-01...O-24

Extra Fast Recovery Diodes - Capsule Types

WESTCODE

Featuring a combination of the latest developments in lifetime engineering technologies. These products are designed to offer the lowest practical values of reverse recovery current whilst offering wide safe operating area and high di/dt capability required by modern switching components such as IGBT's and GCT's as well as pulsed power applications. Next generation parts currently in development will be released shortly.

Type		V_{RRM}	I_{FAV}	I_{FSM}	I^2t	Typ. Reverse Recovery Parameters					V_{TO}	r_T	T_{JM}	R_{thJK}	Fig. No.
Part No. ➤ New	Old Part No.	V	A	A	10 ms ½ sine $V_R \leq 60\% V_{RRM}$ A ² s	T_{JM} (50% Chord)					@ T_{JM}		°C	d.c. 180° sine K/W	
						I_{rm}	t_{rr}	Q_{ra}	@ I_{FM}	@ -di _r /dt	V	mΩ			
F0240YC250	N/A	2500	240	3100	48.1×10^3	40	2.0	40	550	40	2.271	2.853	150	0.100	W3
F0240YC300	N/A	3000	240	3100	48.1×10^3	40	2.0	40	550	40	2.271	2.853	150	0.100	W3
F0240YH250	N/A	2500	240	3100	48.1×10^3	40	2.0	40	550	40	2.271	2.853	150	0.100	W2
F0240YH300	N/A	3000	240	3100	48.1×10^3	40	2.0	40	550	40	2.271	2.853	150	0.100	W2
F0300WC140	F0258WC140	1400	240	2700	36.5×10^3	530	0.3	75	300	2000	1.760	2.210	125	0.095	W1
F0300WC180	F0258WC180	1800	240	2700	36.5×10^3	530	0.3	75	300	2000	1.760	2.210	125	0.095	W1
F0800LC140	F0400LC140	1400	775	7630	291×10^3	380	1.1	200	800	1000	1.494	0.692	125	0.032	W4
F0800LC180	F0400LC180	1800	775	7630	291×10^3	380	1.1	200	800	1000	1.494	0.692	125	0.032	W4
F0900VC450	FX055VC450	4500	816	10450	546×10^3	3000	1.4	2000	900	2000	2.024	1.274	115	0.016	W6
F0900VC520	FX055VC520	5200	816	10450	546×10^3	3000	1.4	2000	900	2000	2.024	1.274	115	0.016	W6
F0900VF450	FX055VF450	4500	816	10450	546×10^3	3000	1.4	2000	900	2000	2.024	1.274	115	0.016	W43
F0900VF520	FX055VF520	5200	816	10450	546×10^3	3000	1.4	2000	900	2000	2.024	1.274	115	0.016	W43
F1000LC080	F0500LC080	800	826	8500	361×10^3	320	1.6	250	1000	800	1.530	0.547	125	0.032	W4
F1000LC120	F0500LC120	1200	826	8500	361×10^3	320	1.6	250	1000	800	1.530	0.547	125	0.032	W4
➤ F1300NC45P	N/A	4500	1346	20800	2.16×10^6	470	4.3	1010	1000	200	1.569	0.318	140	0.024	W5
➤ F1300NC50P	N/A	5000	1346	20800	2.16×10^6	470	4.3	1010	1000	200	1.569	0.318	140	0.024	W5
➤ F1300NC55P	N/A	5500	1346	20800	2.16×10^6	470	4.3	1010	1000	200	1.569	0.318	140	0.024	W5
F1400NC140	FX004NC140	1400	1093	17250	1.49×10^6	800	1.5	600	1400	1000	1.618	0.388	125	0.024	W5
F1400NC180	FX004NC180	1800	1093	17250	1.49×10^6	800	1.5	600	1400	1000	1.618	0.388	125	0.024	W5
F1500NC200	FX056NC200	2000	1054	13750	950×10^3	1065	1.5	800	1500	2000	1.372	0.535	125	0.024	W5
F1500NC250	FX056NC250	2500	1054	13750	950×10^3	1065	1.5	800	1500	2000	1.372	0.535	125	0.024	W5
F1600NC080	FX021NC080	800	1326	20000	2.0×10^6	480	2.3	550	1600	800	1.320	0.268	125	0.024	W5
F1600NC120	FX021NC120	1200	1326	20000	2.0×10^6	480	2.3	550	1600	800	1.320	0.268	125	0.024	W5



W1 Weight 70 g



W2 Weight 80 g



W3 Weight 140 g



W4 Weight 340 g



W5 Weight 510 g



W6 Weight 1000 g



W43 Weight 800 g

Outlines on pages O-01...O-24

HP Sonic-FRDs - Capsule Types

WESTCODE

Introducing a world-leading class of ultra fast and ultra soft recovery diode available from 1.7 kV to 4.5 kV in current ratings from 300 A to 2500 A. These diodes incorporate a unique manufacturing process and lifetime control to offer a class leading trade-off between conduction and switching losses. The wide safe operating area (SOA) makes them ideal as freewheeling diodes for snubberless IGBT and IGCT applications. In fact, any application which requires a fast, low loss diode. For example, traction, medium voltage drives, induction heating and pulsed power applications.


Type Part No. ➤ New	V_{RRM} V	I_{FAV} $T_K = 55^\circ C$ A	I_{FSM} 10 ms ½ sine $V_R \leq 60\% V_{RRM}$ A	I^2t 34.6 × 10 ³ A ² s	Typ. Reverse Recovery Parameters T_{JM} (50% Chord)					V_{TO} V	r_T @ T_{JM} mΩ	T_{JM} °C	R_{thJK} 180° Sine K/W	Fig. No.
					I_{rm} A	t_{rr} μs	Q_{rra} μC	@ I_{FM} A	@ -di/dt A/μs					
E0300YH400	4000	277	2630	34.6 × 10 ³	605	0.75	245	300	2000	2.170	3.800	150	0.073	W3
E0300YH450	4500	277	2630	34.6 × 10 ³	605	0.75	245	300	2000	2.170	3.800	150	0.073	W3
E0400YH200	2000	348	3550	63.0 × 10 ³	570	0.75	175	400	1500	1.768	2.286	150	0.073	W3
E0400YH250	2500	348	3550	63.0 × 10 ³	570	0.75	175	400	1500	1.768	2.286	150	0.073	W3
E0900NC400	4000	969	15270	1.17 × 10 ⁶	1340	2.20	1440	900	2000	2.140	1.150	150	0.020	W5
E0900NC450	4500	969	15270	1.17 × 10 ⁶	1340	2.20	1440	900	2000	2.140	1.150	150	0.020	W5
➤ E0900NH400	4000	969	15270	1.17 × 10 ⁶	1340	2.20	1440	900	2000	2.140	1.150	150	0.020	W47
➤ E0900NH450	4500	969	15270	1.17 × 10 ⁶	1340	2.20	1440	900	2000	2.140	1.150	150	0.020	W47
E1500NC200	2000	1557	15180	1.15 × 10 ⁶	1450	2.30	1550	1500	2000	1.670	0.358	150	0.020	W5
E1500NC250	2500	1557	15180	1.15 × 10 ⁶	1450	2.30	1550	1500	2000	1.670	0.358	150	0.020	W5
➤ E1500NH200	2000	1557	15180	1.15 × 10 ⁶	1450	2.30	1550	1500	2000	1.670	0.358	150	0.020	W47
➤ E1500NH250	2500	1557	15180	1.15 × 10 ⁶	1450	2.30	1550	1500	2000	1.670	0.358	150	0.020	W47
E1500VF400	4000	1918	23600	2.78 × 10 ⁶	1550	2.50	1940	1500	2000	2.491	0.277	150	0.013	W43
E1500VF450	4500	1918	23600	2.78 × 10 ⁶	1550	2.50	1940	1500	2000	2.491	0.277	150	0.013	W43
➤ E1500NC36P	3600	1280	17050	1.45 × 10 ⁶	1425	2.80	1880	1000	1000	1.417	0.656	140	0.019	W5
➤ E1500NC42P	4200	1280	17050	1.45 × 10 ⁶	1425	2.80	1880	1000	1000	1.417	0.656	140	0.019	W5
➤ E1500NC48P	4800	1280	17050	1.45 × 10 ⁶	1425	2.80	1880	1000	1000	1.417	0.656	140	0.019	W5
➤ E1500NH36P	3600	1280	17050	1.45 × 10 ⁶	1425	2.80	1880	1000	1000	1.417	0.656	140	0.019	W47
➤ E1500NH42P	4200	1280	17050	1.45 × 10 ⁶	1425	2.80	1880	1000	1000	1.417	0.656	140	0.019	W47
➤ E1500NH48P	4800	1280	17050	1.45 × 10 ⁶	1425	2.80	1880	1000	1000	1.417	0.656	140	0.019	W47
E2000NC140	1400	1568	15000	1.13 × 10 ⁶	1870	1.00	935	2000	4000	1.770	0.350	150	0.020	W5
E2000NC170	1700	1568	15000	1.13 × 10 ⁶	1870	1.00	935	2000	4000	1.770	0.350	150	0.020	W5
➤ E2000NH140	1400	1568	15000	1.13 × 10 ⁶	1870	1.00	935	2000	4000	1.770	0.350	150	0.020	W47
➤ E2000NH170	1700	1568	15000	1.13 × 10 ⁶	1870	1.00	935	2000	4000	1.770	0.350	150	0.020	W47
E2400TC400	4000	2227	25600	3.29 × 10 ⁶	2400	1.12	1330	2400	4000	2.039	0.598	150	0.008	W28
E2400TC450	4500	2227	25600	3.29 × 10 ⁶	2400	1.12	1330	2400	4000	2.039	0.598	150	0.008	W28
E2500VF200	2000	2516	28600	4.10 × 10 ⁶	1750	1.40	1350	2500	3000	1.628	0.205	150	0.013	W43
E2500VF250	2500	2516	28600	4.10 × 10 ⁶	1750	1.40	1350	2500	3000	1.628	0.205	150	0.013	W43




W3 Weight 140 g




W5 Weight 510 g

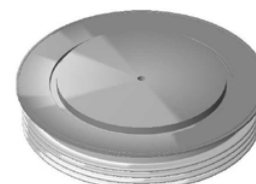

W28 Weight 1230 g



W43 Weight 800 g




W47 Weight 250 g

Outlines on pages
O-01...O-24

Type		V_{DRM} V_{RRM}	I_{TAV} $T_C = 55^\circ C$	I_{TSM}	I^2t 10 ms 1/2 sine $V_R \leq 60\% V_{RRM}$	V_{TO}	r_T @ T_{JM}	T_{JM}	R_{thJC}		Fig. No.
Part No.	Old Part No.	V	A	A	A ² s	V	mΩ	°C	d.c. 180° sine K/W	120° Rect. K/W	
➤ New											
N0131SH120	N086PH12	1200	131	1700	14.5 x 10 ³	1.570	2.290	125	0.230	0.280	W17
N0131SH160	N086PH16	1600	131	1700	14.5 x 10 ³	1.570	2.290	125	0.230	0.280	W17
N0131SJ120	N086RH12	1200	131	1700	14.5 x 10 ³	1.570	2.290	125	0.230	0.280	W16
N0131SJ160	N086RH16	1600	131	1700	14.5 x 10 ³	1.570	2.290	125	0.230	0.280	W16
N0180SH120	N105PH12	1200	180	2450	30 x 10 ³	0.900	1.790	125	0.230	0.280	W17
N0180SH160	N105PH16	1600	180	2450	30 x 10 ³	0.900	1.790	125	0.230	0.280	W17
N0180SJ120	N105RH12	1200	180	2450	30 x 10 ³	0.900	1.790	125	0.230	0.280	W16
N0180SJ160	N105RH16	1600	180	2450	30 x 10 ³	0.900	1.790	125	0.230	0.280	W16
N0290SC120	N170PH12	1200	290	4200	88.2 x 10 ³	1.080	1.300	125	0.120	0.140	W18
N0290SC160	N170PH16	1600	290	4200	88.2 x 10 ³	1.080	1.300	125	0.120	0.140	W18
N0290SD120	N/A	1200	290	4200	88.2 x 10 ³	1.080	1.300	125	0.120	0.140	W19
N0290SD160	N/A	1600	290	4200	88.2 x 10 ³	1.080	1.300	125	0.120	0.140	W19
N0290SG120	N/A	1200	290	4200	88.2 x 10 ³	1.080	1.300	125	0.120	0.140	W25
N0290SG160	N/A	1600	290	4200	88.2 x 10 ³	1.080	1.300	125	0.120	0.140	W25
N0335SC120	N195PH12	1200	335	4650	108 x 10 ³	0.920	0.990	125	0.120	0.140	W18
N0335SC160	N195PH16	1600	335	4650	108 x 10 ³	0.920	0.990	125	0.120	0.140	W18
N0335SD120	N/A	1200	335	4650	108 x 10 ³	0.920	0.990	125	0.120	0.140	W19
N0335SD160	N/A	1600	335	4650	108 x 10 ³	0.920	0.990	125	0.120	0.140	W19
N0335SG120	N/A	1200	335	4650	108 x 10 ³	0.920	0.990	125	0.120	0.140	W25
N0335SG160	N/A	1600	335	4650	108 x 10 ³	0.920	0.990	125	0.120	0.140	W25
N0416SC020	N275PH02	200	416	6000	180 x 10 ³	0.850	0.535	125	0.120	0.140	W18
N0416SC080	N275PH08	800	416	6000	180 x 10 ³	0.850	0.535	125	0.120	0.140	W18
N0416SD020	N/A	200	416	6000	180 x 10 ³	0.850	0.535	125	0.120	0.140	W19
N0416SD080	N/A	800	416	6000	180 x 10 ³	0.850	0.535	125	0.120	0.140	W19
N0416SG020	N/A	200	416	6000	180 x 10 ³	0.850	0.535	125	0.120	0.140	W25
N0416SG080	N/A	800	416	6000	180 x 10 ³	0.850	0.535	125	0.120	0.140	W25



Outlines on pages O-01...O-24

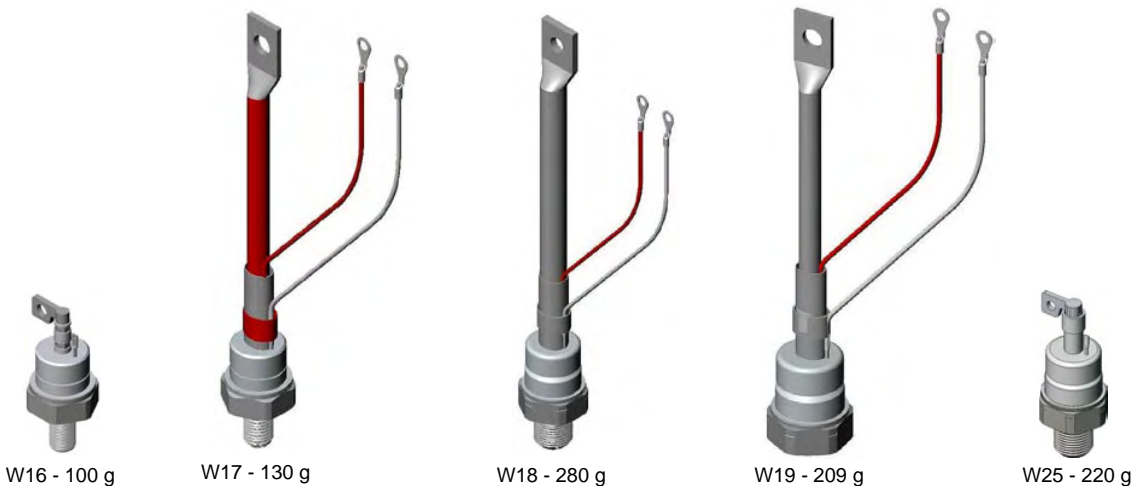

Phase Control Thyristors - Capsule Types

WESTCODE

We provide one of the most comprehensive ranges of standard phase control thyristors in the industry.

Device with voltage ranges from 600 V to 4500 V are available, making them suitable for applications with line voltages from 230 V to over 1000 V (higher voltage applications are now served by our range of Medium Voltage Thyristors). Westcode is a leading supplier of phase control products into demanding markets such as industrial DC drives, induction melting, marine/rail propulsion systems, wind power converters, electrochemical power supplies and soft starters. These devices are optimised to give low conduction losses and are primarily intended for applications with line frequencies up to 400 Hz.

Outlines on pages O-01...O-24

Type Part No. New	Old Part No.	V_{DRM} V_{RRM} V	I_{TAV} $T_K = 55^\circ C$ A	I_{TSM} A	I^2t 10 ms ½ sine $V_R \leq 60\% V_{RRM}$ A ² s	V_{T0} r_T @ T_{JM} V mΩ		T_{JM} °C	R_{thJK} 180° Sine K/W 120° Rect. K/W		Fig. No.
						V	mΩ		K/W	K/W	
N0194WC120	N086CH12	1200	194	1700	14.5 x 10 ³	1.570	2.290	125	0.135	0.190	W8
N0194WC160	N086CH16	1600	194	1700	14.5 x 10 ³	1.570	2.290	125	0.135	0.190	W8
N0255WC120	N105CH12	1200	255	2450	30.0 x 10 ³	0.900	1.790	125	0.135	0.190	W8
N0255WC160	N105CH16	1600	255	2450	30.0 x 10 ³	0.900	1.790	125	0.135	0.190	W8
N0339WC120	N170CH12	1200	339	4200	88.2 x 10 ³	1.080	1.300	125	0.095	0.110	W8
N0339WC160	N170CH16	1600	339	4200	88.2 x 10 ³	1.080	1.300	125	0.095	0.110	W8
N0392WC120	N195CH12	1200	392	4650	108 x 10 ³	0.920	0.990	125	0.095	0.110	W8
N0392WC160	N195CH16	1600	392	4650	108 x 10 ³	0.920	0.990	125	0.095	0.110	W8
N0491WC020	N275CH02	200	491	6000	180 x 10 ³	0.850	0.535	125	0.095	0.110	W8
N0491WC080	N275CH08	800	491	6000	180 x 10 ³	0.850	0.535	125	0.095	0.110	W8
N0606YS200	N282SH20	2000	606	7100	252 x 10 ³	1.103	0.804	125	0.050	0.058	W9
N0606YS250	N/A	2500	606	7100	252 x 10 ³	1.103	0.804	125	0.050	0.058	W9
N0616LC400	N255CH40	4000	616	5250	138 x 10 ³	1.220	1.530	125	0.032	0.040	W10
N0616LC450	N255CH45	4500	616	5250	138 x 10 ³	1.220	1.530	125	0.032	0.040	W10
N0634LC380	N257CH38	3800	634	7000	245 x 10 ³	1.100	1.500	125	0.032	0.040	W10
N0634LC420	N257CH42	4200	634	7000	245 x 10 ³	1.100	1.500	125	0.032	0.040	W10
N0646LC300	N260CH30	3000	646	5700	162 x 10 ³	1.210	1.360	125	0.032	0.040	W10
N0646LC360	N260CH36	3600	646	5700	162 x 10 ³	1.210	1.360	125	0.032	0.040	W10
N0676YS120	N281SH12	1200	676	7500	281 x 10 ³	1.090	0.587	125	0.050	0.058	W9
N0676YS180	N281SH18	1800	676	7500	281 x 10 ³	1.090	0.587	125	0.050	0.058	W9
N0734YS120	N280SH12	1200	734	8400	353 x 10 ³	1.030	0.483	125	0.050	0.058	W9
N0734YS160	N280SH16	1600	734	8400	353 x 10 ³	1.030	0.483	125	0.050	0.058	W9
N0782YS120	N283SH12	1200	782	9420	444 x 10 ³	0.920	0.450	125	0.050	0.058	W9
N0782YS160	N283SH16	1600	782	9420	444 x 10 ³	0.920	0.450	125	0.050	0.058	W9
N0882NC400	N320CH40	4000	882	7700	296 x 10 ³	1.300	0.920	125	0.024	0.030	W11
N0882NC450	N320CH45	4500	882	7700	296 x 10 ³	1.300	0.920	125	0.024	0.030	W11
N0910LS200	N330SH20	2000	910	9200	423 x 10 ³	1.040	0.606	125	0.032	0.040	W60
N0910LS260	N330SH26	2600	910	9200	423 x 10 ³	1.040	0.606	125	0.032	0.040	W60
N0992YS020	N310SH02	200	992	11000	605 x 10 ³	0.820	0.240	125	0.050	0.058	W9
N0992YS060	N310SH06	600	992	11000	605 x 10 ³	0.820	0.240	125	0.050	0.058	W9
N1010NC300	N360CH30	3000	1010	12100	732 x 10 ³	1.170	0.687	125	0.024	0.030	W11
N1010NC380	N360CH38	3800	1010	12100	732 x 10 ³	1.170	0.687	125	0.024	0.030	W11
N1042LS120	N350SH12	1200	1042	11500	661 x 10 ³	1.080	0.395	125	0.032	0.040	W60
N1042LS180	N350SH18	1800	1042	11500	661 x 10 ³	1.080	0.395	125	0.032	0.040	W60
N1114LS120	N370SH12	1200	1114	12700	806 x 10 ³	1.000	0.349	125	0.032	0.040	W60
N1114LS180	N370SH18	1800	1114	12700	806 x 10 ³	1.000	0.349	125	0.032	0.040	W60
N1132NC300	N390CH30	3000	1132	14300	1.02 x 10 ⁶	1.150	0.510	125	0.024	0.030	W11
N1132NC320	N390CH32	3200	1132	14300	1.02 x 10 ⁶	1.150	0.510	125	0.024	0.030	W11
N1159NC380	N500CH38	3800	1159	14500	1.05 x 10 ⁶	1.100	0.574	125	0.022	0.027	W11
N1159NC420	N500CH42	4200	1159	14500	1.05 x 10 ⁶	1.100	0.574	125	0.022	0.027	W11
N1265LS120	N520SH12	1200	1226	15000	1.125 X 10 ⁶	0.883	0.297	125	0.032	0.039	W60
N1265LS160	N520SH16	1600	1226	15000	1.125 X 10 ⁶	0.883	0.297	125	0.032	0.039	W60
N1297NS200	N450SH20	2000	1297	17600	1.55 x 10 ⁶	1.030	0.380	125	0.024	0.030	W61
N1297NS260	N450SH26	2600	1297	17600	1.55 x 10 ⁶	1.030	0.380	125	0.024	0.030	W61
N1314NC300	N570CH30	3000	1314	16600	1.38 x 10 ⁶	1.000	0.437	125	0.024	0.030	W11
N1314NC360	N570CH36	3600	1314	16600	1.38 x 10 ⁶	1.000	0.437	125	0.024	0.030	W11
N1351VC400	N560CH40	4000	1351	17500	1.53 x 10 ⁶	1.200	0.553	125	0.017	0.020	W12
N1351VC450	N560CH45	4500	1351	17500	1.53 x 10 ⁶	1.200	0.553	125	0.017	0.020	W12
N1351VF400	N/A	4000	1351	17500	1.53 x 10 ⁶	1.200	0.553	125	0.017	0.020	W62
N1351VF450	N/A	4500	1351	17500	1.53 x 10 ⁶	1.200	0.553	125	0.017	0.020	W62
N1467NS200	N490SH20	2000	1467	21500	2.31 x 10 ⁶	1.000	0.272	125	0.024	0.030	W61
N1467NS260	N490SH26	2600	1467	21500	2.31 x 10 ⁶	1.000	0.272	125	0.024	0.030	W61
N1479NS240	N620SH24	2400	1436	21000	2.21 x 10 ⁶	1.000	0.342	125	0.022	0.026	W61
N1479NS300	N620SH30	3000	1436	21000	2.21 x 10 ⁶	1.000	0.342	125	0.022	0.026	W61
N1547NS160	N510SH16	1600	1547	23300	2.71 x 10 ⁶	0.920	0.252	125	0.024	0.030	W61
N1547NS200	N510SH20	2000	1547	23300	2.71 x 10 ⁶	0.920	0.252	125	0.024	0.030	W61
N1588NS200	N680SH20	2000	1588	22500	2.53 x 10 ⁶	0.951	0.268	125	0.022	0.027	W61
N1588NS260	N680SH26	2600	1588	22500	2.53 x 10 ⁶	0.951	0.268	125	0.022	0.027	W61

Type		V_{DRM} V_{RRM}	I_{TAV} $T_K = 55^\circ C$	I_{TSM}	I^2t 10 ms ½ sine $V_R \leq 60\% V_{RRM}$	V_{TO}	r_T @ T_{JM}	T_{JM}	R_{thJK}		Fig. No.
Part No.	Old Part No.	V	A	A	A ² s	V	mΩ	°C	180° Sine K/W	120° Rect. K/W	
➤ New											
N1661VC300	N630CH30	3000	1661	23000	2.65 x 10 ⁶	1.040	0.350	125	0.017	0.020	W12
N1661VC360	N630CH36	3600	1661	23000	2.65 x 10 ⁶	1.040	0.350	125	0.017	0.020	W12
N1661VF300	N/A	3000	1661	23000	2.65 x 10 ⁶	1.040	0.350	125	0.017	0.020	W62
N1661VF360	N/A	3600	1661	23000	2.65 x 10 ⁶	1.040	0.350	125	0.017	0.020	W62
N1712VC240	N640CH24	2400	1712	24500	3.00 x 10 ⁶	1.050	0.320	125	0.017	0.020	W12
N1712VC300	N640CH30	3000	1712	24500	3.00 x 10 ⁶	1.050	0.320	125	0.017	0.020	W12
N1712VF240	N/A	2400	1712	24500	3.00 x 10 ⁶	1.050	0.320	125	0.017	0.020	W62
N1712VF300	N/A	3000	1712	24500	3.00 x 10 ⁶	1.050	0.320	125	0.017	0.020	W62
N1718NS120	N540SH12	1200	1718	27200	3.70 x 10 ⁶	0.979	0.169	125	0.024	0.030	W61
N1718NS180	N540SH18	1800	1718	27200	3.70 x 10 ⁶	0.979	0.169	125	0.024	0.030	W61
N1718NS200	N/A	2000	1718	27200	3.70 x 10 ⁶	0.979	0.169	125	0.024	0.030	W61
N1802NS120	N600SH12	1200	1802	29600	4.38 x 10 ⁶	0.855	0.171	125	0.024	0.030	W61
N1802NS160	N600SH16	1600	1802	29600	4.38 x 10 ⁶	0.855	0.171	125	0.024	0.030	W61
N2046NS120	N740SH12	1200	2046	29200	4.26 x 10 ⁶	0.980	0.114	125	0.022	0.026	W61
N2046NS160	N740SH16	1600	2046	29200	4.26 x 10 ⁶	0.980	0.114	125	0.022	0.026	W61
N2086NS060	N610SH06	600	2086	35000	6.13 x 10 ⁶	0.840	0.108	125	0.024	0.030	W61
N2086NS100	N610SH10	1000	2086	35000	6.13 x 10 ⁶	0.840	0.108	125	0.024	0.030	W61
N2172ZC400	N750CH40	4000	2172	28000	3.92 x 10 ⁶	1.350	0.294	125	0.011	0.012	W13
N2172ZC450	N750CH45	4500	2172	28000	3.92 x 10 ⁶	1.350	0.294	125	0.011	0.012	W13
N2172ZD400	N750DH40	4000	2172	28000	3.92 x 10 ⁶	1.350	0.294	125	0.011	0.012	W46
N2172ZD450	N750DH45	4500	2172	28000	3.92 x 10 ⁶	1.350	0.294	125	0.011	0.012	W46
N2293VC180	N760CH18	1800	2293	33800	5.71 x 10 ⁶	0.956	0.148	125	0.017	0.020	W12
N2293VC220	N760CH22	2200	2293	33800	5.71 x 10 ⁶	0.956	0.148	125	0.017	0.020	W12
N2293VF180	N/A	1800	2293	33800	5.71 x 10 ⁶	0.956	0.148	125	0.017	0.020	W62
N2293VF220	N/A	2200	2293	33800	5.71 x 10 ⁶	0.956	0.148	125	0.017	0.020	W62
N2418ZC300	N850CH30	3000	2418	30000	4.50 x 10 ⁶	1.160	0.246	125	0.011	0.012	W13
N2418ZC360	N850CH36	3600	2418	30000	4.50 x 10 ⁶	1.160	0.246	125	0.011	0.012	W13
N2418ZD300	N/A	3000	2418	30000	4.50 x 10 ⁶	1.160	0.246	125	0.011	0.012	W46
N2418ZD360	N/A	3600	2418	30000	4.50 x 10 ⁶	1.160	0.246	125	0.011	0.012	W46
N2500VC120	N990CH12	1200	2500	37000	6.85 x 10 ⁶	0.880	0.124	125	0.017	0.020	W12
N2500VC160	N990CH16	1600	2500	37000	6.85 x 10 ⁶	0.880	0.124	125	0.017	0.020	W12
N2500VF120	N/A	1200	2500	37000	6.85 x 10 ⁶	0.880	0.124	125	0.017	0.020	W62
N2500VF160	N/A	1600	2500	37000	6.85 x 10 ⁶	0.880	0.124	125	0.017	0.020	W62
N2543ZC240	N880CH24	2400	2543	32000	5.12 x 10 ⁶	0.780	0.274	125	0.011	0.012	W13
N2543ZC300	N880CH30	3000	2543	32000	5.12 x 10 ⁶	0.780	0.274	125	0.011	0.012	W13
N2543ZD240	N/A	2400	2543	32000	5.12 x 10 ⁶	0.780	0.274	125	0.011	0.012	W46
N2543ZD300	N/A	3000	2543	32000	5.12 x 10 ⁶	0.780	0.274	125	0.011	0.012	W46
N3012ZC200	N900CH20	2000	3012	45100	10.2 x 10 ⁶	0.920	0.160	125	0.011	0.012	W13
N3012ZC260	N900CH26	2600	3012	45100	10.2 x 10 ⁶	0.920	0.160	125	0.011	0.012	W13
N3012ZD200	N/A	2000	3012	45100	10.2 x 10 ⁶	0.920	0.160	125	0.011	0.012	W46
N3012ZD260	N/A	2600	3012	45100	10.2 x 10 ⁶	0.920	0.160	125	0.011	0.012	W46
➤ N3022ZC160	N980CH160	1600	3022	45600	10.40 x 10 ⁶	0.977	0.151	125	0.011	0.012	W13
➤ N3022ZC220	N980CH220	2200	3022	45600	10.40 x 10 ⁶	0.977	0.151	125	0.011	0.012	W13
➤ N3022ZD160	N/A	1600	3022	45600	10.40 x 10 ⁶	0.977	0.151	125	0.011	0.012	W46
➤ N3022ZD220	N/A	2200	3022	45600	10.40 x 10 ⁶	0.977	0.151	125	0.011	0.012	W46
➤ N3029ZC240	N/A	2400	3029	38200	7.30 x 10 ⁶	0.947	0.154	125	0.011	0.012	W13
➤ N3029ZC280	N/A	2800	3029	38200	7.30 x 10 ⁶	0.947	0.154	125	0.011	0.012	W13
➤ N3029ZD240	N/A	2400	3029	38200	7.30 x 10 ⁶	0.947	0.154	125	0.011	0.012	W46
➤ N3029ZD280	N/A	2800	3029	38200	7.30 x 10 ⁶	0.947	0.154	125	0.011	0.012	W46
N3476TC360	N1463CH36	3600	3476	46800	10.95 x 10 ⁶	0.970	0.180	125	0.008	0.009	W14
N3476TC420	N1463CH42	4200	3476	46800	10.95 x 10 ⁶	0.970	0.180	125	0.008	0.009	W14
N3476TD360	N1463DH36	3600	3476	46800	10.95 x 10 ⁶	0.970	0.180	125	0.008	0.009	W51
N3476TD420	N1463DH42	4200	3476	46800	10.95 x 10 ⁶	0.970	0.180	125	0.008	0.009	W51
N3533ZC140	N1400CH14	1400	3533	50000	12.50 x 10 ⁶	0.970	0.095	125	0.011	0.012	W13
➤ N3533ZC200	N1400CH20	2000	3533	50000	12.50 x 10 ⁶	0.970	0.095	125	0.011	0.012	W13
N3533ZC220	N1400CH22	2200	3533	50000	12.50 x 10 ⁶	0.970	0.095	125	0.011	0.012	W13
N3533ZD140	N/A	1400	3533	50000	12.50 x 10 ⁶	0.970	0.095	125	0.011	0.012	W46
➤ N3533ZD200	N/A	2000	3533	50000	12.50 x 10 ⁶	0.970	0.095	125	0.011	0.012	W46
N3533ZD220	N/A	2200	3533	50000	12.50 x 10 ⁶	0.970	0.095	125	0.011	0.012	W46
N3839TC300	N1663CH30	3000	3839	49500	12.25 x 10 ⁶	0.950	0.140	125	0.008	0.012	W14
N3839TC350	N1663CH35	3500	3839	49500	12.25 x 10 ⁶	0.950	0.140	125	0.008	0.012	W14
N3839TD300	N1663DH30	3000	3839	49500	12.25 x 10 ⁶	0.950	0.140	125	0.008	0.012	W51
N3839TD350	N1663DH35	3500	3839	49500	12.25 x 10 ⁶	0.950	0.140	125	0.008	0.012	W51
➤ N3930ZC120	NX188ZC120	1200	3930	54000	14.6 x 10 ⁶	0.841	0.080	125	0.011	0.012	W13
➤ N3930ZC160	NX188ZC160	1600	3930	54000	14.6 x 10 ⁶	0.841	0.080	125	0.011	0.012	W13
➤ N3930ZD120	NX188ZD120	1200	3930	54000	14.6 x 10 ⁶	0.841	0.080	125	0.011	0.012	W46
➤ N3930ZD160	NX188ZD160	1600	3930	54000	14.6 x 10 ⁶	0.841	0.080	125	0.011	0.012	W46

Part No.	Type	V_{DRM} V_{RRM}	I_{TAV} $T_K = 55^\circ C$	I_{TSM}	I^2t 10 ms 1/2 sine $V_R \leq 60\% V_{RRM}$	V_{T0}	r_T @ T_{JM}	T_{JM}	R_{thJK}		Fig. No.
	Old Part No.	V	A	A	A ² s	V	mΩ	°C	180° Sine K/W	120° Rect. K/W	
> N4085ZC080	N1600CH08	800	4085	64000	20.5×10^6	0.850	0.070	125	0.011	0.012	W13
N4085ZC120	N1600CH12	1200	4085	64000	20.5×10^6	0.850	0.070	125	0.011	0.012	W13
N4085ZD080	N/A	800	4085	64000	20.5×10^6	0.850	0.070	125	0.011	0.012	W46
N4085ZD120	N/A	1200	4085	64000	20.5×10^6	0.850	0.070	125	0.011	0.012	W46
N4151FC360	N1483CH36	3600	4151	54000	14.6×10^6	0.850	0.170	125	0.0065	0.0070	W15
N4151FC420	N1483CH42	4200	4151	54000	14.6×10^6	0.850	0.170	125	0.0065	0.0070	W15
N4151FD360	N1483DH36	3600	4151	54000	14.6×10^6	0.850	0.170	125	TBA	TBA	W48
N4151FD420	N1483DH42	4200	4151	54000	14.6×10^6	0.850	0.170	125	TBA	TBA	W48
N4400TC120	N1863CH12	1200	4400	54000	14.6×10^6	0.900	0.100	125	0.008	0.009	W14
> N4400TC220	N1863CH22	2200	4400	54000	14.6×10^6	0.900	0.100	125	0.008	0.009	W14
N4400TC280	N1863CH28	2800	4400	54000	14.6×10^6	0.900	0.100	125	0.008	0.009	W14
N4400TD120	N1863DH12	1200	4400	54000	14.6×10^6	0.900	0.100	125	0.008	0.009	W51
> N4400TD220	N1863DH22	2200	4400	54000	14.6×10^6	0.900	0.100	125	0.008	0.009	W51
N4400TD280	N1863DH28	2800	4400	54000	14.6×10^6	0.900	0.100	125	0.008	0.009	W51
N4803FC300	N1683CH30	3000	4803	60000	18.0×10^6	0.920	0.110	125	0.0065	0.0070	W15
N4803FC350	N1683CH35	3500	4803	60000	18.0×10^6	0.920	0.110	125	0.0065	0.0070	W15
N4803FD300	N/A	3000	4803	60000	18.0×10^6	0.920	0.110	125	TBA	TBA	W48
N4803FD350	N/A	3500	4803	60000	18.0×10^6	0.920	0.110	125	TBA	TBA	W48
N5177FC200	N1883CH20	2000	5177	67500	22.8×10^6	0.800	0.100	125	0.0065	0.0070	W15
N5177FC280	N1883CH28	2800	5177	67500	22.8×10^6	0.800	0.100	125	0.0065	0.0070	W15
N5177FD200	N/A	2000	5177	67500	22.8×10^6	0.800	0.100	125	TBA	TBA	W48
N5177FD280	N/A	2800	5177	67500	22.8×10^6	0.800	0.100	125	TBA	TBA	W48
N5946FC180	N1983CH18	1800	5946	72000	25.9×10^6	0.855	0.065	125	0.0065	0.0070	W15
N5946FC220	N1983CH22	2200	5946	72000	25.9×10^6	0.855	0.065	125	0.0065	0.0070	W15
N5946FD180	N/A	1800	5946	72000	25.9×10^6	0.855	0.065	125	TBA	TBA	W48
N5946FD220	N/A	2200	5946	72000	25.9×10^6	0.855	0.065	125	TBA	TBA	W48
> NX037VC200	N/A	2000	2102	In Development							W12
> NX037VC260	N/A	2600	2102								W12
> NX037VF200	N/A	2000	2102								W62
> NX037VF260	N/A	2600	2102								W62



Outlines on pages O-01...O-24



W8 Weight 70 g



W9 Weight 90 g



W10 Weight 340 g



W11 Weight 510 g



W12 Weight 1000 g




W13 Weight 1700 g



W14 Weight 1300 g




W15 Weight 2800 g



W46 Weight 1200 g




W48 Weight 2000 g




W51 Weight 1700 g



W60 Weight 340 g



W61 Weight 510 g



W62 Weight 1000 g

The Wespack outline is a new concept in phase control thyristors for applications requiring devices rated to 2200 V. It gives the maximum power rating for weight and volume without compromising on quality and reliability. It also gives the maximum current rating and lowest thermal resistance for the package size.

Type		V_{DRM}	I_{TAV}	I_{TSM}	I^2t	V_{TO}	r_T	T_{JM}	R_{thJK}		Fig. No.	
Part No.	Old Part No.	V_{RRM}	$T_K = 55^\circ C$	10ms ½ sine $V_R \leq 60\% V_{RRM}$		@ T_{JM}			180° sine	120° Rect.		
➤ New		V	A	A	A²s	V	mΩ	°C	K/W	K/W		
➤ N1174JK200	NX159JK200	2000	1174	13200	870×10^3	1.000	0.416	125	0.0270	0.0314	WP1	
➤ N1174JK220	NX159JK220	2200	1174	13200	870×10^3	1.000	0.416	125	0.0270	0.0314	WP1	
➤ N1263JK160	NX159JK160	1600	1263	15000	1.13×10^6	1.015	0.332	125	0.0270	0.0314	WP1	
➤ N1263JK180	NX159JK180	1800	1263	15000	1.13×10^6	1.015	0.332	125	0.0270	0.0314	WP1	
➤ N1366JK080	NX159JK080	800	1366	15900	1.26×10^6	0.985	0.270	125	0.0270	0.0314	WP1	
➤ N1366JK120	NX159JK120	1200	1366	15900	1.26×10^6	0.985	0.270	125	0.0270	0.0314	WP1	
➤ N1366JK140	NX159JK140	1400	1366	15900	1.26×10^6	0.985	0.270	125	0.0270	0.0314	WP1	
N1651QK200	NX058QK200	2000	1651	17300	1.50×10^6	1.060	0.317	125	0.0180	0.0217	WP2	
N1651QK220	NX058QK220	2200	1651	17300	1.50×10^6	1.060	0.317	125	0.0180	0.0217	WP2	
N1806QK160	NX058QK160	1600	1806	19100	1.82×10^6	1.022	0.253	125	0.0180	0.0217	WP2	
N1806QK180	NX058QK180	1800	1806	19100	1.82×10^6	1.022	0.253	125	0.0180	0.0217	WP2	
N2083QK080	N/A	800	2083	22000	2.42×10^6	0.955	0.177	125	0.0180	0.0217	WP2	
N2083QK120	N/A	1200	2083	22000	2.42×10^6	0.955	0.177	125	0.0180	0.0217	WP2	
N2083QK140	N/A	1400	2083	22000	2.42×10^6	0.955	0.177	125	0.0180	0.0217	WP2	
N2154JK020	NX159JK020	200	2154	22700	2.58×10^6	0.890	0.107	140	0.0270	0.0314	WP1	
➤ N2154JK040	NX159JK040	400	2154	22700	2.58×10^6	0.890	0.107	140	0.0270	0.0314	WP1	
N2154JK060	NX159JK060	600	2154	22700	2.58×10^6	0.890	0.107	140	0.0270	0.0314	WP1	
N2367MK200	NX149MK200	2000	2367	32400	5.25×10^6	0.883	0.210	125	0.0140	0.0157	WP3	
N2367MK220	NX149MK220	2200	2367	32400	5.25×10^6	0.883	0.210	125	0.0140	0.0157	WP3	
N2593MK160	NX149MK160	1600	2593	34500	5.95×10^6	0.940	0.154	125	0.0140	0.0157	WP3	
N2593MK180	NX149MK180	1800	2593	34500	5.95×10^6	0.940	0.154	125	0.0140	0.0157	WP3	
➤ N3022MK040	NX149MK040	400	3022	38200	7.30×10^6	0.981	0.090	125	0.0140	0.0157	WP3	
➤ N3022MK120	NX149MK120	1200	3022	38200	7.30×10^6	0.981	0.090	125	0.0140	0.0157	WP3	
➤ N3022MK140	NX149MK140	1400	3022	38200	7.30×10^6	0.981	0.090	125	0.0140	0.0157	WP3	
N3229QK020	NX155QK020	200	3229	28000	3.92×10^6	0.926	0.067	140	0.0180	0.0217	WP2	
➤ N3229QK040	NX155QK040	400	3229	28000	3.92×10^6	0.926	0.067	140	0.0180	0.0217	WP2	
N3229QK060	NX155QK060	600	3229	28000	3.92×10^6	0.926	0.067	140	0.0180	0.0217	WP2	
➤ N3904HK200	NX160HK200	2000	3904	50900	12.95×10^6	0.920	0.111	125	0.0090	0.0099	WP4	
➤ N3904HK220	NX160HK220	2200	3904	50900	12.95×10^6	0.920	0.111	125	0.0090	0.0099	WP4	
N4316MK020	N4004MK020	200	4316	45400	10.3×10^6	0.840	0.053	140	0.0140	0.0157	WP3	
➤ N4316MK040	N4004MK040	400	4316	45400	10.3×10^6	0.840	0.053	140	0.0140	0.0157	WP3	
N4316MK060	N/A	600	4316	45400	10.3×10^6	0.840	0.053	140	0.0140	0.0157	WP3	
N4472HK160	N/A	1600	4472	59000	17.40×10^6	0.986	0.068	125	0.0090	0.0099	WP4	
N4472HK180	N/A	1800	4472	59000	17.40×10^6	0.986	0.068	125	0.0090	0.0099	WP4	
➤ N6974HK020	N/A	200	6974	65000	21.13×10^6	0.853	0.029	140	0.0090	0.0099	WP4	
➤ N6974HK040	N/A	400	6974	65000	21.13×10^6	0.853	0.029	140	0.0090	0.0099	WP4	
➤ N6974HK060	N/A	600	6974	65000	21.13×10^6	0.853	0.029	140	0.0090	0.0099	WP4	
➤ NX160HK080	N/A	800	Product under development							0.0090	0.0099	WP4
➤ NX160HK120	N/A	1200	Product under development							0.0090	0.0099	WP4
➤ NX160HK140	N/A	1400	Product under development							0.0090	0.0099	WP4



Outlines on pages O-01...O-24



WP1 Weight 180 g



WP2 Weight 200 g



WP3 Weight 260 g



WP4 Weight 550 g

Medium Voltage Thyristors - Capsule Types

WESTCODE

Medium voltage applications place additional demands on phase controlled thyristors. To meet these demands we have developed a comprehensive range of thyristors optimised for medium voltage applications. As voltages increase, so do switching losses and turn-off time to a point where they become significant in line frequency applications. Our patented distributed gate architecture ensures excellent switching performance over a wide range of voltage, current and di/dt. Device lifetime is also engineered to achieve an optimum balance between conduction losses, commutation losses and turn-off time to give maximum power handling from line frequency to 400 Hz. This also gives significant benefits when series or parallel connection of devices is required. Medium voltage thyristors are available from 3.2 kV up to 6.5 kV with silicon diameters from 38 mm to 100 mm making them particularly suitable for high power converters such as medium voltage DC drives, medium voltage soft starts and utility applications such as HVDC, static VAr compensators, excitation and transfer switches.

We recognise the importance of reliability in these large, capital intensive applications and as a result we subject these parts to extended levels of both routine and type testing to ensure that your investment gives years of trouble free service.

Type		V_{DRM} V_{RRM}	I_{TAV}	I_{TSM}	I^2t	t_q	Typ. Reverse Recovery Charge			V_{TO}	r_T	T_{JM}	$R_{th,jk}$		Fig. No.
Part No. New	Old Part No.	V	$T_K = 55^\circ C$ A	A	10 ms ½ sine $V_R \leq 60\% V_{RRM}$ A ² s	@ 200 V/µs µs	$T_{JM}, 50\% \text{ Chord}$ Q_{ra} µC	@ I_{TM} A	@ -di/dt A/µs	@ T_{JM} V	mΩ	°C	180° Sine K/W	120° Rect. K/W	
K0349LC600	P201CH60	6000	349	4800	115 x 10 ³	900-1200	2100	1000	10	1.568	2.428	115	0.0470	0.0490	W10
K0349LC650	P201CH65	6500	349	4800	115 x 10 ³	900-1200	2100	1000	10	1.568	2.428	115	0.0470	0.0490	W10
K0349LG600	N/A	6000	349	4800	115 x 10 ³	900-1200	2100	1000	10	1.568	2.428	115	0.0470	0.0490	W56
K0349LG650	N/A	6500	349	4800	115 x 10 ³	900-1200	2100	1000	10	1.568	2.428	115	0.0470	0.0490	W56
K0443LC600	N/A	6000	443	4800	115 x 10 ³	900-1200	2100	1000	10	1.568	2.428	115	0.0320	0.0388	W10
K0443LC650	N/A	6500	443	4800	115 x 10 ³	900-1200	2100	1000	10	1.568	2.428	115	0.0320	0.0388	W10
K0443LG600	N/A	6000	443	4800	115 x 10 ³	900-1200	2100	1000	10	1.568	2.428	115	0.0320	0.0388	W56
K0443LG650	N/A	6500	443	4800	115 x 10 ³	900-1200	2100	1000	10	1.568	2.428	115	0.0320	0.0388	W56
K0682LC360	KX190LC360	3600	682	6350	202 x 10 ³	650-800	1050	1000	10	1.211	1.182	125	0.0320	0.0388	W10
K0682LC420	KX190LC420	4200	682	6350	202 x 10 ³	650-800	1050	1000	10	1.211	1.182	125	0.0320	0.0388	W10
K0682LG360	N/A	3600	682	6350	202 x 10 ³	650-800	1050	1000	10	1.211	1.182	125	0.0320	0.0388	W56
K0682LG420	N/A	4200	682	6350	202 x 10 ³	650-800	1050	1000	10	1.211	1.182	125	0.0320	0.0388	W56
K0769NC600	P410CH60	6000	769	8600	370 x 10 ³	900-1200	2050	1000	10	1.566	1.172	115	0.0240	0.0290	W11
K0769NC650	P410CH65	6500	769	8600	370 x 10 ³	900-1200	2050	1000	10	1.566	1.172	115	0.0240	0.0290	W11
K0769NG600	N/A	6000	769	8600	370 x 10 ³	900-1200	2050	1000	10	1.566	1.172	115	0.0240	0.0290	W57
K0769NG650	N/A	6500	769	8600	370 x 10 ³	900-1200	2050	1000	10	1.566	1.172	115	0.0240	0.0290	W57
K0890NC360	R295CH36	3600	890	10900	594 x 10 ³	350-550	1500	1000	10	1.516	0.800	125	0.0240	0.0290	W11
K0890NC420	R295CH42	4200	890	10900	594 x 10 ³	350-550	1500	1000	10	1.516	0.800	125	0.0240	0.0290	W11
K1120NC360	KX192NC360	3600	1120	13500	911 x 10 ³	650-1000	2600	1000	10	1.092	0.546	125	0.0240	0.0271	W11
K1120NC420	KX192NC420	4200	1120	13500	911 x 10 ³	650-1000	2600	1000	10	1.092	0.546	125	0.0240	0.0271	W11
K1120NG360	N/A	3600	1120	13500	911 x 10 ³	650-1000	2600	1000	10	1.092	0.546	125	0.0240	0.0271	W57
K1120NG420	N/A	4200	1120	13500	911 x 10 ³	650-1000	2600	1000	10	1.092	0.546	125	0.0240	0.0271	W57
K1121NC320	P440CH32	3200	1121	15000	1.13 x 10 ⁶	400-500	1000	1000	10	1.098	0.542	125	0.0240	0.0290	W11
K1121NC360	P440CH36	3600	1121	15000	1.13 x 10 ⁶	400-500	1000	1000	10	1.098	0.542	125	0.0240	0.0290	W11
K1197NC300	P480CH30	3000	1197	10646	567 x 10 ³	200-300	1400	1000	10	1.210	0.430	125	0.0240	0.0290	W11
K1197NC320	P480CH32	3200	1197	10646	567 x 10 ³	200-300	1400	1000	10	1.210	0.430	125	0.0240	0.0290	W11
K1351VC600	KX120VC600	6000	1351	14300	1.02 x 10 ⁶	800-1500	4500	2000	10	1.410	0.600	115	0.0130	0.0145	W12
K1351VC650	KX120VC650	6500	1351	14300	1.02 x 10 ⁶	800-1500	4500	2000	10	1.410	0.600	115	0.0130	0.0145	W12
K1351VF600	KX120VF600	6000	1351	14300	1.02 x 10 ⁶	800-1500	4500	2000	10	1.410	0.600	115	0.0130	0.0145	W62
K1351VF650	KX120VF650	6500	1351	14300	1.02 x 10 ⁶	800-1500	4500	2000	10	1.410	0.600	115	0.0130	0.0145	W62
K1947ZC400	P855CH40	4000	1947	25000	3.13 x 10 ⁶	600-700	3500	1000	10	1.221	0.425	125	0.0110	0.0119	W13
K1947ZC440	P855CH44	4400	1947	25000	3.13 x 10 ⁶	600-700	3500	1000	10	1.221	0.425	125	0.0110	0.0119	W13
K1947ZD400	P855DH40	4000	1947	25000	3.13 x 10 ⁶	600-700	3500	1000	10	1.221	0.425	125	0.0110	0.0119	W46
K1947ZD440	P855DH44	4400	1947	25000	3.13 x 10 ⁶	600-700	3500	1000	10	1.221	0.425	125	0.0110	0.0119	W46
K2065VC360	KX162VC360	3600	2065	28000	3.92 x 10 ⁶	400-700	4300	2000	10	1.121	0.291	125	0.0130	0.0145	W12
K2065VC420	KX162VC420	4200	2065	28000	3.92 x 10 ⁶	400-700	4300	2000	10	1.121	0.291	125	0.0130	0.0145	W12
K2065VF360	KX162VF360	3600	2065	28000	3.92 x 10 ⁶	400-700	4300	2000	10	1.121	0.291	125	0.0130	0.0145	W62
K2065VF420	KX162VF650	4200	2065	28000	3.92 x 10 ⁶	400-700	4300	2000	10	1.121	0.291	125	0.0130	0.0145	W62
K2095ZC360	P880CH36	3600	2095	18200	1.66 x 10 ⁶	400-500	2400	2000	10	1.502	0.296	125	0.0110	0.0119	W13
K2095ZC420	P880CH42	4200	2095	18200	1.66 x 10 ⁶	400-500	2400	2000	10	1.502	0.296	125	0.0110	0.0119	W13
K2095ZD360	P880DH36	3600	2095	18200	1.66 x 10 ⁶	400-500	2400	2000	10	1.502	0.296	125	0.0110	0.0119	W46
K2095ZD420	P880DH42	4200	2095	18200	1.66 x 10 ⁶	400-500	2400	2000	10	1.502	0.296	125	0.0110	0.0119	W46
K2359TC600	P1063CH60	6000	2359	27000	3.65 x 10 ⁶	1100-1500	6800	2000	10	1.391	0.360	115	0.0085	0.0092	W14
K2359TC650	P1063CH65	6500	2359	27000	3.65 x 10 ⁶	1100-1500	6800	2000	10	1.391	0.360	115	0.0085	0.0092	W14
K2359TD600	N/A	6000	2359	27000	3.65 x 10 ⁶	1100-1500	6800	2000	10	1.391	0.360	115	0.0085	0.0092	W51
K2359TD650	N/A	6500	2359	27000	3.65 x 10 ⁶	1100-1500	6800	2000	10	1.391	0.360	115	0.0085	0.0092	W51
K2623TC450	R1263CH45	4500	2623	27000	3.65 x 10 ⁶	500-1000	2600	2000	10	1.421	0.295	125	0.0080	0.0089	W14
K2623TC480	R1263CH48	4800	2623	27000	3.65 x 10 ⁶	500-1000	2600	2000	10	1.421	0.295	125	0.0080	0.0089	W14
K2623TC520	R1263CH52	5200	2623	27000	3.65 x 10 ⁶	500-1000	2600	2000	10	1.421	0.295	125	0.0080	0.0089	W14
K2623TD450	N/A	4500	2623	27000	3.65 x 10 ⁶	500-1000	2600	2000	10	1.421	0.295	125	0.0080	0.0089	W51
K2623TD480	N/A	4800	2623	27000	3.65 x 10 ⁶	500-1000	2600	2000	10	1.421	0.295	125	0.0080	0.0089	W51
K2623TD520	N/A	5200	2623	27000	3.65 x 10 ⁶	500-1000	2600	2000	10	1.421	0.295	125	0.0080	0.0089	W51

Type		V_{DRM} V_{RRM}	I_{TAV} $T_K = 55^\circ C$	I_{TSM}	I^2t 10 ms 1/2 sine $V_R \leq 60\% V_{RRM}$	t_q @ 200 V/ μs	Typ. Reverse Recovery Charge $T_{JM}, 50\% \text{ Chord}$			V_{TO}	r_T	T_{JM}	R_{thJK}		Fig. No.
Part No. New	Old Part No.	V	A	A	A ² s	μs	Q_{rr} μC	@ I_{TM} A	@ -di/dt A/ μs	V	m Ω	°C	180° Sine K/W	120° Rect. K/W	
K2960TC450	N/A	4500	2960	32500	5.28×10^6	800-1600	11000	4000	10	1.229	0.212	125	0.0085	0.0092	W14
K2960TC480	N/A	4800	2960	32500	5.28×10^6	800-1600	11000	4000	10	1.229	0.212	125	0.0085	0.0092	W14
K2960TC520	N/A	5200	2960	32500	5.28×10^6	800-1600	11000	4000	10	1.229	0.212	125	0.0085	0.0092	W14
K2960TD450	N/A	4500	2960	32500	5.28×10^6	800-1600	11000	4000	10	1.229	0.212	125	0.0085	0.0092	W51
K2960TD480	N/A	4800	2960	32500	5.28×10^6	800-1600	11000	4000	10	1.229	0.212	125	0.0085	0.0092	W51
K2960TD520	N/A	5200	2960	32500	5.28×10^6	800-1600	11000	4000	10	1.229	0.212	125	0.0085	0.0092	W51
K2973FC600	N/A	6000	2973	35400	6.27×10^6	1100-1500	6200	4000	10	1.581	0.207	115	0.0065	0.0069	W15
K2973FC650	N/A	6500	2973	35400	6.27×10^6	1100-1500	6200	4000	10	1.581	0.207	115	0.0065	0.0069	W15
K2973FD600	N/A	6000	2973	35400	6.27×10^6	1100-1500	6200	4000	10	1.581	0.207	115	0.0065	0.0069	W48
K2973FD650	N/A	6500	2973	35400	6.27×10^6	1100-1500	6200	4000	10	1.581	0.207	115	0.0065	0.0069	W48
K3207EC450	KX142EC450	4500	3207	32500	5.28×10^6	800-1600	11000	4000	10	1.229	0.212	125	0.0075	0.0080	W55
K3207EC480	KX142EC480	4800	3207	32500	5.28×10^6	800-1600	11000	4000	10	1.229	0.212	125	0.0075	0.0080	W55
K3207EC520	KX142EC520	5200	3207	32500	5.28×10^6	800-1600	11000	4000	10	1.229	0.212	125	0.0075	0.0080	W55
K3362TC360	N/A	3600	3362	39500	7.80×10^6	1000-2000	7400	4000	10	1.052	0.168	125	0.0085	0.0092	W14
K3362TC420	N/A	4200	3362	39500	7.80×10^6	1000-2000	7400	4000	10	1.052	0.168	125	0.0085	0.0092	W14
K3362TD360	N/A	3600	3362	39500	7.80×10^6	1000-2000	7400	4000	10	1.052	0.168	125	0.0085	0.0092	W51
K3362TD420	N/A	4200	3362	39500	7.80×10^6	1000-2000	7400	4000	10	1.052	0.168	125	0.0085	0.0092	W51
K3503FC450	KX094FC450	4500	3503	43200	9.33×10^6	900-1800	5500	4000	10	1.375	0.196	125	0.0065	0.0070	W15
K3503FC480	KX094FC480	4800	3503	43200	9.33×10^6	900-1800	5500	4000	10	1.375	0.196	125	0.0065	0.0070	W15
K3503FC520	KX094FC520	5200	3503	43200	9.33×10^6	900-1800	5500	4000	10	1.375	0.196	125	0.0065	0.0070	W15
K3503FD450	KX094FD450	4500	3503	43200	9.33×10^6	900-1800	5500	4000	10	1.375	0.196	125	0.0065	0.0070	W48
K3503FD480	KX094FD480	4800	3503	43200	9.33×10^6	900-1800	5500	4000	10	1.375	0.196	125	0.0065	0.0070	W48
K3503FD520	KX094FD520	5200	3503	43200	9.33×10^6	900-1800	5500	4000	10	1.375	0.196	125	0.0065	0.0070	W48
KX101FC360	N/A	3600	Products under development									125	0.0065	0.0070	W15
KX101FC420	N/A	4200										125	0.0065	0.0070	W15
KX101FD360	N/A	3600										125	TBA	TBA	W48
KX101FD420	N/A	4200										125	TBA	TBA	W48
KX163VC520	N/A	5200										125	0.0130	0.0150	W12
KX163VF520	N/A	5200										125	0.0130	0.0150	W62
KX191LC520	N/A	5200										125	0.0320	0.0390	W10
KX191LG520	N/A	5200										125	0.0320	0.0390	W56
KX193NC520	N/A	5200										125	0.0240	0.0290	W11
KX193NG520	N/A	5200										125	0.0240	0.0290	W57



Outlines on pages
O-01...O-24




W10 Weight 340 g



W11 Weight 510 g



W12 Weight 1000 g




W13 Weight 1700 g



W14 Weight 1300 g



W15 Weight 2800 g



W46 Weight 1200 g



W48 Weight 2000 g



W51 Weight 1700 g




W55 Weight 1800 g



W56 Weight 271 g



W57 Weight 326 g



W62 Weight 1000 g

Fast Turn-Off Thyristors - Stud Types


WESTCODE

Westcode "P" series of fast switching thyristors have regenerative gate structure to ensure low switching losses and high di/dt performance. "P" Series devices are particularly attractive to; Inverter, DC chopper drives, UPS and Pulse Power applications. In addition to pressure contact technology these devices offer lower reverse recovery charge values, low forward switching losses and high reliability.

Type		V _{DRM} V _{RRM}	I _{TAV} T _C = 55°C	I _{TSM}	I ² t 10 ms ½ sine V _R ≤ 60% V _{RRM}	t _q @ 200 V/μs	Typ. Reverse Recovery Charge			V _{TO}	r _T @ T _{JM}	T _{JM} °C	R _{thJC} 180° sine K/W	Fig. No.
Part No. New	Old Part No.						V	A	A					
➤ P0128SH10C	N/A	1000	128	1700	19 × 10 ³	15	25	100	10	1.600	2.490	125	0.230	W17
➤ P0128SH10D	N/A	1000	128	1700	19 × 10 ³	20	25	100	10	1.600	2.490	125	0.230	W17
➤ P0128SH10E	N/A	1000	128	1700	19 × 10 ³	25	25	100	10	1.600	2.490	125	0.230	W17
➤ P0128SH10F	N/A	1000	128	1700	19 × 10 ³	30	25	100	10	1.600	2.490	125	0.230	W17
➤ P0128SH12C	N/A	1200	128	1700	19 × 10 ³	15	25	100	10	1.600	2.490	125	0.230	W17
➤ P0128SH12D	N/A	1200	128	1700	19 × 10 ³	20	25	100	10	1.600	2.490	125	0.230	W17
➤ P0128SH12E	N/A	1200	128	1700	19 × 10 ³	25	25	100	10	1.600	2.490	125	0.230	W17
➤ P0128SH12F	N/A	1200	128	1700	19 × 10 ³	30	25	100	10	1.600	2.490	125	0.230	W17
➤ P0128SJ10C	N/A	1000	128	1700	19 × 10 ³	15	25	100	10	1.600	2.490	125	0.230	W16
➤ P0128SJ10D	N/A	1000	128	1700	19 × 10 ³	20	25	100	10	1.600	2.490	125	0.230	W16
➤ P0128SJ10E	N/A	1000	128	1700	19 × 10 ³	25	25	100	10	1.600	2.490	125	0.230	W16
➤ P0128SJ10F	N/A	1000	128	1700	19 × 10 ³	30	25	100	10	1.600	2.490	125	0.230	W16
➤ P0128SJ12C	N/A	1200	128	1700	19 × 10 ³	15	25	100	10	1.600	2.490	125	0.230	W16
➤ P0128SJ12D	N/A	1200	128	1700	19 × 10 ³	20	25	100	10	1.600	2.490	125	0.230	W16
➤ P0128SJ12E	N/A	1200	128	1700	19 × 10 ³	25	25	100	10	1.600	2.490	125	0.230	W16
➤ P0128SJ12F	N/A	1200	128	1700	19 × 10 ³	30	25	100	10	1.600	2.490	125	0.230	W16
P0248SC10D	P200PH10	1000	248	2700	36.5 × 10 ³	20	25	300	20	1.600	1.230	125	0.120	W18
P0248SC10E	P200PH10	1000	248	2700	36.5 × 10 ³	25	25	300	20	1.600	1.230	125	0.120	W18
P0248SC10F	P200PH10	1000	248	2700	36.5 × 10 ³	30	25	300	20	1.600	1.230	125	0.120	W18
P0248SC12D	P200PH12	1200	248	2700	36.5 × 10 ³	20	25	300	20	1.600	1.230	125	0.120	W18
P0248SC12E	P200PH12	1200	248	2700	36.5 × 10 ³	25	25	300	20	1.600	1.230	125	0.120	W18
P0248SC12F	P200PH12	1200	248	2700	36.5 × 10 ³	30	25	300	20	1.600	1.230	125	0.120	W18
P0248SD10D	N/A	1000	248	2700	36.5 × 10 ³	20	25	300	20	1.600	1.230	125	0.120	W19
P0248SD10E	N/A	1000	248	2700	36.5 × 10 ³	25	25	300	20	1.600	1.230	125	0.120	W19
P0248SD10F	N/A	1000	248	2700	36.5 × 10 ³	30	25	300	20	1.600	1.230	125	0.120	W19
P0248SD12D	N/A	1200	248	2700	36.5 × 10 ³	20	25	300	20	1.600	1.230	125	0.120	W19
P0248SD12E	N/A	1200	248	2700	36.5 × 10 ³	25	25	300	20	1.600	1.230	125	0.120	W19
P0248SD12F	N/A	1200	248	2700	36.5 × 10 ³	30	25	300	20	1.600	1.230	125	0.120	W19
P0248SG10D	N/A	1000	248	2700	36.5 × 10 ³	20	25	300	20	1.600	1.230	125	0.120	W25
P0248SG10E	N/A	1000	248	2700	36.5 × 10 ³	25	25	300	20	1.600	1.230	125	0.120	W25
P0248SG10F	N/A	1000	248	2700	36.5 × 10 ³	30	25	300	20	1.600	1.230	125	0.120	W25
P0248SG12D	N/A	1200	248	2700	36.5 × 10 ³	20	25	300	20	1.600	1.230	125	0.120	W25
P0248SG12E	N/A	1200	248	2700	36.5 × 10 ³	25	25	300	20	1.600	1.230	125	0.120	W25
P0248SG12F	N/A	1200	248	2700	36.5 × 10 ³	30	25	300	20	1.600	1.230	125	0.120	W25
P0273SC10D	P202PH10	1000	273	3250	52.8 × 10 ³	20	45	300	20	1.550	0.870	125	0.120	W18
P0273SC10E	P202PH10	1000	273	3250	52.8 × 10 ³	25	45	300	20	1.550	0.870	125	0.120	W18
P0273SC10F	P202PH10	1000	273	3250	52.8 × 10 ³	30	45	300	20	1.550	0.870	125	0.120	W18
P0273SC12D	P202PH12	1200	273	3250	52.8 × 10 ³	20	45	300	20	1.550	0.870	125	0.120	W18
P0273SC12E	P202PH12	1200	273	3250	52.8 × 10 ³	25	45	300	20	1.550	0.870	125	0.120	W18
P0273SC12F	P202PH12	1200	273	3250	52.8 × 10 ³	30	45	300	20	1.550	0.870	125	0.120	W18
P0273SD10D	N/A	1000	273	3250	52.8 × 10 ³	20	45	300	20	1.550	0.870	125	0.120	W19
P0273SD10E	N/A	1000	273	3250	52.8 × 10 ³	25	45	300	20	1.550	0.870	125	0.120	W19
P0273SD10F	N/A	1000	273	3250	52.8 × 10 ³	30	45	300	20	1.550	0.870	125	0.120	W19
P0273SD12D	N/A	1200	273	3250	52.8 × 10 ³	20	45	300	20	1.550	0.870	125	0.120	W19
P0273SD12E	N/A	1200	273	3250	52.8 × 10 ³	25	45	300	20	1.550	0.870	125	0.120	W19
P0273SD12F	N/A	1200	273	3250	52.8 × 10 ³	30	45	300	20	1.550	0.870	125	0.120	W19
P0273SG10D	N/A	1000	273	3250	52.8 × 10 ³	20	45	300	20	1.550	0.870	125	0.120	W25
P0273SG10E	N/A	1000	273	3250	52.8 × 10 ³	25	45	300	20	1.550	0.870	125	0.120	W25
P0273SG10F	N/A	1000	273	3250	52.8 × 10 ³	30	45	300	20	1.550	0.870	125	0.120	W25
P0273SG12D	N/A	1200	273	3250	52.8 × 10 ³	20	45	300	20	1.550	0.870	125	0.120	W25
P0273SG12E	N/A	1200	273	3250	52.8 × 10 ³	25	45	300	20	1.550	0.870	125	0.120	W25
P0273SG12F	N/A	1200	273	3250	52.8 × 10 ³	30	45	300	20	1.550	0.870	125	0.120	W25
P0306SC04A	P214PH04	400	306	4700	101 × 10 ³	10	25	300	20	1.400	0.670	125	0.120	W18
P0306SC04B	P214PH04	400	306	4700	101 × 10 ³	12	25	300	20	1.400	0.670	125	0.120	W18
P0306SC04C	P214PH04	400	306	4700	101 × 10 ³	15	25	300	20	1.400	0.670	125	0.120	W18
P0306SC08A	P214PH08	800	306	4700	101 × 10 ³	10	25	300	20	1.400	0.670	125	0.120	W18
P0306SC08B	P214PH08	800	306	4700	101 × 10 ³	12	25	300	20	1.400	0.670	125	0.120	W18
P0306SC08C	P214PH08	800	306	4700	101 × 10 ³	15	25	300	20	1.400	0.670	125	0.120	W18
P0306SD04A	N/A	400	306	4700	101 × 10 ³	10	25	300	20	1.400	0.670	125	0.120	W19
P0306SD04B	N/A	400	306	4700	101 × 10 ³	12	25	300	20	1.400	0.670	125	0.120	W19
P0306SD04C	N/A	400	306	4700	101 × 10 ³	15	25	300	20	1.400	0.670	125	0.120	W19
P0306SD08A	N/A	800	306	4700	101 × 10 ³	10	25	300	20	1.400	0.670	125	0.120	W19
P0306SD08B	N/A	800	306	4700	101 × 10 ³	12	25	300	20	1.400	0.670	125	0.120	W19
P0306SD08C	N/A	800	306	4700	101 × 10 ³	15	25	300	20	1.400	0.670	125	0.120	W19
P0306SG04A	N/A	400	306	4700	101 × 10 ³	10	25	300	20	1.400	0.670	125	0.120	W25

Type		V _{DRM} V _{RRM}	I _{TAV} T _C = 55°C	I _{TSM}	I ² t 10 ms ½ sine V _R ≤ 60% V _{RRM}	t _q @ 200 V/μs	Typ. Reverse Recovery Charge			V _{TO}	r _T @ T _{JM}	T _{JM}	R _{thJC} 180° sine	Fig. No.
Part No. ➤ New	Old Part No.						Q _{rra} μC	@ I _{TM} A	@ -di/dt A/μs					
P0306SG04B	N/A	400	306	4700	101 x 10 ³	12	25	300	20	1.400	0.670	125	0.120	W25
P0306SG04C	N/A	400	306	4700	101 x 10 ³	15	25	300	20	1.400	0.670	125	0.120	W25
P0306SG08A	N/A	800	306	4700	101 x 10 ³	10	25	300	20	1.400	0.670	125	0.120	W25
P0306SG08B	N/A	800	306	4700	101 x 10 ³	12	25	300	20	1.400	0.670	125	0.120	W25
P0306SG08C	N/A	800	306	4700	101 x 10 ³	15	25	300	20	1.400	0.670	125	0.120	W25
P0311SC10E	P205PH10	1000	311	3600	64.8 x 10 ³	25	30	300	20	1.170	0.920	125	0.120	W18
P0311SC10F	P205PH10	1000	311	3600	64.8 x 10 ³	30	30	300	20	1.170	0.920	125	0.120	W18
P0311SC10G	P205PH10	1000	311	3600	64.8 x 10 ³	35	30	300	20	1.170	0.920	125	0.120	W18
P0311SC12E	P205PH12	1200	311	3600	64.8 x 10 ³	25	30	300	20	1.170	0.920	125	0.120	W18
P0311SC12F	P205PH12	1200	311	3600	64.8 x 10 ³	30	30	300	20	1.170	0.920	125	0.120	W18
P0311SC12G	P205PH12	1200	311	3600	64.8 x 10 ³	35	30	300	20	1.170	0.920	125	0.120	W18
P0311SD10E	N/A	1000	311	3600	64.8 x 10 ³	25	30	300	20	1.170	0.920	125	0.120	W19
P0311SD10F	N/A	1000	311	3600	64.8 x 10 ³	30	30	300	20	1.170	0.920	125	0.120	W19
P0311SD10G	N/A	1000	311	3600	64.8 x 10 ³	35	30	300	20	1.170	0.920	125	0.120	W19
P0311SD12E	N/A	1200	311	3600	64.8 x 10 ³	25	30	300	20	1.170	0.920	125	0.120	W19
P0311SD12F	N/A	1200	311	3600	64.8 x 10 ³	30	30	300	20	1.170	0.920	125	0.120	W19
P0311SD12G	N/A	1200	311	3600	64.8 x 10 ³	35	30	300	20	1.170	0.920	125	0.120	W19
P0311SG10E	N/A	1000	311	3600	64.8 x 10 ³	25	30	300	20	1.170	0.920	125	0.120	W25
P0311SG10F	N/A	1000	311	3600	64.8 x 10 ³	30	30	300	20	1.170	0.920	125	0.120	W25
P0311SG10G	N/A	1000	311	3600	64.8 x 10 ³	35	30	300	20	1.170	0.920	125	0.120	W25
P0311SG12E	N/A	1200	311	3600	64.8 x 10 ³	25	30	300	20	1.170	0.920	125	0.120	W25
P0311SG12F	N/A	1200	311	3600	64.8 x 10 ³	30	30	300	20	1.170	0.920	125	0.120	W25
P0311SG12G	N/A	1200	311	3600	64.8 x 10 ³	35	30	300	20	1.170	0.920	125	0.120	W25
➤ P0330SC04A	P215PH04	400	330	5000	125 x 10 ³	10	30	300	20	1.050	0.880	125	0.120	W18
P0330SC04C	P215PH04	400	330	5000	125 x 10 ³	15	30	300	20	1.050	0.880	125	0.120	W18
P0330SC04D	P215PH04	400	330	5000	125 x 10 ³	20	30	300	20	1.050	0.880	125	0.120	W18
➤ P0330SC06A	P215PH06	600	330	5000	125 x 10 ³	10	30	300	20	1.050	0.880	125	0.120	W18
P0330SC06C	P215PH06	600	330	5000	125 x 10 ³	20	30	300	20	1.050	0.880	125	0.120	W18
P0330SC06D	P215PH06	600	330	5000	125 x 10 ³	20	30	300	20	1.050	0.880	125	0.120	W18
➤ P0330SC08A	P215PH08	800	330	5000	125 x 10 ³	10	30	300	20	1.050	0.880	125	0.120	W18
P0330SC08C	P215PH08	800	330	5000	125 x 10 ³	15	30	300	20	1.050	0.880	125	0.120	W18
P0330SC08D	P215PH08	800	330	5000	125 x 10 ³	20	30	300	20	1.050	0.880	125	0.120	W18
P0330SD04C	N/A	400	330	5000	125 x 10 ³	15	30	300	20	1.050	0.880	125	0.120	W19
P0330SD04D	N/A	400	330	5000	125 x 10 ³	20	30	300	20	1.050	0.880	125	0.120	W19
P0330SD08C	N/A	800	330	5000	125 x 10 ³	15	30	300	20	1.050	0.880	125	0.120	W19
P0330SD08D	N/A	800	330	5000	125 x 10 ³	20	30	300	20	1.050	0.880	125	0.120	W19
P0330SG04C	N/A	400	330	5000	125 x 10 ³	15	30	300	20	1.050	0.880	125	0.120	W25
P0330SG04D	N/A	400	330	5000	125 x 10 ³	20	30	300	20	1.050	0.880	125	0.120	W25
P0330SG08C	N/A	800	330	5000	125 x 10 ³	15	30	300	20	1.050	0.880	125	0.120	W25
P0330SG08D	N/A	800	330	5000	125 x 10 ³	20	30	300	20	1.050	0.880	125	0.120	W25
P0431SC04C	P270PH04	400	431	6500	211 x 10 ³	15	106	300	20	0.950	0.377	125	0.120	W18
P0431SC06C	P270PH06	600	431	6500	211 x 10 ³	15	106	300	20	0.950	0.377	125	0.120	W18
P0431SD04C	N/A	400	431	6500	211 x 10 ³	15	106	300	20	0.950	0.377	125	0.120	W19
P0431SD06C	N/A	600	431	6500	211 x 10 ³	15	106	300	20	0.950	0.377	125	0.120	W19
P0431SG04C	N/A	400	431	6500	211 x 10 ³	15	106	300	20	0.950	0.377	125	0.120	W25
P0431SG06C	N/A	600	431	6500	211 x 10 ³	15	106	300	20	0.950	0.377	125	0.120	W25

Outlines on pages O-01...O-24

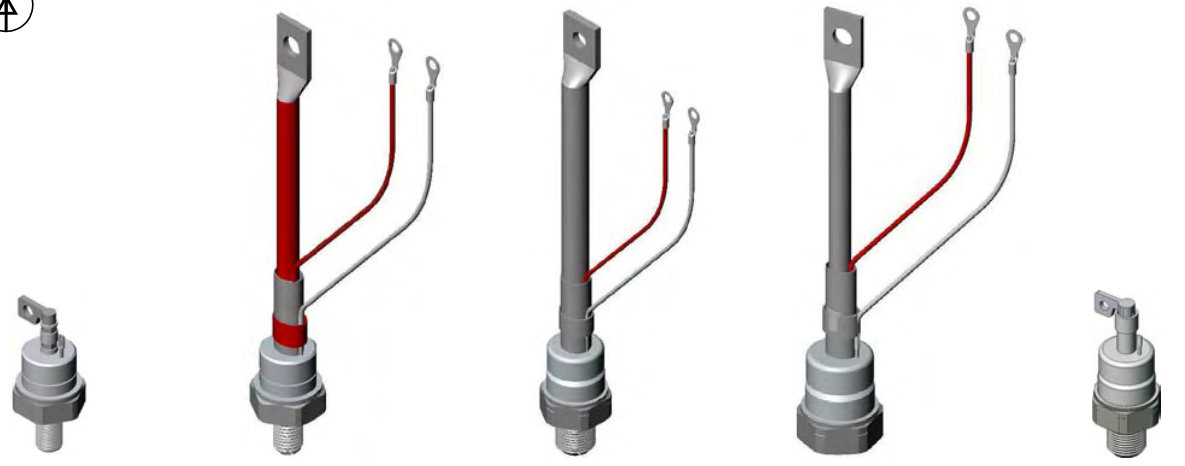

W16 - 100 g W17 - 130 g W18 - 280 g W19 - 209 g W25 - 220 g

Fast Turn-Off Thyristors - Capsule Types

WESTCODE

Westcode "P" series of fast switching thyristors have regenerative gate structure to ensure low switching losses and high di/dt performance. "P" Series devices are particularly attractive to; Inverter, DC chopper drives, UPS and Pulse Power applications. In addition to pressure contact technology these devices offer lower reverse recovery charge values, low forward switching losses and high reliability.


Type		V _{DRM}	I _{TAV}	I _{TSM}	I ² t	t _q	Typ. Reverse Recov. Charge			V _{TO}	r _T	T _{JM}	R _{thJK}	Fig. No.
Part No.	Old Part No.	V _{RRM}	T _K = 55°C	10 ms ½ sine	10 ms ½ sine	@ 200 V/μs	T _{JM} , 50% Chord			@ T _{JM}		d.c.		
➤ New		V	A	A	A ² s	μs	Q _{rr}	@ I _{TM}	@ -di/dt	V	mΩ	°C	180° sine	
							μC	A	A/μs				K/W	
P0295WC12D	P200CH12	1200	295	2700	36.5 x 10 ³	20	25	300	20	1.600	1.230	125	0.095	W8
P0295WC12E	P200CH12	1200	295	2700	36.5 x 10 ³	25	25	300	20	1.600	1.230	125	0.095	W8
P0295WC12F	P200CH12	1200	295	2700	36.5 x 10 ³	30	25	300	20	1.600	1.230	125	0.095	W8
➤ P0327WC08D	P202CH08	800	327	3250	52.8 x 10 ³	20	45	300	20	1.550	0.870	125	0.095	W8
➤ P0327WC08E	P202CH08	800	327	3250	52.8 x 10 ³	25	45	300	20	1.550	0.870	125	0.095	W8
➤ P0327WC08F	P202CH08	800	327	3250	52.8 x 10 ³	30	45	300	20	1.550	0.870	125	0.095	W8
➤ P0327WC10D	P202CH10	1000	327	3250	52.8 x 10 ³	20	45	300	20	1.550	0.870	125	0.095	W8
➤ P0327WC10E	P202CH10	1000	327	3250	52.8 x 10 ³	25	45	300	20	1.550	0.870	125	0.095	W8
➤ P0327WC10F	P202CH10	1000	327	3250	52.8 x 10 ³	30	45	300	20	1.550	0.870	125	0.095	W8
P0327WC12D	P202CH12	1200	327	3250	52.8 x 10 ³	20	45	300	20	1.550	0.870	125	0.095	W8
P0327WC12E	P202CH12	1200	327	3250	52.8 x 10 ³	25	45	300	20	1.550	0.870	125	0.095	W8
P0327WC12F	P202CH12	1200	327	3250	52.8 x 10 ³	30	45	300	20	1.550	0.870	125	0.095	W8
P0366WC04A	P214CH04	400	366	4700	110 x 10 ³	10	20	300	20	1.400	0.670	125	0.095	W8
P0366WC04B	P214CH04	400	366	4700	110 x 10 ³	12	20	300	20	1.400	0.670	125	0.095	W8
P0366WC04C	P214CH04	400	366	4700	110 x 10 ³	15	20	300	20	1.400	0.670	125	0.095	W8
➤ P0366WC04D	P214CH04	400	366	4700	110 x 10 ³	20	20	300	20	1.400	0.670	125	0.095	W8
P0366WC06A	P214CH06	600	366	4700	110 x 10 ³	10	20	300	20	1.400	0.670	125	0.095	W8
P0366WC06B	P214CH06	600	366	4700	110 x 10 ³	12	20	300	20	1.400	0.670	125	0.095	W8
P0366WC06C	P214CH06	600	366	4700	110 x 10 ³	15	20	300	20	1.400	0.670	125	0.095	W8
➤ P0366WC06D	P214CH06	600	366	4700	110 x 10 ³	20	20	300	20	1.400	0.670	125	0.095	W8
P0366WC08A	P214CH08	800	366	4700	110 x 10 ³	10	20	300	20	1.400	0.670	125	0.095	W8
P0366WC08B	P214CH08	800	366	4700	110 x 10 ³	12	20	300	20	1.400	0.670	125	0.095	W8
P0366WC08C	P214CH08	800	366	4700	110 x 10 ³	15	20	300	20	1.400	0.670	125	0.095	W8
➤ P0366WC08D	P214CH08	800	366	4700	110 x 10 ³	20	20	300	20	1.400	0.670	125	0.095	W8
P0367WC12E	P205CH12	1200	367	3600	64.8 x 10 ³	25	45	300	20	1.170	0.920	125	0.095	W8
P0367WC12F	P205CH12	1200	367	3600	64.8 x 10 ³	30	45	300	20	1.170	0.920	125	0.095	W8
P0367WC12G	P205CH12	1200	367	3600	64.8 x 10 ³	35	45	300	20	1.170	0.920	125	0.095	W8
➤ P0389WC04B	P215CH04	400	389	5000	125 x 10 ³	12	30	300	20	1.050	0.880	125	0.095	W8
P0389WC04C	P215CH04	400	389	5000	125 x 10 ³	15	30	300	20	1.050	0.880	125	0.095	W8
P0389WC04D	P215CH04	400	389	5000	125 x 10 ³	20	30	300	20	1.050	0.880	125	0.095	W8
➤ P0389WC08B	P215CH08	800	389	5000	125 x 10 ³	12	30	300	20	1.050	0.880	125	0.095	W8
P0389WC08C	P215CH08	800	389	5000	125 x 10 ³	15	30	300	20	1.050	0.880	125	0.095	W8
P0389WC08D	P215CH08	800	389	5000	125 x 10 ³	20	30	300	20	1.050	0.880	125	0.095	W8
P0515WC04C	P270CH04	400	515	6500	211 x 10 ³	15	100	300	20	0.950	0.377	125	0.095	W8
P0515WC04D	P270CH04	400	515	6500	211 x 10 ³	20	100	300	20	0.950	0.377	125	0.095	W8
P0515WC06C	P270CH06	600	515	6500	211 x 10 ³	15	100	300	20	0.950	0.377	125	0.095	W8
P0515WC06D	P270CH06	600	515	6500	211 x 10 ³	20	100	300	20	0.950	0.377	125	0.095	W8
P0848YS04B	P280SH04	400	848	8750	383 x 10 ³	12	80	550	40	1.010	0.305	125	0.050	W9
P0848YS04C	P280SH04	400	848	8750	383 x 10 ³	15	80	550	40	1.010	0.305	125	0.050	W9
P0848YS04D	P280SH04	400	848	8750	383 x 10 ³	20	80	550	40	1.010	0.305	125	0.050	W9
P0848YS06B	P280SH06	600	848	8750	383 x 10 ³	12	80	550	40	1.010	0.305	125	0.050	W9
P0848YS06C	P280SH06	600	848	8750	383 x 10 ³	15	80	550	40	1.010	0.305	125	0.050	W9
P0848YS06D	P280SH06	600	848	8750	383 x 10 ³	20	80	550	40	1.010	0.305	125	0.050	W9
P1007LS08D	P300SH800	800	1007	9500	451 x 10 ³	20	200	800	50	1.509	0.265	125	0.032	W60
P1007LS08E	P300SH800	800	1007	9500	451 x 10 ³	25	200	800	50	1.509	0.265	125	0.032	W60
P1007LS08F	P300SH800	800	1007	9500	451 x 10 ³	30	200	800	50	1.509	0.265	125	0.032	W60
P1007LS12D	P300SH12	1200	1007	9500	451 x 10 ³	20	200	800	50	1.509	0.265	125	0.032	W60
P1007LS12E	P300SH12	1200	1007	9500	451 x 10 ³	25	200	800	50	1.509	0.265	125	0.032	W60
P1007LS12F	P300SH12	1200	1007	9500	451 x 10 ³	30	200	800	50	1.509	0.265	125	0.032	W60



W8 Weight 70 g



W9 Weight 90 g



W60 Weight 340 g

Outlines on pages
O-01...O-24

Distributed Gate Thyristors - Capsule Types

WESTCODE

Westcode is recognised as the Worldwide leader in distributed gate technology. These devices are available with blocking voltages to 5.2 kV and currents to 3 kA, with t_q from 10 μ s to 300 μ s. The unique distributed gate design and lifetime control features give these devices both high di/dt capability and fast, low recovery turn-off, while maintaining a low on-state voltage drop. Ideally suited to application including: induction heating, power supplied, high frequency inverters/converters, UPS and pulse power.

Type		V_{DRM} V_{RRM}	I_{TAV} $T_K = 55^\circ C$	I_{TSM}	I^2t 10 ms 1/2 sine $V_R \leq 60\% V_{RRM}$	t_q @ 200 V/ μ s	Typ. Reverse Recov. Charge 50% Chord			V_{T0}	r_T	T_{JM}	R_{thJK} 180° Sine	Fig. No.
Part No. New	Old Part No.	V	A	A	A ² s	μ s	T_{JM} Q_{ra} μ C	@ I_{TM} A	@ -di/dt A/ μ s	@ T_{JM} V	m Ω	°C	K/W	
R0487YS10D	R210SH10	1000	487	4300	92.5 x 10 ³	20	40	550	40	1.738	0.943	125	0.0500	W9
R0487YS10E	R210SH10	1000	487	4300	92.5 x 10 ³	25	40	550	40	1.738	0.943	125	0.0500	W9
R0487YS10F	R210SH10	1000	487	4300	92.5 x 10 ³	30	40	550	40	1.738	0.943	125	0.0500	W9
R0487YS12D	R210SH12	1200	487	4300	92.5 x 10 ³	20	40	550	40	1.738	0.943	125	0.0500	W9
R0487YS12E	R210SH12	1200	487	4300	92.5 x 10 ³	25	40	550	40	1.738	0.943	125	0.0500	W9
R0487YS12F	R210SH12	1200	487	4300	92.5 x 10 ³	30	40	550	40	1.738	0.943	125	0.0500	W9
R0487YS14D	R210SH14	1400	487	4300	92.5 x 10 ³	20	40	550	40	1.738	0.943	125	0.0500	W9
R0487YS14E	R210SH14	1400	487	4300	92.5 x 10 ³	25	40	550	40	1.738	0.943	125	0.0500	W9
R0487YS14F	R210SH14	1400	487	4300	92.5 x 10 ³	30	40	550	40	1.738	0.943	125	0.0500	W9
R0577YS08C	R185SH08	800	577	6000	180 x 10 ³	15	85	550	40	1.510	0.640	125	0.0500	W9
R0577YS08D	R185SH08	800	577	6000	180 x 10 ³	20	85	550	40	1.510	0.640	125	0.0500	W9
R0577YS08E	R185SH08	800	577	6000	180 x 10 ³	25	85	550	40	1.510	0.640	125	0.0500	W9
R0577YS10C	R185SH10	1000	577	6000	180 x 10 ³	15	85	550	40	1.510	0.640	125	0.0500	W9
R0577YS10D	R185SH10	1000	577	6000	180 x 10 ³	20	85	550	40	1.510	0.640	125	0.0500	W9
R0577YS10E	R185SH10	1000	577	6000	180 x 10 ³	25	85	550	40	1.510	0.640	125	0.0500	W9
R0577YS12C	R185SH12	1200	577	6000	180 x 10 ³	15	85	550	40	1.510	0.640	125	0.0500	W9
R0577YS12D	R185SH12	1200	577	6000	180 x 10 ³	20	85	550	40	1.510	0.640	125	0.0500	W9
R0577YS12E	R185SH12	1200	577	6000	180 x 10 ³	25	85	550	40	1.510	0.640	125	0.0500	W9
R0633YS08D	R216SH08	800	633	6300	200 x 10 ³	20	85	550	40	1.250	0.614	125	0.0500	W9
R0633YS08E	R216SH08	800	633	6300	200 x 10 ³	25	85	550	40	1.250	0.614	125	0.0500	W9
R0633YS08F	R216SH08	800	633	6300	200 x 10 ³	30	85	550	40	1.250	0.614	125	0.0500	W9
R0633YS10D	R216SH10	1000	633	6300	200 x 10 ³	20	85	550	40	1.250	0.612	125	0.0500	W9
R0633YS10E	R216SH10	1000	633	6300	200 x 10 ³	25	85	550	40	1.250	0.614	125	0.0500	W9
R0633YS10F	R216SH10	1000	633	6300	200 x 10 ³	30	85	550	40	1.250	0.614	125	0.0500	W9
R0633YS12D	R216SH12	1200	633	6300	200 x 10 ³	20	85	550	40	1.250	0.612	125	0.0500	W9
R0633YS12E	R216SH12	1200	633	6300	200 x 10 ³	25	85	550	40	1.250	0.614	125	0.0500	W9
R0633YS12F	R216SH12	1200	633	6300	200 x 10 ³	30	85	550	40	1.250	0.614	125	0.0500	W9
R0717LS14G	R181SH14	1400	717	7050	248.5 x 10 ³	35	150	1000	60	1.752	0.732	125	0.0320	W60
R0717LS14H	R181SH14	1400	717	7050	248.5 x 10 ³	40	150	1000	60	1.752	0.732	125	0.0320	W60
R0717LS14J	R181SH14	1400	717	7050	248.5 x 10 ³	50	150	1000	60	1.752	0.732	125	0.0320	W60
R0717LS16G	R181SH16	1600	717	7050	248.5 x 10 ³	35	150	1000	60	1.752	0.732	125	0.0320	W60
R0717LS16H	R181SH16	1600	717	7050	248.5 x 10 ³	40	150	1000	60	1.752	0.732	125	0.0320	W60
R0717LS16J	R181SH16	1600	717	7050	248.5 x 10 ³	50	150	1000	60	1.752	0.732	125	0.0320	W60
R0736LS20J	R175SH20	2000	736	6800	231 x 10 ³	50	240	1000	60	1.842	0.619	125	0.0320	W60
R0736LS20K	R175SH20	2000	736	6800	231 x 10 ³	60	240	1000	60	1.842	0.619	125	0.0320	W60
R0736LS20L	R175SH20	2000	736	6800	231 x 10 ³	65	240	1000	60	1.842	0.619	125	0.0320	W60
R0736LS20M	R175SH20	2000	736	6800	231 x 10 ³	70	240	1000	60	1.842	0.619	125	0.0320	W60
R0736LS22J	R175SH22	2200	736	6800	231 x 10 ³	50	240	1000	60	1.842	0.619	125	0.0320	W60
R0736LS22K	R175SH22	2200	736	6800	231 x 10 ³	60	240	1000	60	1.842	0.619	125	0.0320	W60
R0736LS22L	R175SH22	2200	736	6800	231 x 10 ³	65	240	1000	60	1.842	0.619	125	0.0320	W60
R0736LS22M	R175SH22	2200	736	6800	231 x 10 ³	70	240	1000	60	1.842	0.619	125	0.0320	W60
R0736LS25J	R175SH25	2500	736	6800	231 x 10 ³	50	240	1000	60	1.842	0.619	125	0.0320	W60
R0736LS25K	R175SH25	2500	736	6800	231 x 10 ³	60	240	1000	60	1.842	0.619	125	0.0320	W60
R0736LS25L	R175SH25	2500	736	6800	231 x 10 ³	65	240	1000	60	1.842	0.619	125	0.0320	W60
R0736LS25M	R175SH25	2500	736	6800	231 x 10 ³	70	240	1000	60	1.842	0.619	125	0.0320	W60
R0809LS06A	R180SH06	600	809	8000	320 x 10 ³	10	50	1000	60	2.100	0.300	125	0.0320	W60
R0809LS06B	R180SH06	600	809	8000	320 x 10 ³	12	50	1000	60	2.100	0.300	125	0.0320	W60
R0809LS06C	R180SH06	600	809	8000	320 x 10 ³	15	50	1000	60	2.100	0.300	125	0.0320	W60
R0809LS10A	R180SH10	1000	809	8000	320 x 10 ³	10	50	1000	60	2.100	0.300	125	0.0320	W60
R0809LS10B	R180SH10	1000	809	8000	320 x 10 ³	12	50	1000	60	2.100	0.300	125	0.0320	W60
R0809LS10C	R180SH10	1000	809	8000	320 x 10 ³	15	50	1000	60	2.100	0.300	125	0.0320	W60
R0830LS10D	R190SH10	1000	830	8500	361 x 10 ³	20	110	1000	60	1.900	0.357	125	0.0320	W60
R0830LS10E	R190SH10	1000	830	8500	361 x 10 ³	25	110	1000	60	1.900	0.357	125	0.0320	W60
R0830LS10F	R190SH10	1000	830	8500	361 x 10 ³	30	110	1000	60	1.900	0.357	125	0.0320	W60
R0830LS10G	R190SH10	1000	830	8500	361 x 10 ³	35	110	1000	60	1.900	0.357	125	0.0320	W60
R0830LS12D	R190SH12	1200	830	8500	361 x 10 ³	20	110	1000	60	1.900	0.357	125	0.0320	W60
R0830LS12E	R190SH12	1200	830	8500	361 x 10 ³	25	110	1000	60	1.900	0.357	125	0.0320	W60
R0830LS12F	R190SH12	1200	830	8500	361 x 10 ³	30	110	1000	60	1.900	0.357	125	0.0320	W60
R0830LS12G	R190SH12	1200	830	8500	361 x 10 ³	35	110	1000	60	1.900	0.357	125	0.0320	W60
R0830LS14D	R190SH14	1400	830	8500	361 x 10 ³	20	110	1000	60	1.900	0.357	125	0.0320	W60
R0830LS14E	R190SH14	1400	830	8500	361 x 10 ³	25	110	1000	60	1.900	0.357	125	0.0320	W60
R0830LS14F	R190SH14	1400	830	8500	361 x 10 ³	30	110	1000	60	1.900	0.357	125	0.0320	W60
R0830LS14G	R190SH14	1400	830	8500	361 x 10 ³	35	110	1000	60	1.900	0.357	125	0.0320	W60

Type		V_{DRM} V_{RRM}	I_{TAV} $T_K = 55^\circ C$	I_{TSM}	I^2t 10 ms ½ sine $V_R \leq 60\% V_{RRM}$	t_q @ 200 V/µs	Typ. Reverse Recov. Charge			V_{TO}	r_T	T_{JM}	R_{thJK} 180° Sine K/W	Fig. No.
Part No. ➤ New	Old Part No.	V	A	A	A ² s	µs	T_{JM} Q_{ra} µC	@ I_{TM} A	@ -di/dt A/µs	V	mΩ	°C		
R0878LS16K	R200SH16	1600	878	7500	281×10^3	60	350	1000	60	1.447	0.480	125	0.0320	W60
➤ R0878LS16L	R200SH16	1600	878	7500	281×10^3	65	350	1000	60	1.447	0.480	125	0.0320	W60
R0878LS16M	R200SH16	1600	878	7500	281×10^3	70	350	1000	60	1.447	0.480	125	0.0320	W60
R0878LS18K	R200SH18	1800	878	7500	281×10^3	60	350	1000	60	1.447	0.480	125	0.0320	W60
➤ R0878LS18L	R200SH18	1800	878	7500	281×10^3	65	350	1000	60	1.447	0.480	125	0.0320	W60
R0878LS18M	R200SH18	1800	878	7500	281×10^3	70	350	1000	60	1.447	0.480	125	0.0320	W60
R0878LS20K	R200SH20	1 2000	878	7500	281×10^3	60	350	1000	60	1.447	0.480	125	0.0320	W60
➤ R0878LS20L	R200SH20	1 2000	878	7500	281×10^3	65	350	1000	60	1.447	0.480	125	0.0320	W60
R0878LS20M	R200SH20	1 2000	878	7500	281×10^3	70	350	1000	60	1.447	0.480	125	0.0320	W60
R0878LS21K	R200SH21	1 2100	878	7500	281×10^3	60	350	1000	60	1.447	0.480	125	0.0320	W60
➤ R0878LS21L	R200SH21	1 2100	878	7500	281×10^3	65	350	1000	60	1.447	0.480	125	0.0320	W60
R0878LS21M	R200SH21	1 2100	878	7500	281×10^3	70	350	1000	60	1.447	0.480	125	0.0320	W60
➤ R0929LS08A	R219SH08	800	929	9000	405×10^3	10	85	1000	60	1.549	0.350	125	0.0320	W60
➤ R0929LS08B	R219SH08	800	929	9000	405×10^3	12	85	1000	60	1.549	0.350	125	0.0320	W60
R0929LS08C	R219SH08	800	929	9000	405×10^3	15	85	1000	60	1.549	0.350	125	0.0320	W60
R0929LS08D	R219SH08	800	929	9000	405×10^3	20	85	1000	60	1.549	0.350	125	0.0320	W60
R0929LS08E	R219SH08	800	929	9000	405×10^3	25	85	1000	60	1.549	0.350	125	0.0320	W60
➤ R0929LS10A	R219SH10	1000	929	9000	405×10^3	10	85	1000	60	1.549	0.350	125	0.0320	W60
➤ R0929LS10B	R219SH10	1000	929	9000	405×10^3	12	85	1000	60	1.549	0.350	125	0.0320	W60
R0929LS10C	R219SH10	1000	929	9000	405×10^3	15	85	1000	60	1.549	0.350	125	0.0320	W60
R0929LS10D	R219SH10	1000	929	9000	405×10^3	20	85	1000	60	1.549	0.350	125	0.0320	W60
R0929LS10E	R219SH10	1000	929	9000	405×10^3	25	85	1000	60	1.549	0.350	125	0.0320	W60
➤ R0929LS12A	R219SH12	1200	929	9000	405×10^3	10	85	1000	60	1.549	0.350	125	0.0320	W60
➤ R0929LS12B	R219SH12	1200	929	9000	405×10^3	12	85	1000	60	1.549	0.350	125	0.0320	W60
R0929LS12C	R219SH12	1200	929	9000	405×10^3	15	85	1000	60	1.549	0.350	125	0.0320	W60
R0929LS12D	R219SH12	1200	929	9000	405×10^3	20	85	1000	60	1.549	0.350	125	0.0320	W60
R0929LS12E	R219SH12	1200	929	9000	405×10^3	25	85	1000	60	1.549	0.350	125	0.0320	W60
R0964LS08C	R220SH08	800	964	9400	442×10^3	15	75	1000	60	1.530	0.309	125	0.0320	W60
R0964LS08D	R220SH08	800	964	9400	442×10^3	20	75	1000	60	1.530	0.309	125	0.0320	W60
R0964LS08E	R220SH08	800	964	9400	442×10^3	25	75	1000	60	1.530	0.309	125	0.0320	W60
R0964LS08F	R220SH08	800	964	9400	442×10^3	30	75	1000	60	1.530	0.309	125	0.0320	W60
R0964LS10C	R220SH10	1000	964	9400	442×10^3	15	75	1000	60	1.530	0.309	125	0.0320	W60
R0964LS10D	R220SH10	1000	964	9400	442×10^3	20	75	1000	60	1.530	0.309	125	0.0320	W60
R0964LS10E	R220SH10	1000	964	9400	442×10^3	25	75	1000	60	1.530	0.309	125	0.0320	W60
R0964LS10F	R220SH10	1000	964	9400	442×10^3	30	75	1000	60	1.530	0.309	125	0.0320	W60
R0964LS12C	R220SH12	1200	964	9400	442×10^3	15	75	1000	60	1.530	0.309	125	0.0320	W60
R0964LS12D	R220SH12	1200	964	9400	442×10^3	20	75	1000	60	1.530	0.309	125	0.0320	W60
R0964LS12E	R220SH12	1200	964	9400	442×10^3	25	75	1000	60	1.530	0.309	125	0.0320	W60
R0964LS12F	R220SH12	1200	964	9400	442×10^3	30	75	1000	60	1.530	0.309	125	0.0320	W60
R0990LS04A	R270SH08	400	990	11000	6.05×10^5	10	40	1000	60	1.350	0.350	125	0.0320	W60
R0990LS04B	R270SH08	400	990	11000	6.05×10^5	12	40	1000	60	1.350	0.350	125	0.0320	W60
R0990LS04C	R270SH08	400	990	11000	6.05×10^5	15	40	1000	60	1.350	0.350	125	0.0320	W60
R0990LS06A	R270SH06	600	990	11000	6.05×10^5	10	40	1000	60	1.350	0.350	125	0.0320	W60
R0990LS06B	R270SH06	600	990	11000	6.05×10^5	12	40	1000	60	1.350	0.350	125	0.0320	W60
R0990LS06C	R270SH06	600	990	11000	6.05×10^5	15	40	1000	60	1.350	0.350	125	0.0320	W60
R0990LS08A	R270SH08	800	990	11000	6.05×10^5	10	40	1000	60	1.350	0.350	125	0.0320	W60
R0990LS08B	R270SH08	800	990	11000	6.05×10^5	12	40	1000	60	1.350	0.350	125	0.0320	W60
R0990LS08C	R270SH08	800	990	11000	6.05×10^5	15	40	1000	60	1.350	0.350	125	0.0320	W60
➤ R1124NS18J	R305SH18	1800	1124	13500	0.91×10^6	50	400	1000	60	1.540	0.379	125	0.0240	W61
R1124NS18K	R305SH18	1800	1124	13500	0.91×10^6	60	400	1000	60	1.540	0.379	125	0.0240	W61
➤ R1124NS18L	R305SH18	1800	1124	13500	0.91×10^6	65	400	1000	60	1.540	0.379	125	0.0240	W61
R1124NS18M	R305SH18	1800	1124	13500	0.91×10^6	70	400	1000	60	1.540	0.379	125	0.0240	W61
➤ R1124NS20J	R305SH20	1 2000	1124	13500	0.91×10^6	50	400	1000	60	1.540	0.379	125	0.0240	W61
R1124NS20K	R305SH20	1 2000	1124	13500	0.91×10^6	60	400	1000	60	1.540	0.379	125	0.0240	W61
➤ R1124NS20L	R305SH20	1 2000	1124	13500	0.91×10^6	65	400	1000	60	1.540	0.379	125	0.0240	W61
R1124NS20M	R305SH20	1 2000	1124	13500	0.91×10^6	70	400	1000	60	1.540	0.379	125	0.0240	W61
➤ R1124NS21J	R305SH21	1 2100	1124	13500	0.91×10^6	50	400	1000	60	1.540	0.379	125	0.0240	W61
R1124NS21K	R305SH21	1 2100	1124	13500	0.91×10^6	60	400	1000	60	1.540	0.379	125	0.0240	W61
➤ R1124NS21L	R305SH21	1 2100	1124	13500	0.91×10^6	65	400	1000	60	1.540	0.379	125	0.0240	W61
R1124NS21M	R305SH21	1 2100	1124	13500	0.91×10^6	70	400	1000	60	1.540	0.379	125	0.0240	W61
➤ R1127NC32P	D315CH32	3200	1127	12800	819×10^3	120	1500	1000	60	1.500	0.474	125	0.0220	W11
R1127NC32R	D315CH32	3200	1127	12800	819×10^3	140	1500	1000	60	1.500	0.474	125	0.0220	W11
R1127NC32S	D315CH32	3200	1127	12800	819×10^3	160	1500	1000	60	1.500	0.474	125	0.0220	W11
R1127NC32T	D315CH32	3200	1127	12800	819×10^3	200	1500	1000	60	1.500	0.474	125	0.0220	W11
R1127NC34S	D315CH34	3400	1127	12800	819×10^3	160	1500	1000	60	1.500	0.474	125	0.0220	W11
R1127NC34T	D315CH34	3400	1127	12800	819×10^3	200	1500	1000	60	1.500	0.474	125	0.0220	W11
R1127NC36S	D315CH36	3600	1127	12800	819×10^3	160	1500	1000	60	1.500	0.474	125	0.0220	W11
R1127NC36T	D315CH36	3600	1127	12800	819×10^3	200	1500	1000	60	1.500	0.474	125	0.0220	W11

Type		V _{DRM} V _{RRM}	I _{TAV} T _K = 55°C	I _{TSM} 10 ms ½ sine V _R ≤ 60% V _{RRM}	I _t A ² s	t _q @ 200 V/μs	Typ. Reverse Recov. Charge 50% Chord			V _{TO}	r _T	T _{JM}	R _{thJK} 180° Sine K/W	Fig. No.
Part No. New	Old Part No.	V	A	A	A ² s	μs	T _{JM} , Q _{ra} μC	@ I _{TM} A	@ -di/dt A/μs	@ T _{JM} V	mΩ	°C		
R1158NS24N	D350SH24	2400	1158	14500	1.05 x 10 ⁶	100	900	1000	60	1.600	0.400	125	0.0220	W61
R1158NS24P	D350SH24	2400	1158	14500	1.05 x 10 ⁶	120	900	1000	60	1.600	0.400	125	0.0220	W61
R1158NS24T	D350SH24	2400	1158	14500	1.05 x 10 ⁶	200	900	1000	60	1.600	0.400	125	0.0220	W61
R1158NS26N	D350SH26	2600	1158	14500	1.05 x 10 ⁶	100	900	1000	60	1.600	0.400	125	0.0220	W61
R1158NS26P	D350SH26	2600	1158	14500	1.05 x 10 ⁶	120	900	1000	60	1.600	0.400	125	0.0220	W61
R1158NS26T	D350SH26	2600	1158	14500	1.05 x 10 ⁶	200	900	1000	60	1.600	0.400	125	0.0220	W61
R1178NS10E	R325SH10	1000	1178	17000	1.45 x 10 ⁶	25	170	1000	60	1.600	0.300	125	0.0240	W61
R1178NS10F	R325SH10	1000	1178	17000	1.45 x 10 ⁶	30	170	1000	60	1.600	0.300	125	0.0240	W61
R1178NS10G	R325SH10	1000	1178	17000	1.45 x 10 ⁶	35	170	1000	60	1.600	0.300	125	0.0240	W61
R1178NS12E	R325SH12	1200	1178	17000	1.45 x 10 ⁶	25	170	1000	60	1.600	0.300	125	0.0240	W61
R1178NS12F	R325SH12	1200	1178	17000	1.45 x 10 ⁶	30	170	1000	60	1.600	0.300	125	0.0240	W61
R1178NS12G	R325SH12	1200	1178	17000	1.45 x 10 ⁶	35	170	1000	60	1.600	0.300	125	0.0240	W61
R1178NS14E	R325SH14	1400	1178	17000	1.45 x 10 ⁶	25	170	1000	60	1.600	0.300	125	0.0240	W61
R1178NS14F	R325SH14	1400	1178	17000	1.45 x 10 ⁶	30	170	1000	60	1.600	0.300	125	0.0240	W61
R1178NS14G	R325SH14	1400	1178	17000	1.45 x 10 ⁶	35	170	1000	60	1.600	0.300	125	0.0240	W61
R1211NS08C	R350SH08	800	1211	17600	15.48 x 10 ⁵	20	100	1000	60	1.720	0.230	125	0.0240	W61
R1211NS08D	R350SH08	800	1211	17600	15.48 x 10 ⁵	20	100	1000	60	1.720	0.230	125	0.0240	W61
R1211NS08E	R350SH08	800	1211	17600	15.48 x 10 ⁵	25	100	1000	60	1.720	0.230	125	0.0240	W61
R1211NS10C	R350SH10	1000	1211	17600	15.48 x 10 ⁵	20	100	1000	60	1.720	0.230	125	0.0240	W61
R1211NS10D	R350SH10	1000	1211	17600	15.48 x 10 ⁵	20	100	1000	60	1.720	0.230	125	0.0240	W61
R1211NS10E	R350SH10	1000	1211	17600	15.48 x 10 ⁵	25	100	1000	60	1.720	0.230	125	0.0240	W61
R1211NS12C	R350SH12	1200	1211	17600	15.48 x 10 ⁵	20	100	1000	60	1.720	0.230	125	0.0240	W61
R1211NS12D	R350SH12	1200	1211	17600	15.48 x 10 ⁵	20	100	1000	60	1.720	0.230	125	0.0240	W61
R1211NS12E	R350SH12	1200	1211	17600	15.48 x 10 ⁵	25	100	1000	60	1.720	0.230	125	0.0240	W61
R1271NS08C	R355SH08	800	1271	18000	1.62 x 10 ⁶	15	120	1000	60	1.547	0.237	125	0.0240	W61
R1271NS08D	R355SH08	800	1271	18000	1.62 x 10 ⁶	20	120	1000	60	1.547	0.237	125	0.0240	W61
R1271NS08E	R355SH08	800	1271	18000	1.62 x 10 ⁶	25	120	1000	60	1.547	0.237	125	0.0240	W61
R1271NS08G	R355SH08	800	1271	18000	1.62 x 10 ⁶	35	120	1000	60	1.547	0.237	125	0.0240	W61
R1271NS10C	R355SH10	1000	1271	18000	1.62 x 10 ⁶	15	120	1000	60	1.547	0.237	125	0.0240	W61
R1271NS10D	R355SH10	1000	1271	18000	1.62 x 10 ⁶	20	120	1000	60	1.547	0.237	125	0.0240	W61
R1271NS10E	R355SH10	1000	1271	18000	1.62 x 10 ⁶	25	120	1000	60	1.547	0.237	125	0.0240	W61
R1271NS10G	R355SH10	1000	1271	18000	1.62 x 10 ⁶	35	120	1000	60	1.547	0.237	125	0.0240	W61
R1271NS12B	R355SH12	1200	1271	18000	1.62 x 10 ⁶	12	120	1000	60	1.547	0.237	125	0.0240	W61
R1271NS12C	R355SH12	1200	1271	18000	1.62 x 10 ⁶	15	120	1000	60	1.547	0.237	125	0.0240	W61
R1271NS12D	R355SH12	1200	1271	18000	1.62 x 10 ⁶	20	120	1000	60	1.547	0.237	125	0.0240	W61
R1271NS12E	R355SH12	1200	1271	18000	1.62 x 10 ⁶	25	120	1000	60	1.547	0.237	125	0.0240	W61
R1271NS12G	R355SH12	1200	1271	18000	1.62 x 10 ⁶	35	120	1000	60	1.547	0.237	125	0.0240	W61
R1275NS14J	R395SH14	1400	1275	15500	1.20 x 10 ⁶	50	420	1000	60	1.207	0.342	125	0.0240	W61
R1275NS14K	R395SH14	1400	1275	15500	1.20 x 10 ⁶	60	420	1000	60	1.207	0.342	125	0.0240	W61
R1275NS14L	R395SH14	1400	1275	15500	1.20 x 10 ⁶	65	420	1000	60	1.207	0.342	125	0.0240	W61
R1275NS14M	R395SH14	1400	1275	15500	1.20 x 10 ⁶	70	420	1000	60	1.207	0.342	125	0.0240	W61
R1275NS18J	R395SH18	1800	1275	15500	1.20 x 10 ⁶	50	420	1000	60	1.207	0.342	125	0.0240	W61
R1275NS18K	R395SH18	1800	1275	15500	1.20 x 10 ⁶	60	420	1000	60	1.207	0.342	125	0.0240	W61
R1275NS18L	R395SH18	1800	1275	15500	1.20 x 10 ⁶	65	420	1000	60	1.207	0.342	125	0.0240	W61
R1275NS18M	R395SH18	1800	1275	15500	1.20 x 10 ⁶	70	420	1000	60	1.207	0.342	125	0.0240	W61
R1275NS20J	R395SH20	2000	1275	15500	1.20 x 10 ⁶	50	420	1000	60	1.207	0.342	125	0.0240	W61
R1275NS20K	R395SH20	2000	1275	15500	1.20 x 10 ⁶	60	420	1000	60	1.207	0.342	125	0.0240	W61
R1275NS20L	R395SH20	2000	1275	15500	1.20 x 10 ⁶	65	420	1000	60	1.207	0.342	125	0.0240	W61
R1275NS20M	R395SH20	2000	1275	15500	1.20 x 10 ⁶	70	420	1000	60	1.207	0.342	125	0.0240	W61
R1275NS21J	R395SH21	2100	1275	15500	1.20 x 10 ⁶	50	420	1000	60	1.207	0.342	125	0.0240	W61
R1275NS21K	R395SH21	2100	1275	15500	1.20 x 10 ⁶	60	420	1000	60	1.207	0.342	125	0.0240	W61
R1275NS21L	R395SH21	2100	1275	15500	1.20 x 10 ⁶	65	420	1000	60	1.207	0.342	125	0.0240	W61
R1275NS21M	R395SH21	2100	1275	15500	1.20 x 10 ⁶	70	420	1000	60	1.207	0.342	125	0.0240	W61
R1279NS22J	D391SH22	2200	1279	14800	1.10 x 10 ⁶	50	700	1000	60	1.440	0.330	125	0.0220	W61
R1279NS22K	D391SH22	2200	1279	14800	1.10 x 10 ⁶	60	700	1000	60	1.440	0.330	125	0.0220	W61
R1279NS22L	D391SH22	2200	1279	14800	1.10 x 10 ⁶	65	700	1000	60	1.440	0.330	125	0.0220	W61
R1279NS22M	D391SH22	2200	1279	14800	1.10 x 10 ⁶	70	700	1000	60	1.440	0.330	125	0.0220	W61
R1279NS25J	D391SH25	2500	1279	14800	1.10 x 10 ⁶	50	700	1000	60	1.440	0.330	125	0.0220	W61
R1279NS25K	D391SH25	2500	1279	14800	1.10 x 10 ⁶	60	700	1000	60	1.440	0.330	125	0.0220	W61
R1279NS25L	D391SH25	2500	1279	14800	1.10 x 10 ⁶	65	700	1000	60	1.440	0.330	125	0.0220	W61
R1279NS25M	D391SH25	2500	1279	14800	1.10 x 10 ⁶	70	700	1000	60	1.440	0.330	125	0.0220	W61

Type		V_{DRM} V_{RRM}	I_{TAV} $T_K = 55^\circ C$	I_{TSM}	I^2t 10 ms ½ sine $V_R \leq 60\% V_{RRM}$	t_q @ 200 V/μs	Typ. Reverse Recov. Charge			V_{TO}	r_T	T_{JM}	R_{thJK} 180° Sine K/W	Fig. No.
Part No. ➤ New	Old Part No.	V	A	A	A ² s	μs	T_{JM} Q_{ra} μC	50% Chord @ I_{TM} A	@ -di/dt A/μs	V	mΩ	°C		
R1280NS18K	D390SH18	1800	1280	14800	1.10 x 10 ⁶	60	600	1000	60	1.440	0.330	125	0.0220	W61
➤ R1280NS18L	D390SH18	1800	1280	14800	1.10 x 10 ⁶	65	600	1000	60	1.440	0.330	125	0.0220	W61
R1280NS18M	D390SH18	1800	1280	14800	1.10 x 10 ⁶	70	600	1000	60	1.440	0.330	125	0.0220	W61
R1280NS21K	D390SH21	2100	1280	14800	1.10 x 10 ⁶	60	600	1000	60	1.440	0.330	125	0.0220	W61
➤ R1280NS21L	D390SH21	2100	1280	14800	1.10 x 10 ⁶	65	600	1000	60	1.440	0.330	125	0.0220	W61
R1280NS21M	D390SH21	2100	1280	14800	1.10 x 10 ⁶	70	600	1000	60	1.440	0.330	125	0.0220	W61
R1280NS22K	D390SH22	³ 2200	1280	14800	1.10 x 10 ⁶	60	600	1000	60	1.440	0.330	125	0.0220	W61
➤ R1280NS22L	D390SH22	³ 2200	1280	14800	1.10 x 10 ⁶	65	600	1000	60	1.440	0.330	125	0.0220	W61
R1280NS22M	D390SH22	³ 2200	1280	14800	1.10 x 10 ⁶	70	600	1000	60	1.440	0.330	125	0.0220	W61
R1280NS25K	D390SH25	³ 2500	1280	14800	1.10 x 10 ⁶	60	600	1000	60	1.440	0.330	125	0.0220	W61
➤ R1280NS25L	D390SH25	³ 2500	1280	14800	1.10 x 10 ⁶	65	600	1000	60	1.440	0.330	125	0.0220	W61
R1280NS25M	D390SH25	³ 2500	1280	14800	1.10 x 10 ⁶	70	600	1000	60	1.440	0.330	125	0.0220	W61
R1331NS10B	D450SH10	1000	1331	18200	1.66 x 10 ⁶	12	80	1000	60	1.450	0.285	125	0.0220	W61
R1331NS10C	D450SH10	1000	1331	18200	1.66 x 10 ⁶	15	80	1000	60	1.450	0.285	125	0.0220	W61
R1331NS10D	D450SH10	1000	1331	18200	1.66 x 10 ⁶	20	80	1000	60	1.450	0.285	125	0.0220	W61
R1331NS12B	D450SH12	1200	1331	18200	1.66 x 10 ⁶	12	80	1000	60	1.450	0.285	125	0.0220	W61
R1331NS12C	D450SH12	1200	1331	18200	1.66 x 10 ⁶	15	80	1000	60	1.450	0.285	125	0.0220	W61
R1331NS12D	D450SH12	1200	1331	18200	1.66 x 10 ⁶	20	80	1000	60	1.450	0.285	125	0.0220	W61
➤ R1446NS08C	R400SH08	800	1446	19500	1.90 x 10 ⁶	15	120	1000	60	1.304	0.200	125	0.0240	W61
R1446NS08E	R400SH08	800	1446	19500	1.90 x 10 ⁶	20	120	1000	60	1.304	0.200	125	0.0240	W61
R1446NS08F	R400SH08	800	1446	19500	1.90 x 10 ⁶	30	120	1000	60	1.304	0.200	125	0.0240	W61
R1446NS08G	R400SH08	800	1446	19500	1.90 x 10 ⁶	35	120	1000	60	1.304	0.200	125	0.0240	W61
➤ R1446NS10C	R400SH10	1000	1446	19500	1.90 x 10 ⁶	15	120	1000	60	1.304	0.199	125	0.0240	W61
R1446NS10E	R400SH10	1000	1446	19500	1.90 x 10 ⁶	20	120	1000	60	1.304	0.199	125	0.0240	W61
R1446NS10F	R400SH10	1000	1446	19500	1.90 x 10 ⁶	30	120	1000	60	1.304	0.199	125	0.0240	W61
R1446NS10G	R400SH10	1000	1446	19500	1.90 x 10 ⁶	35	120	1000	60	1.304	0.199	125	0.0240	W61
➤ R1446NS12C	R400SH12	1200	1446	19500	1.90 x 10 ⁶	15	120	1000	60	1.304	0.199	125	0.0240	W61
R1446NS12E	R400SH12	1200	1446	19500	1.90 x 10 ⁶	20	120	1000	60	1.304	0.199	125	0.0240	W61
R1446NS12F	R400SH12	1200	1446	19500	1.90 x 10 ⁶	30	120	1000	60	1.304	0.199	125	0.0240	W61
R1446NS12G	R400SH12	1200	1446	19500	1.90 x 10 ⁶	35	120	1000	60	1.304	0.199	125	0.0240	W61
R1448NS14H	D405SH14	1400	1448	15500	1.20 x 10 ⁶	40	500	1000	60	1.300	0.250	125	0.0220	W61
R1448NS14J	D405SH14	1400	1448	15500	1.20 x 10 ⁶	50	500	1000	60	1.300	0.250	125	0.0220	W61
➤ R1448NS14K	D405SH14	1400	1448	15500	1.20 x 10 ⁶	60	500	1000	60	1.300	0.250	125	0.0220	W61
R1448NS14L	D405SH14	1400	1448	15500	1.20 x 10 ⁶	65	500	1000	60	1.300	0.250	125	0.0220	W61
➤ R1448NS14M	D405SH14	1400	1448	15500	1.20 x 10 ⁶	70	500	1000	60	1.300	0.250	125	0.0220	W61
R1448NS18H	D405SH18	1800	1448	15500	1.20 x 10 ⁶	40	500	1000	60	1.300	0.250	125	0.0220	W61
R1448NS18J	D405SH18	1800	1448	15500	1.20 x 10 ⁶	50	500	1000	60	1.300	0.250	125	0.0220	W61
➤ R1448NS18K	D405SH18	1800	1448	15500	1.20 x 10 ⁶	60	500	1000	60	1.300	0.250	125	0.0220	W61
R1448NS18L	D405SH18	1800	1448	15500	1.20 x 10 ⁶	65	500	1000	60	1.300	0.250	125	0.0220	W61
➤ R1448NS18M	D405SH18	1800	1448	15500	1.20 x 10 ⁶	70	500	1000	60	1.300	0.250	125	0.0220	W61
R1448NS20H	N/A	2000	1448	15500	1.20 x 10 ⁶	40	500	1000	60	1.300	0.250	125	0.0220	W61
R1448NS20J	N/A	2000	1448	15500	1.20 x 10 ⁶	50	500	1000	60	1.300	0.250	125	0.0220	W61
➤ R1448NS20K	N/A	2000	1448	15500	1.20 x 10 ⁶	60	500	1000	60	1.300	0.250	125	0.0220	W61
R1448NS20L	N/A	2000	1448	15500	1.20 x 10 ⁶	65	500	1000	60	1.300	0.250	125	0.0220	W61
➤ R1448NS20M	N/A	2000	1448	15500	1.20 x 10 ⁶	70	500	1000	60	1.300	0.250	125	0.0220	W61
➤ R2475ZC20M	R500CH20	2000	2475	31000	4.81 x 10 ⁶	70	1700	4000	60	1.504	0.174	125	0.0110	W13
R2475ZC20N	R500CH20	2000	2475	31000	4.81 x 10 ⁶	100	1700	4000	60	1.504	0.174	125	0.0110	W13
➤ R2475ZC20R	R500CH20	2000	2475	31000	4.81 x 10 ⁶	140	1700	4000	60	1.504	0.174	125	0.0110	W13
➤ R2475ZC28M	R500CH28	2800	2475	31000	4.81 x 10 ⁶	70	1700	4000	60	1.504	0.174	125	0.0110	W13
R2475ZC28N	R500CH28	2800	2475	31000	4.81 x 10 ⁶	100	1700	4000	60	1.504	0.174	125	0.0110	W13
➤ R2475ZC28R	R500CH28	2800	2475	31000	4.81 x 10 ⁶	140	1700	4000	60	1.504	0.174	125	0.0110	W13
➤ R2475ZD20M	R500DH20	2000	2475	31000	4.81 x 10 ⁶	70	1700	4000	60	1.504	0.174	125	0.0110	W46
R2475ZD20N	R500DH20	2000	2475	31000	4.81 x 10 ⁶	100	1700	4000	60	1.504	0.174	125	0.0110	W46
➤ R2475ZD20R	R500DH20	2000	2475	31000	4.81 x 10 ⁶	140	1700	4000	60	1.504	0.174	125	0.0110	W46
➤ R2475ZD28M	R500DH28	2800	2475	31000	4.81 x 10 ⁶	70	1700	4000	60	1.504	0.174	125	0.0110	W46
R2475ZD28N	R500DH28	2800	2475	31000	4.81 x 10 ⁶	100	1700	4000	60	1.504	0.174	125	0.0110	W46
➤ R2475ZD28R	R500DH28	2800	2475	31000	4.81 x 10 ⁶	140	1700	4000	60	1.504	0.174	125	0.0110	W46
R2619ZC18J	R600CH18	1800	2619	33800	5.71 x 10 ⁶	50	1100	4000	60	1.308	0.173	125	0.0110	W13
R2619ZC18K	R600CH18	1800	2619	33800	5.71 x 10 ⁶	60	1100	4000	60	1.308	0.173	125	0.0110	W13
R2619ZC18L	R600CH18	1800	2619	33800	5.71 x 10 ⁶	65	1100	4000	60	1.308	0.173	125	0.0110	W13
R2619ZC20J	R600CH20	2000	2619	33800	5.71 x 10 ⁶	50	1100	4000	60	1.308	0.173	125	0.0110	W13
R2619ZC20K	R600CH20	2000	2619	33800	5.71 x 10 ⁶	60	1100	4000	60	1.308	0.173	125	0.0110	W13
R2619ZC20L	R600CH20	2000	2619	33800	5.71 x 10 ⁶	65	1100	4000	60	1.308	0.173	125	0.0110	W13
R2619ZC21J	R600CH21	2100	2619	33800	5.71 x 10 ⁶	50	1100	4000	60	1.308	0.173	125	0.0110	W13
R2619ZC21K	R600CH21	2100	2619	33800	5.71 x 10 ⁶	60	1100	4000	60	1.308	0.173	125	0.0110	W13

³ V_{RRM} 2100 V max

Outlines on pages O-01...O-24

Type		V _{DRM} V _{RRM}	I _{TAV} T _K = 55°C	I _{TSM}	I _t 10 ms ½ sine V _R ≤ 60% V _{RRM}	t _q @ 200 V/μs	Typ. Reverse Recov. Charge 50% Chord			V _{TO}	r _T	T _{JM}	R _{thJK} 180° Sine	Fig. No.
Part No. New	Old Part No.	V	A	A	A ² s	μs	Q _{ra} μC	I _{TM} A	@ -di/dt A/μs	V	mΩ	°C	K/W	
R2619ZC21L	R600CH21	2100	2619	33800	5.71 x 10 ⁶	65	1100	4000	60	1.308	0.173	125	0.0110	W13
R2619ZC25J	R600CH25	³ 2500	2619	33800	5.71 x 10 ⁶	50	1100	4000	60	1.308	0.173	125	0.0110	W13
R2619ZC25K	R600CH25	³ 2500	2619	33800	5.71 x 10 ⁶	60	1100	4000	60	1.308	0.173	125	0.0110	W13
R2619ZC25L	R600CH25	³ 2500	2619	33800	5.71 x 10 ⁶	65	1100	4000	60	1.308	0.173	125	0.0110	W13
R2619ZD18J	N/A	1800	2619	33800	5.71 x 10 ⁶	50	1100	4000	60	1.308	0.173	125	0.0110	W46
R2619ZD18K	N/A	1800	2619	33800	5.71 x 10 ⁶	60	1100	4000	60	1.308	0.173	125	0.0110	W46
R2619ZD18L	N/A	1800	2619	33800	5.71 x 10 ⁶	65	1100	4000	60	1.308	0.173	125	0.0110	W46
R2619ZD20J	N/A	2000	2619	33800	5.71 x 10 ⁶	50	1100	4000	60	1.308	0.173	125	0.0110	W46
R2619ZD20K	N/A	2000	2619	33800	5.71 x 10 ⁶	60	1100	4000	60	1.308	0.173	125	0.0110	W46
R2619ZD20L	N/A	2000	2619	33800	5.71 x 10 ⁶	65	1100	4000	60	1.308	0.173	125	0.0110	W46
R2619ZD21J	N/A	¹ 2100	2619	33800	5.71 x 10 ⁶	50	1100	4000	60	1.308	0.173	125	0.0110	W46
R2619ZD21K	N/A	¹ 2100	2619	33800	5.71 x 10 ⁶	60	1100	4000	60	1.308	0.173	125	0.0110	W46
R2619ZD21L	N/A	¹ 2100	2619	33800	5.71 x 10 ⁶	65	1100	4000	60	1.308	0.173	125	0.0110	W46
R2619ZD25J	N/A	³ 2500	2619	33800	5.71 x 10 ⁶	50	1100	4000	60	1.308	0.173	125	0.0110	W46
R2619ZD25K	N/A	³ 2500	2619	33800	5.71 x 10 ⁶	60	1100	4000	60	1.308	0.173	125	0.0110	W46
R2619ZD25L	N/A	³ 2500	2619	33800	5.71 x 10 ⁶	65	1100	4000	60	1.308	0.173	125	0.0110	W46
R2620ZC22J	R610CH22	2200	2620	33800	5.71 x 10 ⁶	50	1200	4000	60	1.500	0.143	125	0.0110	W13
R2620ZC22K	R610CH22	2200	2620	33800	5.71 x 10 ⁶	60	1200	4000	60	1.500	0.143	125	0.0110	W13
R2620ZC22L	R610CH22	2200	2620	33800	5.71 x 10 ⁶	65	1200	4000	60	1.500	0.143	125	0.0110	W13
R2620ZC25J	R610CH25	2500	2620	33800	5.71 x 10 ⁶	50	1200	4000	60	1.500	0.143	125	0.0110	W13
R2620ZC25K	R610CH25	2500	2620	33800	5.71 x 10 ⁶	60	1200	4000	60	1.500	0.143	125	0.0110	W13
R2620ZC25L	R610CH25	2500	2620	33800	5.71 x 10 ⁶	65	1200	4000	60	1.500	0.143	125	0.0110	W13
R2620ZD22J	N/A	2200	2620	33800	5.71 x 10 ⁶	50	1200	4000	60	1.500	0.143	125	0.0110	W46
R2620ZD22K	N/A	2200	2620	33800	5.71 x 10 ⁶	60	1200	4000	60	1.500	0.143	125	0.0110	W46
R2620ZD22L	N/A	2200	2620	33800	5.71 x 10 ⁶	65	1200	4000	60	1.500	0.143	125	0.0110	W46
R2620ZD25J	N/A	2500	2620	33800	5.71 x 10 ⁶	50	1200	4000	60	1.500	0.143	125	0.0110	W46
R2620ZD25K	N/A	2500	2620	33800	5.71 x 10 ⁶	60	1200	4000	60	1.500	0.143	125	0.0110	W46
R2620ZD25L	N/A	2500	2620	33800	5.71 x 10 ⁶	65	1200	4000	60	1.500	0.143	125	0.0110	W46
R2714ZC14H	R800CH14	1400	2714	35600	6.34 x 10 ⁶	40	700	4000	60	1.250	0.163	125	0.0110	W13
R2714ZC14J	R800CH14	1400	2714	35600	6.34 x 10 ⁶	50	700	4000	60	1.250	0.163	125	0.0110	W13
R2714ZC14K	R800CH14	1400	2714	35600	6.34 x 10 ⁶	60	700	4000	60	1.250	0.163	125	0.0110	W13
R2714ZC16H	R800CH16	1600	2714	35600	6.34 x 10 ⁶	40	700	4000	60	1.250	0.163	125	0.0110	W13
R2714ZC16J	R800CH16	1600	2714	35600	6.34 x 10 ⁶	50	700	4000	60	1.250	0.163	125	0.0110	W13
R2714ZC16K	R800CH16	1600	2714	35600	6.34 x 10 ⁶	60	700	4000	60	1.250	0.163	125	0.0110	W13
R2714ZC18H	R800CH18	1800	2714	35600	6.34 x 10 ⁶	40	700	4000	60	1.250	0.163	125	0.0110	W13
R2714ZC18J	R800CH18	1800	2714	35600	6.34 x 10 ⁶	50	700	4000	60	1.250	0.163	125	0.0110	W13
R2714ZC18K	R800CH18	1800	2714	35600	6.34 x 10 ⁶	60	700	4000	60	1.250	0.163	125	0.0110	W13
R2714ZD14H	R800CH14	1400	2714	35600	6.34 x 10 ⁶	40	700	4000	60	1.250	0.163	125	0.0110	W13
R2714ZD14J	R800CH14	1400	2714	35600	6.34 x 10 ⁶	50	700	4000	60	1.250	0.163	125	0.0110	W13
R2714ZD14K	R800CH14	1400	2714	35600	6.34 x 10 ⁶	60	700	4000	60	1.250	0.163	125	0.0110	W13
R2714ZD16H	N/A	1600	2714	35600	6.34 x 10 ⁶	40	700	4000	60	1.250	0.163	125	0.0110	W46
R2714ZD16J	N/A	1600	2714	35600	6.34 x 10 ⁶	50	700	4000	60	1.250	0.163	125	0.0110	W46
R2714ZD16K	N/A	1600	2714	35600	6.34 x 10 ⁶	60	700	4000	60	1.250	0.163	125	0.0110	W46
R2714ZD18H	N/A	1800	2714	35600	6.34 x 10 ⁶	40	700	4000	60	1.250	0.163	125	0.0110	W46
R2714ZD18J	N/A	1800	2714	35600	6.34 x 10 ⁶	50	700	4000	60	1.250	0.163	125	0.0110	W46
R2714ZD18K	N/A	1800	2714	35600	6.34 x 10 ⁶	60	700	4000	60	1.250	0.163	125	0.0110	W46
R3047TC24K	R1863CH24	2400	3047	50000	12.5 x 10 ⁶	60	1400	4000	60	1.580	0.170	125	0.0080	W14
R3047TC24L	R1863CH24	2400	3047	50000	12.5 x 10 ⁶	65	1400	4000	60	1.580	0.170	125	0.0080	W14
R3047TC24M	R1863CH24	2400	3047	50000	12.5 x 10 ⁶	70	1400	4000	60	1.580	0.170	125	0.0080	W14
R3047TC24N	R1863CH24	2400	3047	50000	12.5 x 10 ⁶	100	1400	4000	60	1.580	0.170	125	0.0080	W14
R3047TC24R	R1863CH24	2400	3047	50000	12.5 x 10 ⁶	140	1400	4000	60	1.580	0.170	125	0.0080	W14
R3047TC24T	R1863CH24	2400	3047	50000	12.5 x 10 ⁶	200	1400	4000	60	1.580	0.170	125	0.0080	W14
R3047TC28K	R1863CH28	2800	3047	50000	12.5 x 10 ⁶	60	1400	4000	60	1.580	0.170	125	0.0080	W14
R3047TC28K	R1863CH28	2800	3047	50000	12.5 x 10 ⁶	65	1400	4000	60	1.580	0.170	125	0.0080	W14
R3047TC28M	R1863CH28	2800	3047	50000	12.5 x 10 ⁶	70	1400	4000	60	1.580	0.170	125	0.0080	W14
R3047TC28N	R1863CH28	2800	3047	50000	12.5 x 10 ⁶	100	1400	4000	60	1.580	0.170	125	0.0080	W14
R3047TC28R	R1863CH28	2800	3047	50000	12.5 x 10 ⁶	140	1400	4000	60	1.580	0.170	125	0.0080	W14
R3047TC28T	R1863CH28	2800	3047	50000	12.5 x 10 ⁶	200	1400	4000	60	1.580	0.170	125	0.0080	W14
R3047TD24K	R1863DH24	2400	3047	50000	12.5 x 10 ⁶	60	1400	4000	60	1.580	0.170	125	0.0080	W51
R3047TD24K	R1863DH24	2400	3047	50000	12.5 x 10 ⁶	65	1400	4000	60	1.580	0.170	125	0.0080	W51
R3047TD24M	R1863DH24	2400	3047	50000	12.5 x 10 ⁶	70	1400	4000	60	1.580	0.170	125	0.0080	W51
R3047TD24N	R1863DH24	2400	3047	50000	12.5 x 10 ⁶	100	1400	4000	60	1.580	0.170	125	0.0080	W51
R3047TD24R	R1863DH24	2400	3047	50000	12.5 x 10 ⁶	140	1400	4000	60	1.580	0.170	125	0.0080	W51
R3047TD24T	R1863DH24	2400	3047	50000	12.5 x 10 ⁶	200	1400	4000	60	1.580	0.170	125	0.0080	W51

Type		V _{DRM} V _{RRM}	I _{TAV} T _K = 55°C	I _{TSM}	I ² t 10 ms ½ sine V _R ≤ 60% V _{RRM}	t _q @ 200 V/μs	Typ. Reverse Recov. Charge			V _{T0}	r _T	T _{JM}	R _{thJK} 180° Sine K/W	Fig. No.
Part No. ➤ New	Old Part No.	V	A	A	A ² s	μs	T _{JM} , Q _{ra} μC	50% Chord @ I _{TM} A	@ -di/dt A/μs	V	mΩ	°C		
➤ R3047TD28K	R1863DH28	2800	3047	50000	12.5 x 10 ⁶	60	1400	4000	60	1.580	0.170	125	0.0080	W51
➤ R3047TD28L	R1863DH28	2800	3047	50000	12.5 x 10 ⁶	65	1400	4000	60	1.580	0.170	125	0.0080	W51
➤ R3047TD28M	R1863DH28	2800	3047	50000	12.5 x 10 ⁶	70	1400	4000	60	1.580	0.170	125	0.0080	W51
R3047TD28N	R1863DH28	2800	3047	50000	12.5 x 10 ⁶	100	1400	4000	60	1.580	0.170	125	0.0080	W51
R3047TD28R	R1863DH28	2800	3047	50000	12.5 x 10 ⁶	140	1400	4000	60	1.580	0.170	125	0.0080	W51
R3047TD28T	R1863DH28	2800	3047	50000	12.5 x 10 ⁶	200	1400	4000	60	1.580	0.170	125	0.0080	W51
R3370ZC10C	R1200CH10	1000	3370	43900	9.64 x 10 ⁶	15	240	4000	60	1.353	0.064	125	0.0110	W13
R3370ZC10D	R1200CH10	1000	3370	43900	9.64 x 10 ⁶	20	240	4000	60	1.353	0.064	125	0.0110	W13
R3370ZC10E	R1200CH10	1000	3370	43900	9.64 x 10 ⁶	25	240	4000	60	1.353	0.064	125	0.0110	W13
R3370ZC12C	R1200CH12	1200	3370	43900	9.64 x 10 ⁶	15	240	4000	60	1.353	0.064	125	0.0110	W13
R3370ZC12D	R1200CH12	1200	3370	43900	9.64 x 10 ⁶	20	240	4000	60	1.353	0.064	125	0.0110	W13
R3370ZC12E	R1200CH12	1200	3370	43900	9.64 x 10 ⁶	25	240	4000	60	1.353	0.064	125	0.0110	W13
R3370ZD10C	N/A	1000	3370	43900	9.64 x 10 ⁶	15	240	4000	60	1.353	0.064	125	0.0110	W46
R3370ZD10D	N/A	1000	3370	43900	9.64 x 10 ⁶	20	240	4000	60	1.353	0.064	125	0.0110	W46
R3370ZD10E	N/A	1000	3370	43900	9.64 x 10 ⁶	25	240	4000	60	1.353	0.064	125	0.0110	W46
R3370ZD12C	N/A	1200	3370	43900	9.64 x 10 ⁶	15	240	4000	60	1.353	0.064	125	0.0110	W46
R3370ZD12D	N/A	1200	3370	43900	9.64 x 10 ⁶	20	240	4000	60	1.353	0.064	125	0.0110	W46
R3370ZD12E	N/A	1200	3370	43900	9.64 x 10 ⁶	25	240	4000	60	1.353	0.064	125	0.0110	W46
R3559TC16K	R1966CH16	1600	3559	38900	7.57 x 10 ⁶	60	750	4000	60	1.173	0.155	125	0.0080	W14
➤ R3559TC16M	R1966CH16	1600	3559	38900	7.57 x 10 ⁶	70	750	4000	60	1.173	0.155	125	0.0080	W14
R3559TC16N	R1966CH16	1600	3559	38900	7.57 x 10 ⁶	100	750	4000	60	1.173	0.155	125	0.0080	W14
R3559TC16R	R1966CH16	1600	3559	38900	7.57 x 10 ⁶	140	750	4000	60	1.173	0.155	125	0.0080	W14
R3559TC16T	R1966CH16	1600	3559	38900	7.57 x 10 ⁶	200	750	4000	60	1.173	0.155	125	0.0080	W14
R3559TC20K	R1966CH20	2000	3559	38900	7.57 x 10 ⁶	60	750	4000	60	1.173	0.155	125	0.0080	W14
➤ R3559TC20M	R1966CH20	2000	3559	38900	7.57 x 10 ⁶	70	750	4000	60	1.173	0.155	125	0.0080	W14
R3559TC20N	R1966CH20	2000	3559	38900	7.57 x 10 ⁶	100	750	4000	60	1.173	0.155	125	0.0080	W14
R3559TC20R	R1966CH20	2000	3559	38900	7.57 x 10 ⁶	140	750	4000	60	1.173	0.155	125	0.0080	W14
R3559TC20T	R1966CH20	2000	3559	38900	7.57 x 10 ⁶	200	750	4000	60	1.173	0.155	125	0.0080	W14
R3559TD16K	R1966DH16	1600	3559	38900	7.57 x 10 ⁶	60	750	4000	60	1.173	0.155	125	0.0080	W51
➤ R3559TD16M	R1966DH16	1600	3559	38900	7.57 x 10 ⁶	70	750	4000	60	1.173	0.155	125	0.0080	W51
R3559TD16N	R1966DH16	1600	3559	38900	7.57 x 10 ⁶	100	750	4000	60	1.173	0.155	125	0.0080	W51
R3559TD16R	R1966DH16	1600	3559	38900	7.57 x 10 ⁶	140	750	4000	60	1.173	0.155	125	0.0080	W51
R3559TD16T	R1966DH16	1600	3559	38900	7.57 x 10 ⁶	200	750	4000	60	1.173	0.155	125	0.0080	W51
R3559TD20K	R1966DH20	2000	3559	38900	7.57 x 10 ⁶	60	750	4000	60	1.173	0.155	125	0.0080	W51
➤ R3559TD20M	R1966DH20	2000	3559	38900	7.57 x 10 ⁶	70	750	4000	60	1.173	0.155	125	0.0080	W51
R3559TD20N	R1966DH20	2000	3559	38900	7.57 x 10 ⁶	100	750	4000	60	1.173	0.155	125	0.0080	W51
R3559TD20R	R1966DH20	2000	3559	38900	7.57 x 10 ⁶	140	750	4000	60	1.173	0.155	125	0.0080	W51
R3559TD20T	R1966DH20	2000	3559	38900	7.57 x 10 ⁶	200	750	4000	60	1.173	0.155	125	0.0080	W51
➤ R3636EC16K	N/A	1600	3636	38900	7.57 x 10 ⁶	60	750	4000	60	1.173	0.155	125	0.0075	W57
➤ R3636EC16M	N/A	1600	3636	38900	7.57 x 10 ⁶	70	750	4000	60	1.173	0.155	125	0.0075	W57
➤ R3636EC16N	N/A	1600	3636	38900	7.57 x 10 ⁶	100	750	4000	60	1.173	0.155	125	0.0075	W57
➤ R3636EC16R	N/A	1600	3636	38900	7.57 x 10 ⁶	140	750	4000	60	1.173	0.155	125	0.0075	W57
➤ R3636EC16T	N/A	1600	3636	38900	7.57 x 10 ⁶	200	750	4000	60	1.173	0.155	125	0.0075	W57
➤ R3636EC20K	N/A	2000	3636	38900	7.57 x 10 ⁶	60	750	4000	60	1.173	0.155	125	0.0075	W57
➤ R3636EC20M	N/A	2000	3636	38900	7.57 x 10 ⁶	70	750	4000	60	1.173	0.155	125	0.0075	W57
➤ R3636EC20N	N/A	2000	3636	38900	7.57 x 10 ⁶	100	750	4000	60	1.173	0.155	125	0.0075	W57
➤ R3636EC20R	N/A	2000	3636	38900	7.57 x 10 ⁶	140	750	4000	60	1.173	0.155	125	0.0075	W57
➤ R3636EC20T	N/A	2000	3636	38900	7.57 x 10 ⁶	200	750	4000	60	1.173	0.155	125	0.0075	W57
R3708FC40V	R1386CH40	2 4000	3708	50000	12.5 x 10 ⁶	250	4000	4000	60	1.473	0.156	125	0.0065	W15
R3708FC40W	R1386CH40	2 4000	3708	50000	12.5 x 10 ⁶	300	4000	4000	60	1.473	0.156	125	0.0065	W15
R3708FC45V	R1386CH45	2 4500	3708	50000	12.5 x 10 ⁶	250	4000	4000	60	1.473	0.156	125	0.0065	W15
R3708FC45W	R1386CH45	2 4500	3708	50000	12.5 x 10 ⁶	300	4000	4000	60	1.473	0.156	125	0.0065	W15
R3708FD40V	N/A	2 4000	3708	50000	12.5 x 10 ⁶	250	4000	4000	60	1.473	0.156	125	0.0065	W48
R3708FD40W	N/A	2 4000	3708	50000	12.5 x 10 ⁶	300	4000	4000	60	1.473	0.156	125	0.0065	W48
R3708FD45V	N/A	2 4500	3708	50000	12.5 x 10 ⁶	250	4000	4000	60	1.473	0.156	125	0.0065	W48
R3708FD45W	N/A	2 4500	3708	50000	12.5 x 10 ⁶	300	4000	4000	60	1.473	0.156	125	0.0065	W48
R3968FC20K	N/A	2000	3968	66000	21.78 x 10 ⁶	60	1700	4000	60	1.398	1.398	125	0.0065	W15
R3968FC20L	N/A	2000	3968	66000	21.78 x 10 ⁶	65	1700	4000	60	1.398	1.398	125	0.0065	W15
R3968FC20M	N/A	2000	3968	66000	21.78 x 10 ⁶	70	1700	4000	60	1.398	1.398	125	0.0065	W15
R3968FC20N	N/A	2000	3968	66000	21.78 x 10 ⁶	100	1700	4000	60	1.398	1.398	125	0.0065	W15
➤ R3968FC20R	N/A	2000	3968	66000	21.78 x 10 ⁶	140	1700	4000	60	1.398	1.398	125	0.0065	W15
➤ R3968FC20T	N/A	2000	3968	66000	21.78 x 10 ⁶	200	1700	4000	60	1.398	1.398	125	0.0065	W15

² V_{RRM} 3000 V max

Outlines on pages O-01...O-24

Type		V_{DRM} V_{RRM}	I_{TAV} $T_K = 55^\circ C$	I_{TSM}	I^2t 10 ms 1/2 sine $V_R \leq 60\% V_{RRM}$	t_q @ 200 V/ μs	Typ. Reverse Recov. Charge 50% Chord			V_{T0}	r_T @ T_{JM}	T_{JM}	R_{thJK} 180° Sine	Fig. No.
Part No. New	Old Part No.	V	A	A	A ² s	μs	Q_{ra} μC	I_{TM} A	$-di/dt$ A/ μs	V	m Ω	°C	K/W	
R3968FC24K	RX075FC24K	2400	3968	66000	21.78×10^6	60	1700	4000	60	1.398	1.398	125	0.0065	W15
R3968FC24L	RX075FC24L	2400	3968	66000	21.78×10^6	65	1700	4000	60	1.398	1.398	125	0.0065	W15
R3968FC24M	RX075FC24M	2400	3968	66000	21.78×10^6	70	1700	4000	60	1.398	1.398	125	0.0065	W15
R3968FC24N	RX075FC24N	2400	3968	66000	21.78×10^6	100	1700	4000	60	1.398	1.398	125	0.0065	W15
R3968FC24R	RX075FC24R	2400	3968	66000	21.78×10^6	140	1700	4000	60	1.398	1.398	125	0.0065	W15
R3968FC24T	RX075FC24T	2400	3968	66000	21.78×10^6	200	1700	4000	60	1.398	1.398	125	0.0065	W15
R3968FC28K	RX075FC28K	2800	3968	66000	21.78×10^6	60	1700	4000	60	1.398	1.398	125	0.0065	W15
R3968FC28L	RX075FC28L	2800	3968	66000	21.78×10^6	65	1700	4000	60	1.398	1.398	125	0.0065	W15
R3968FC28M	RX075FC28M	2800	3968	66000	21.78×10^6	70	1700	4000	60	1.398	1.398	125	0.0065	W15
R3968FC28N	RX075FC28N	2800	3968	66000	21.78×10^6	100	1700	4000	60	1.398	1.398	125	0.0065	W15
R3968FC28R	RX075FC28R	2800	3968	66000	21.78×10^6	140	1700	4000	60	1.398	1.398	125	0.0065	W15
R3968FC28T	RX075FC28T	2800	3968	66000	21.78×10^6	200	1700	4000	60	1.398	1.398	125	0.0065	W15
R3968FD20K	N/A	2000	3968	66000	21.78×10^6	60	1700	4000	60	1.398	1.398	125	0.0065	W48
R3968FD20L	N/A	2000	3968	66000	21.78×10^6	65	1700	4000	60	1.398	1.398	125	0.0065	W48
R3968FD20M	N/A	2000	3968	66000	21.78×10^6	70	1700	4000	60	1.398	1.398	125	0.0065	W48
R3968FD20N	N/A	2000	3968	66000	21.78×10^6	100	1700	4000	60	1.398	1.398	125	0.0065	W48
R3968FD20R	N/A	2000	3968	66000	21.78×10^6	140	1700	4000	60	1.398	1.398	125	0.0065	W48
R3968FD20T	N/A	2000	3968	66000	21.78×10^6	200	1700	4000	60	1.398	1.398	125	0.0065	W48
R3968FD24K	RX075FD24K	2400	3968	66000	21.78×10^6	60	1700	4000	60	1.398	1.398	125	0.0065	W48
R3968FD24L	RX075FD24L	2400	3968	66000	21.78×10^6	65	1700	4000	60	1.398	1.398	125	0.0065	W48
R3968FD24M	RX075FD24M	2400	3968	66000	21.78×10^6	70	1700	4000	60	1.398	1.398	125	0.0065	W48
R3968FD24N	RX075FD24N	2400	3968	66000	21.78×10^6	100	1700	4000	60	1.398	1.398	125	0.0065	W48
R3968FD24R	RX075FD24R	2400	3968	66000	21.78×10^6	140	1700	4000	60	1.398	1.398	125	0.0065	W48
R3968FD24T	RX075FD24T	2400	3968	66000	21.78×10^6	200	1700	4000	60	1.398	1.398	125	0.0065	W48
R3968FD28K	RX075FD28K	2800	3968	66000	21.78×10^6	60	1700	4000	60	1.398	1.398	125	0.0065	W48
R3968FD28L	RX075FD28L	2800	3968	66000	21.78×10^6	65	1700	4000	60	1.398	1.398	125	0.0065	W48
R3968FD28M	RX075FD28M	2800	3968	66000	21.78×10^6	70	1700	4000	60	1.398	1.398	125	0.0065	W48
R3968FD28N	RX075FD28N	2800	3968	66000	21.78×10^6	100	1700	4000	60	1.398	1.398	125	0.0065	W48
R3968FD28R	RX075FD28R	2800	3968	66000	21.78×10^6	140	1700	4000	60	1.398	1.398	125	0.0065	W48
R3968FD28T	RX075FD28T	2800	3968	66000	21.78×10^6	200	1700	4000	60	1.398	1.398	125	0.0065	W48

¹ Denotes V_{RRM} 1800 V max.

² Denotes V_{RRM} 3000 V max.

³ Denotes V_{RRM} 2100 V max.

Outlines on pages O-01...O-24



W9 Weight 90 g



W11 Weight 510 g




W13 Weight 1700 g




W14 Weight 1300 g




W15 Weight 2800 g



W46 Weight 1200 g



W51 Weight 1700 g




W57 Weight 1230 g



W60 Weight 340 g



W61 Weight 510 g



W62 Weight 1000 g

Gate Turn-Off Thyristors - Capsule Type

WESTCODE

We offer a broad range of high specification devices incorporating advanced features such as buffer layer, fine pattern and transparent emitter technologies. Devices with voltage ratings to 6 kV (3.8 kV DC link) and controllable current ratings of up to 4 kA are available to meet the toughest demands in applications such as traction propulsion and auxiliaries, AC industrial drives, FACT's and active VAR controllers. Offering both symmetrical devices for applications with a reverse blocking requirement e.g. current sourced inverters and anode shorted devices for applications where no reverse blocking requirement exists e.g. voltage sourced inverters. Gate Turn-off Thyristors are still the component of choice when it comes to very high power converters and we remain totally committed to this technology for the foreseeable future


Type		V_{DRM} $V_{GK} = -2 V$ V	V_{RRM} V	$I_{TGM} @ C_s$		I_{TAV} $T_K = 55^\circ C$ A	I_{TSM} kA	I^2t 10 ms ½ sine $V_R \leq 10 V$ kA²s	Typ. Switching Times		V_T $I_T = I_{TGM}$ V	T_{JM} °C	R_{thJK} 180° Sine K/W	Fig. No.
Part No. New	Old Part No.			A	µF				t_{gt} µs	t_{gq} µs				
S0500KC200	N/A	2000	2000	500	1.0	330	4.0	80 x 10 ³	3.5	10	2.50	125	0.065	W34
S0500KC20Y	N/A	2000	100	500	1.0	330	4.0	80 x 10 ³	3.5	10	2.50	125	0.065	W34
S0500KC25D	N/A	2500	2000	500	1.0	330	4.0	80 x 10 ³	3.5	10	2.50	125	0.065	W34
S0500KC25Y	N/A	2500	100	500	1.0	330	4.0	80 x 10 ³	3.5	10	2.50	125	0.065	W34
S0700KC140	N/A	1400	1400	700	1.5	430	5.0	125 x 10 ³	3.0	10	2.20	125	0.065	W34
S0700KC14Y	N/A	1400	100	700	1.5	430	5.0	125 x 10 ³	3.0	10	2.20	125	0.065	W34
S0700KC17D	N/A	1700	1360	700	1.5	430	5.0	125 x 10 ³	3.0	10	2.20	125	0.065	W34
S0700KC17Y	N/A	1700	100	700	1.5	430	5.0	125 x 10 ³	3.0	10	2.20	125	0.065	W34
S1000NC300	N/A	3000	3000	1000	2.0	600	10.0	500 x 10 ³	5.0	19	3.50	125	0.027	W36
S1000NC30Y	N/A	3000	100	1000	2.0	600	10.0	500 x 10 ³	5.0	19	3.50	125	0.027	W36
S1000NC36D	N/A	3600	2880	1000	2.0	600	10.0	500 x 10 ³	5.0	19	3.50	125	0.027	W36
S1000NC36Y	N/A	3600	100	1000	2.0	600	10.0	500 x 10 ³	5.0	19	3.50	125	0.027	W36
S1200NC200	N/A	2000	2000	1200	3.0	790	13.0	840 x 10 ³	4.5	19	2.70	125	0.027	W36
S1200NC20Y	N/A	2000	100	1200	3.0	790	13.0	840 x 10 ³	4.5	19	2.70	125	0.027	W36
S1200NC25D	N/A	2500	2000	1200	3.0	790	13.0	840 x 10 ³	4.5	19	2.70	125	0.027	W36
S1200NC25Y	N/A	2500	100	1200	3.0	790	13.0	840 x 10 ³	4.5	19	2.70	125	0.027	W36
H0500KC200	N/A	2000	2000	500	1.0	280	3.0	45 x 10 ³	2.0	5	3.20	125	0.065	W34
H0500KC20Y	N/A	2000	100	500	1.0	280	3.0	45 x 10 ³	2.0	5	3.20	125	0.065	W34
H0500KC25D	N/A	2500	2000	500	1.0	280	3.0	45 x 10 ³	2.0	5	3.20	125	0.065	W34
H0500KC25Y	N/A	2500	100	500	1.0	280	3.0	45 x 10 ³	2.0	5	3.20	125	0.065	W34
H0700KC140	N/A	1400	1360	700	1.5	360	4.0	80 x 10 ³	3.0	5	2.75	125	0.065	W34
H0700KC14Y	N/A	1400	100	700	1.5	360	4.0	80 x 10 ³	3.0	5	2.75	125	0.065	W34
H0700KC17D	N/A	1700	1360	700	1.5	360	4.0	80 x 10 ³	3.0	5	2.75	125	0.065	W34
H0700KC17Y	N/A	1700	100	700	1.5	360	4.0	80 x 10 ³	3.0	5	2.75	125	0.065	W34
H1200NC200	N/A	2000	2000	1200	3.0	670	10.5	550 x 10 ³	3.0	12	3.30	125	0.027	W36
H1200NC20Y	N/A	2000	100	1200	3.0	670	10.5	550 x 10 ³	3.0	12	3.30	125	0.027	W36
H1200NC25D	N/A	2500	2000	1200	3.0	670	10.5	550 x 10 ³	3.0	12	3.30	125	0.027	W36
H1200NC25Y	N/A	2500	100	1200	3.0	670	10.5	550 x 10 ³	3.0	12	3.30	125	0.027	W36
G1000NC450	N/A	4500	18	1000	2.0	545	8.0	320 x 10 ³	4.5	14	4.00	125	0.027	W30
G1000QC400	GX152QC400	4000	18	1000	1.0	443	6.5	211.25 x 10 ³	3.0	13	4.00	125	0.038	W35
G1000QC450	GX152QC450	4500	18	1000	1.0	443	6.5	211.25 x 10 ³	3.0	13	4.00	125	0.038	W35
GX185QC250	N/A	2500	18	1000	1.0	In Development					125	0.038	W35	
G2000VC250	WG20025SN	2500	18	2000	4.0	1020	16.0	1.28 x 10 ⁶	5.0	24	2.80	125	0.022	W31
G2000VC450	WG20045SN	4500	18	2000	4.0	870	13.0	845 x 10 ³	8.0	25	3.50	125	0.022	W31
G3000TC250	WG30025SN	2500	18	3000	5.0	1640	30.0	4.50 x 10 ⁶	3.0	25	2.50	125	0.015	W32
G3000TC450	WG30045SN	4500	18	3000	6.0	1180	24.0	2.88 x 10 ⁶	9.0	28	4.00	125	0.015	W32
G3000TC600	WG30060SN	6000	18	3000	3.0	1100	24.0	2.88 x 10 ⁶	7.5	28	3.50	110	0.015	W32
G4000EC450	WG40045SN	4500	18	4000	6.0	1270	25.0	3.13 x 10 ⁶	7.5	28	4.40	125	0.014	W33




W30 Weight 600 g



W31 Weight 800 g



W32 Weight 1500 g



W33 Weight 1500 g



W34 Weight 120 g



W35 Weight 300 g



W36 Weight 500 g

Outlines on pages
O-01...O-24

Westcode has long since been at the forefront of solid state pulsed power technology, offering custom solutions to complex pulsed power problems. Pulse thyristors are, in essence, optimised Gate Turn-off Thyristors and as such we are able to offer a flexible range of parts depending on customer needs.

Devices with voltage ratings to 2.5 kV, pulsed currents to 150 kA peak and di/dt capabilities to over 30 kA/μs are available. A selection of preferred parts is shown here, for other parts and technical support please contact the factory.

Pulse Thyristors - Capsule Types

Type		V_{DRM}	V_{RRM}	V_{DC}	I_{PULSE}	di/dt_{cr}	V_{T0}	r_T	T_{Jmax}	R_{thJK}	Fig. No.
New		$V_{GK} = -2 V$		$V_{GK} = -2 V$			@ T_{Jmax}			DC 180° sine	
Part No.	Old Part No.	V	V	V	kA	kA/μs	V	mΩ	°C	K/W	
➤ Y200CKC250	Y2002KC250	2500	2000	1500	20	5	1.216	2.196	125	0.065	W34
➤ Y500CKC250	Y5002NC250	2500	2000	1500	50	11	1.755	1.122	125	0.027	W36



Outlines on pages O-01...O-24



W34 Weight 120 g



W36 Weight 500 g

Features:

- V_{DC} up to 30kV
- V_{peak} up to 50kV
- Peak current up to 140kA
- Symmetric blocking, Asymmetric blocking and reverse conducting types
- Press-pack IGBT, Pulse Thyristor and Fast Thyristor based designs

Typical Applications:

- Laser, X-ray pulsers
- Ozone generators
- Electrostatic precipitators
- PUV and PEF Sterilisers
- Electromagnetic Launchers
- Metal Forming
- Medical
- Military
- Particle physics and accelerators



Integrated Switch Assembly

High Voltage IGBT Gate Drive Units

C0030BG400

WESTCODE


The C0030BG400 is a single channel 30 A peak rated gate drive unit (GDU), suitable for low and high side applications with DC link voltages of up to 3.5 kV (5 kV available on request) and with dv/dt immunity of over 100 kV/ μ s.

This GDU performs all of the necessary supervisory functions including under voltage lockout and SCSOA protection with user configurable response and feedback. The unit requires a simple 15 V DC power supply and features fibre optic command and feedback signals.

This GDU is capable of driving virtually all IGBTs including our range of press-pack devices at frequencies from DC up to 20 kHz with no duty cycle limitations.

Options include standard variants set up for use with each of Westcode's range of IGBTs (see table) and the core module for integration into end user PCBs. Additionally our application engineers can develop semi-custom solutions based around the standard core module.

IGBT Part No.	$R_{g(on)}$ Ω	$R_{g(off)}$ Ω	GDU Part No.
T0360NA25A	33	18	C0030BG400SAA
T0500NA25E	22	15	C0030BG400SAB
T1200TA25A	4.7	6.8	C0030BG400SAC
T1500TA25E	3.3	6.8	C0030BG400SAD
T0160NA45A	15	8.2	C0030BG400SAK
T0240NA45E	10	8.2	C0030BG400SAL
T0600TA45A	5.6	3.3	C0030BG400SAM
T0800TA45E	4.7	3.3	C0030BG400SAN
T0900EA45A	4.7	2.7	C0030BG400SAP
T1200EA45E	3.3	2.2	C0030BG400SAR
T1800GA45A	3.3	2.2	C0030BG400SAS
T2400GA45E	2.2	1.5	C0030BG400SAT

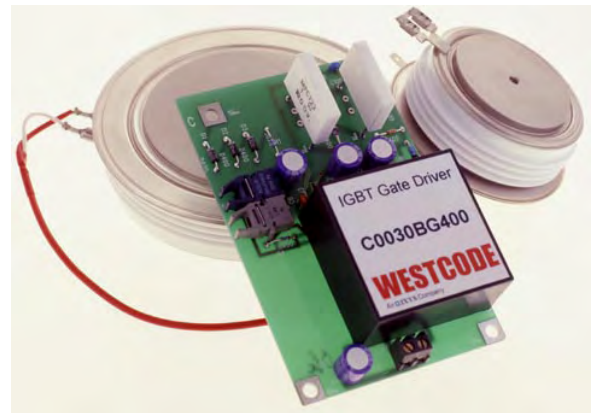

Features

- 30 A peak drive current (500 ns rise time)
- 10 kV AC rms isolation test
- Partial discharge free up to 4 kV AC rms
- 100 kV/ μ s dv/dt immunity
- Temperature range -40°C up to +70°C (-55°C up to +80°C available)
- ± 15 V gate drive voltage
- Standard HP Versatile Link™ Fibre Optic links
- Status feedback signal
- User configurable SCSOA protection

The launch of this new complementary product demonstrates our continued commitment to provide our customers with complete solutions for power electronics and further strengthens our assemblies' capability. This GDU also provides our customers with a rapid route to prototype with our range of high voltage press-pack IGBTs without having to solve the additional problems associated with high isolation voltage gate drives.

As a pioneer of Press-Pack IGBT technology, we are able to offer a range of class leading devices with voltage ratings of 1.7 kV (900 V DC link), 2.5 kV (1.25 kV DC link) and 4.5 kV (2.8 kV DC link). The construction of these devices is totally free from wire and solder bonds which all but eliminates the problems of mechanical fatigue associated with conventional modules. Internal stray inductance in both the gate connections and emitter connections is vastly reduced when compared to conventional modules leading to improved ruggedness and short circuit behavior, which is further enhanced by direct cooling of the emitter side of the chip

These devices are based on a state of the art punch through (PT) process, which yields exceptional values $V_{CE(sat)}$ and quiet switching behavior despite the high voltage ratings, yet the devices feature a positive temperature coefficient making them suitable for reliable parallel operation. Devices available with or without integral anti-parallel diode – a range of complimentary extra fast recovery diodes optimised for use with these IGBTs are available now with more based on exciting new technologies coming soon, please contact your representative for more information.







They exhibit exceptional power cycling performance – typically an order of magnitude better than modules – making them highly suited to applications such as induction heating and mass transits where there are repeated cyclic power demands. They are explosion rated making them a good choice in critical applications such as mining, the petro-chemical industry, and transportation applications. They have a stable short circuit failure mode which, as well as safety benefits, makes them an ideal choice for medium and high voltage applications where series connection is required. Press-pack construction is the obvious choice where series connection is needed and the short circuit failure mode allows for the design in of n+ redundancy.

Typical examples include HVDC, Active VAr controllers and medium voltage drives. They are largely backwardly compatible with standard 2.5 kV and 4.5 kV GTOs in many applications such as AC drives. This makes these parts a simple and economical path to upgrade or refurbish equipment that previously used GTOs, such as locomotives or medium voltage drives. They are suitable for all cooling options including direct liquid immersion. Complementary gate drives, mounting clamps and passive components available.

Press-Pack IGBTs - Capsule Types


Outlines on pages O-01...O-24

Type Part No.	V_{CES} V	I_C A	I_{CM} A	$V_{CE(sat)}$ V	IGBT Switching Typical			Diode Recovery Typical				T_{JM} °C	R_{thJK}		Fig. No.
					$I_F = I_C$		$I_F = I_C$ V	I_{rm} A	t_{rr} µs	Q_r µC	IGBT K/W		Diode K/W		
					E_{ON} J	E_{OFF} J									
➤ T0160NA45A	4500	160	310	4.7	0.50	0.42	3.6	400	0.96	340	125	0.07	0.175	W40	
T0240NA45E	4500	240	400	4.7	0.73	0.88	N/A	N/A	N/A	N/A	125	0.053	N/A	W40	
➤ T0340VA45G	4500	340	570	4.7	In Development				125	0.035	0.058	W67			
T0360NA25A	2500	360	720	3.6	0.75	0.34	2.5	250	0.93	285	125	0.054	0.087	W40	
T0500NA25E	2500	500	1000	3.6	0.80	0.50	N/A	N/A	N/A	N/A	125	0.039	N/A	W40	
➤ T0500NC17A	1700	500	1000	In Development				125	0.054	0.087	W40				
➤ T0510VA45E	4500	510	850	4.7	In Development		N/A	N/A	N/A	N/A	125	0.023	N/A	W67	
➤ T0570VA25G	2500	570	1140	3.6	In Development				125	0.034	0.044	W67			
T0600TA45A	4500	600	1000	4.7	1.75	1.50	3.6	1400	0.92	650	125	0.021	0.044	W41	
➤ T0700NC17E	1700	700	1400	In Development			N/A	N/A	N/A	N/A	125	0.039	N/A	W40	
T0800TA45E	4500	800	1340	4.7	2.20	1.92	3.6	N/A	N/A	N/A	125	0.015	N/A	W41	
➤ T0800VC15G	1700	800	1600	In Development				125	0.034	0.044	W67				
➤ T0850VA25E	2500	850	1700	3.6	In Development				125	0.023	N/A	W67			
T0900EA45A	4500	900	1500	4.7	2.80	2.60	3.6	1440	1.50	1900	125	0.014	0.029	W44	
T1200EA45E	4500	1200	2100	4.7	3.50	4.00	N/A	N/A	N/A	N/A	125	0.010	N/A	W44	
T1200TA25A	2500	1200	2400	3.6	2.50	1.40	2.5	670	1.50	830	125	0.017	0.035	W41	
➤ T1200VC17E	1700	1200	2400	In Development			N/A	N/A	N/A	N/A	125	0.023	N/A	W67	
T1500TA25E	2500	1500	3000	3.6	3.30	1.70	N/A	N/A	N/A	N/A	125	0.013	N/A	W41	
➤ T1600TC17A	1700	1600	3200	In Development				125	0.017	0.029	W41				
T1800GA45A	4500	1800	3000	4.7	5.6	6.4	2320	1.7	2.2	2720	125	0.007	0.014	W45	
➤ T2100TC17E	1700	2100	4200	In Development			N/A	N/A	N/A	N/A	125	0.013	N/A	W41	
T2400GA45E	4500	2400	4200	4.7	7.2	7.8	N/A	N/A	N/A	N/A	125	0.005	N/A	W45	




Dual Diode Modules


Type	V_{RRM}	I_{FAV}	@ T_C	I_{FRMS}	I_{FSM}	V_{TO}	r_T	T_{VJM}	per Chip		Fig. No.	Config.
	V	A	°C	A	A	V	mΩ	°C	K/W	K/W		
> New												
MDD600-12N1	1200	600	111	1818	21800	0.75	0.2	150	0.062	0.02	W63	H
MDD600-14N1	1400	600	111	1818	21800	0.75	0.2	150	0.062	0.02	W63	
MDD600-16N1	1600	600	111	1818	21800	0.75	0.2	150	0.062	0.02	W63	
MDD600-18N1	1800	600	111	1818	21800	0.75	0.2	150	0.062	0.02	W63	
MDD600-20N1	2000	600	111	1818	21800	0.75	0.2	150	0.062	0.02	W63	
MDD600-22N1	2200	600	111	1818	21800	0.75	0.2	150	0.062	0.02	W63	
MDA600-12N1	1200	600	111	1818	21800	0.75	0.2	150	0.062	0.02	W63	F
MDA600-14N1	1400	600	111	1818	21800	0.75	0.2	150	0.062	0.02	W63	
MDA600-16N1	1600	600	111	1818	21800	0.75	0.2	150	0.062	0.02	W63	
MDA600-18N1	1800	600	111	1818	21800	0.75	0.2	150	0.062	0.02	W63	
MDA600-20N1	2000	600	111	1818	21800	0.75	0.2	150	0.062	0.02	W63	
MDA600-22N1	2200	600	111	1818	21800	0.75	0.2	150	0.062	0.02	W63	
MDK600-12N1	1200	600	111	1818	21800	0.75	0.2	150	0.062	0.02	W63	I
MDK600-14N1	1400	600	111	1818	21800	0.75	0.2	150	0.062	0.02	W63	
MDK600-16N1	1600	600	111	1818	21800	0.75	0.2	150	0.062	0.02	W63	
MDK600-18N1	1800	600	111	1818	21800	0.75	0.2	150	0.062	0.02	W63	
MDK600-20N1	2000	600	111	1818	21800	0.75	0.2	150	0.062	0.02	W63	
MDK600-22N1	2200	600	111	1818	21800	0.75	0.2	150	0.062	0.02	W63	
MDD 710-22N1	2200	708	85	1440	12750	0.80	0.35	150	0.062	0.02	W65	G
MDD 710-26N1	2600	708	85	1440	12750	0.80	0.35	150	0.062	0.02	W65	
MDA 710-22N1	2200	708	85	1440	12750	0.80	0.35	150	0.062	0.02	W65	F
MDA 710-26N1	2600	708	85	1440	12750	0.80	0.35	150	0.062	0.02	W65	
MDK 710-22N1	2200	708	85	1440	12750	0.80	0.35	150	0.062	0.02	W65	I
MDK 710-26N1	2600	708	85	1440	12750	0.80	0.35	150	0.062	0.02	W65	
MDD 810-12N1	1200	807	85	1661	17250	0.78	0.23	150	0.062	0.02	W65	H
MDD 810-16N1	1600	807	85	1661	17250	0.78	0.23	150	0.062	0.02	W65	
MDD 810-18N1	1800	807	85	1661	17250	0.78	0.23	150	0.062	0.02	W65	
MDA 810-12N1	1200	807	85	1661	17250	0.78	0.23	150	0.062	0.02	W65	F
MDA 810-16N1	1600	807	85	1661	17250	0.78	0.23	150	0.062	0.02	W65	
MDA 810-18N1	1800	807	85	1661	17250	0.78	0.23	150	0.062	0.02	W65	
MDK 810-12N1	1200	807	85	1661	17250	0.78	0.23	150	0.062	0.02	W65	I
MDK 810-16N1	1600	807	85	1661	17250	0.78	0.23	150	0.062	0.02	W65	
MDK 810-18N1	1800	807	85	1661	17250	0.78	0.23	150	0.062	0.02	W65	
MDO1200-14N1	1400	1200	111	1818	21800	0.75	0.2	150	0.062	0.02	W66	J
MDO1200-16N1	1600	1200	111	1818	21800	0.75	0.2	150	0.062	0.02	W66	
MDO1200-18N1	1800	1200	111	1818	21800	0.75	0.2	150	0.062	0.02	W66	
MDO1200-20N1	2000	1200	111	1818	21800	0.75	0.2	150	0.062	0.02	W66	
MDO1200-22N1	2200	1200	111	1818	21800	0.75	0.2	150	0.062	0.02	W66	



W63




W65




W66

Outlines on pages O-01...O-24




Config. F

MDA




Config. G

MDC



Config. H

MDD






Config. I

MDK

Config. J


n/a

MDO


Type	V _{RRM}	I _{FAV}	@ T _C	I _{FRMS}	I _{FSM} 125°C 10ms	V _{TO}	r _T	T _{VJM}	R _{thJC}	R _{thCK}	Fig. No.	Config.	Package style Outline drawings on page O-01...O-24		
	V	A	°C	A	A	V	mΩ	°C	per Chip K/W K/W						
MCD 431-22io1	2200	429	85	1020	10900	1.00	0.41	125	0.062	0.02	W65	C	 W63		
MCD 431-24io1	2400	429	85	1020	10900	1.00	0.41	125	0.062	0.02	W65				
MDC 431-22io1	2200	429	85	1020	10900	1.00	0.41	125	0.062	0.02	W65	G		 W65	
MDC 431-24io1	2400	429	85	1020	10900	1.00	0.41	125	0.062	0.02	W65				
MCD500-12io1	1200	500	89	1294	16500	0.82	0.87	125	0.062	0.02	W63	C			 W66
MCD500-14io1	1400	500	89	1294	16500	0.82	0.87	125	0.062	0.02	W63				
MCD500-16io1	1600	500	89	1294	16500	0.82	0.87	125	0.062	0.02	W63				
MCD500-18io1	1800	500	89	1294	16500	0.82	0.87	125	0.062	0.02	W63				
MCD500-20io1	2000	500	80	1071	16500	0.82	0.87	125	0.062	0.02	W63				
MCD500-22io1	2200	500	80	1071	16500	0.82	0.87	125	0.062	0.02	W63				
MDC500-12io1	1200	500	89	1294	16500	0.82	0.87	125	0.062	0.02	W63				
MDC500-14io1	1400	500	89	1294	16500	0.82	0.87	125	0.062	0.02	W63				
MDC500-16io1	1600	500	89	1294	16500	0.82	0.87	125	0.062	0.02	W63				
MDC500-18io1	1800	500	89	1294	16500	0.82	0.87	125	0.062	0.02	W63				
MDC500-20io1	2000	500	80	1071	16500	0.82	0.87	125	0.062	0.02	W63				
MDC500-22io1	2200	500	80	1071	16500	0.82	0.87	125	0.062	0.02	W63				
MCD501-12io1	1200	503	85	1195	14500	0.85	0.30	125	0.062	0.02	W65	C			
MCD501-16io1	1600	503	85	1195	14500	0.85	0.30	125	0.062	0.02	W65				
MCD501-18io1	1800	503	85	1195	14500	0.85	0.30	125	0.062	0.02	W65				
MDC501-12io1	1200	503	85	1195	14500	0.85	0.30	125	0.062	0.02	W65	G			
MDC501-16io1	1600	503	85	1195	14500	0.85	0.30	125	0.062	0.02	W65				
MDC501-18io1	1800	503	85	1195	14500	0.85	0.30	125	0.062	0.02	W65				
MCO740-20io1	2000	740	88	2389	32700	0.833	0.210	125	0.0405	0.0100	W66	J			
MCO740-22io1	2200	740	88	2389	32700	0.833	0.210	125	0.0405	0.0100	W66				
MCO800-16io1	1600	800	86	2564	32700	0.890	0.154	125	0.0405	0.0100	W66	J			
MCO800-18io1	1800	800	86	2564	32700	0.890	0.154	125	0.0405	0.0100	W66				

Dual Thyristor

MCC 431-22io1	2200	429	85	1020	10900	1	0.41	125	0.062	0.02	W65	B
MCC 431-24io1	2400	429	85	1020	10900	1	0.41	125	0.062	0.02	W65	
MCA 431-22io1	2200	429	85	1020	10900	1	0.41	125	0.062	0.02	W65	A
MCA 431-24io1	2400	429	85	1020	10900	1	0.41	125	0.062	0.02	W65	
MCK 431-22io1	2200	429	85	1020	10900	1	0.41	125	0.062	0.02	W65	D
MCK 431-24io1	2400	429	85	1020	10900	1	0.41	125	0.062	0.02	W65	
MCC500-12io1	1200	500	89	1294	16500	0.82	0.87	125	0.062	0.02	W63	B
MCC500-14io1	1400	500	89	1294	16500	0.82	0.87	125	0.062	0.02	W63	
MCC500-16io1	1600	500	89	1294	16500	0.82	0.87	125	0.062	0.02	W63	
MCC500-18io1	1800	500	89	1294	16500	0.82	0.87	125	0.062	0.02	W63	
MCC500-20io1	2000	500	80	1071	16500	0.82	0.87	125	0.062	0.02	W63	
MCC500-22io1	2200	500	80	1071	16500	0.82	0.87	125	0.062	0.02	W63	
MCA500-14io1	1400	500	89	1294	16500	0.82	0.87	125	0.062	0.02	W63	
MCA500-16io1	1600	500	89	1294	16500	0.82	0.87	125	0.062	0.02	W63	
MCA500-18io1	1800	500	89	1294	16500	0.82	0.87	125	0.062	0.02	W63	
MCA500-20io1	2000	500	80	1071	16500	0.82	0.87	125	0.062	0.02	W63	
MCA500-22io1	2200	500	80	1071	16500	0.82	0.87	125	0.062	0.02	W63	
MCK500-12io1	1200	500	89	1294	16500	0.82	0.87	125	0.062	0.02	W63	D
MCK500-14io1	1400	500	89	1294	16500	0.82	0.87	125	0.062	0.02	W63	
MCK500-16io1	1600	500	89	1294	16500	0.82	0.87	125	0.062	0.02	W63	
MCK500-18io1	1800	500	89	1294	16500	0.82	0.87	125	0.062	0.02	W63	
MCK500-20io1	2000	500	80	1071	16500	0.82	0.87	125	0.062	0.02	W63	
MCK500-22io1	2200	500	80	1071	16500	0.82	0.87	125	0.062	0.02	W63	
MCC 501-12io1	1200	503	85	1195	14500	0.85	0.30	125	0.062	0.02	W65	B
MCC 501-16io1	1600	503	85	1195	14500	0.85	0.30	125	0.062	0.02	W65	
MCC 501-18io1	1800	503	85	1195	14500	0.85	0.30	125	0.062	0.02	W65	
MCA 501-12io1	1200	503	85	1195	14500	0.85	0.30	125	0.062	0.02	W65	A
MCA 501-16io1	1600	503	85	1195	14500	0.85	0.30	125	0.062	0.02	W65	
MCA 501-18io1	1800	503	85	1195	14500	0.85	0.30	125	0.062	0.02	W65	
MCK 501-12io1	1200	503	85	1195	14500	0.85	0.30	125	0.062	0.02	W65	D
MCK 501-16io1	1600	503	85	1195	14500	0.85	0.30	125	0.062	0.02	W65	
MCK 501-18io1	1800	503	85	1195	14500	0.85	0.30	125	0.062	0.02	W65	


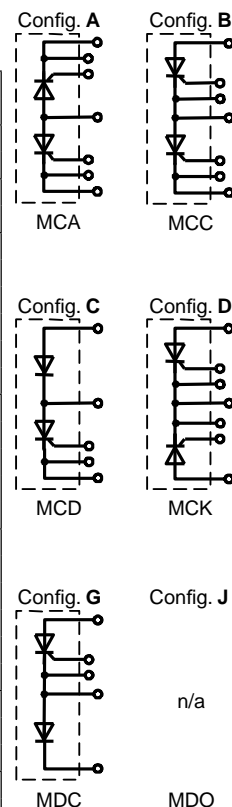


Type	V _{RRM}	I _{FAV}	@ T _C	I _{FRMS}	I _{FSM} 150°C 10ms	V _{TO}	r _T	T _{VJM}	R _{thJW} per Chip K/W	Fig. No.	Config.
> New	V	A	°C	A	A	V	mΩ	°C			
MDD950-12N1W	1200	950	45	1773	21800	0.75	0.2	150	0.09	W64	G
MDD950-14N1W	1400	950	45	1773	21800	0.75	0.2	150	0.09	W64	
MDD950-16N1W	1600	950	45	1773	21800	0.75	0.2	150	0.09	W64	
MDD950-18N1W	1800	950	45	1773	21800	0.75	0.2	150	0.09	W64	
MDD950-20N1W	2000	950	45	1773	21800	0.75	0.2	150	0.09	W64	
MDD950-22N1W	2200	950	45	1773	21800	0.75	0.2	150	0.09	W64	
MDA950-12N1W	1200	950	45	1773	21800	0.75	0.2	150	0.09	W64	E
MDA950-14N1W	1400	950	45	1773	21800	0.75	0.2	150	0.09	W64	
MDA950-16N1W	1600	950	45	1773	21800	0.75	0.2	150	0.09	W64	
MDA950-18N1W	1800	950	45	1773	21800	0.75	0.2	150	0.09	W64	
MDA950-20N1W	2000	950	45	1773	21800	0.75	0.2	150	0.09	W64	
MDA950-22N1W	2200	950	45	1773	21800	0.75	0.2	150	0.09	W64	
MDK950-12N1W	1200	950	45	1773	21800	0.75	0.2	150	0.09	W64	H
MDK950-14N1W	1400	950	45	1773	21800	0.75	0.2	150	0.09	W64	
MDK950-16N1W	1600	950	45	1773	21800	0.75	0.2	150	0.09	W64	
MDK950-18N1W	1800	950	45	1773	21800	0.75	0.2	150	0.09	W64	
MDK950-20N1W	2000	950	45	1773	21800	0.75	0.2	150	0.09	W64	
MDK950-22N1W	2200	950	45	1773	21800	0.75	0.2	150	0.09	W64	







W64

Outlines on pages
O-01...O-24



Water Cooled Thyristor/Diode Modules



Type	V _{RRM} V _{DRM}	I _{TAV}	@ T _C	I _{TRMS}	I _{TSM} 125°C 10ms	V _{TO}	r _T	T _{VJM}	R _{thJW} per Chip K/W	Fig. No.	Config.
> New	V	A	°C	A	A	V	mΩ	°C			
MCD700-12io1W	1200	700	42	1331	16500	0.85	0.27	125	0.09	W64	C
MCD700-14io1W	1400	700	42	1331	16500	0.85	0.27	125	0.09	W64	
MCD700-16io1W	1600	700	42	1331	16500	0.85	0.27	125	0.09	W64	
MCD700-18io1W	1800	700	42	1331	16500	0.85	0.27	125	0.09	W64	
MCD700-20io1W	2000	700	42	1331	16500	0.85	0.27	125	0.09	W64	
MCD700-22io1W	2200	700	42	1331	16500	0.85	0.27	125	0.09	W64	
MDC700-12io1W	1200	700	42	1331	16500	0.85	0.27	125	0.09	W64	F
MDC700-14io1W	1400	700	42	1331	16500	0.85	0.27	125	0.09	W64	
MDC700-16io1W	1600	700	42	1331	16500	0.85	0.27	125	0.09	W64	
MDC700-18io1W	1800	700	42	1331	16500	0.85	0.27	125	0.09	W64	
MDC700-20io1W	2000	700	42	1331	16500	0.85	0.27	125	0.09	W64	
MDC700-22io1W	2200	700	42	1331	16500	0.85	0.27	125	0.09	W64	



Water Cooled Dual Thyristor Modules

MCC700-12io1W	1200	700	42	1331	16500	0.85	0.27	125	0.09	W64	B
MCC700-14io1W	1400	700	42	1331	16500	0.85	0.27	125	0.09	W64	
MCC700-16io1W	1600	700	42	1331	16500	0.85	0.27	125	0.09	W64	
MCC700-18io1W	1800	700	42	1331	16500	0.85	0.27	125	0.09	W64	
MCC700-20io1W	2000	700	42	1331	16500	0.85	0.27	125	0.09	W64	
MCC700-22io1W	2200	700	42	1331	16500	0.85	0.27	125	0.09	W64	
MCA700-12io1W	1200	700	42	1331	16500	0.85	0.27	125	0.09	W64	A
MCA700-14io1W	1400	700	42	1331	16500	0.85	0.27	125	0.09	W64	
MCA700-16io1W	1600	700	42	1331	16500	0.85	0.27	125	0.09	W64	
MCA700-18io1W	1800	700	42	1331	16500	0.85	0.27	125	0.09	W64	
MCA700-20io1W	2000	700	42	1331	16500	0.85	0.27	125	0.09	W64	
MCA700-22io1W	2200	700	42	1331	16500	0.85	0.27	125	0.09	W64	
MCK700-12io1W	1200	700	42	1331	16500	0.85	0.27	125	0.09	W64	D
MCK700-14io1W	1400	700	42	1331	16500	0.85	0.27	125	0.09	W64	
MCK700-16io1W	1600	700	42	1331	16500	0.85	0.27	125	0.09	W64	
MCK700-18io1W	1800	700	42	1331	16500	0.85	0.27	125	0.09	W64	
MCK700-20io1W	2000	700	42	1331	16500	0.85	0.27	125	0.09	W64	
MCK700-22io1W	2200	700	42	1331	16500	0.85	0.27	125	0.09	W64	

MCO



Power Semiconductor Assemblies from IXYS and Westcode


WESTCODE

Power Semiconductor Assemblies

From discrete devices to complete assemblies, our customers can procure our products in whatever form suits their needs on a global basis. Supply management is critical to every manufacturer and reducing costs without compromising quality is essential. Our experienced, international, team of engineers is on hand to help our customers to get more from their products and keep at the forefront of technology in an increasingly competitive marketplace.

Standard Assemblies

We have a comprehensive range of standard assemblies for all of the common converter topologies utilising either natural air, forced air or liquid cooling. These well-proven designs provide an economical alternative to in house design and assembly of discrete parts. These assemblies are available on short lead-times to suit most common line voltages and current ratings from 35 A to 15 kA.

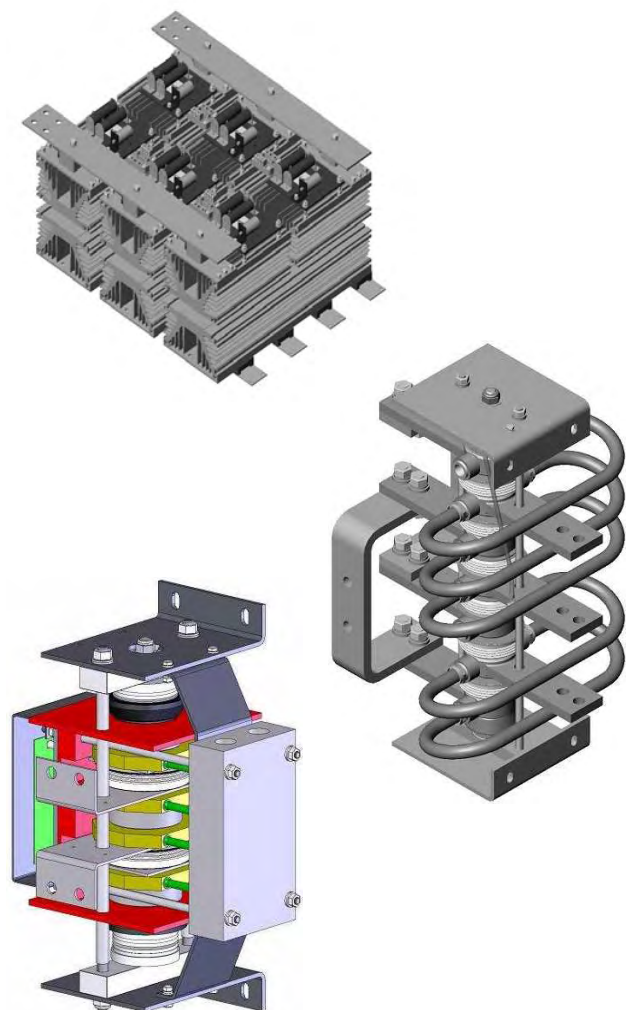

Custom Assemblies

With over 70 years of experience in power circuit design and manufacture, our dedicated team of design engineers can deliver custom solutions for a whole range of design problems ranging from simple crowbar applications to complicated multi-megawatt power converters. Utilising the latest 3D modeling techniques, we can reduce the cycle time from concept to manufacture and ensure successful system level integration into our customers equipment.


Pulsed Power

As a pioneer in the development of solid state pulsed power components and systems, we are able to deliver anything from discrete components to fully integrated energy transfer switches. With systems successfully delivering voltage ratings of over 50 kV and pulsed currents to 140 kA, we have wealth of experience to put at your disposal. Our modular design solutions based on either pulse thyristor or press-pack IGBT technology and integrating control and protection functions provide you with a flexible "black box" approach to energy transfer problems.





We are involved with pulsed power on global basis, working with prestigious research organisations such as CERN, Switzerland as well as medium volume manufacture for emerging commercial applications such as laser supplies, PUV and PEF sterilisation, magnetisation and metal forming.

We have a philosophy of working closely with our customers to ensure that we deliver the right solution in the right time and right price – first time and every time.

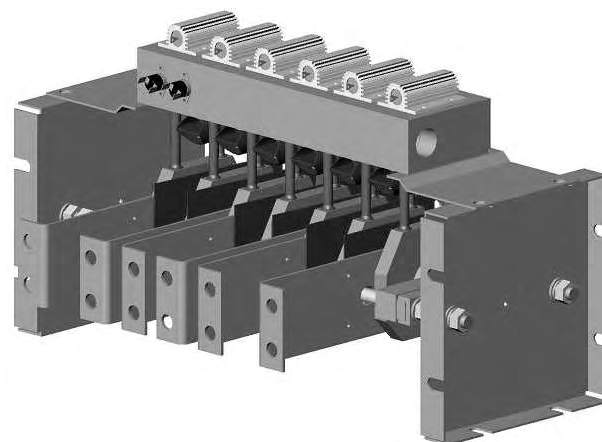

Transportation

We have a long association with the railway industry and over the years have gained an enviable reputation within railway industry as a solution provider. Using our experience and wide ranging contacts within the industry, we are able to offer assistance in tackling issues such as component obsolescence, improving power equipment reliability, contract maintenance of power modules, refurbishment of power electronics and upgrades to existing systems.

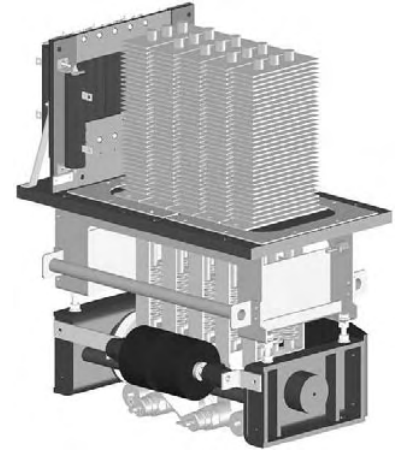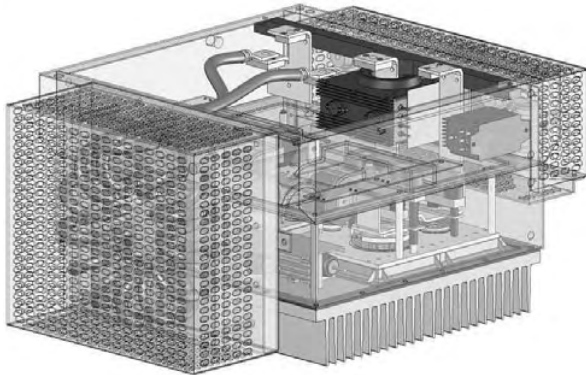

Working systematically to the highest international standards, we can give your equipment a new lease of life and help protect your investment in these valuable assets. For larger projects, such as fleet wide re-fits, we are able to work within a consortium of specialist companies to ensure that you have the right skills to hand to deliver a turnkey solution to your requirements.

Silicon Assemblies

A wide range of units is available, incorporating international standard outline silicon semiconductors. Westcode products have gained a worldwide reputation for quality in military, industrial and domestic applications.

Standard extruded aluminium heatsink profiles are used for mounting discrete semiconductor devices in various configurations, for example:

- Single-phase diode bridges with current ratings from 70 to 5170 Amps DC
- Single-phase half or fully controlled bridges from 35 to 2200 Amps DC
- Three-phase diode bridges with current ratings from 100 to 7190 Amps DC
- Three-phase half or fully controlled bridges from 45 to 3790 Amps DC
- Hexaphase single way diode assemblies from 200 to 14380 Amps DC
- Hexaphase single way Thyristor assemblies from 90 to 7580 Amps DC
- AC Regulators, single and three phase, from 40 to 2940 Amps RMS

Water Cooled AC Regulators

Included in our standard range are solid state, water cooled AC Regulators for resistance welding, with ratings from 315 to 3020 Amps RMS.

Also available are water cooled, single and three phase assemblies from 1200 to 6000 Amps DC.

All the above range is suitable for 440 V_{RMS} 50Hz mains operation.

Beyond Semiconductors

Our flexible manufacturing facility is able to readily adapt to our customers needs. In addition to power semiconductor assembly, we can offer complementary sub-assemblies to our customer's requirements, such as fuse panels and capacitor banks as well as contract manufacture to your designs.

Application and Engineering Support

Our highly experienced technical team is on hand to provide our customers with first class support for everything from the application of our range of discrete devices to the design and development of complex systems. We can help you from concept through design to manufacture and test, working closely with you at every step of the way.

Components


We offer a full portfolio of components which are complementary to our range of power semiconductors including:

Heatsinks Coolers Mounting Clamps
Ultra Rapid Semiconductor Protection Fuses
Capacitors for Power Electronics
Gate Drive Units

A standard assembly module provides the basic building block for this new range of assemblies.

Assembly modules can incorporate either single or dual devices and allow for the building of; single-phase diode and thyristor bridges, 3-phase diode and thyristor bridges, or 6-phase single way diode and thyristor assemblies.

A custom built assembly can be provided when a standard solution is not suitable.

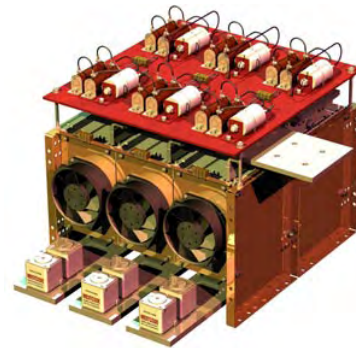

Westack - Modular Solutions


Single phase diode bridges											Approx. total loss $2 \cdot I_{DC}$ @ 25°C		
Assembly Part Number	I_{DC} amps Air Forced 2.5m/s $T_a = 25^\circ\text{C}$ $T_a = 35^\circ\text{C}$ $T_a = 45^\circ\text{C}$			I_{FSM} amps I_{TSM} amps	I^2t A ² s	Dimensions mm Fig. W H D				Mass kg	Device Type and Quantity	Heat Sink Type	
SXB1375B	1375	1303	1230	19500	1.9×10^6	1	382	325	405	20	W2058LC (4)	B(2x83,1x180)	
SXB2096B	2096	1987	1874	33000	5.45×10^6	1	382	325	405	20	W3270NC (4)	B(2x83,1x180)	
SXB3442B	3442	3277	3109	53000	13.5×10^6	2	382	593	405	40	W5696VC (4)	B(2x180)	
SXB4264B	4264	4051	3835	72000	22.5×10^6	2	382	593	405	40	W8405ZC (4)	B(2x180)	
Three phase diode bridges											Approx. total loss $2.5 \cdot I_{DC}$ @ 25°C		
Assembly Part Number	I_{DC} amps Air Forced 2.5m/s $T_a = 25^\circ\text{C}$ $T_a = 35^\circ\text{C}$ $T_a = 45^\circ\text{C}$			I_{FSM} amps I_{TSM} amps	I^2t A ² s	Dimensions mm Fig. W H D				Mass kg	Device Type and Quantity	Heat Sink Type	
SXB1920G	1920	1822	1721	19500	1.9×10^6	3	548	325	405	30	W2058LC (6)	B(2x83,1x180)	
SXB2939G	2939	2788	2634	33000	5.45×10^6	3	548	325	405	30	W3270NC (6)	B(2x83,1x180)	
SXB4869G	4869	4640	4407	53000	13.5×10^6	4	548	593	405	60	W5696VC (6)	B(2x180)	
SXB5993G	5993	5701	5402	72000	22.5×10^6	4	548	593	405	60	W8405ZC (6)	B(2x180)	
Six phase diode, single way with IPT											Approx. total loss $1.25 \cdot I_{DC}$ @ 25°C		
Assembly Part Number	I_{DC} amps Air Forced 2.5m/s $T_a = 25^\circ\text{C}$ $T_a = 35^\circ\text{C}$ $T_a = 45^\circ\text{C}$			I_{FSM} amps I_{TSM} amps	I^2t A ² s	Dimensions mm Fig. W H D				Mass kg	Device Type and Quantity	Heat Sink Type	
SXB3840HEX	3840	3644	3442	19500	1.9×10^6	5	548	325	395	30	W2058LC (6)	B(2x83,1x180)	
SXB5877HEX	5877	5576	5268	33000	5.45×10^6	5	548	325	395	30	W3270NC (6)	B(2x83,1x180)	
SXB9737HEX	9737	9281	8813	53000	13.5×10^6	6	548	593	395	60	W5696VC (6)	B(2x180)	
SXB11987HEX	11987	11401	10804	72000	22.5×10^6	6	548	593	395	60	W8405ZC (6)	B(2x180)	
Six phase thyristor, single way with IPT											Approx. total loss $1.5 \cdot I_{DC}$ @ 25°C		
Assembly Part Number	I_{DC} amps Air Forced 2.5m/s $T_a = 25^\circ\text{C}$ $T_a = 35^\circ\text{C}$ $T_a = 45^\circ\text{C}$			I_{FSM} amps I_{TSM} amps	I^2t A ² s	Dimensions mm Fig. W H D				Mass kg	Device Type and Quantity	Heat Sink Type	
SXB2428HEXT	2428	2233	2030	15000	1.13×10^6	5	548	325	395	30	N1265LS (6)	B(2x83,1x180)	
SXB3529HEXT	3529	3244	2949	29600	4.38×10^6	5	548	325	395	30	N1802NS (6)	B(2x83,1x180)	
SXB4649HEXT	4649	4270	3878	37000	6.85×10^6	6	548	593	395	60	N2500VC (6)	B(2x180)	
SXB6240HEXT	6240	5714	5173	64000	20.5×10^6	6	548	593	395	60	N4085ZC (6)	B(2x180)	
Single phase fully controlled bridges											Approx. total loss $2.5 \cdot I_{DC}$ @ 25°C		
Assembly Part Number	I_{DC} amps Air Forced 2.5m/s $T_a = 25^\circ\text{C}$ $T_a = 35^\circ\text{C}$ $T_a = 45^\circ\text{C}$			I_{FSM} amps I_{TSM} amps	I^2t A ² s	Dimensions mm Fig. W H D				Mass kg	Device Type and Quantity	Heat Sink Type	
SXB868FB	868	797	724	15000	1.13×10^6	1	382	325	405	20	N1265LS (4)	B(2x83,1x180)	
SXB1265FB	1265	1161	1054	29600	4.38×10^6	1	382	325	405	20	N1802NS (4)	B(2x83,1x180)	
SXB1645FB	1645	1508	1367	37000	6.85×10^6	2	382	593	405	40	N2500VC (4)	B(2x180)	
SXB2167FB	2167	1981	1790	64000	20.5×10^6	2	382	593	405	40	N4085ZC (4)	B(2x180)	
Three phase fully controlled bridges											Approx. total loss $3 \cdot I_{DC}$ @ 25°C		
Assembly Part Number	I_{DC} amps Air Forced 2.5m/s $T_a = 25^\circ\text{C}$ $T_a = 35^\circ\text{C}$ $T_a = 45^\circ\text{C}$			I_{FSM} amps I_{TSM} amps	I^2t A ² s	Dimensions mm Fig. W H D				Mass kg	Device Type and Quantity	Heat Sink Type	
SXB1214FG	1214	1116	1015	15000	1.13×10^6	3	548	325	405	30	N1265LS (6)	B(2x83,1x180)	
SXB1764FG	1764	1622	1475	29600	4.38×10^6	3	548	325	405	30	N1802NS (6)	B(2x83,1x180)	
SXB2324FG	2324	2135	1939	37000	6.85×10^6	4	548	593	405	60	N2500VC (6)	B(2x180)	
SXB3120FG	3120	2857	2586	64000	20.5×10^6	4	548	593	405	60	N4085ZC (6)	B(2x180)	

Cooling for each module section is provided by the use of a low noise 115/230 V ac fan which is protected against overloading by an integral thermal cut-out.


Surge suppression and fusing provides reliable and safe operation. Surge suppression (protecting the devices from voltage transients) and high speed fuses (to protect against short circuit) are available. Contact Westcode for details.

All plastic components are UL recognised and meet the requirements of the European Union Directive 2002/95/EC covering the restricted use of certain hazardous substances in electrical and electronic equipment.

ISO 9000 2000 provides the standard against which all our products and services are measured.

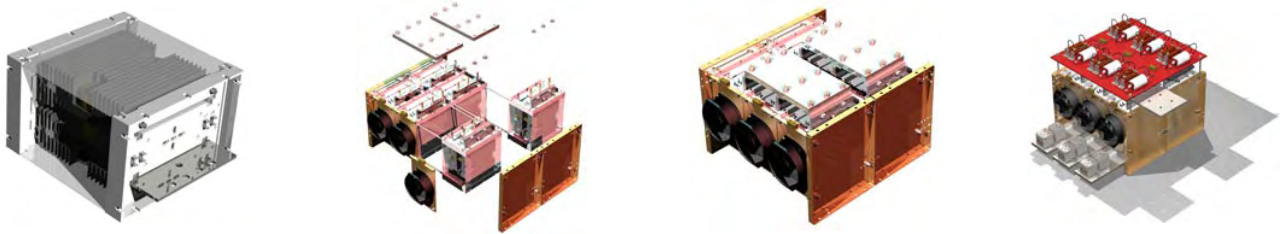

Westack - *Modular Solutions are available in 6 standard configurations, others by request.*

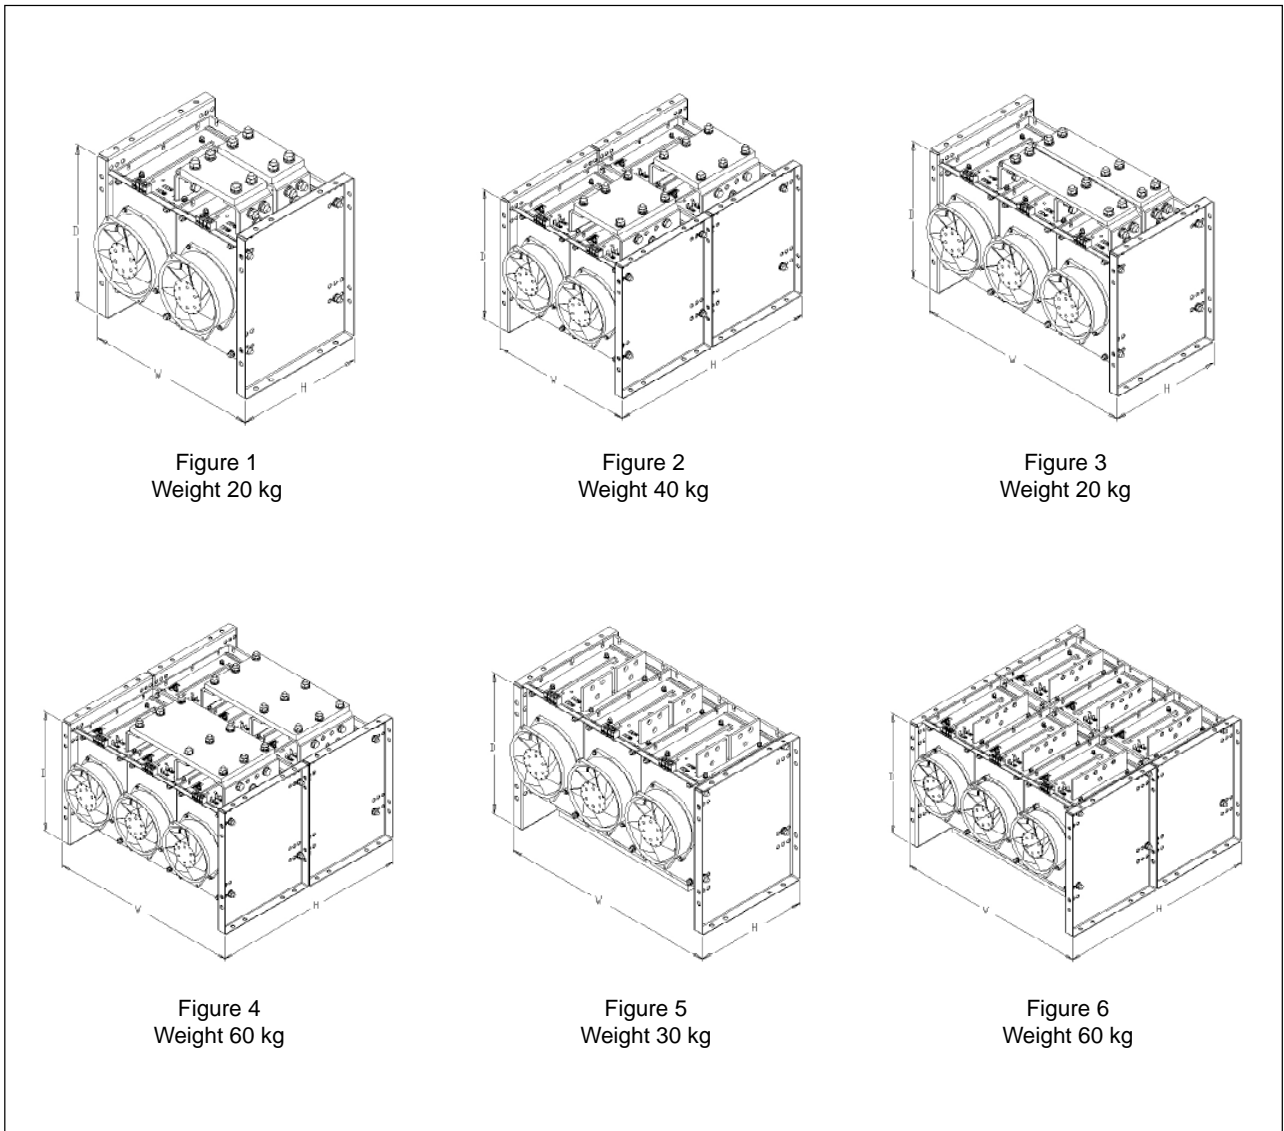

A simple but highly efficient range of stacks incorporating the new WESPACK range of phase control thyristors.

Currently available in 3 standard configurations:


AC voltage regulators

Single-phase bridges

Three-phase bridges

These stacks can easily be modified to meet individual customer requirements.

Fully dimensioned drawings are available upon request from the Chippenham Factory.

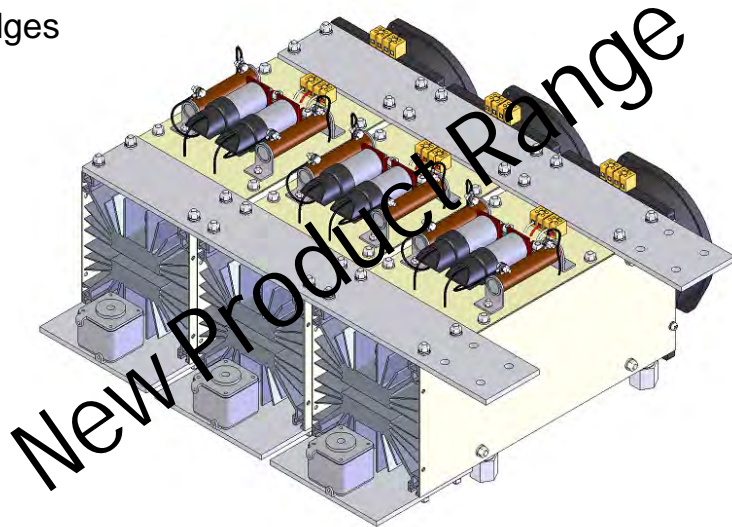

Features and Benefits

WESPACK devices provide the maximum power rating for weight and volume without compromising on quality and reliability.



Cooling is provided by means of a low noise dual voltage (230V/115 V) ac fan that is protected against overloading by an integral thermal cut-out.

Surge suppression and fusing can be added to protect the devices from voltage transients and short circuits.

ISO 9000 2000 provides the standard against which all our products and services are measured.

AC regulators

Approximate total loss $1.3 \times I_{RMS}$

Assembly Type / Part Number	I _{DC} amps Air Forced 5m/s			I _{FSM} amps I _{TSM} amps	I ² t A ² S	Dimensions mm				Weight Kgs	Device Type	No. of Devices	Heat Sink Type
	T _a 25°C	T _a 35°C	T _a 45°C			Fig	Width	Height	Depth				
SXC1195FR	1195	1098	997	19100	1.82×10^6	1	168	415	212	10	N1806QK	2	(2 x 150, 1 x 330)
SXC1464FR	1464	1348	1227	32400	5.25×10^6	1	168	415	212	10	N2367MK	2	(2 x 150, 1 x 330)
SXC1788FR	1788	1636	1480	50900	12.95×10^6	1	168	415	212	10	N3904HK	2	(2 x 150, 1 x 330)

Single phase fully controlled bridges

Approximate total loss $2.5 \times I_{DC}$

SXC1076FB	1076	988	897	19100	1.82×10^6	2	330	415	212	20	N1806QK	4	(2 x 150, 1 x 330)
SXC1318FB	1318	1213	1104	32400	5.25×10^6	2	330	415	212	20	N2367MK	4	(2 x 150, 1 x 330)
SXC1609FB	1609	1473	1332	50900	12.95×10^6	2	330	415	212	20	N3904HK	4	(2 x 150, 1 x 330)

Three phase fully controlled bridges

Approximate total loss $3 \times I_{DC}$

SXC1517FG	1517	1396	1270	19100	1.82×10^6	3	492	415	212	30	N1806QK	6	(2 x 150, 1 x 330)
SXC1871FG	1871	1725	1573	32400	5.25×10^6	3	492	415	212	30	N2367MK	6	(2 x 150, 1 x 330)
SXC2319FG	2319	2125	1926	50900	12.95×10^6	3	492	415	212	30	N3904HK	6	(2 x 150, 1 x 330)

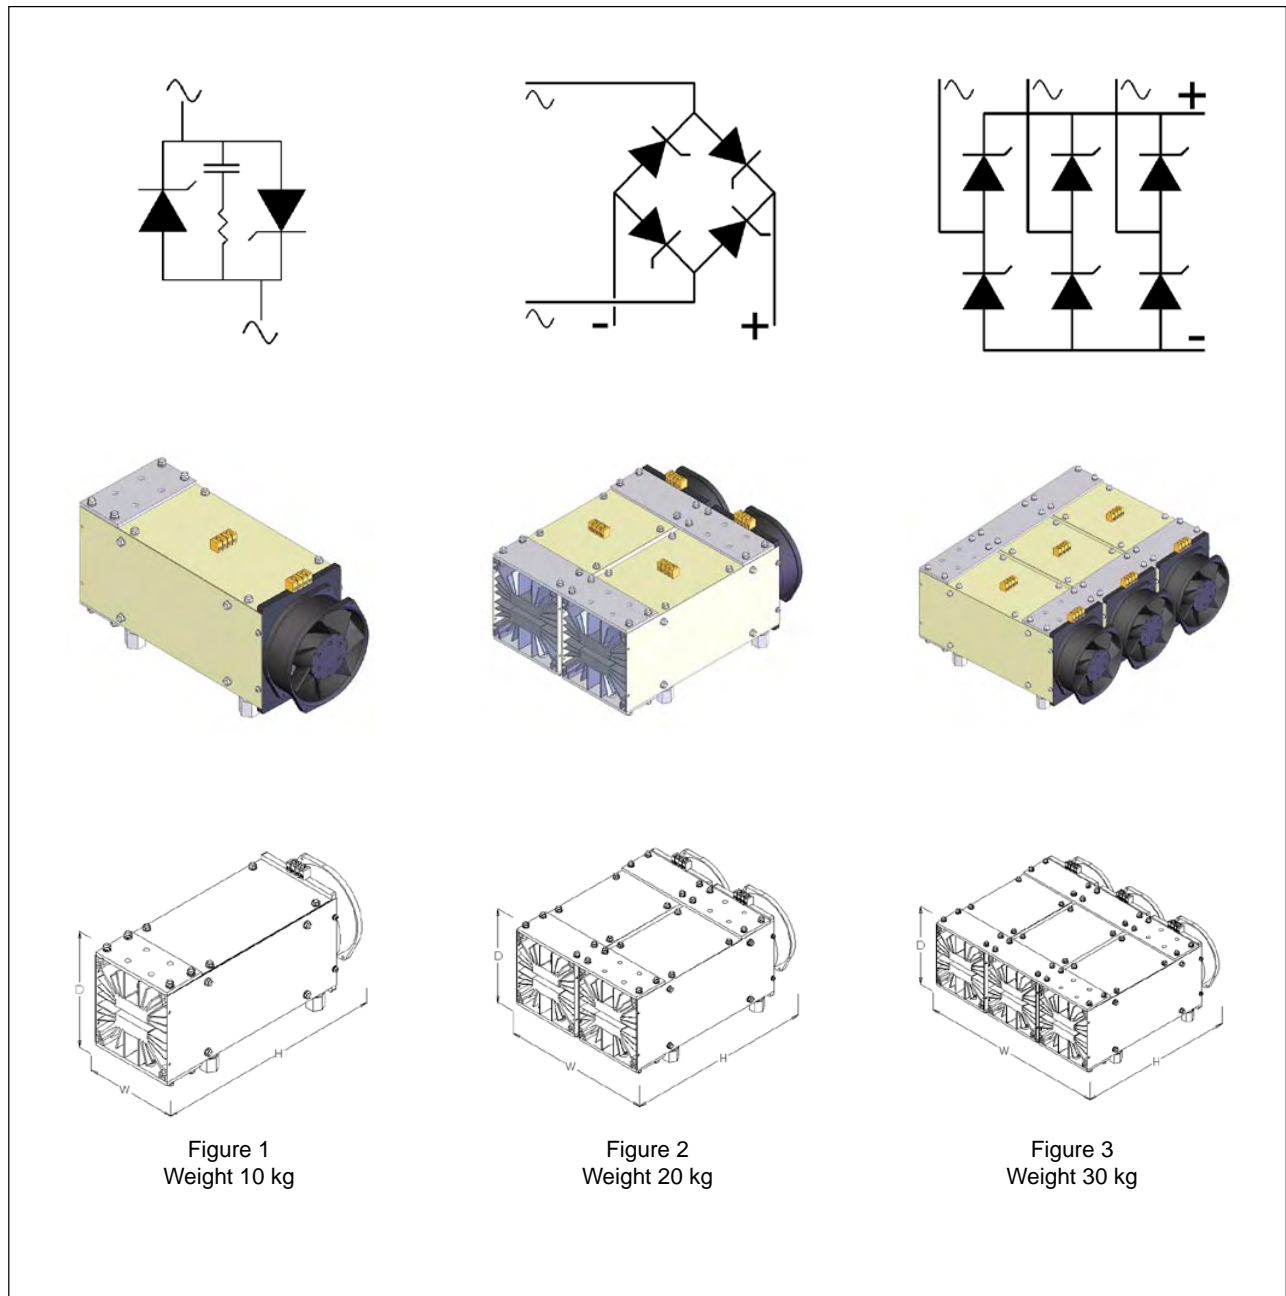


Figure 1
Weight 10 kg

Figure 2
Weight 20 kg

Figure 3
Weight 30 kg

Power Semiconductor Assemblies


WESTCODE

Capsule Mounting Clamps

The Bar type clamp uses a two rod system with a straight bar spring that is bent over a central point to give the clamping force on the device. This force is achieved when the indicators, metal shims at each end of the clamp, become just trapped. (CMK 9000 uses a disc spring stack).

The Box type clamp uses a four bolt system with disc springs and the correct force on the device is achieved when the bottom of the box just touches the heatsink.

As the force indication is contained within these clamps, special equipment or torque spanners are not required. The clamps can therefore be reset to the correct force at any time, using only a box spanner.



Box clamps are suitable for devices with 19 mm, 25 mm or 34 mm diameter mounting surfaces and of 13.8 mm, 14.6 or 26.2 mm nominal thicknesses respectively.



Bar clamps are suitable for devices with 19 mm to 125 mm diameter mounting surfaces and 450 kgf to 9000 kgf clamping forces.


Bar Type	Fixing Centres mm	Rod Size	Capsule Device		
			Outline	Mounting Surface Diameter mm	Nom. Thickness mm
CMK450S56M	65	M8	DO-200AA TO-200AB	19.0	13.8
CMK450D56M					
CMK450DT56M					
CMK550S56M	65	M8	GTO	29.5	16.0
CMK550D56M					
CMK900S56M	65	M8	Diode Thyristor	25.1	14.6
CMK900D56M					
CMK900DT56M					
CMK0600S74M	89	M10	Press-Pack IGBTs	47.0	27.0
CMK0600D74M					
CMK1000S74M	89	M10	Press-Pack IGBTs	47.0	27.0
CMK1000D74M					
CMK1100D76M	89	M10	DO-200AB TO-200AC	34.0	26.2
CMK1130S76M	89	M10	DO-200AB TO-200AC	34.0	26.2
CMK1130D76M					
CMK1130DT76M					
CMK1800S76M	89	M10	Wespack PCT	38.0	14.0
CMK1800D76M					
CMK1800DT76M					
CMK2100S76M*					
CMK2100D76M*	89	M10	GTO	47.0	27.0
CMK2140S76M*					
CMK2140D76M*	89	M10	DO-200 Thyristor	47.0	26.8
CMK2140DT76M*					
CMK2700S76M					
CMK2700D76M	89	M10	Wespack PCT	50.0	14.0
CMK2700DT76M					

Bar Type	Fixing Centres mm	Rod Size	Capsule Device		
			Outline	Mounting Surface Diameter mm	Nom. Thickness mm
CMK2000S114M	132	M12	Press-Pack IGBTs	75.0	26.0
CMK2000D114M					
CMK2500S114M	132	M12	Press-Pack IGBTs	75.0	26.0
CMK2500D114M					
CMK2500S116M*	132	M12	GTO	63.0	26.0
CMK2500D116M*					
CMK3000S116M*	132	M12	DO-200AD Thyristor	63.0	33.0
CMK3000D116M*					
CMK3500S116M*	132	M12	GTO	75.0	26.0
CMK3500D116M*					
CMK4000S116M*	132	M12	Diode Thyristor	73.0	36.8
CMK4000D116M*					
CMK5000D128M*	146	M16	GTO	75.0	26.0
CMK7000D128M*	146	M16	Diode Thyristor	75.0	26.6
CMK3060S140ML	154	M12	Press-Pack IGBTs	85.1	26.0
CMK3060D140ML					
CMK9000S160M*	180	M16	Thyristor	99.3	35.8
CMK9000D160M*					
CMK6120S180ML	196	M16	Press-Pack IGBTs	125.0	26.0
CMK6120D180ML					

* M for T_j up to 190°C, ML for T_j 125°C.

Note: 1 Kgf = 9.8 Newtons

Outline drawings are available from pages O-01...O-24



CMK	XXXX	S, D or DT	XX	N
Capsule Mounting Kit	Nominal Clamping Force Kgf	S-Single side cooled (tapped heatsink) D-Double side cooled (through hole in heatsink) DT-Double side cooled (tapped heatsink)	Maximum Capsule Diameter mm	Metric Fixings M 8, 10 or 12

Bar Type	Fixing Centres mm	Rod Size	Capsule Device		
			Outline	Mounting Surface Diameter mm	Nom. Thickness mm
CMK450B 19M	50 PCD	M5x50 Bolts	DO-200AA TO-200AB	19.0	13.8
CMK450B 25M			Diode Thyristor	25.1	14.6
CMK450B 25M	70 PCD	M6x50 Bolts	DO-200AB TO-200AC	34.0	26.2

Note: 1 Kgf = 9.8 Newtons




CMK	XXXX	B	XX	N
Capsule Mounting Kit	Nominal Clamping Force Kgf	Box Clamp	Capsule Mounting Surface Diameter 19, 25 or 34 mm	Metric Fixing Bolts (See Chart)

Heatsinks

A comprehensive range of heatsinks is offered, details available upon request.

Heatsink Type	Weight Kg/m	Periphery mm	Area mm ²	Fig. No.
G Fin	8.1	1059	2979	WH1
GA Fin	15.6	1682	5867	WH2
H Fin	12.7	1684	4655	WH3
T Fin	20.0	2065	7573	WH4
TB Fin	29.0	2467	10905	WH5
TC Fin	28.0	2544	10561	WH6
LP100 Fin (40 Vane)	30.0	6620	11172	WH7
WS46 Fin	20.0	2822	7411	WH8
WS30 Copper Fin	Dimensions 125 mm x 125 mm x 4 vanes			WH9


Outlines on pages O-01...O-24




WH1 -G Fin




WH2 -GA Fin



WH3 -H Fin

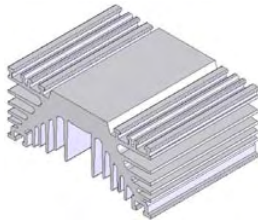


WH4 -T Fin

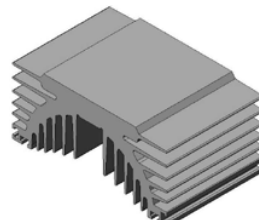


WH5 -TB Fin




WH6 -TC Fin

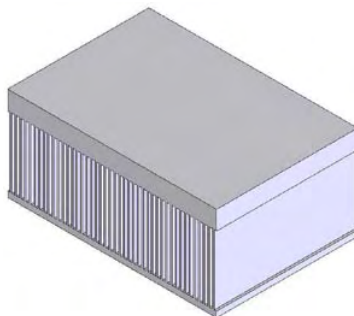

WH7 -LP100 Fin

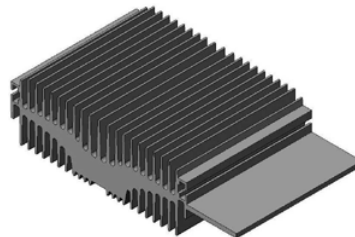

WH8 -WS46 Fin

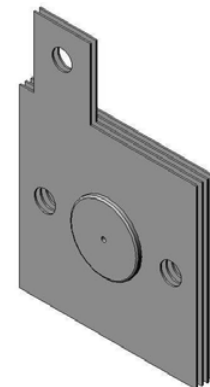


WH9 -WS30 Copper Fin

Coolers


A comprehensive range of coolers is offered, details available upon request.

Outlines on pages O-01...O-24


Cooler Type	Weight Kg	Cooler Thickness mm	Busbar Thickness mm	Fig. No.
LK	0.612	16	6.4	WCL1
LKA	0.148	16	n/a	WCL2
LKB	1.750	20	10	WCL3
LKC	1.300	20	n/a	WCL4
LKD	2.120	20	10	WCL5
LKE	4.520	25	10	WCL6
LKF	3.620	25	n/a	WCL7
WS27	0.375	15	n/a	WCL8
WS65	2.941	25	n/a	WCL9
WS69	4.682	34	n/a	WCL10
WS70	4.92	34	n/a	WCL11
WS71-1	0.581	16	6.35	WCL12
WS71-2	0.4	16	n/a	WCL13
WS72-1	1.672	20	10	WCL14
WS72-2	1.119	20	n/a	WCL15




WCL1 -LK



WCL2 -LKA




WCL3 -LKB



WCL4 -LKC



WCL5 -LKD




WCL6 -LKE



WCL7 -LKF



WCL8 -WS27




WCL9 -WS65




WCL10 -WS69




WCL11 -WS70




WCL12 -WS71-1



WCL13 -WS71-2




WCL14 -WS72-1




WCL15 -WS72-2


Dimensions in mm and inches (1 mm = 0.0394")

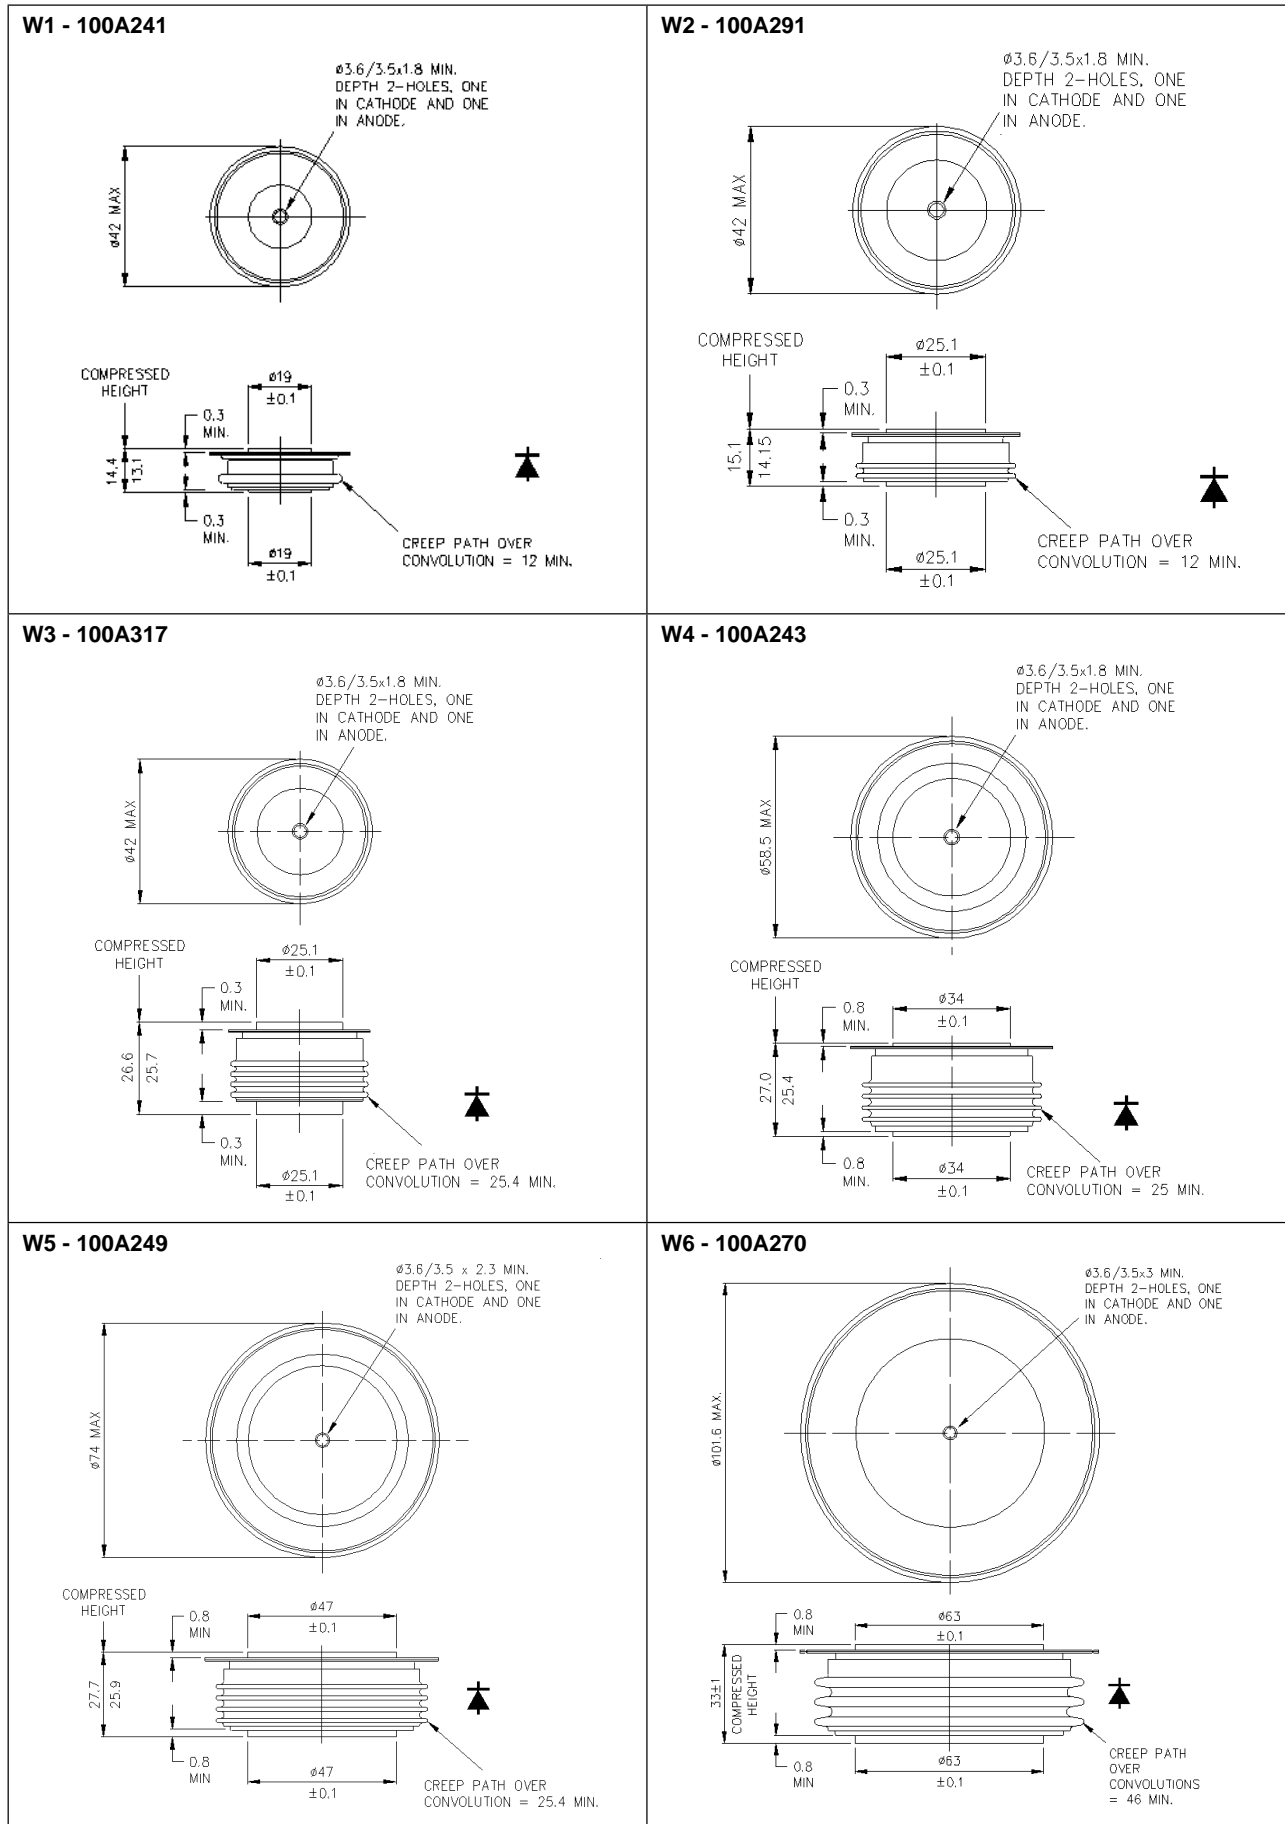







Dimensions in mm and inches (1 mm = 0.0394")

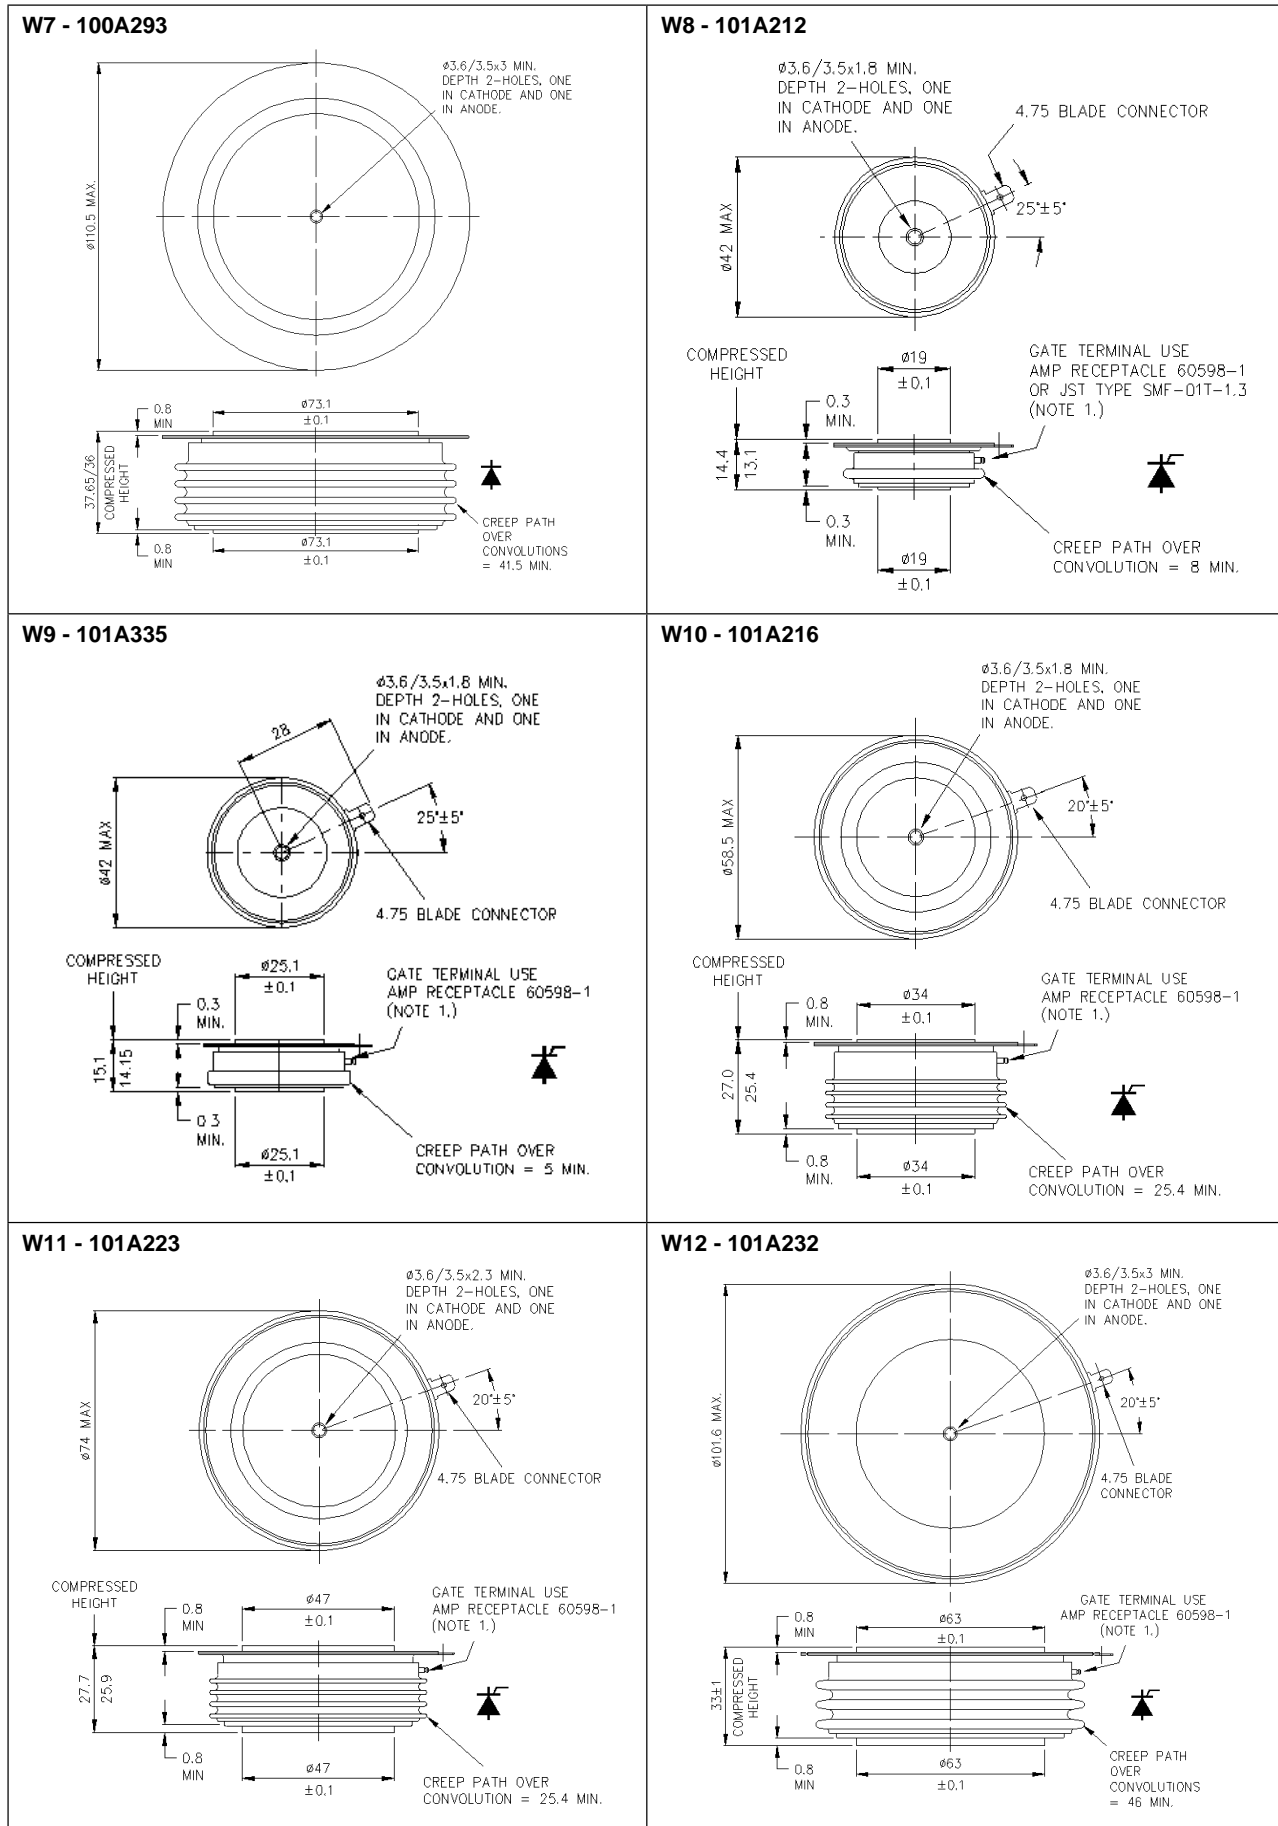


Dimensions in mm and inches (1 mm = 0.0394")

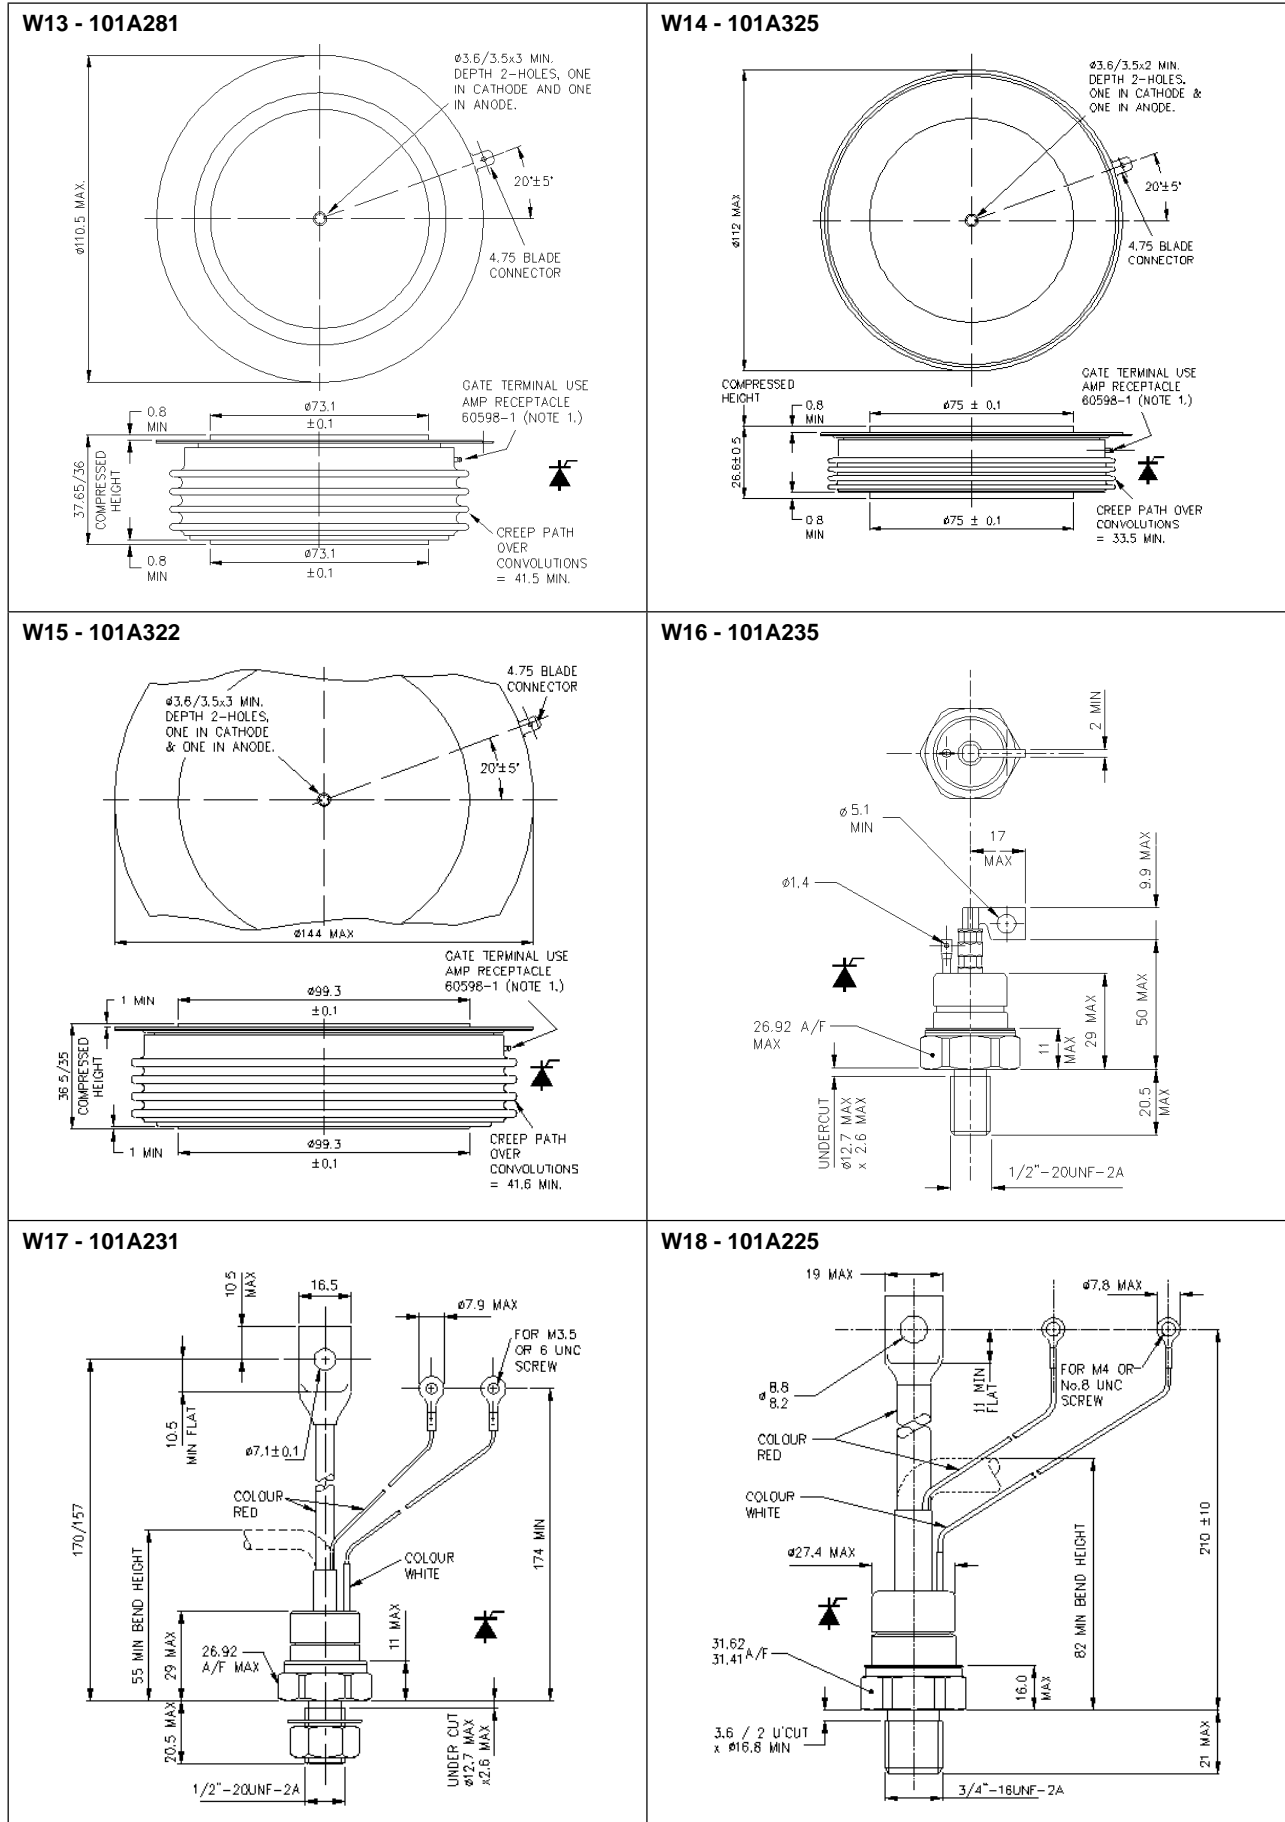


Dimensions in mm and inches (1 mm = 0.0394")

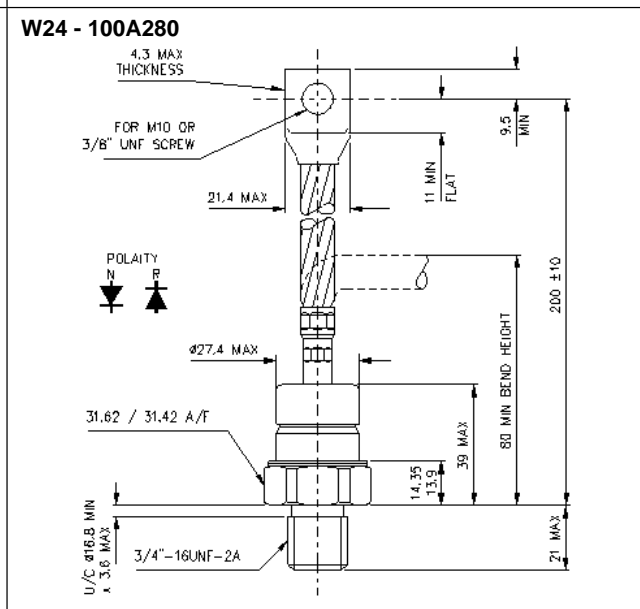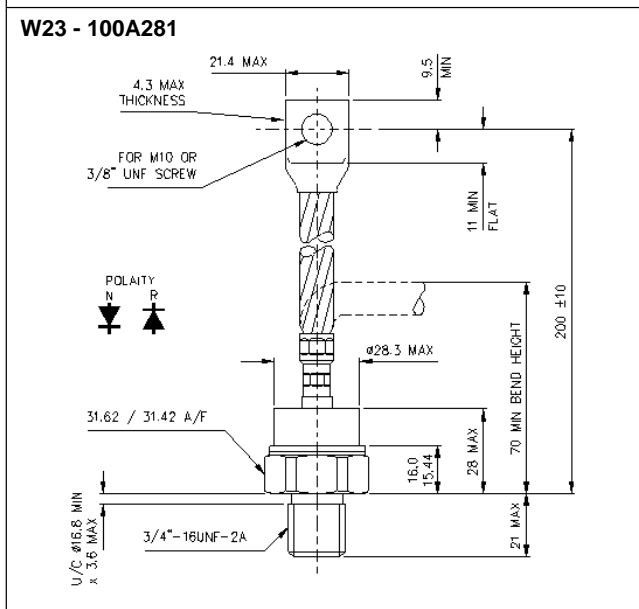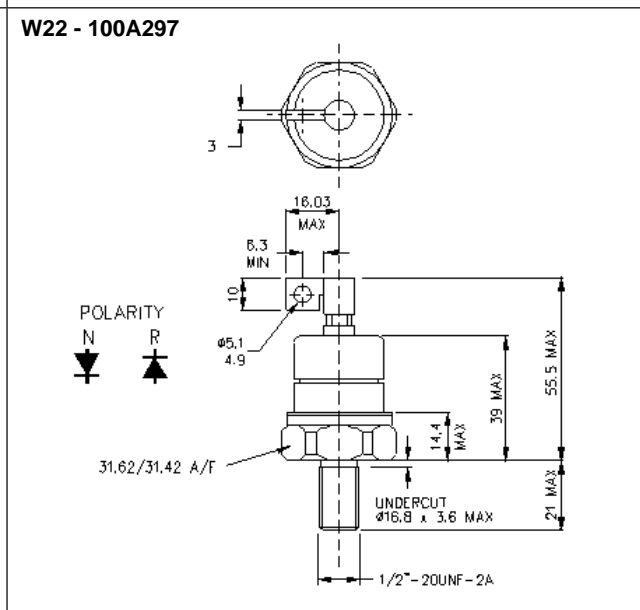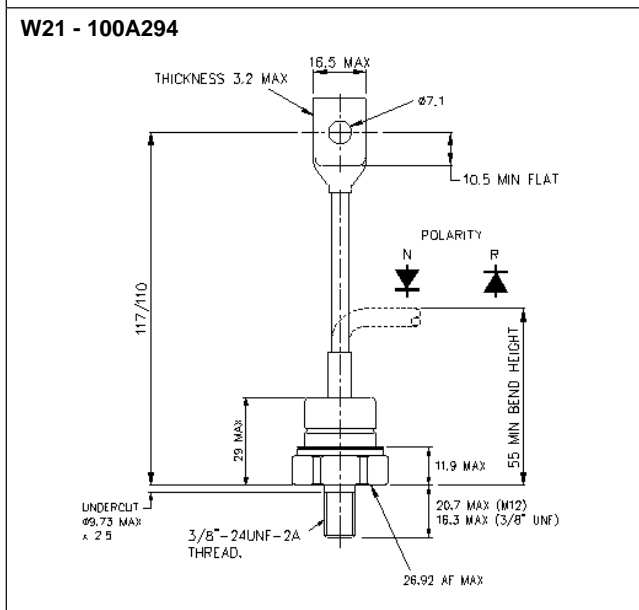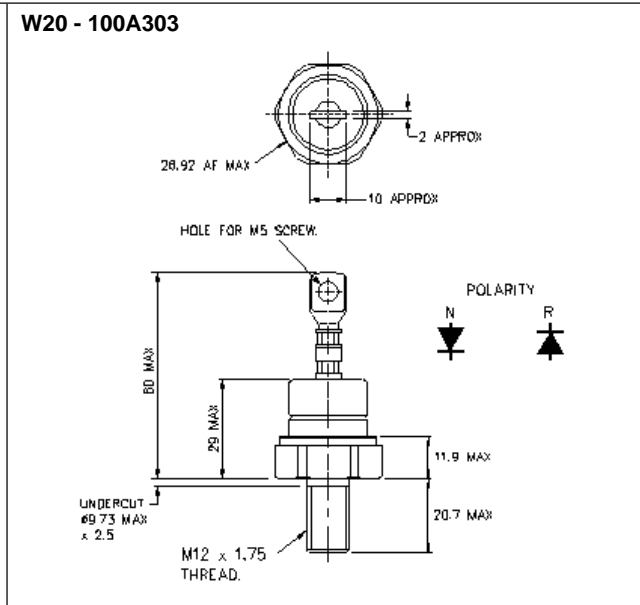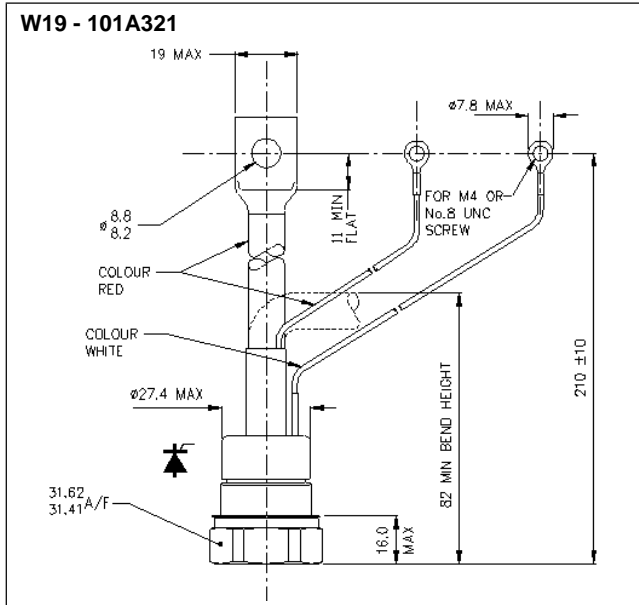


Dimensions in mm and inches (1 mm = 0.0394")

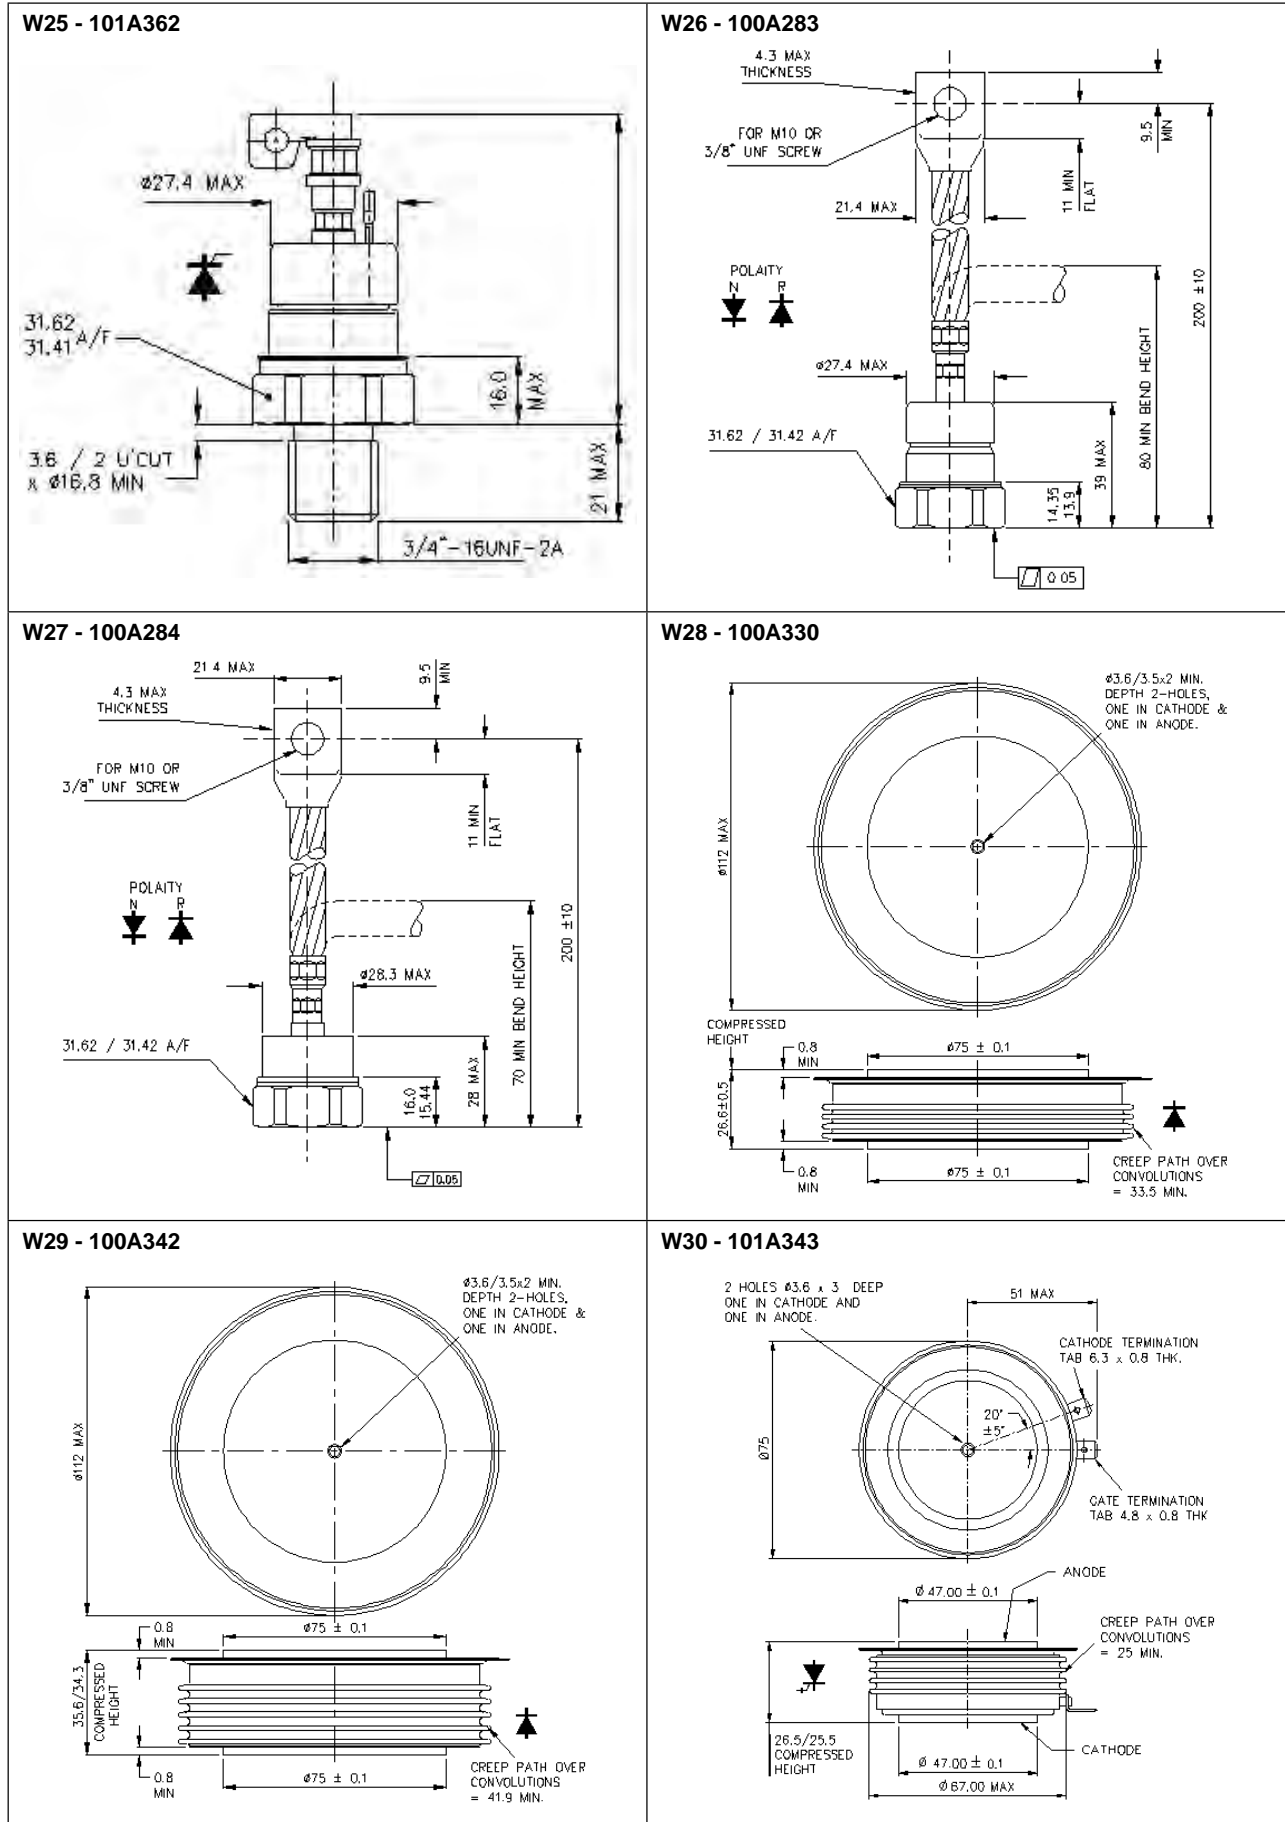


Dimensions in mm and inches (1 mm = 0.0394")

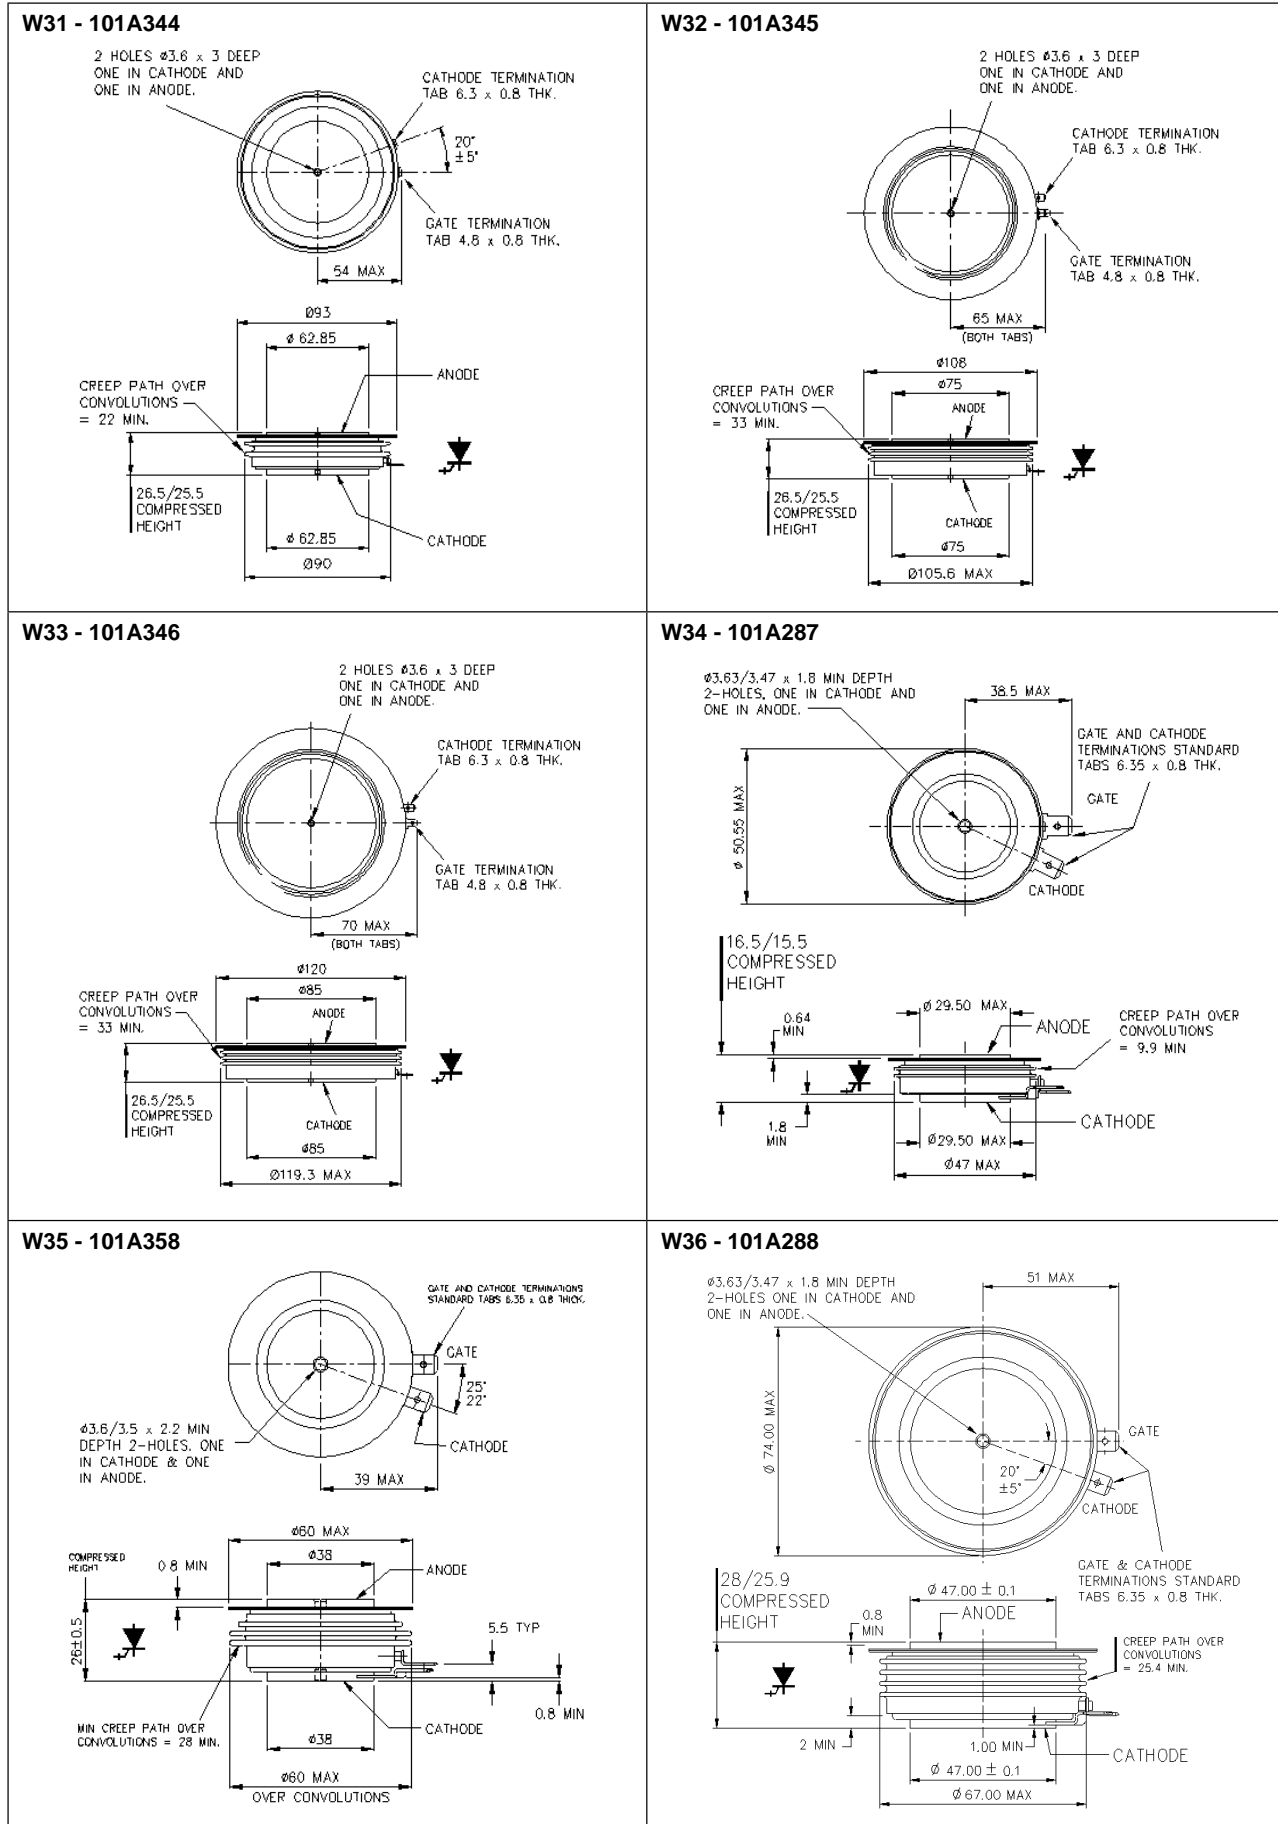


Dimensions in mm and inches (1 mm = 0.0394")

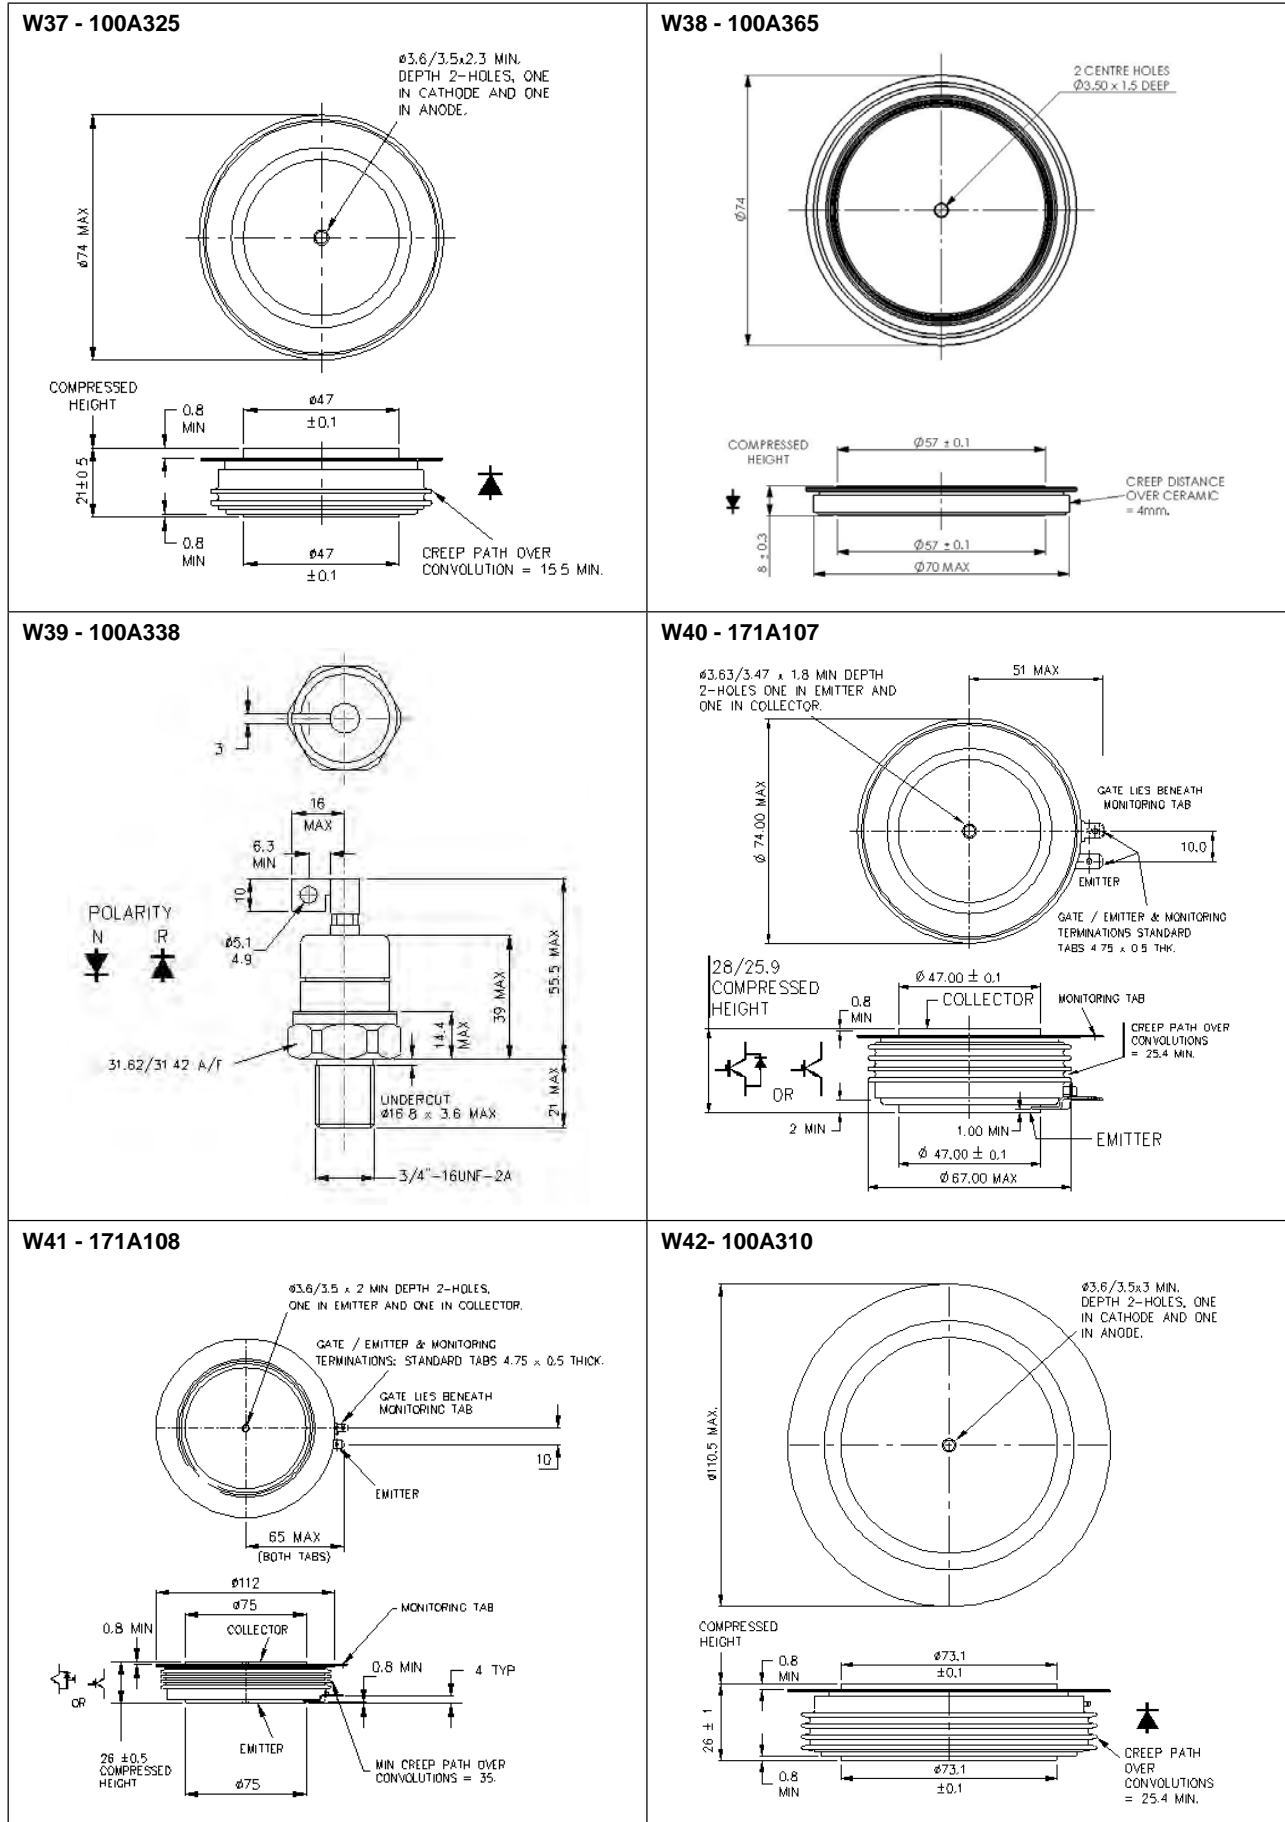


Dimensions in mm and inches (1 mm = 0.0394")

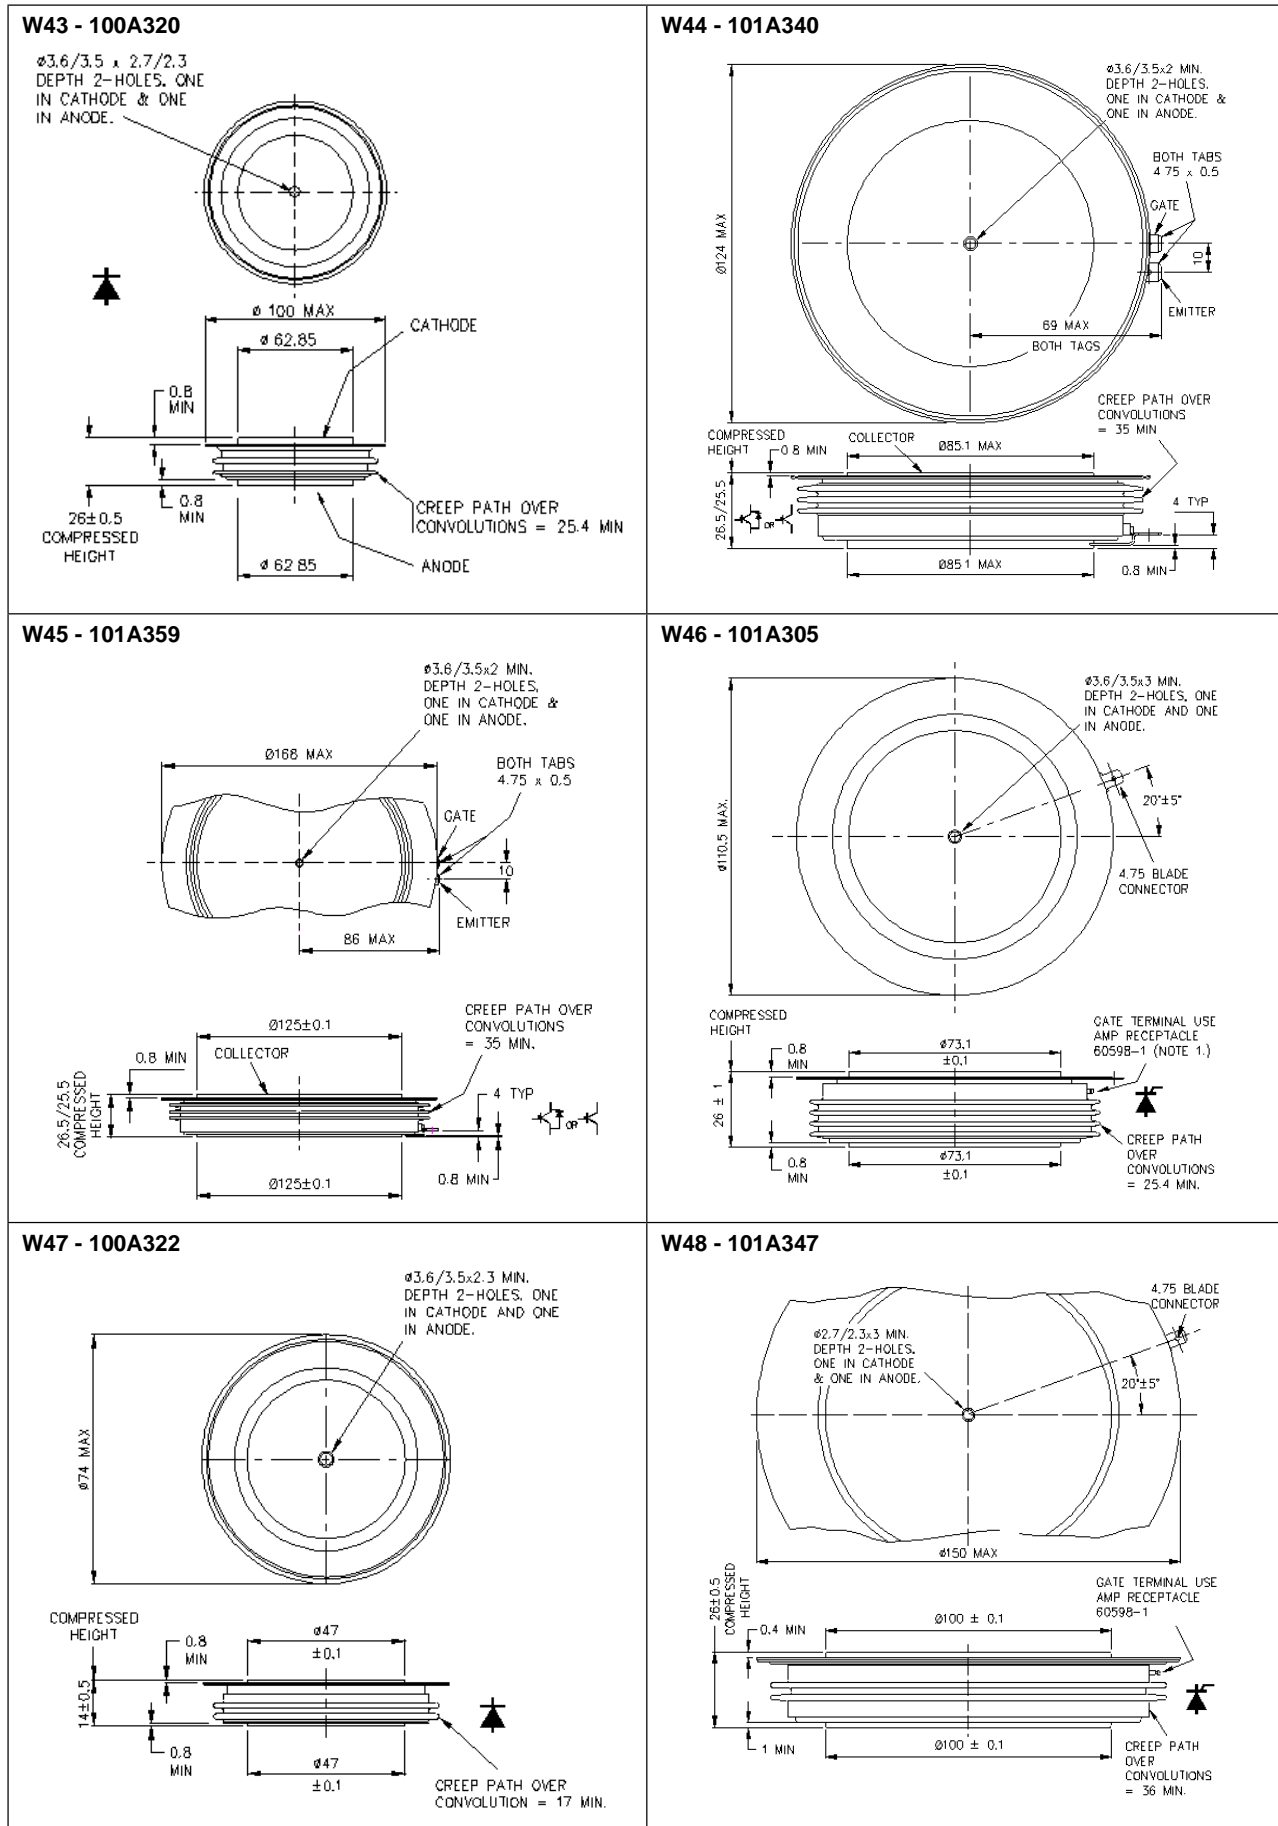


Dimensions in mm and inches (1 mm = 0.0394")

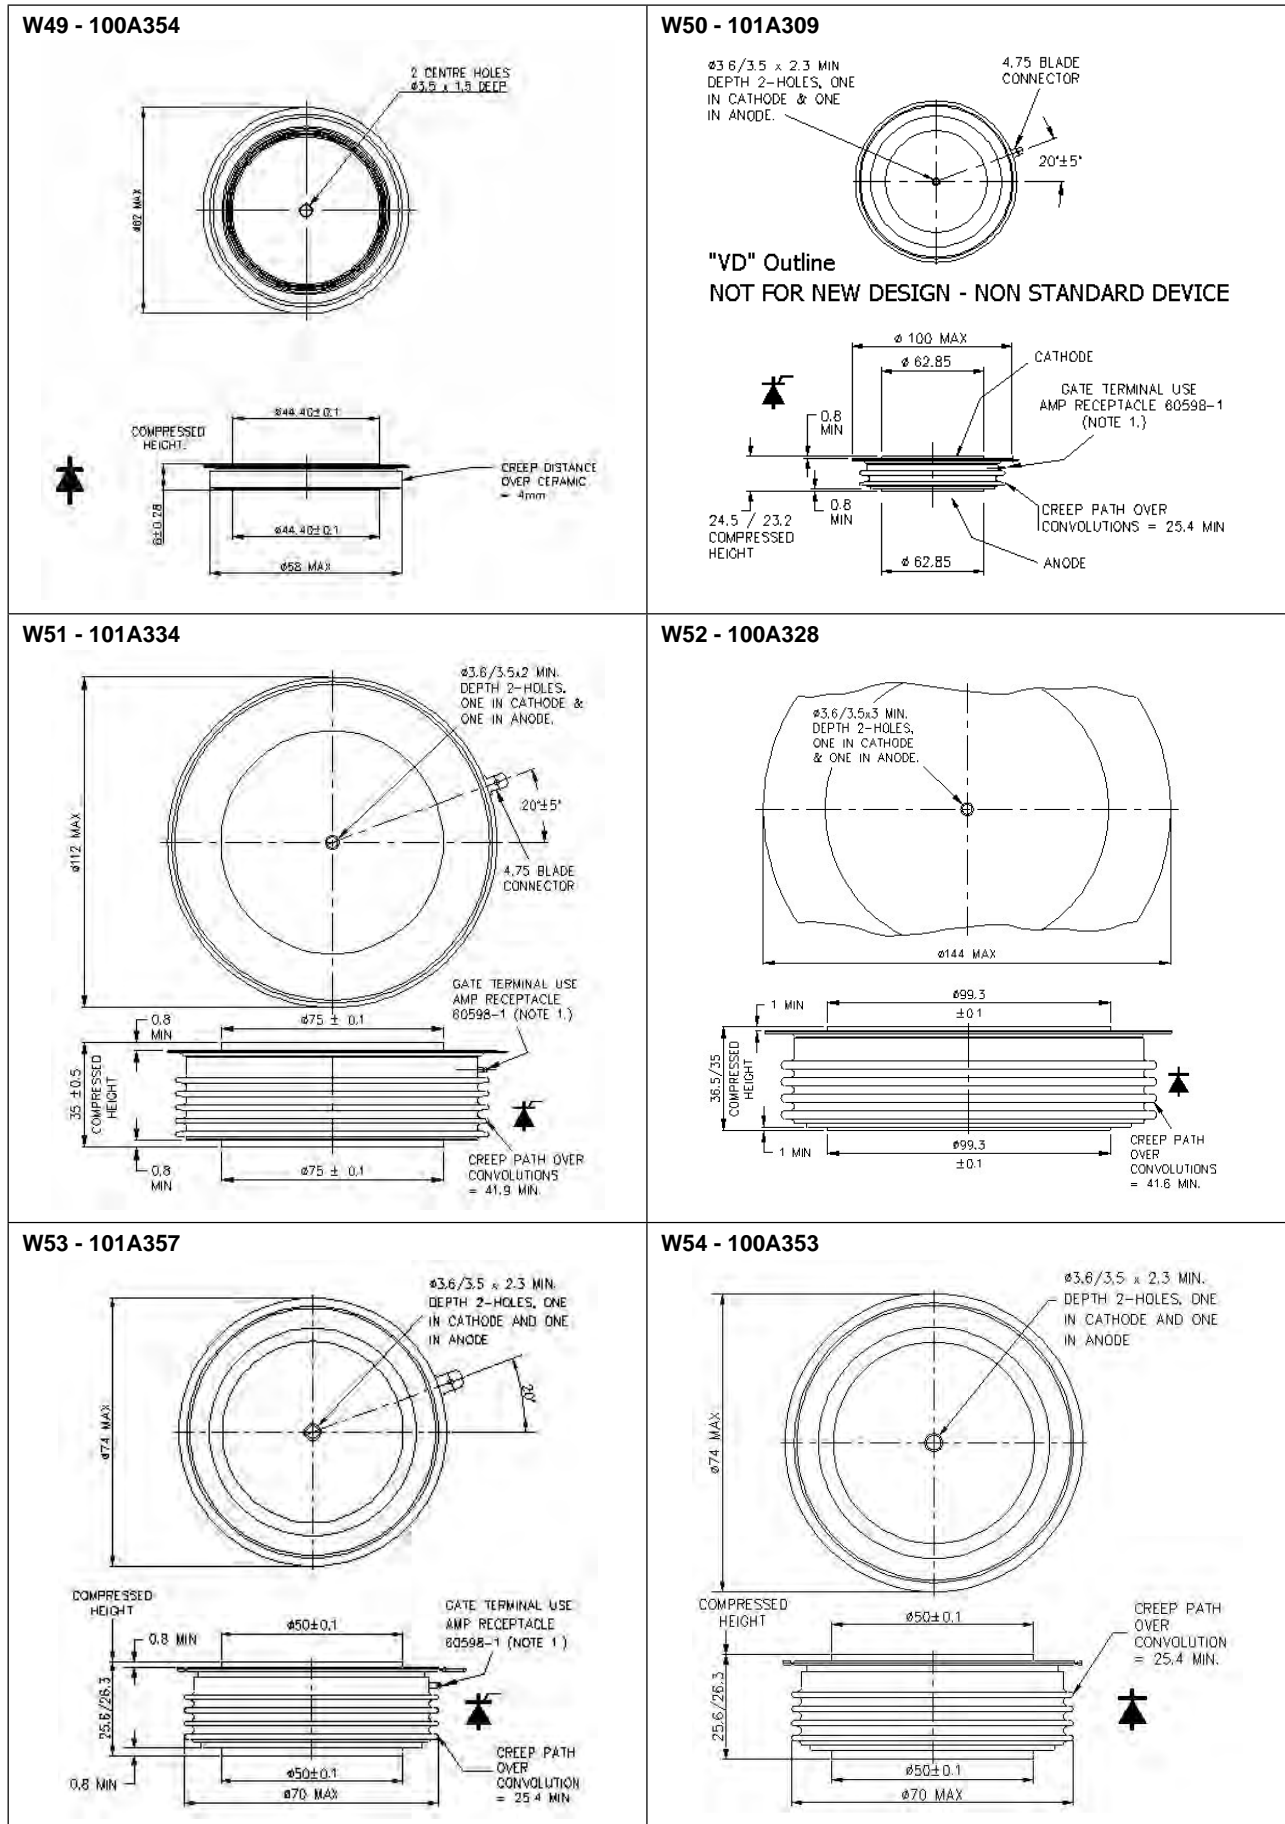


Dimensions in mm and inches (1 mm = 0.0394")

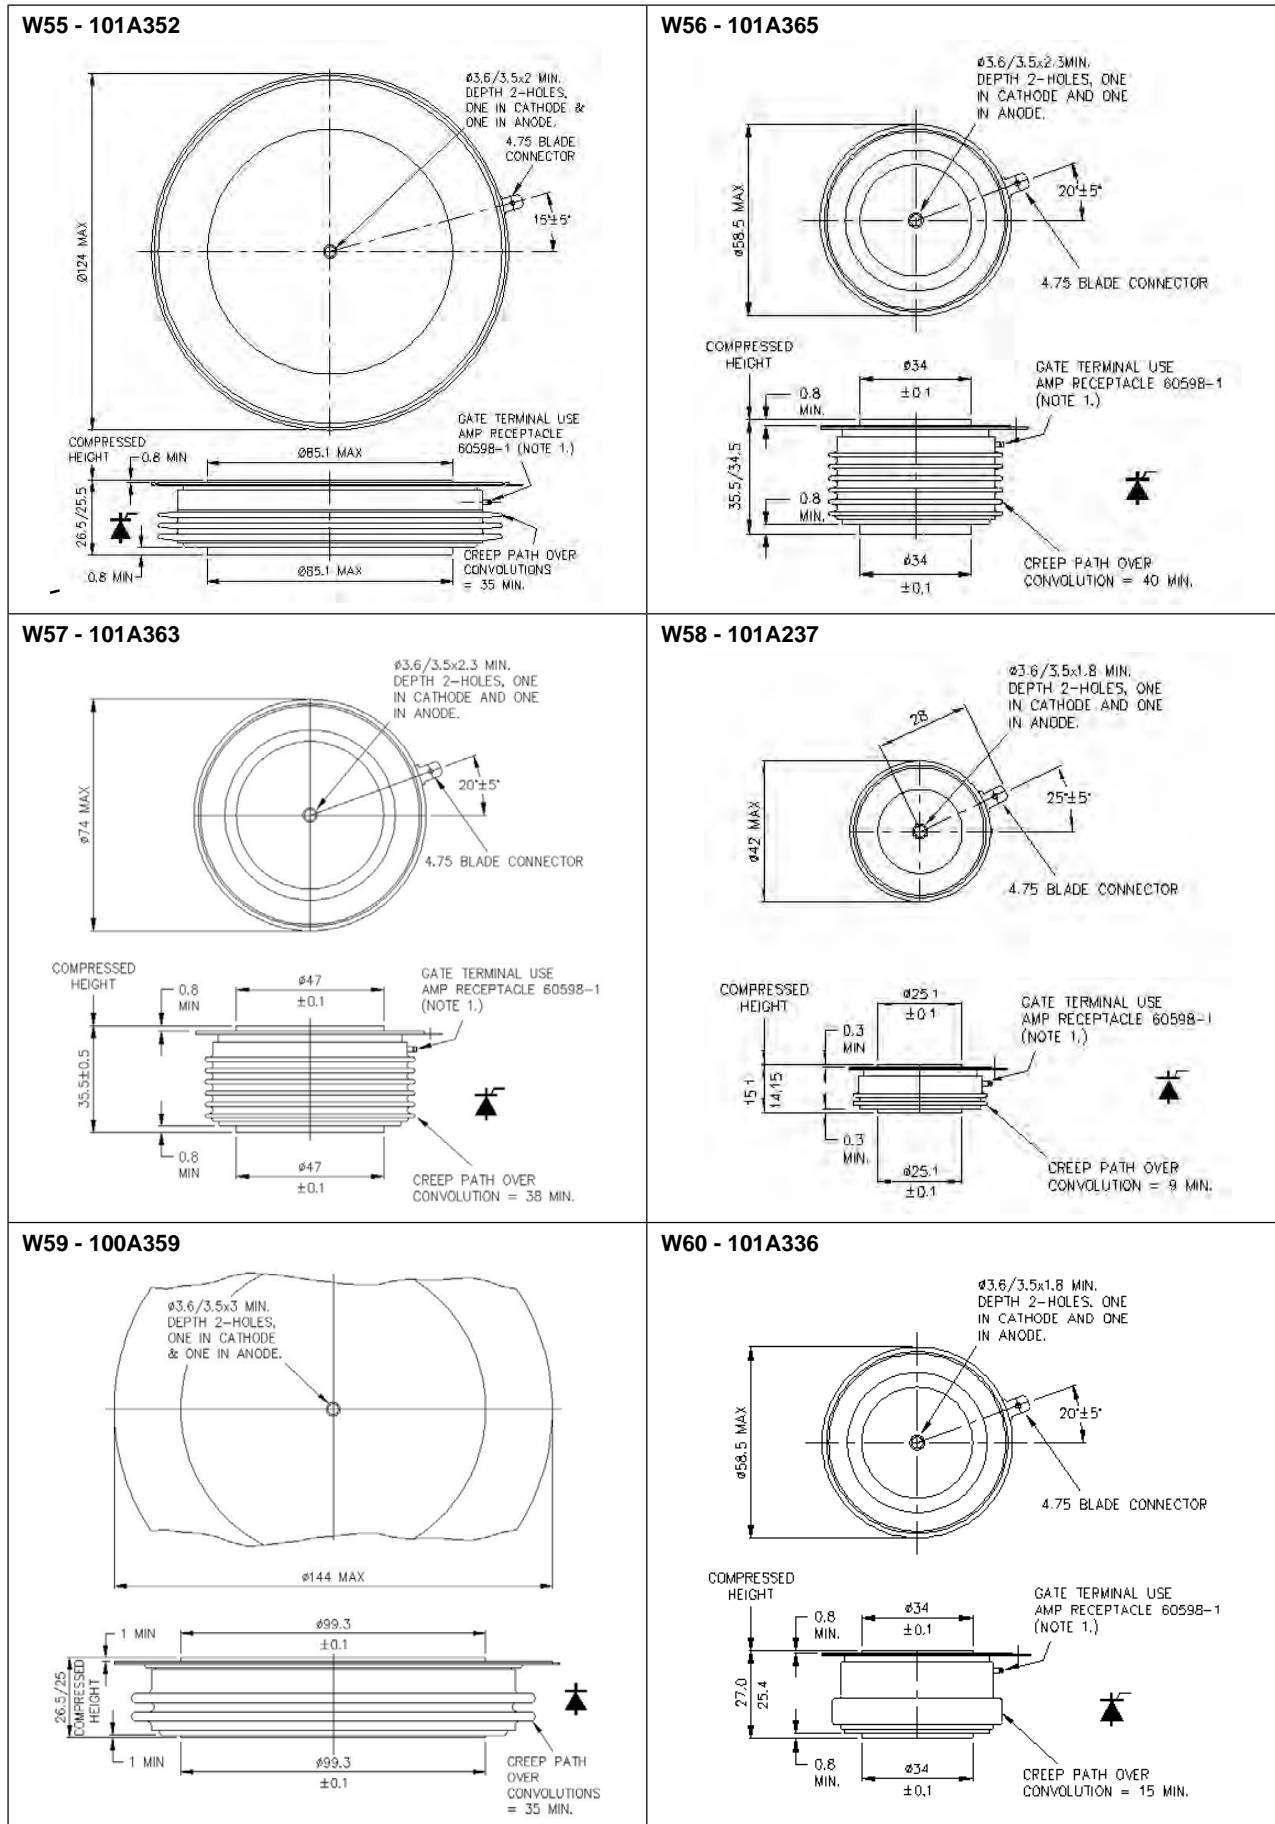


Dimensions in mm and inches (1 mm = 0.0394")

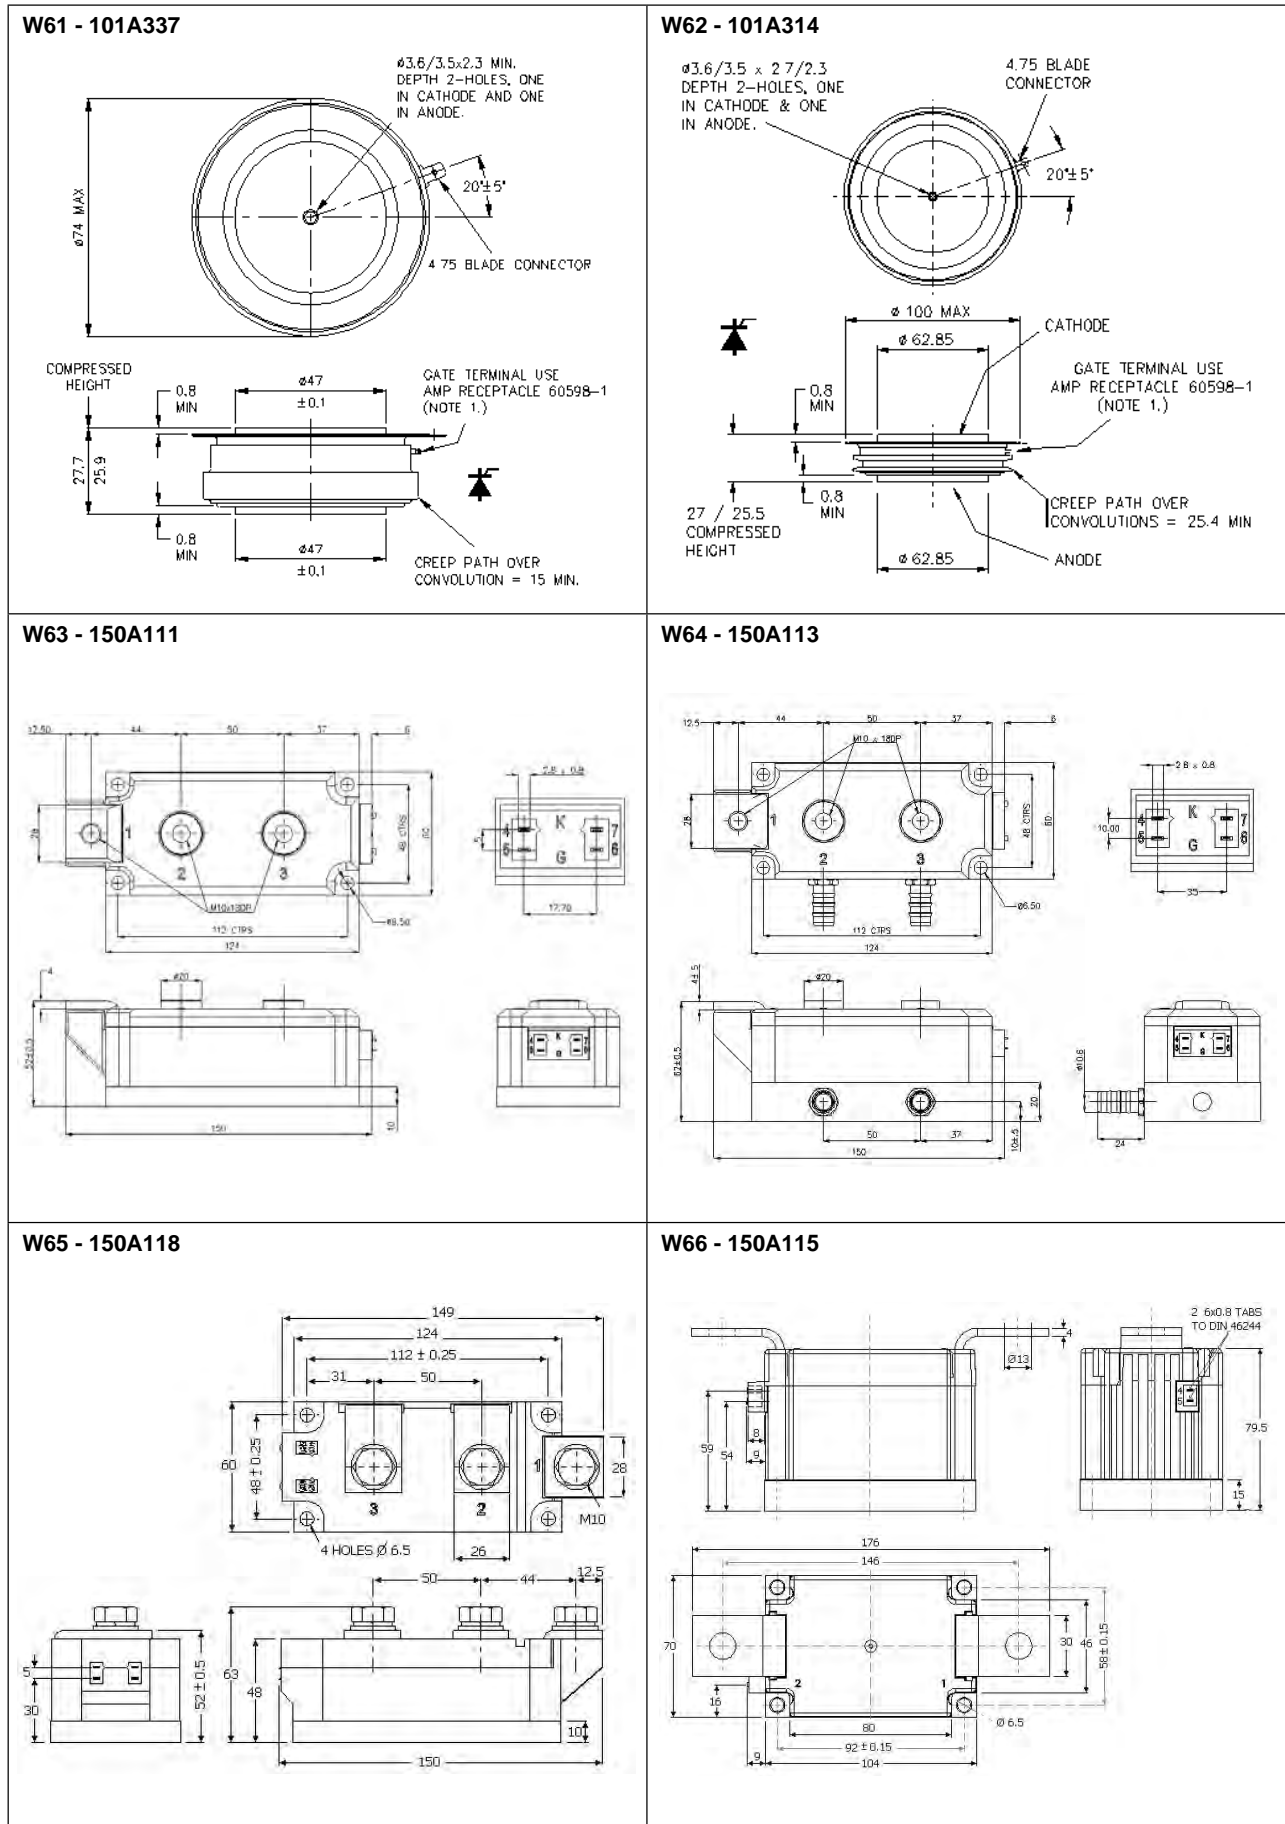


Dimensions in mm and inches (1 mm = 0.0394")

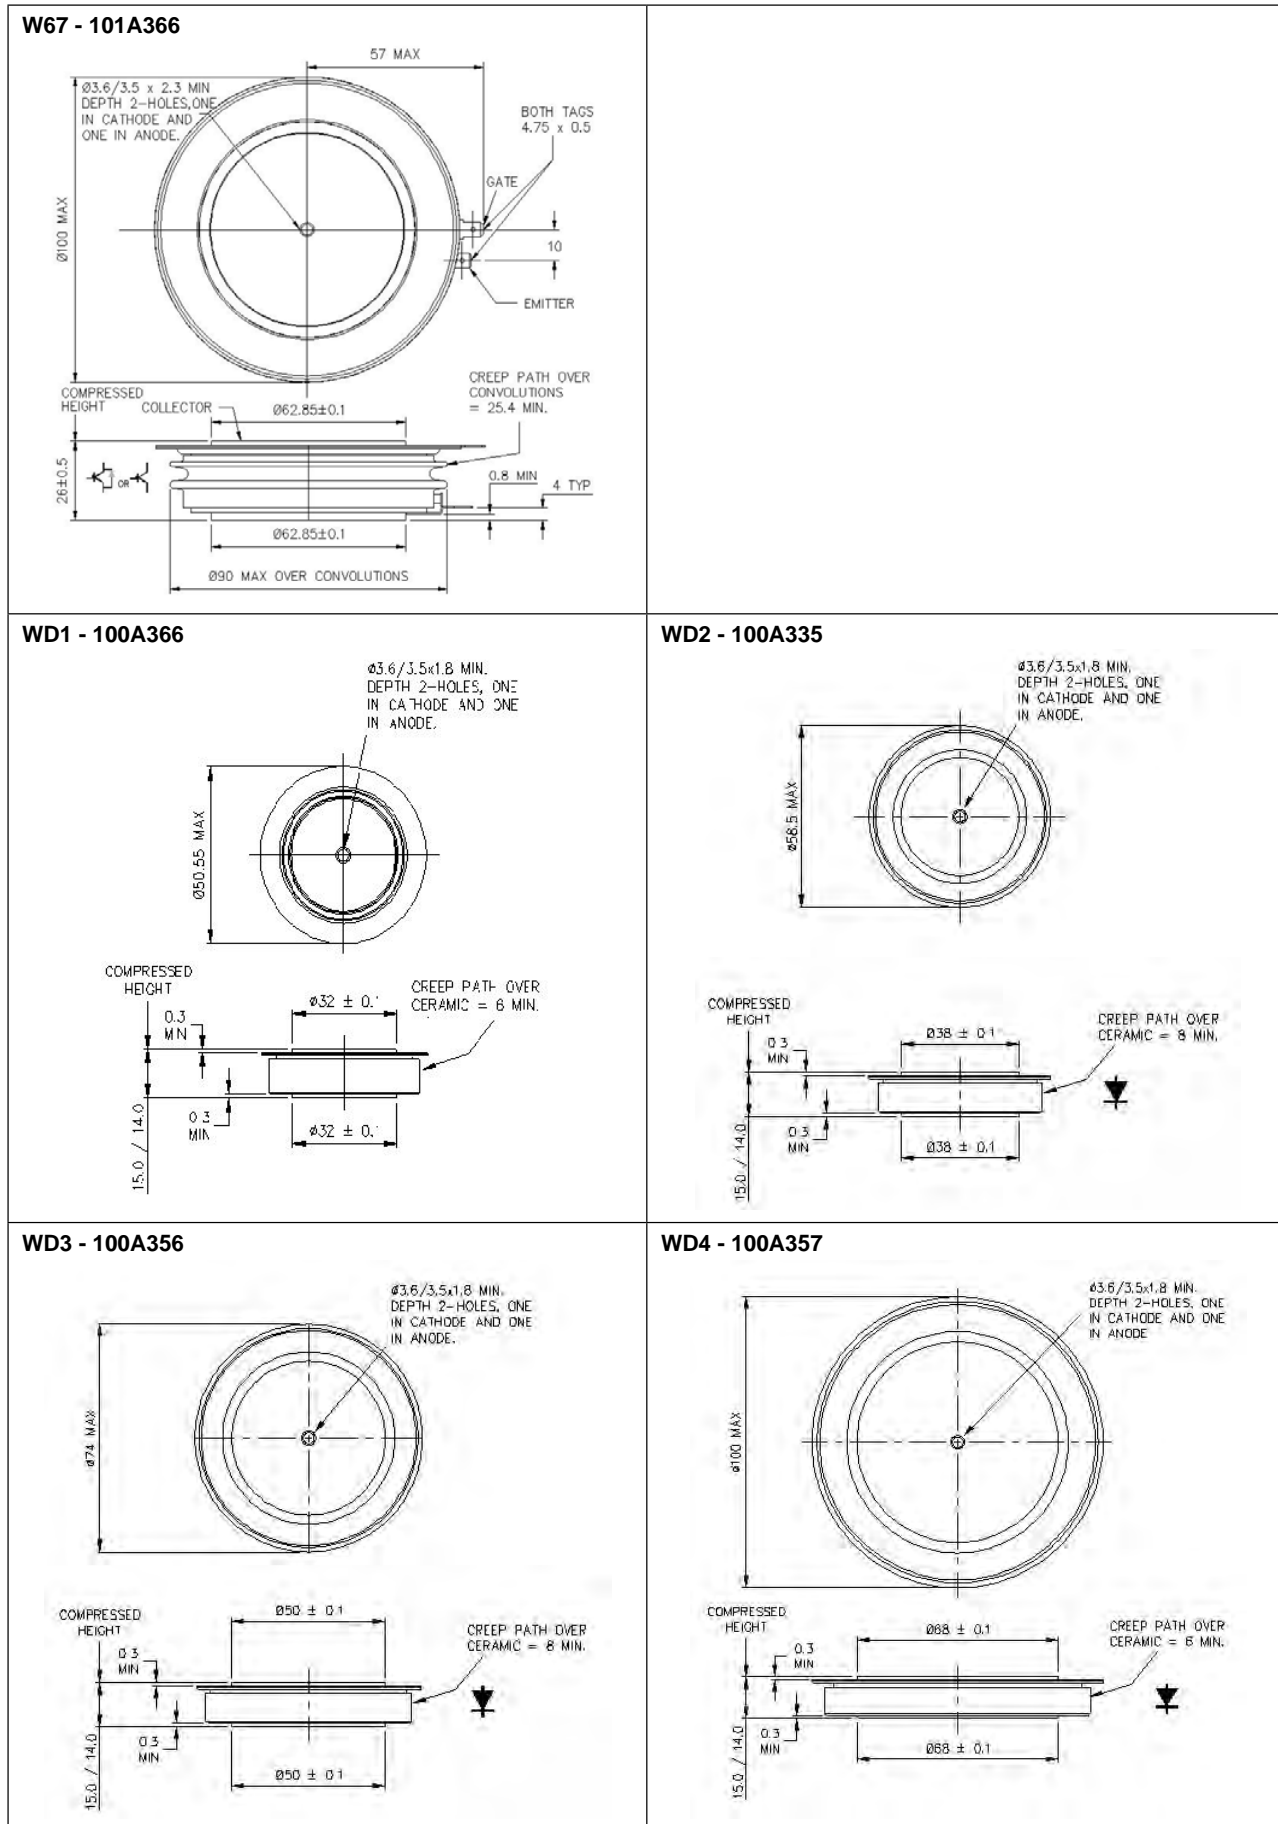


Dimensions in mm and inches (1 mm = 0.0394")

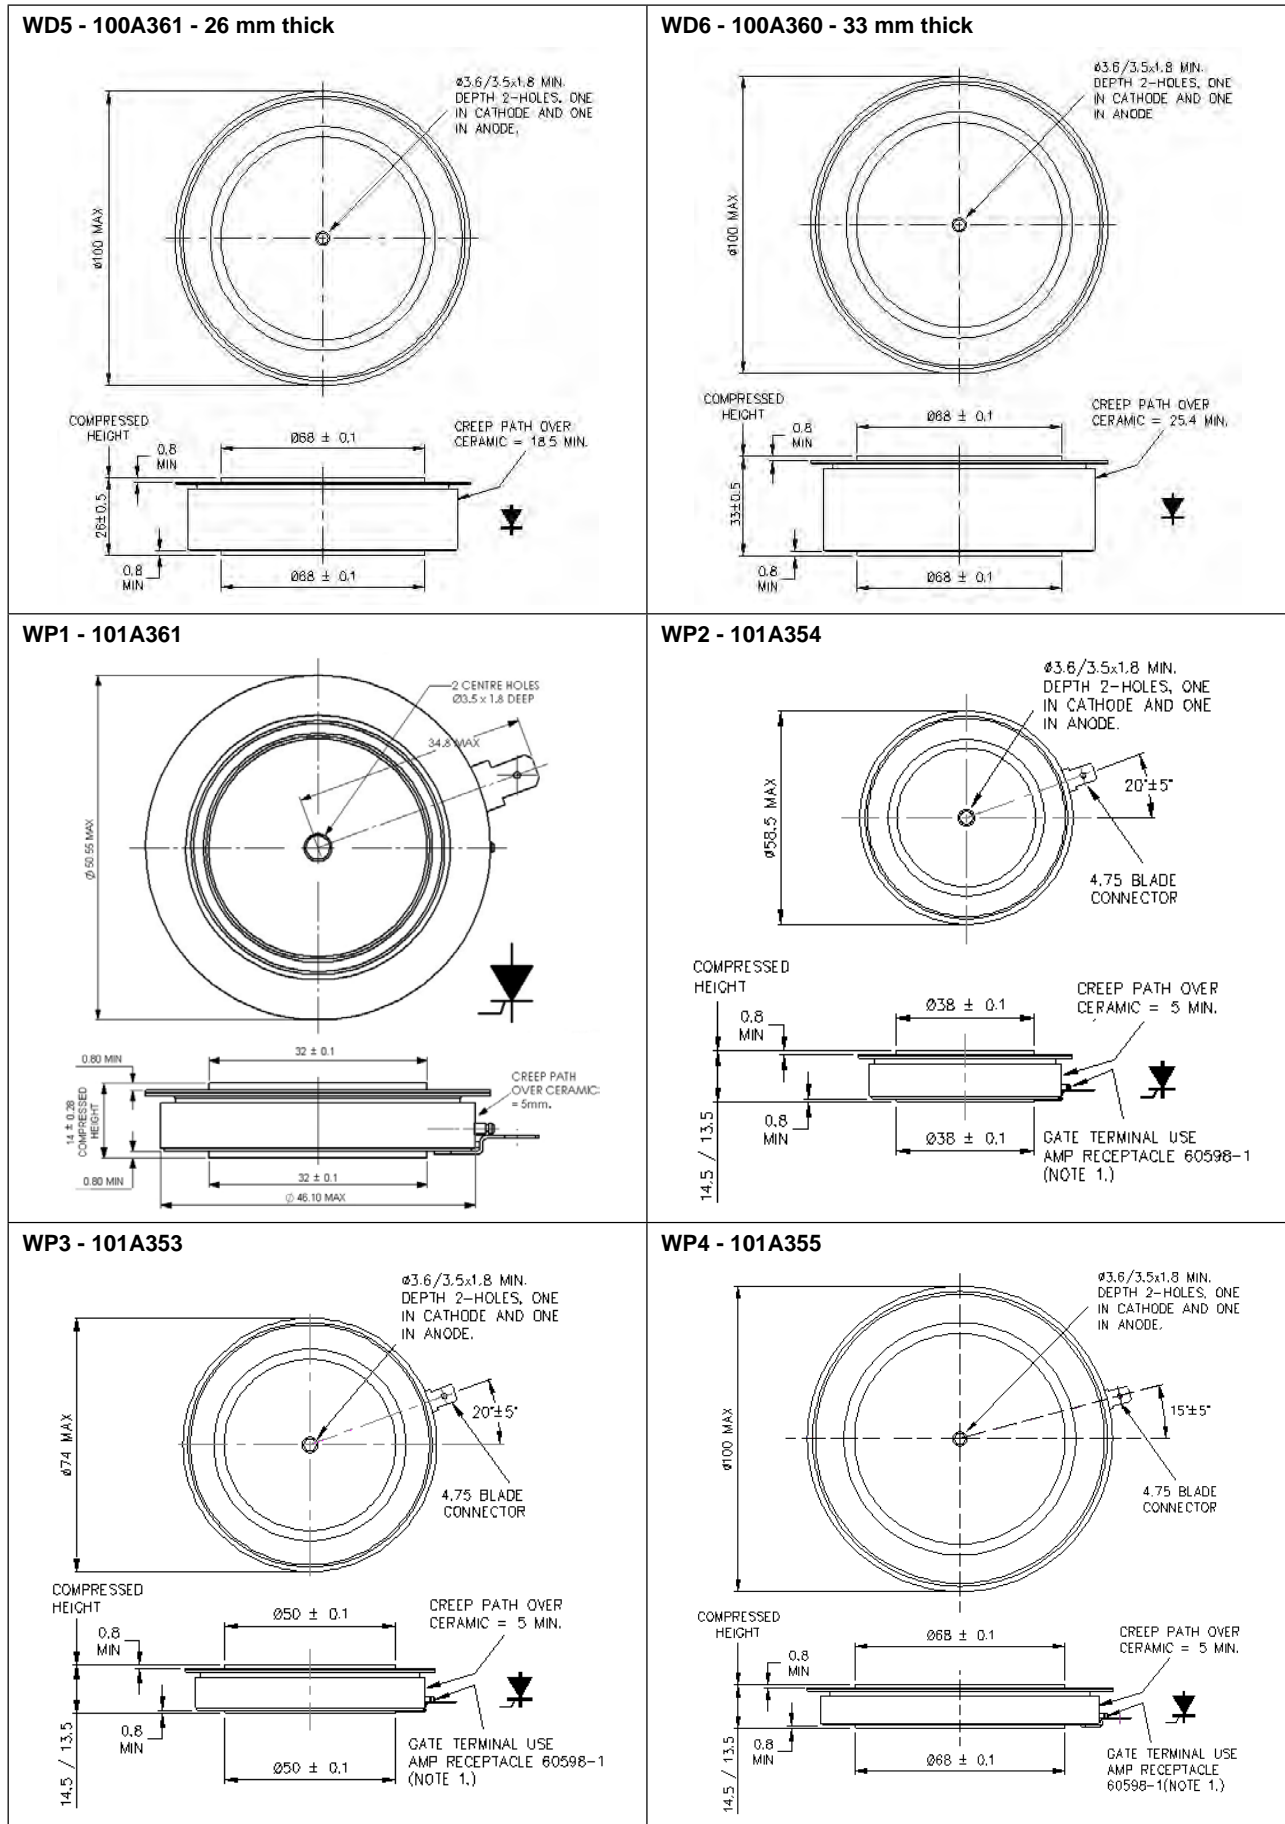


Dimensions in mm and inches (1 mm = 0.0394")

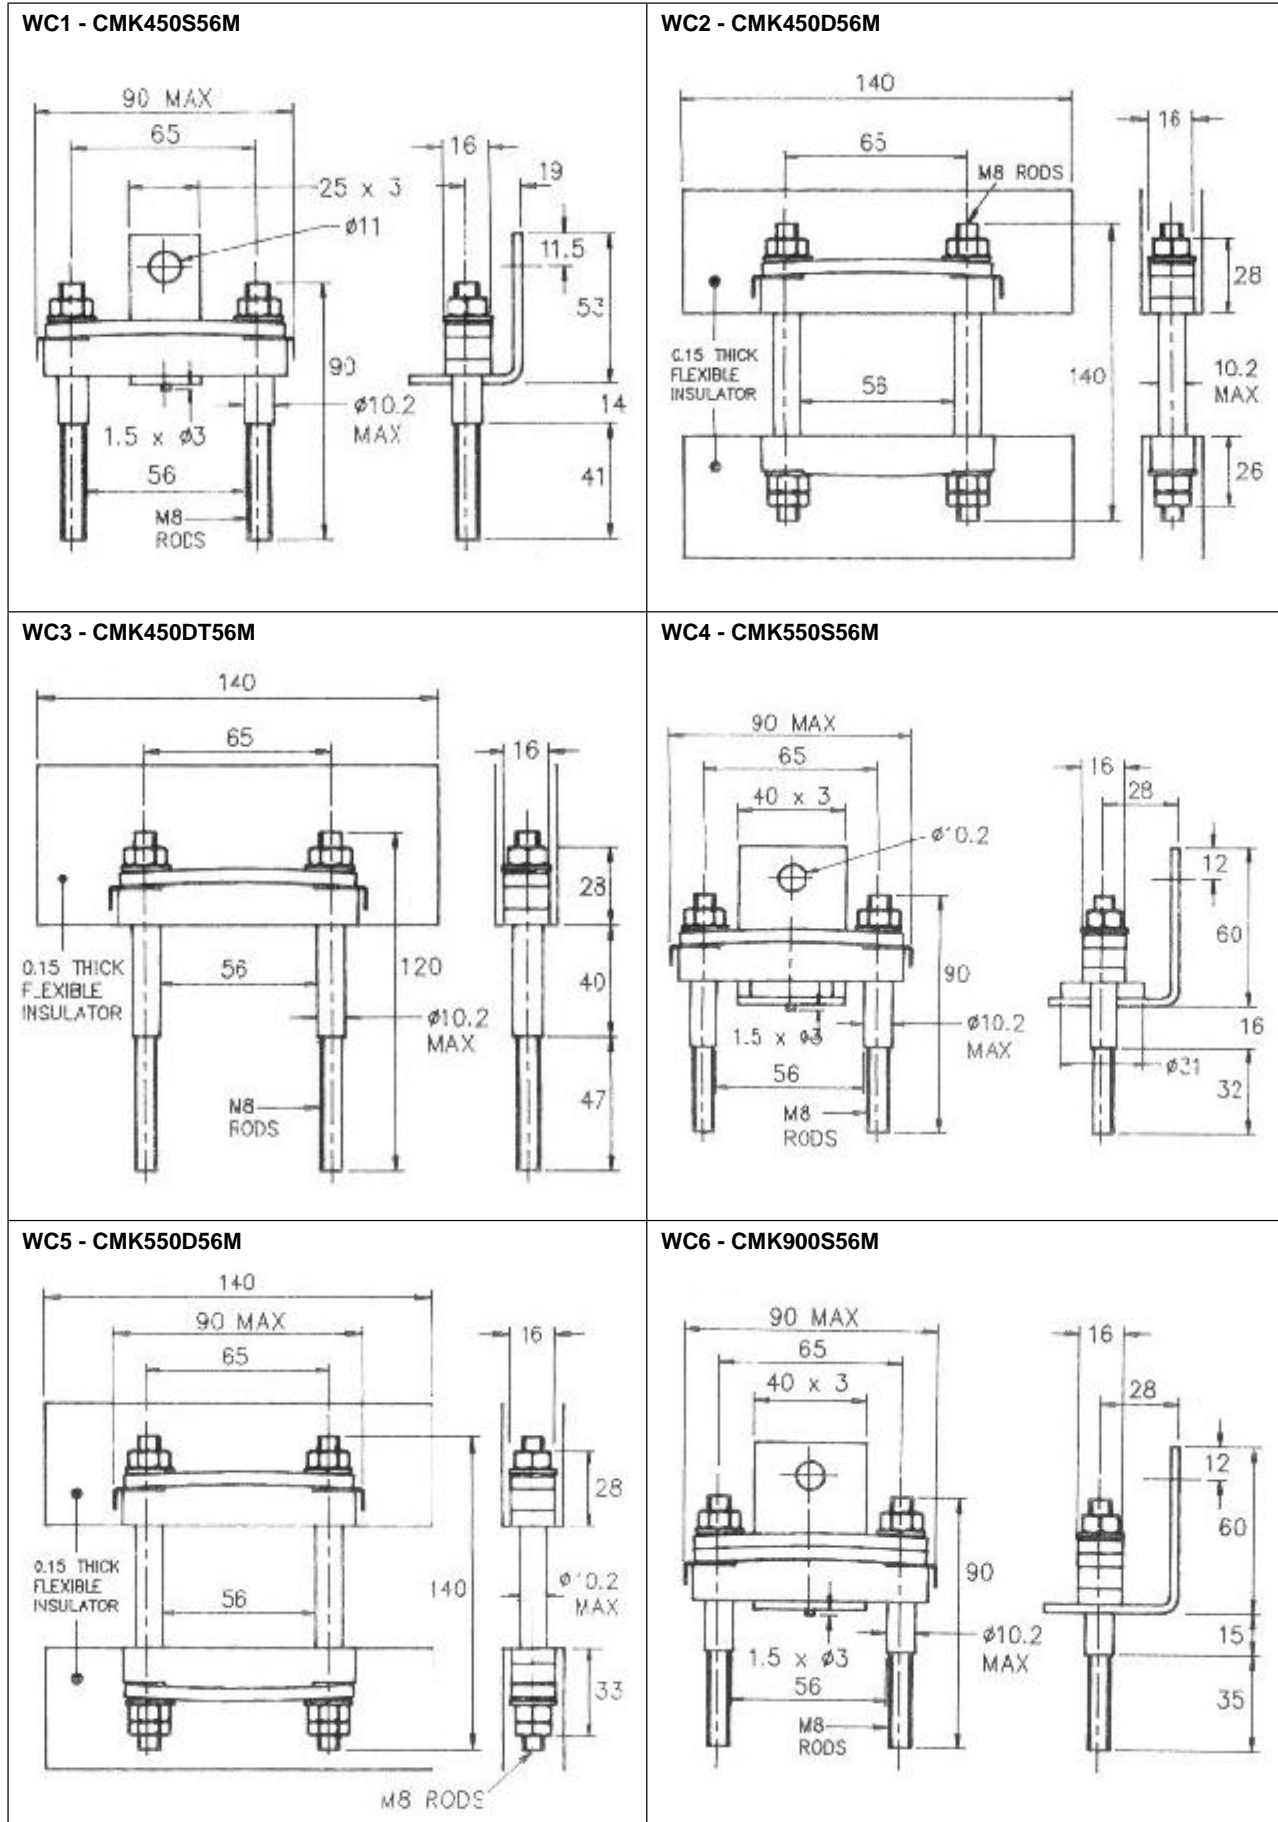


Dimensions in mm and inches (1 mm = 0.0394")

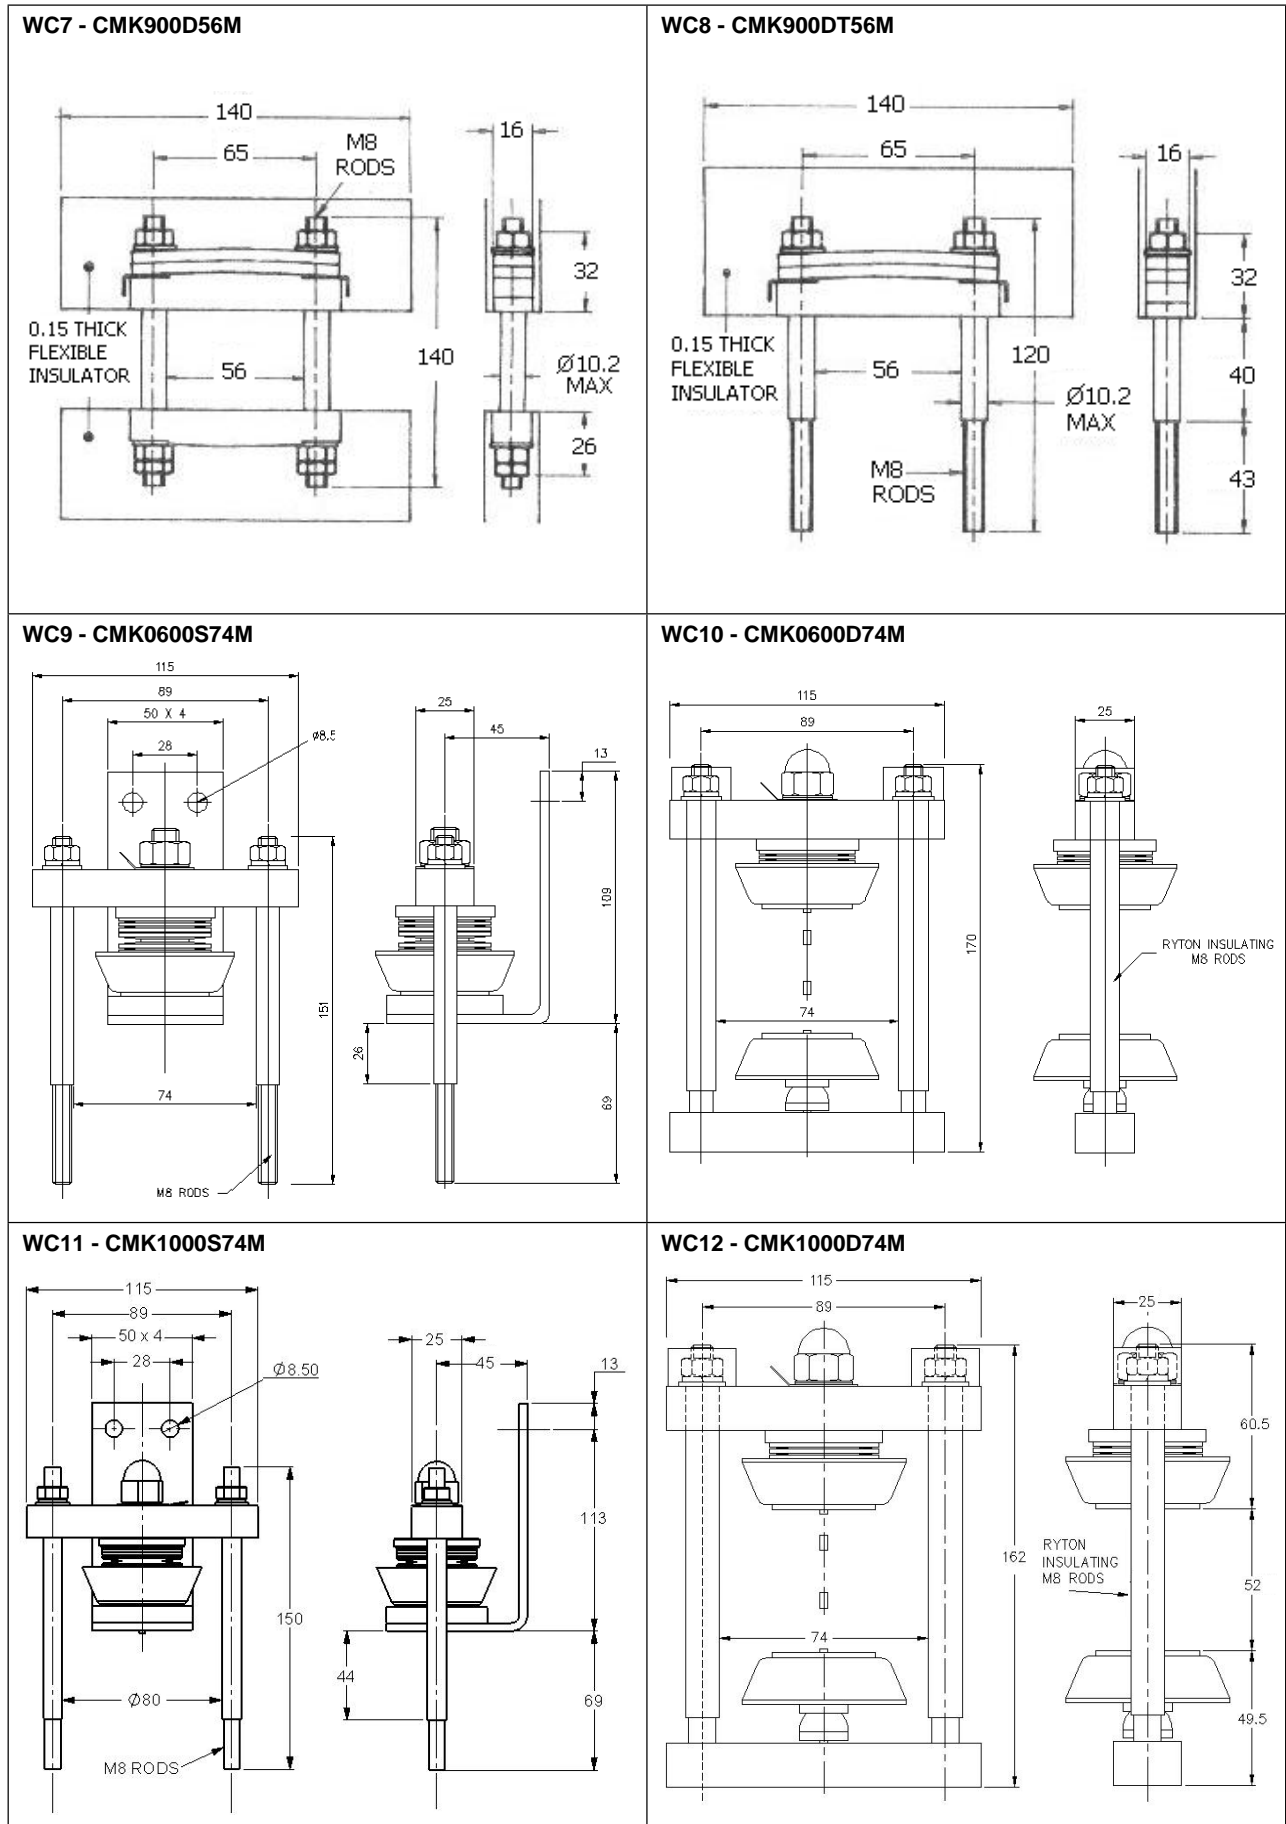


Dimensions in mm and inches (1 mm = 0.0394")

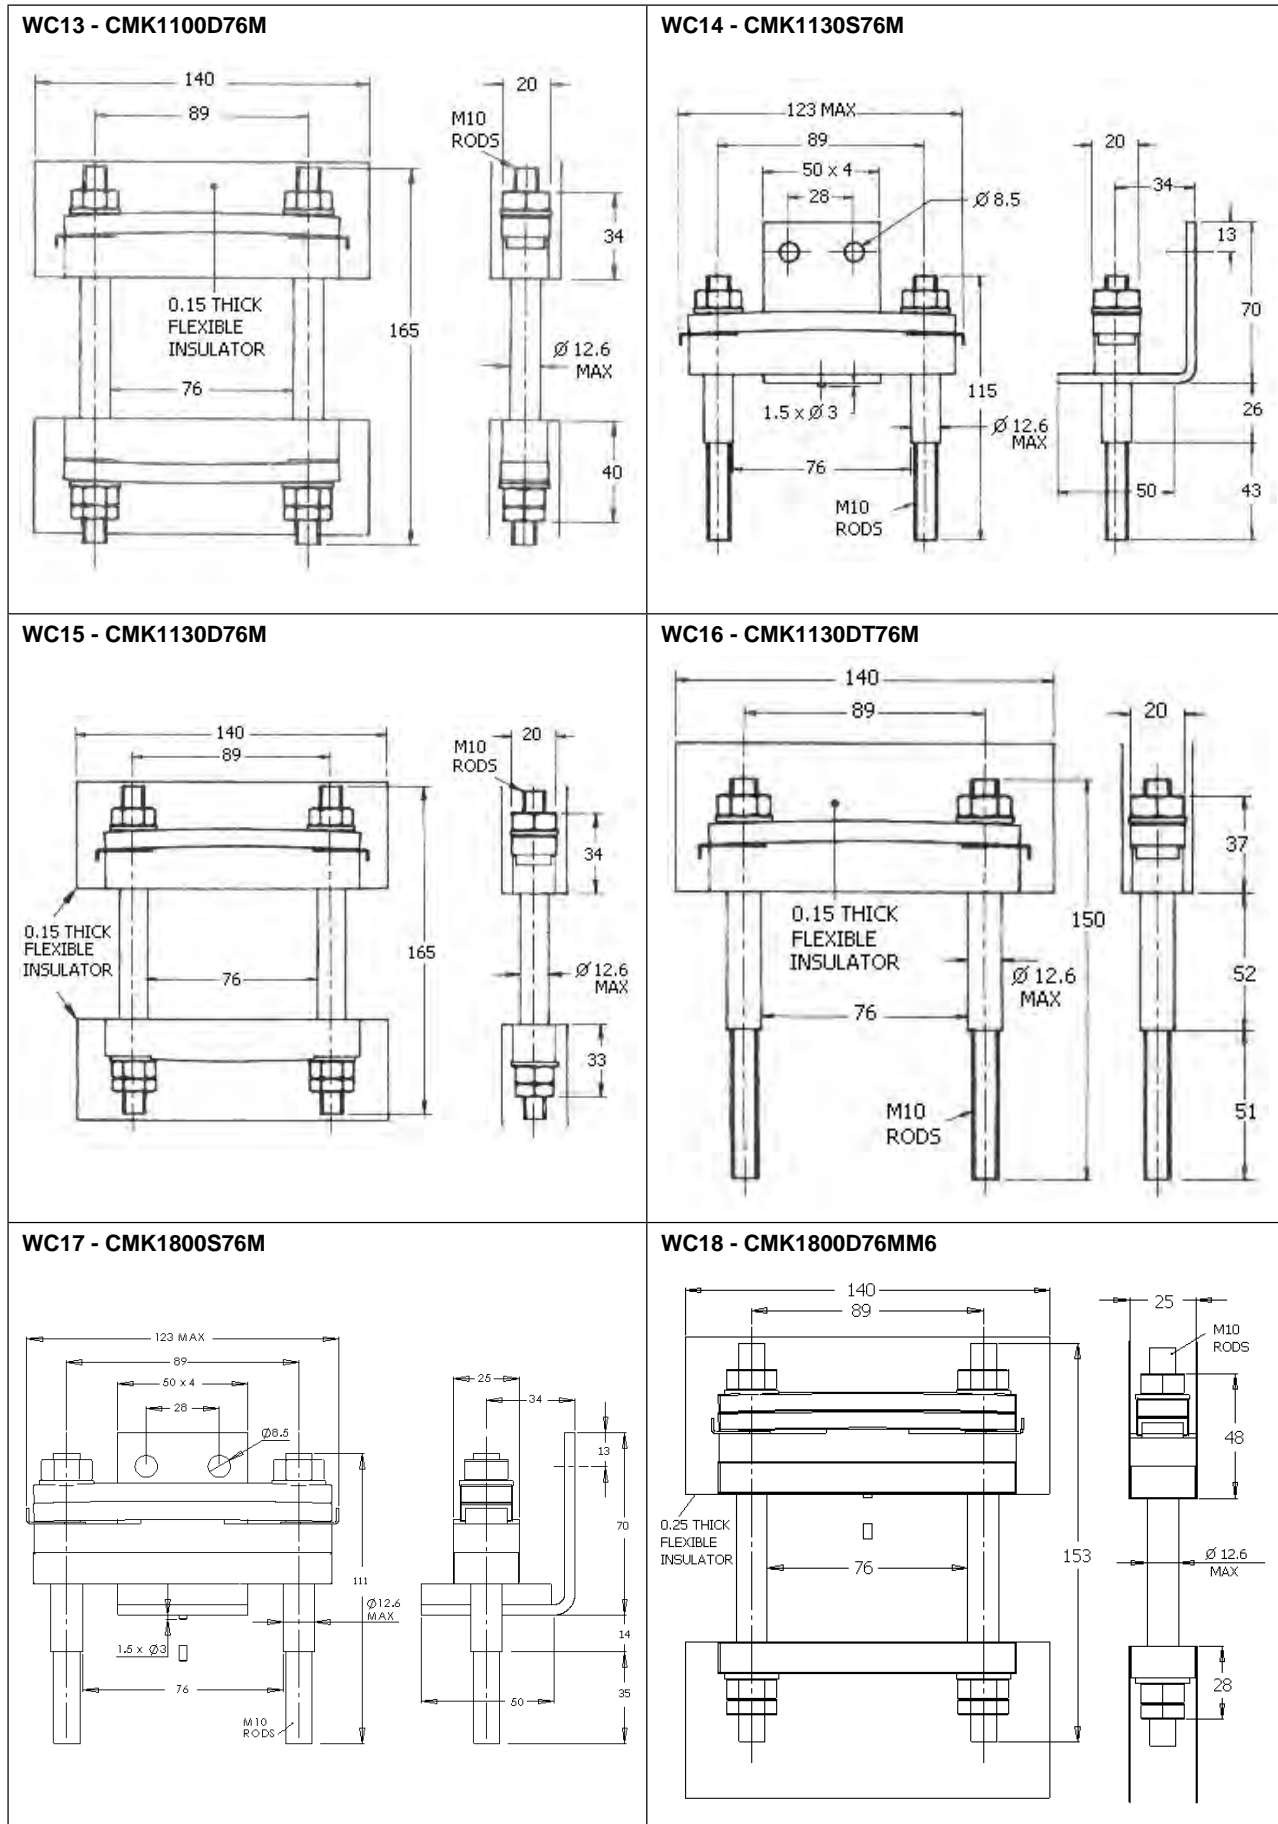

Dimensions in mm and inches (1 mm = 0.0394")

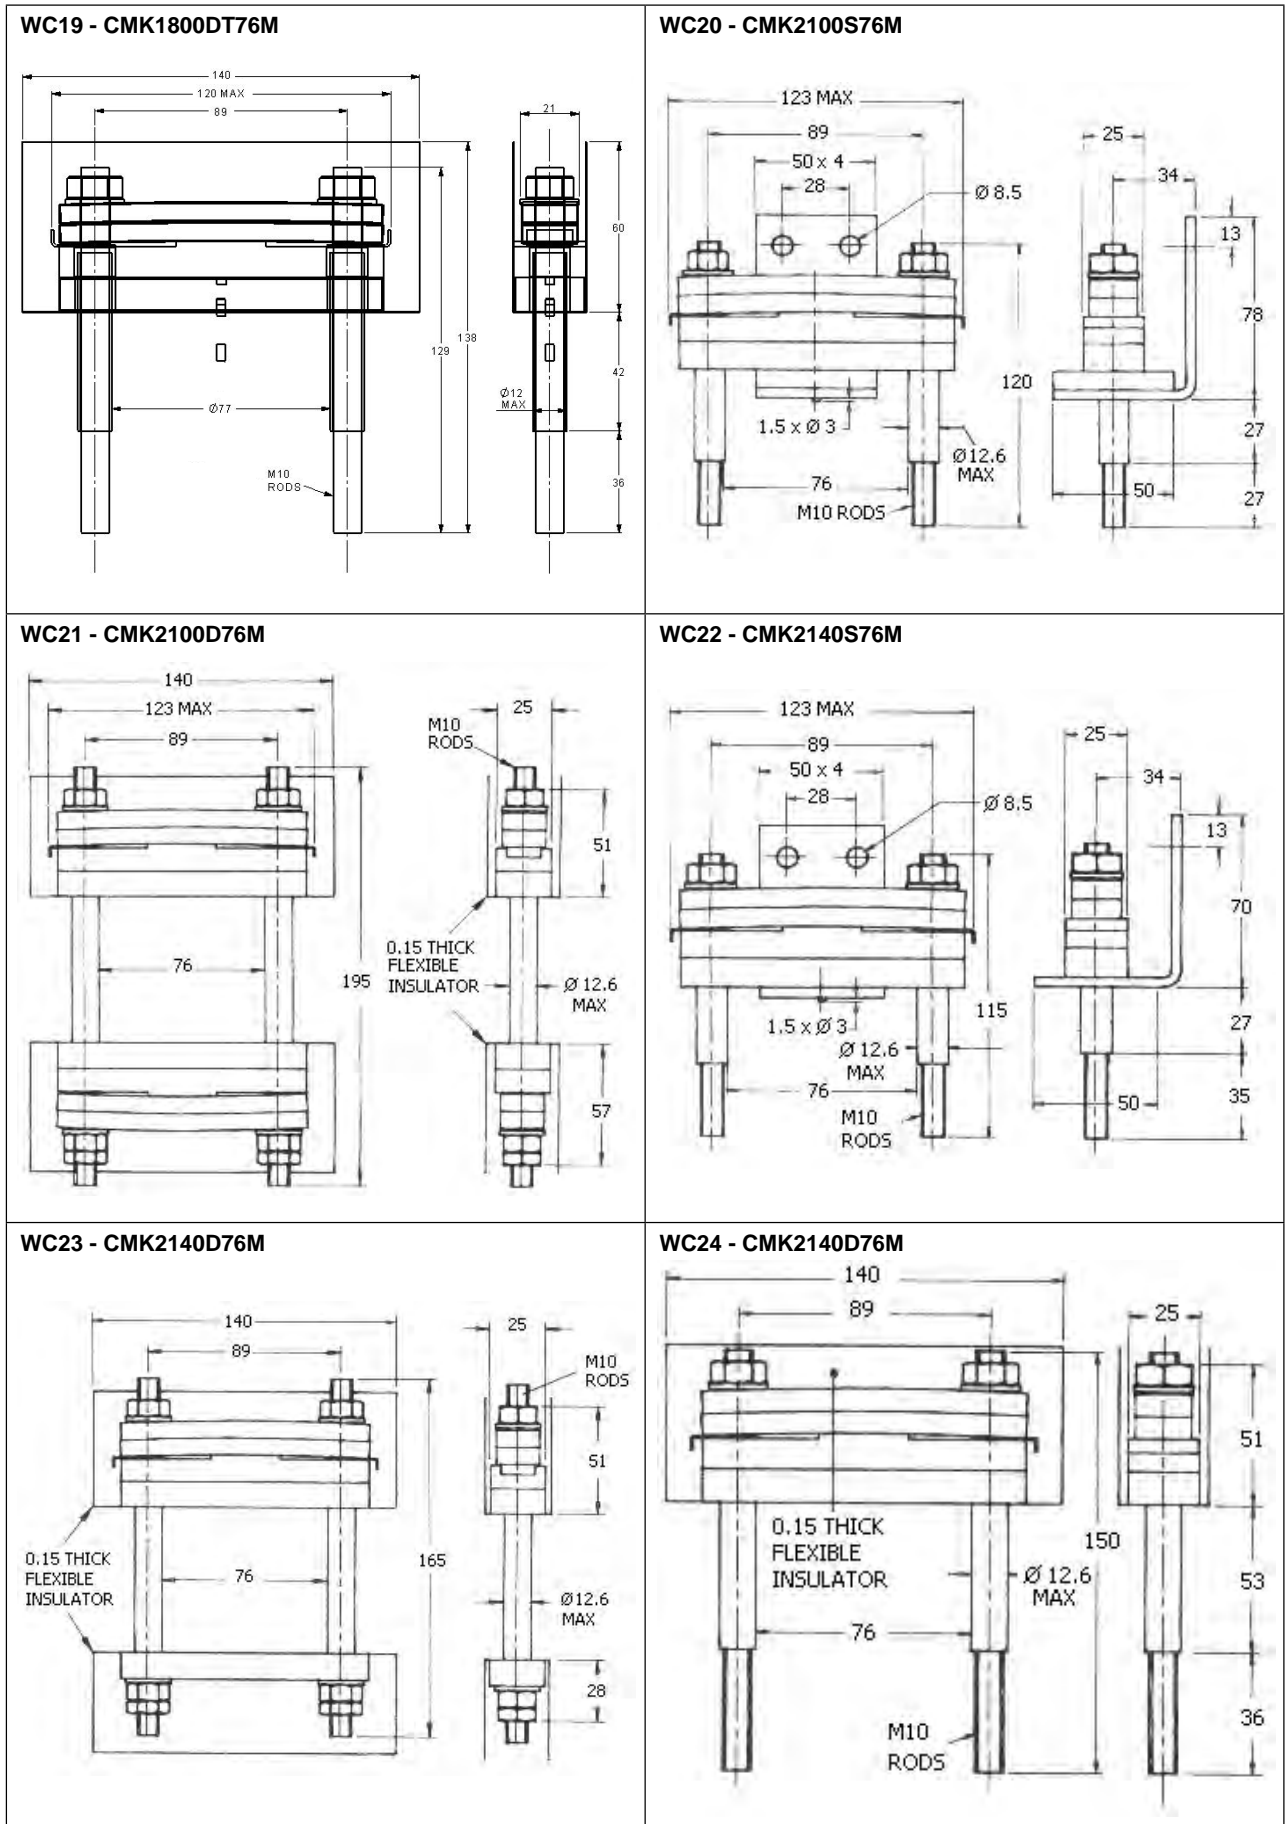


Dimensions in mm and inches (1 mm = 0.0394")

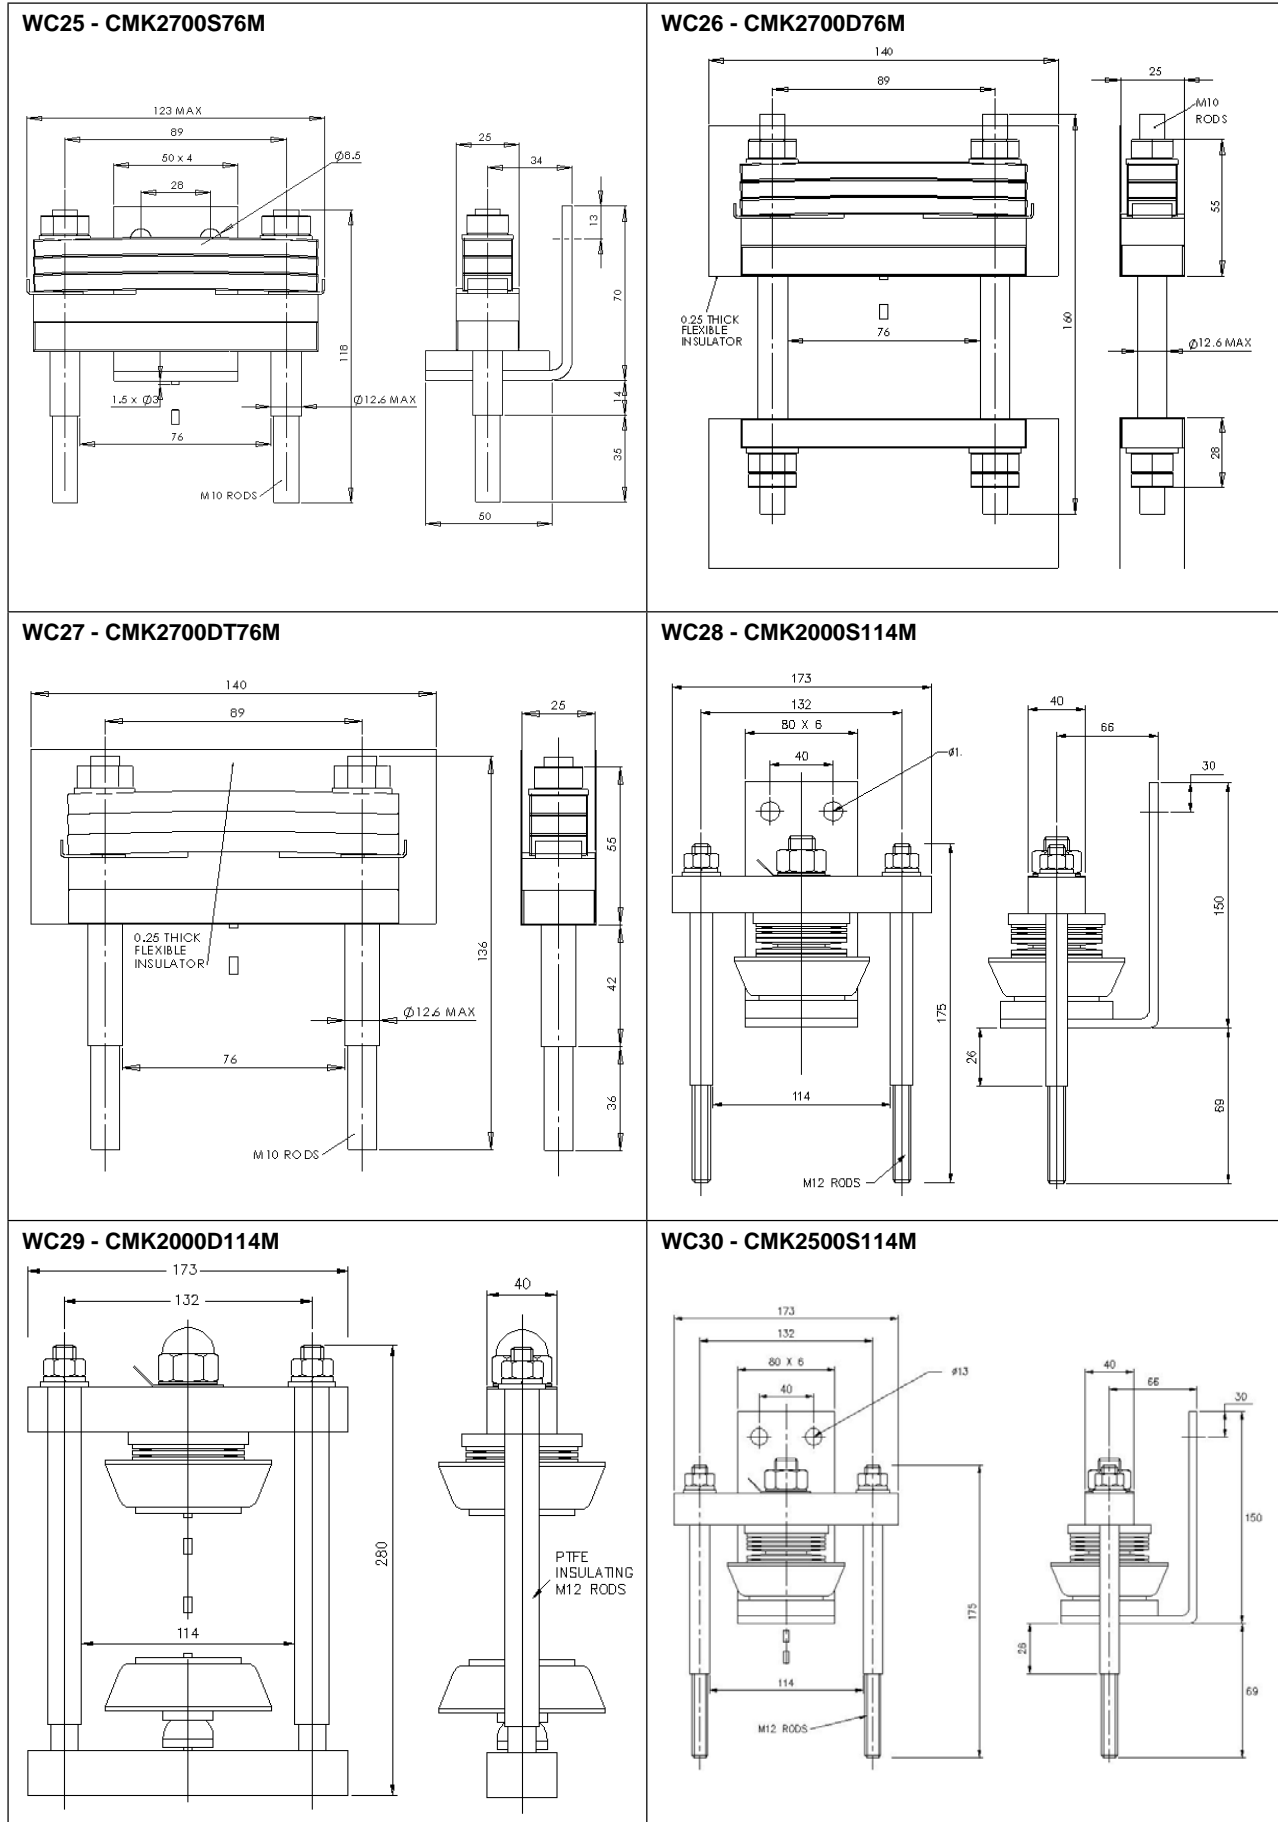


Outline drawings

WESTCODE

Dimensions in mm and inches (1 mm = 0.0394")

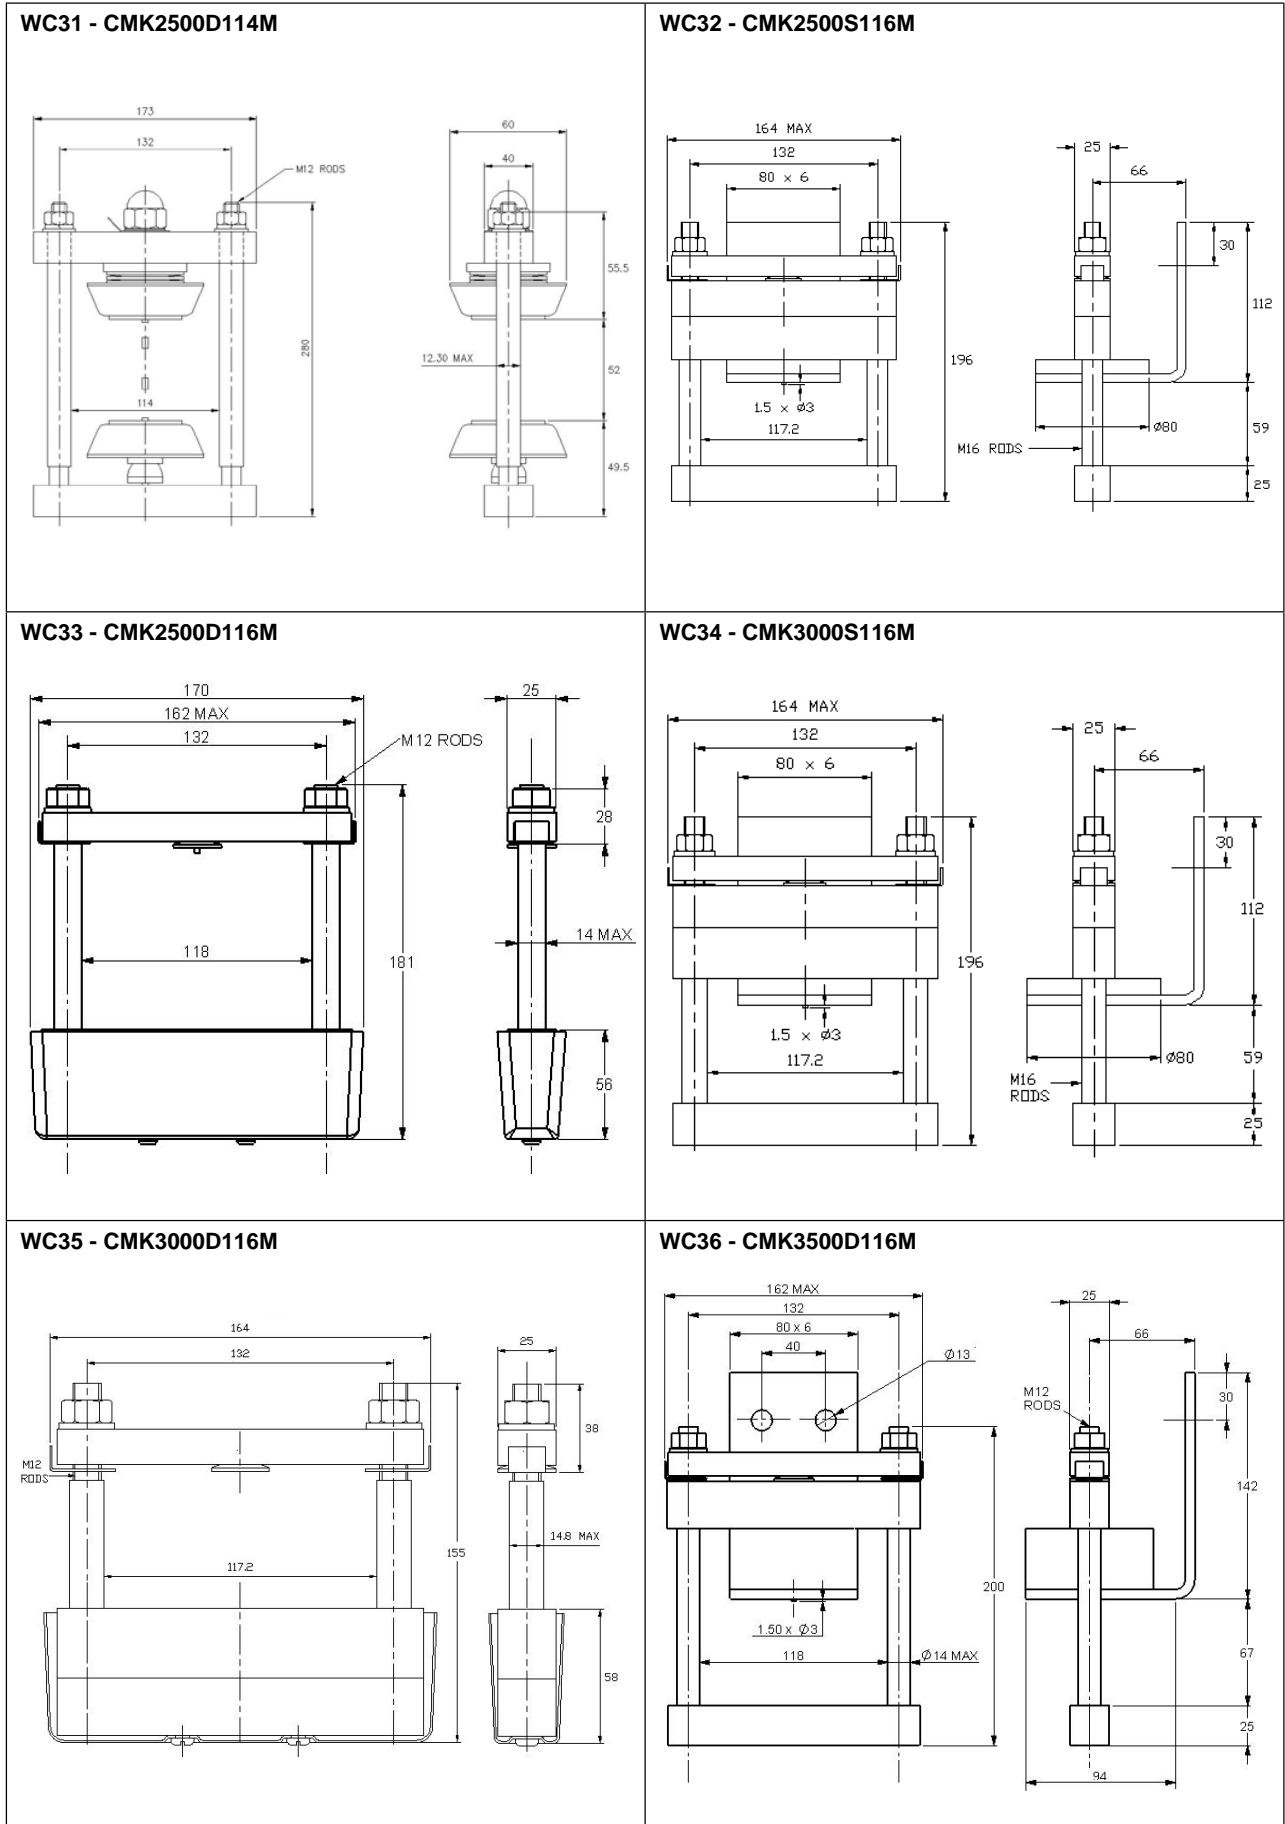


Dimensions in mm and inches (1 mm = 0.0394")

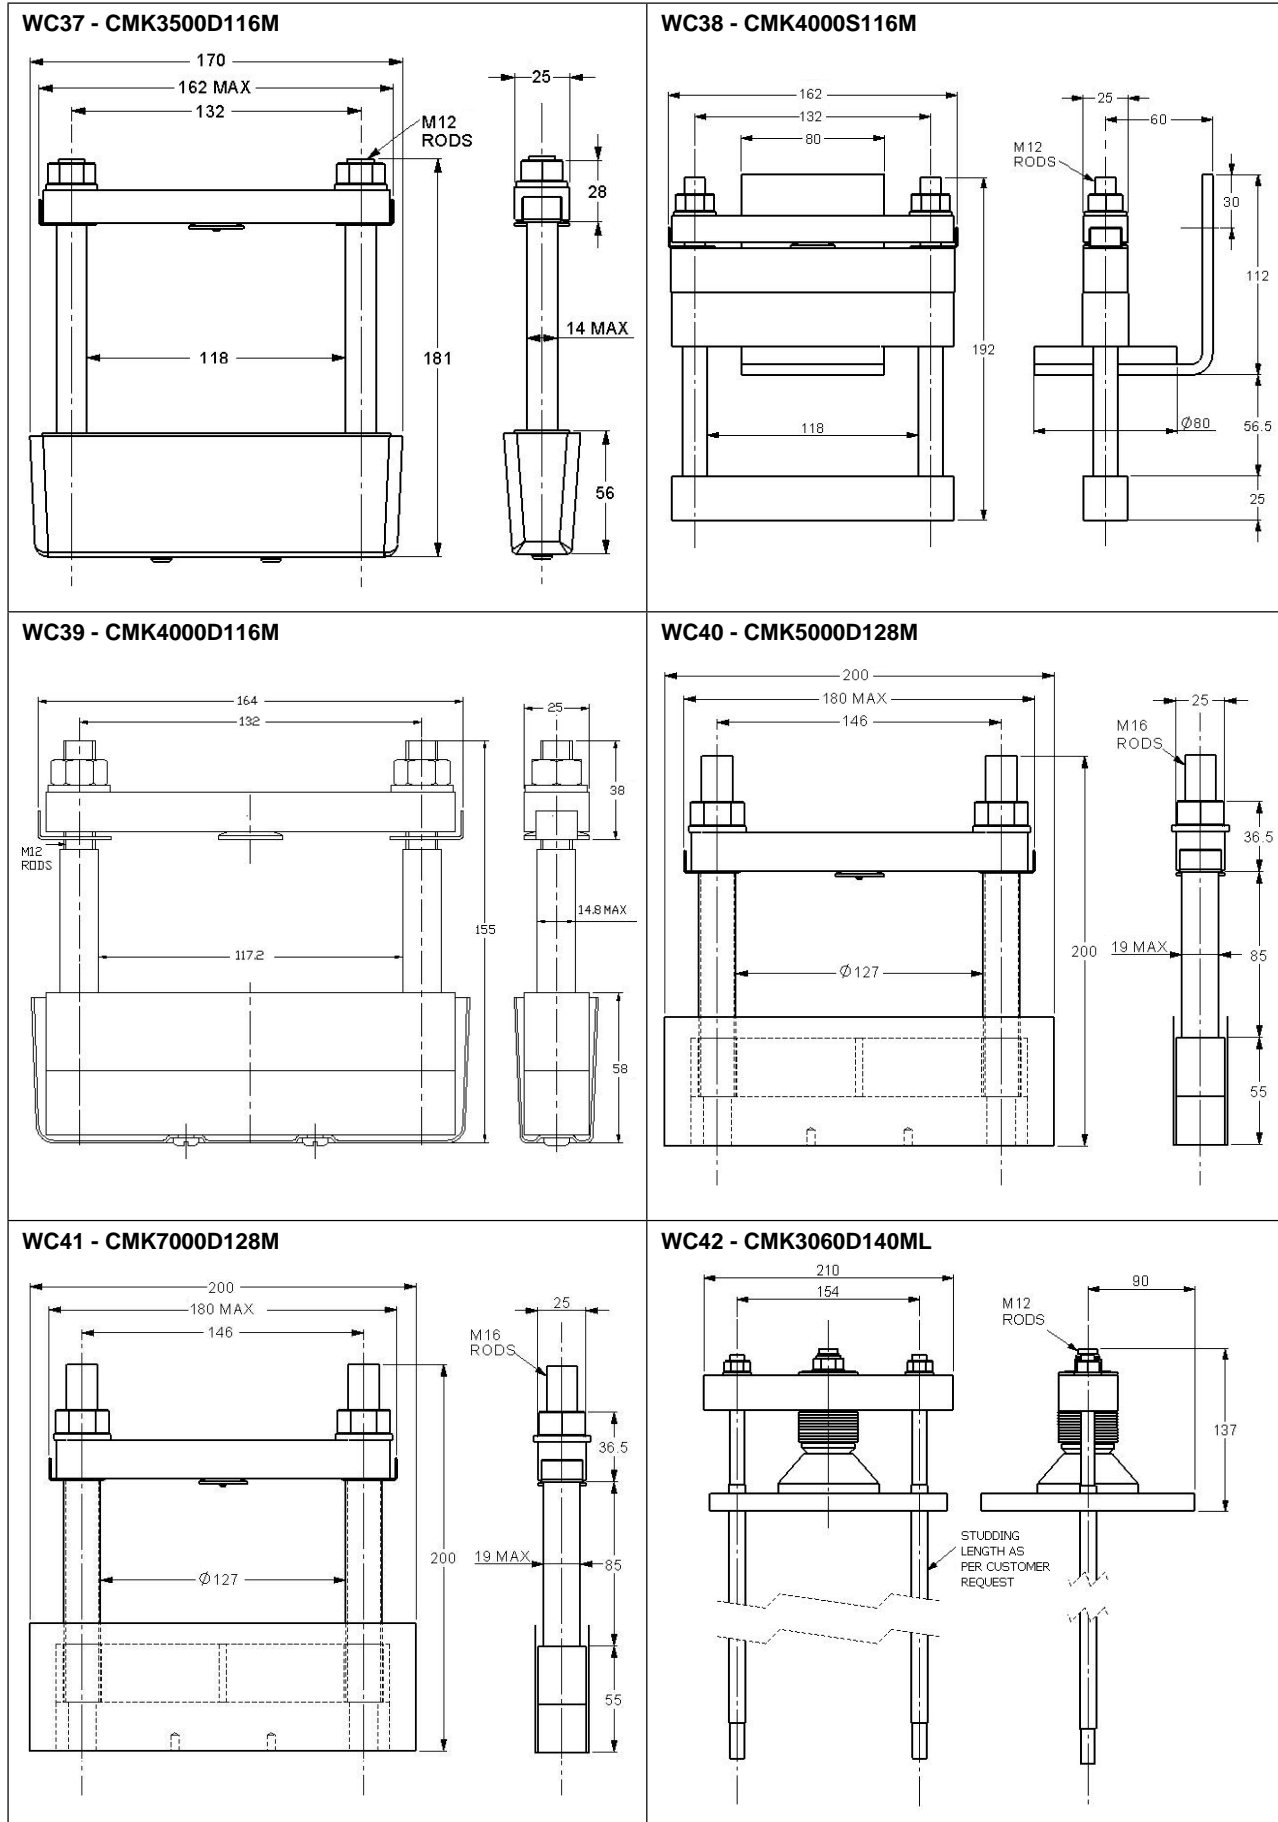


Outline drawings

WESTCODE

Dimensions in mm and inches (1 mm = 0.0394")

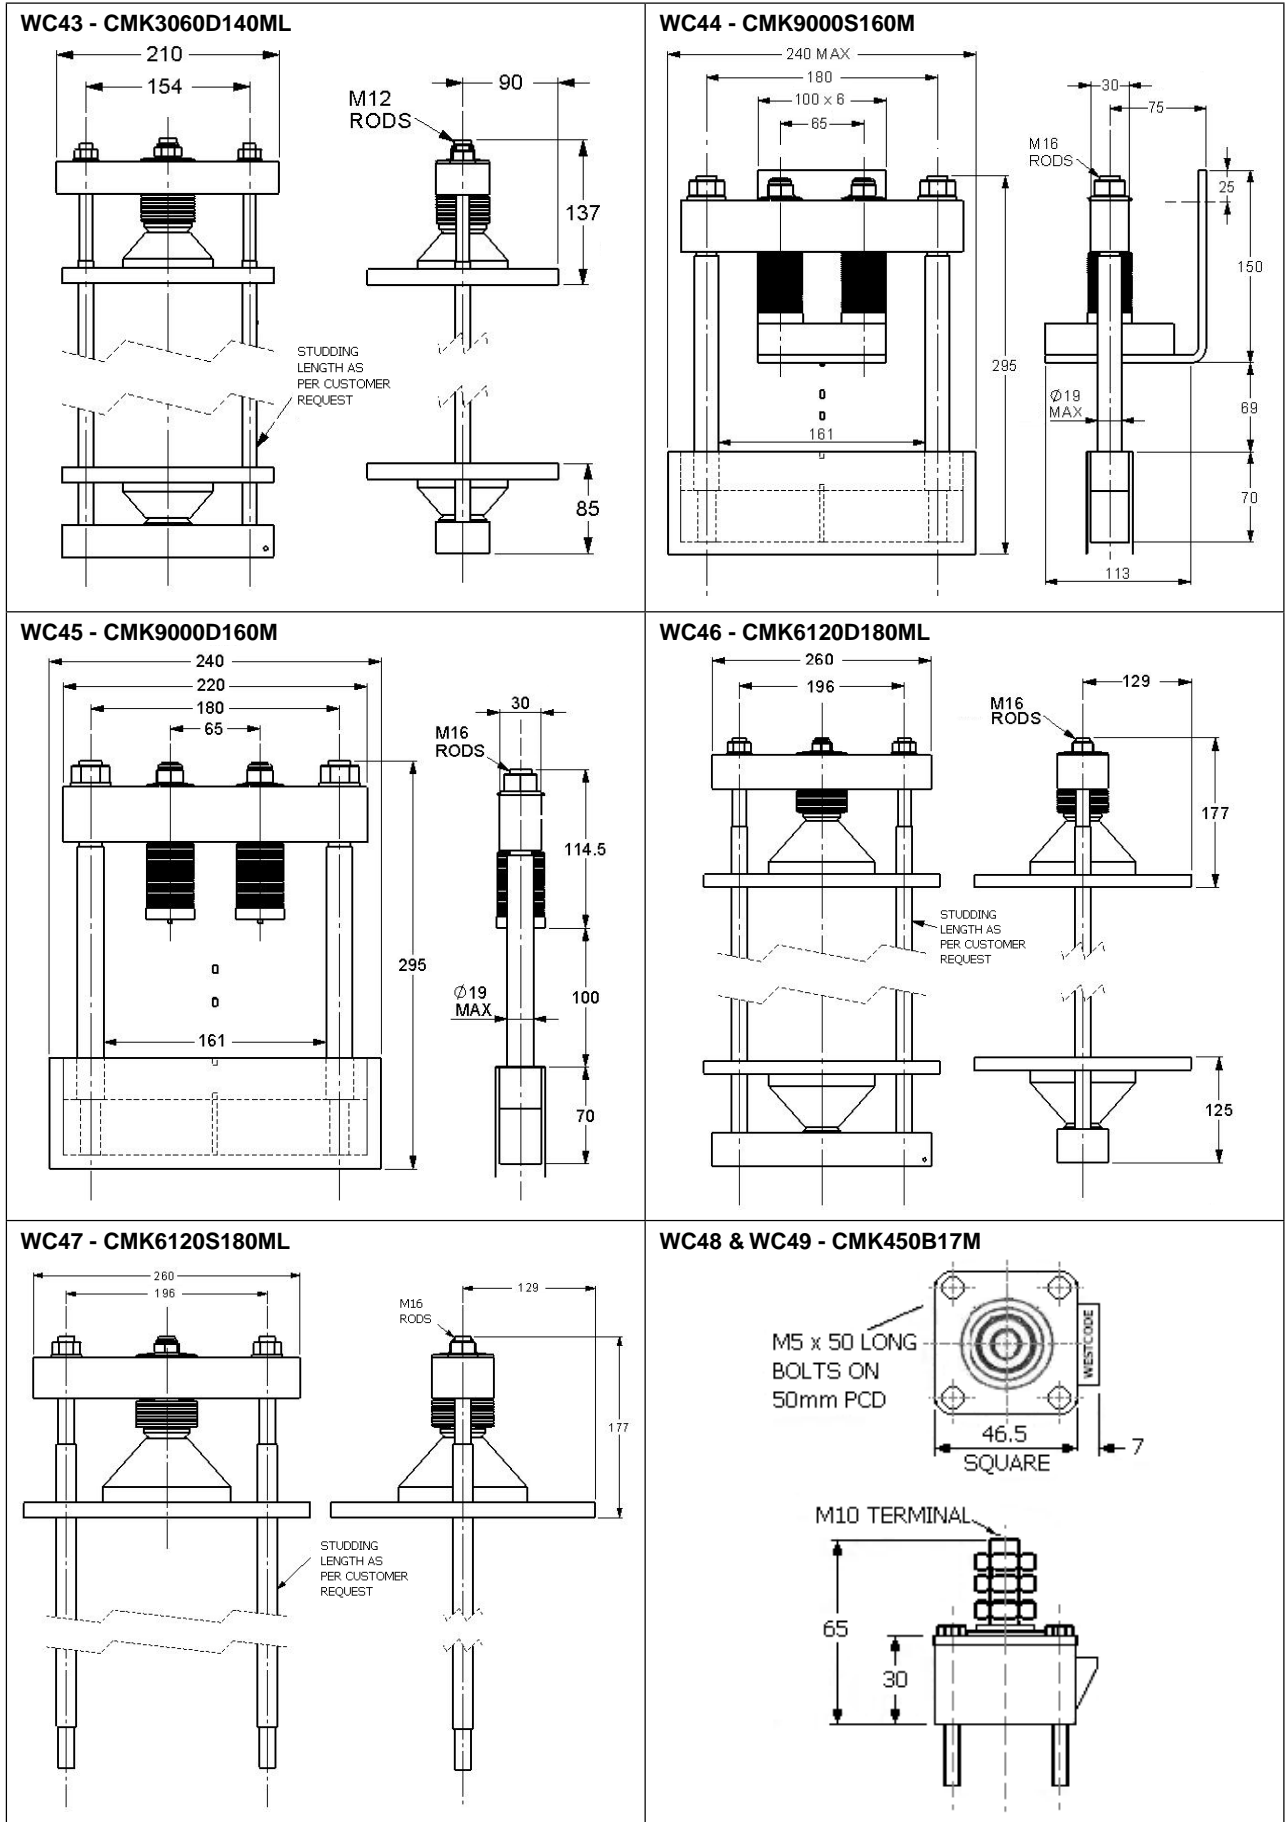


Dimensions in mm and inches (1 mm = 0.0394")

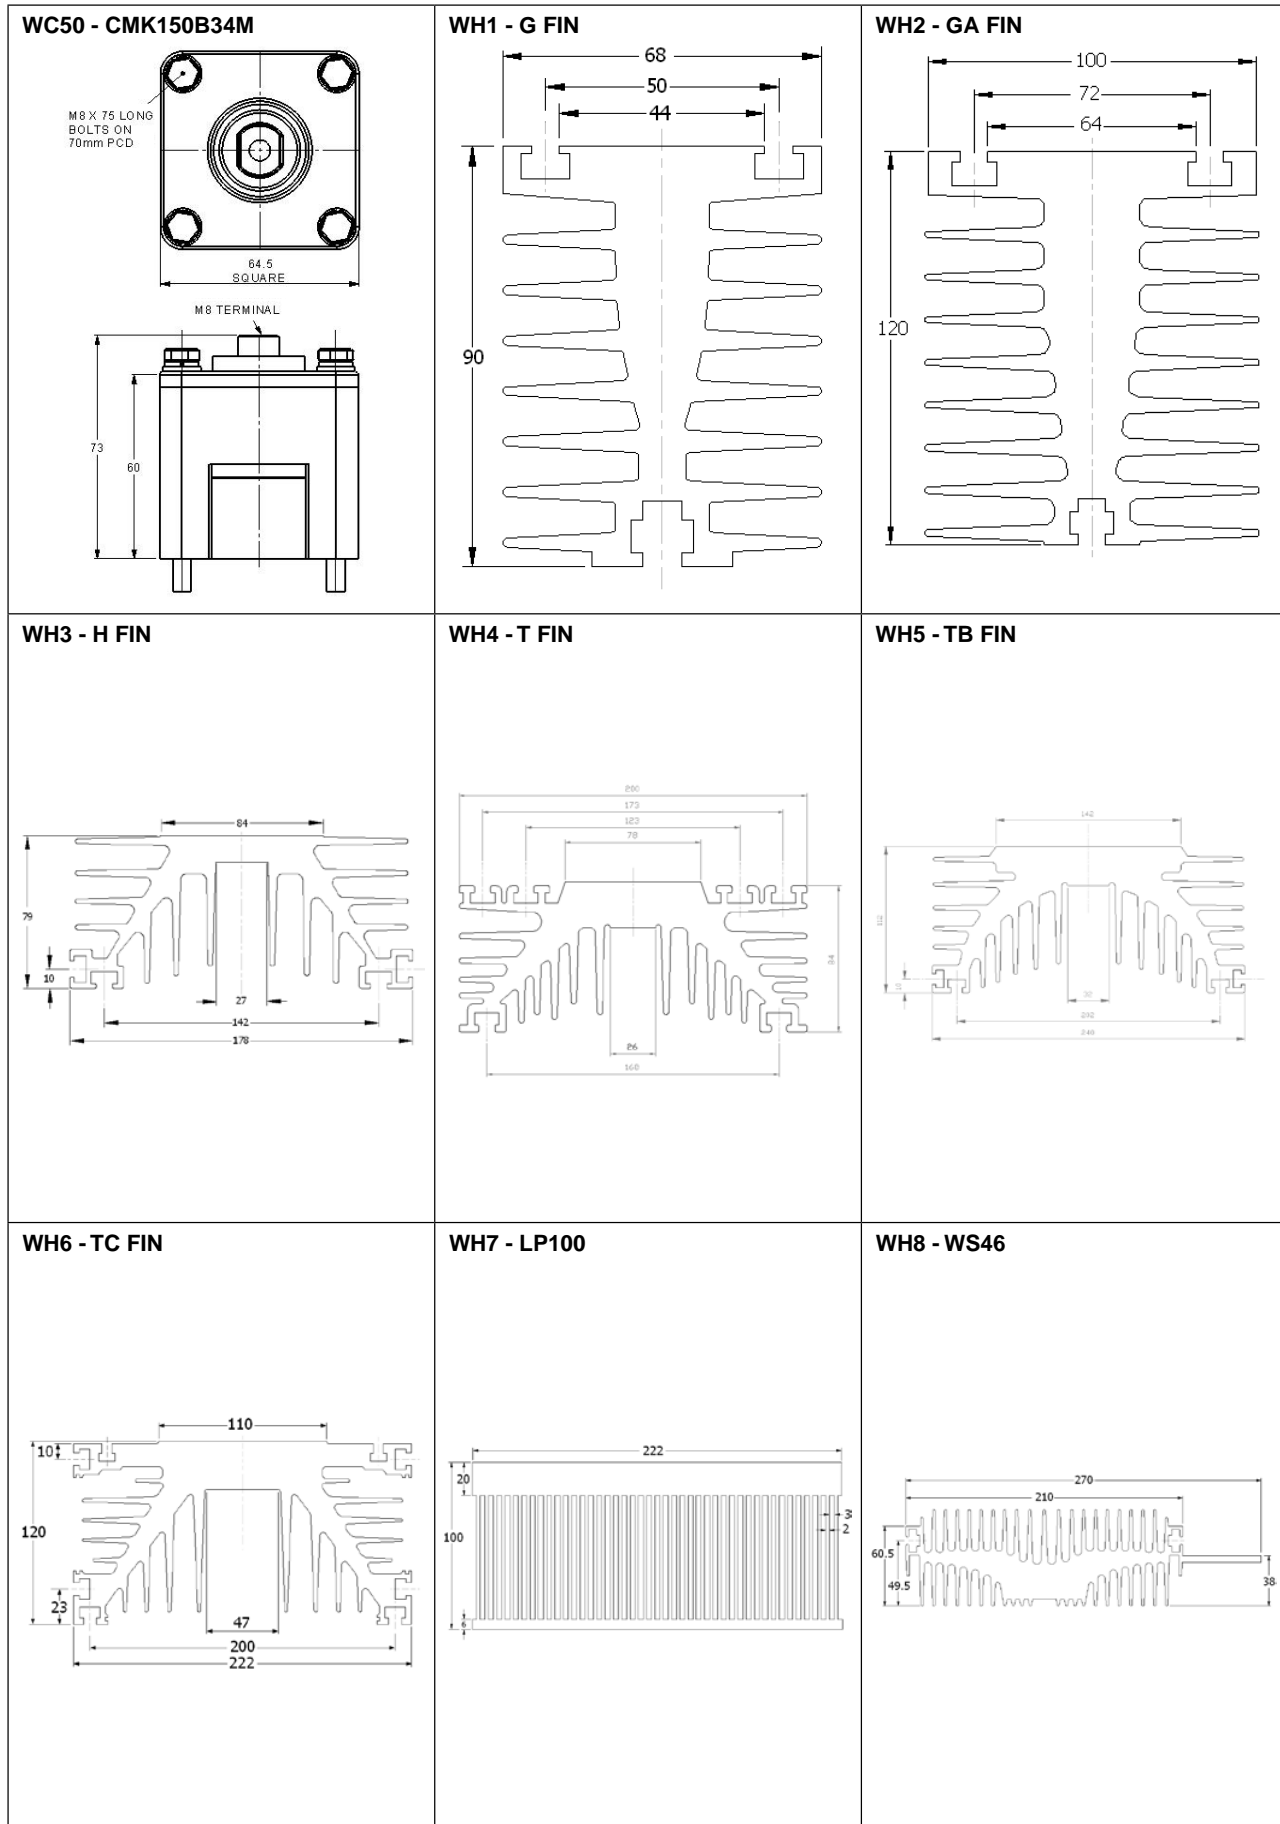

Dimensions in mm and inches (1 mm = 0.0394")


<p>WH9 - WS30 - COPPER</p>		
<p>WCL1 - LK COOLER</p>	<p>WCL2 - LKA COOLER</p>	<p>WCL3 - LKB COOLER</p>
<p>WCL4 - LKC COOLER</p>	<p>WCL5 - LKD COOLER</p>	<p>WCL6 - LKE COOLER</p>

Dimensions in mm and inches (1 mm = 0.0394")

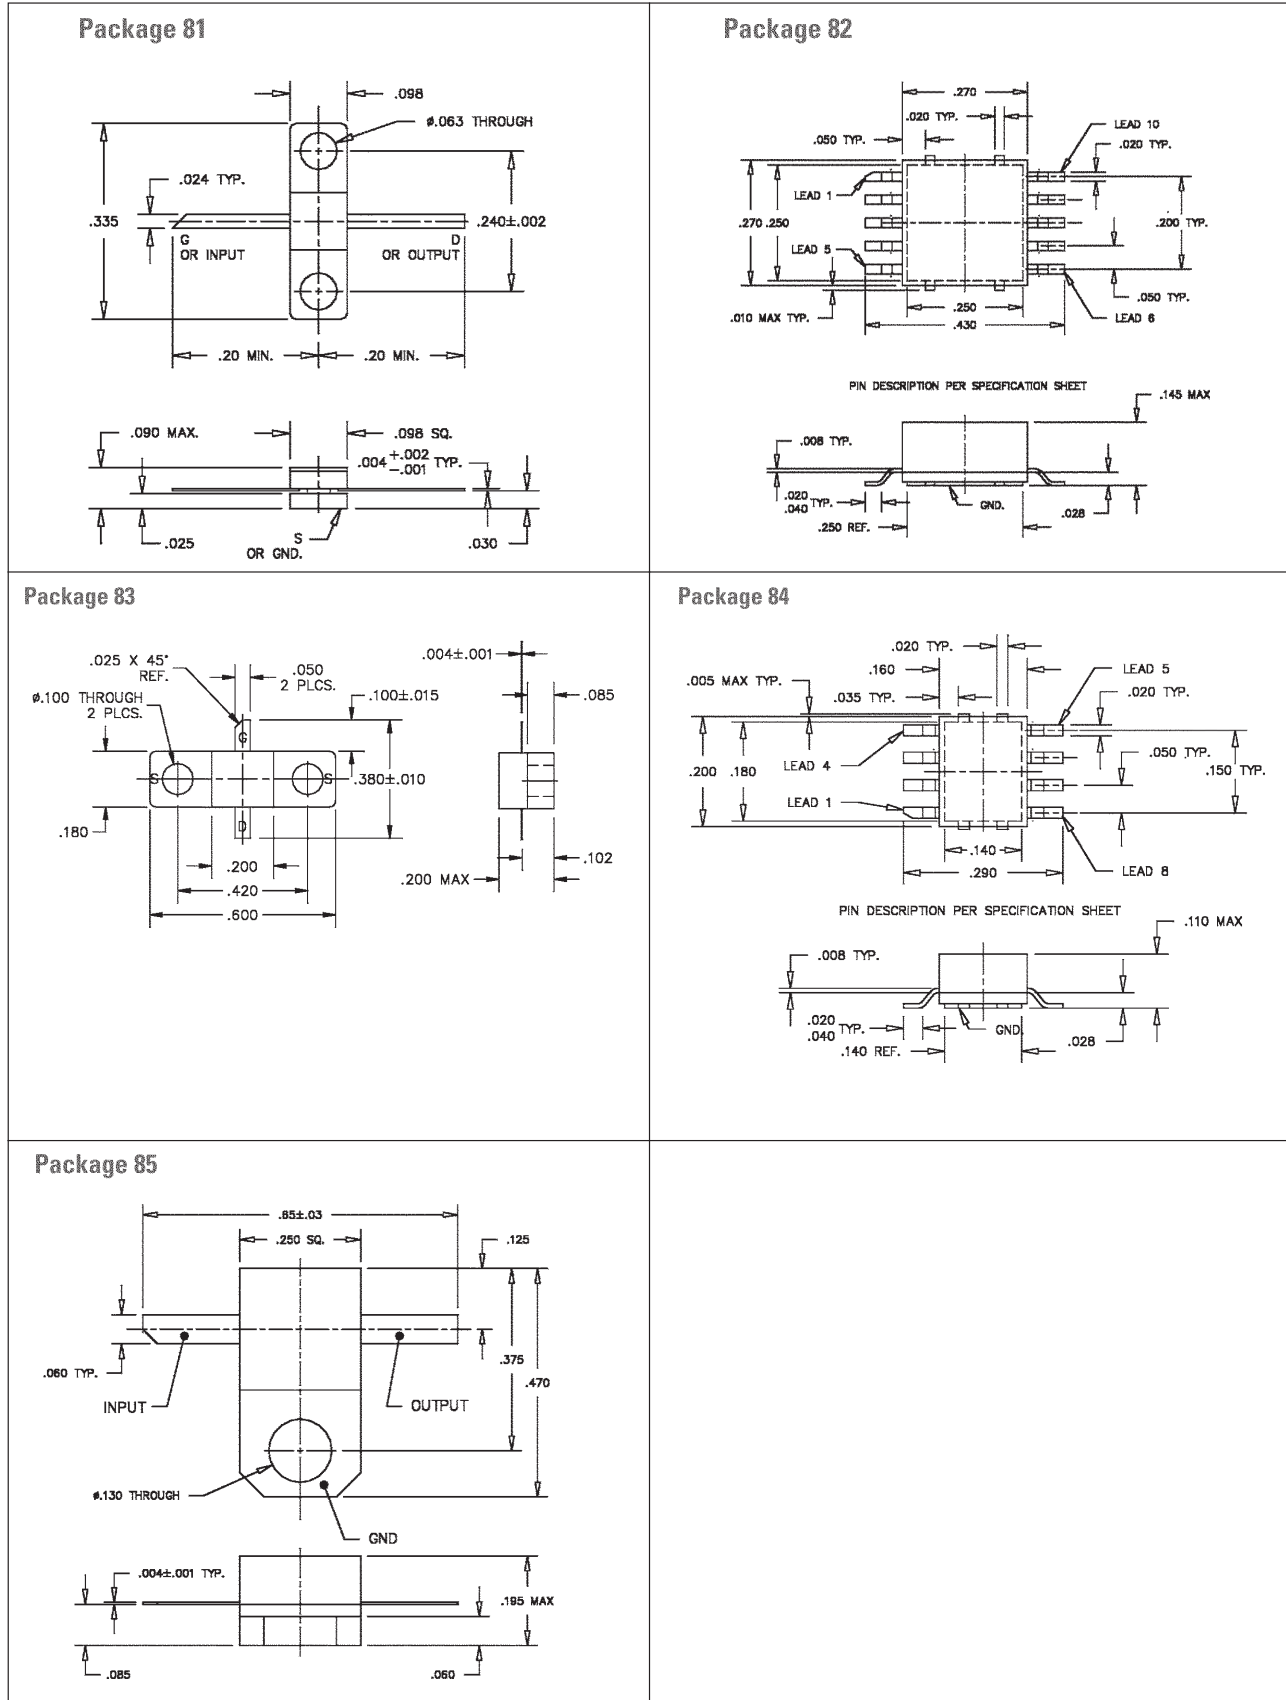






Outline drawings

Dimensions in mm and inches (1 mm = 0.0394")

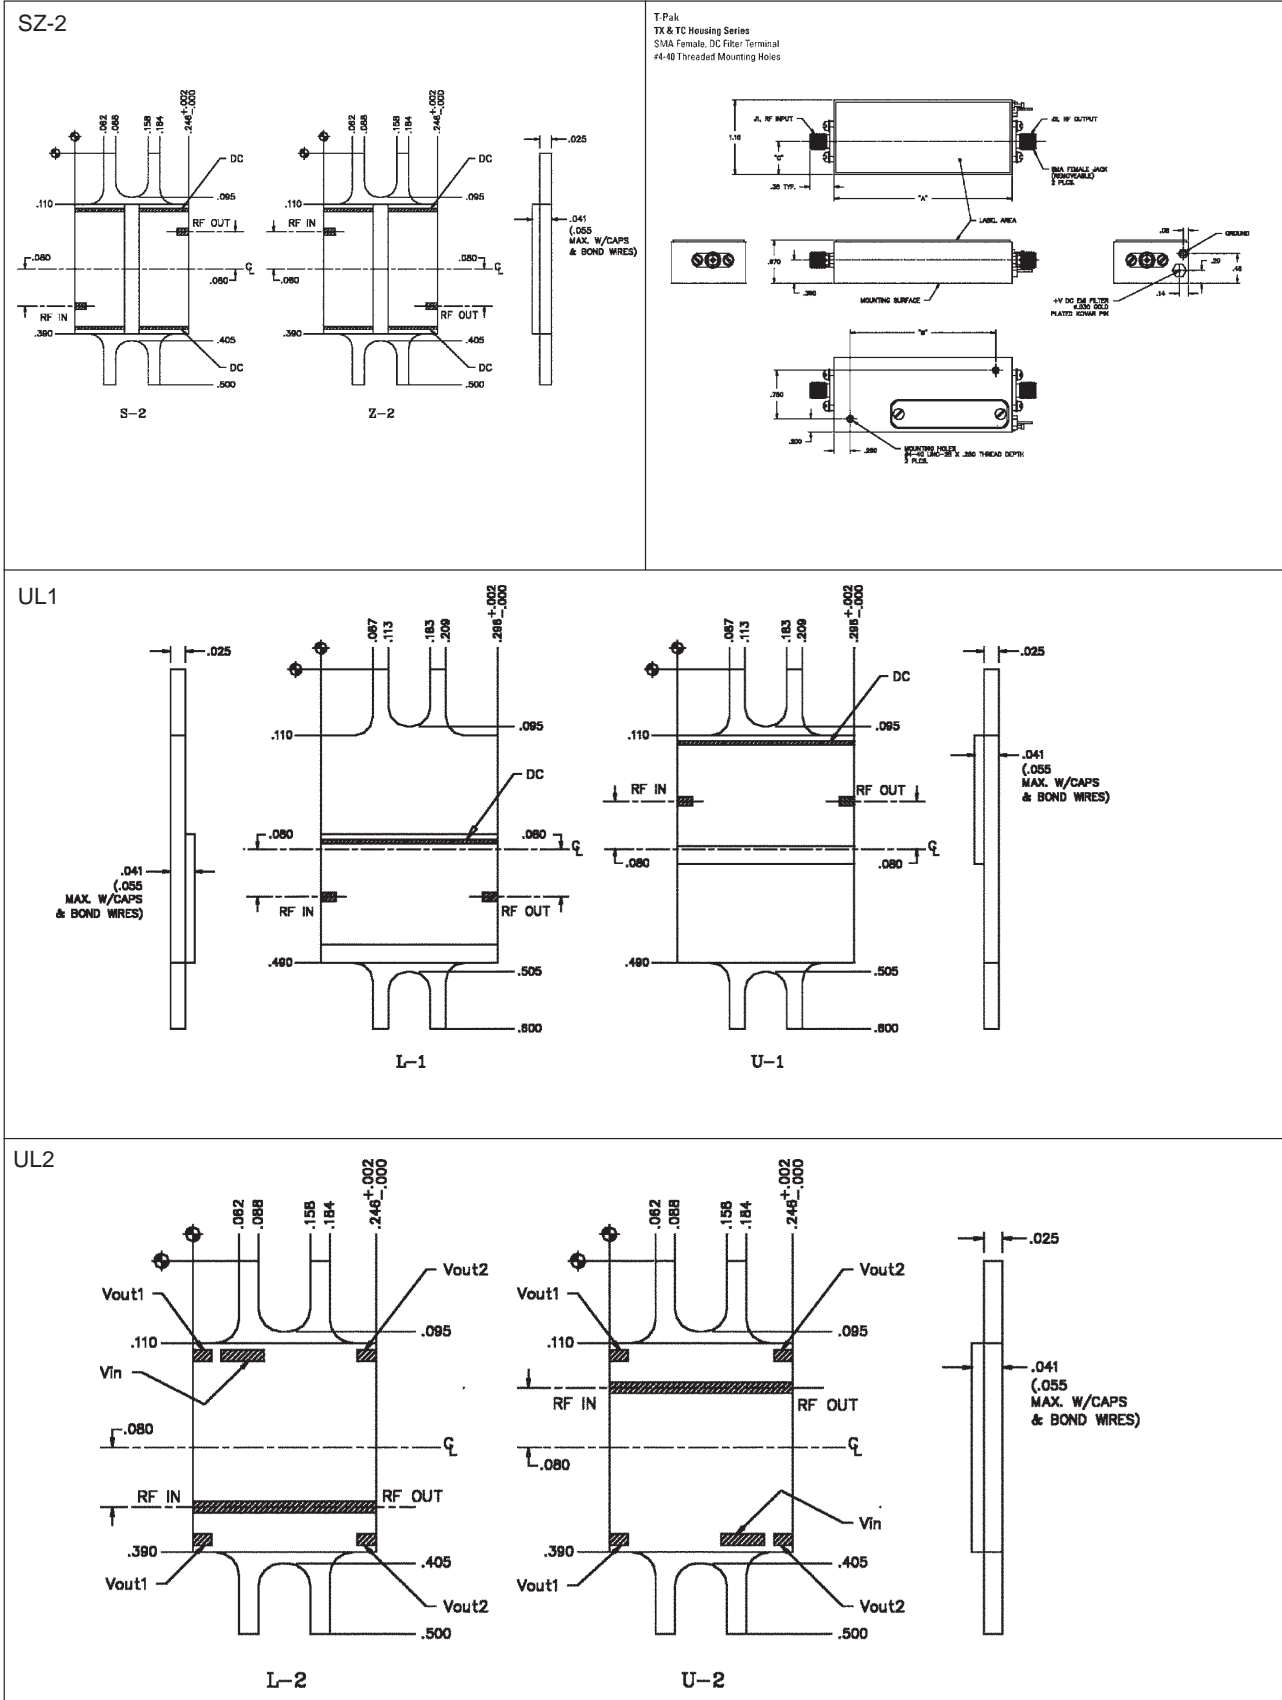

Outline drawings

Dimensions in mm and inches (1 mm = 0.0394")

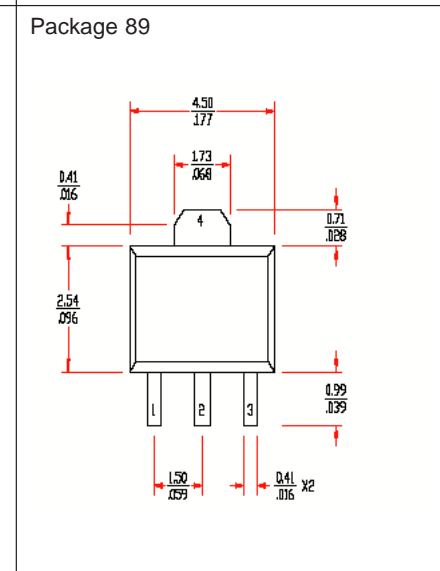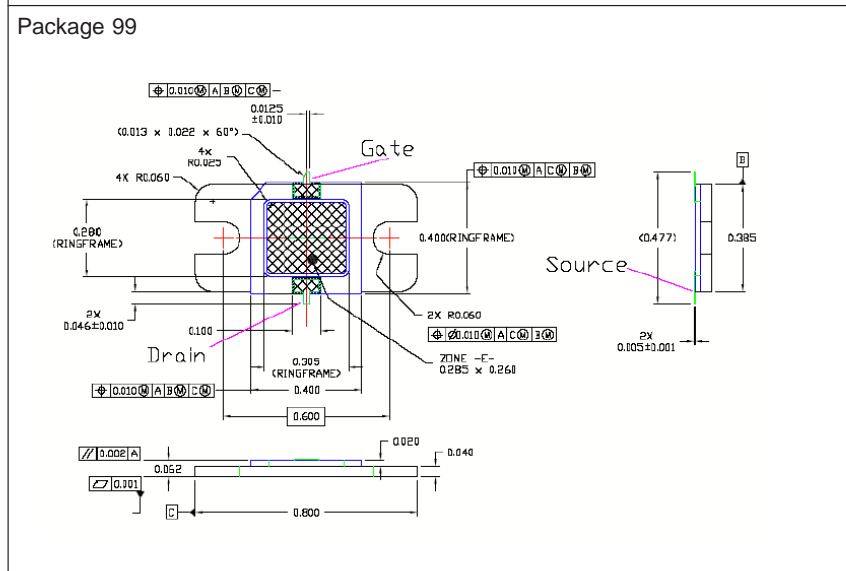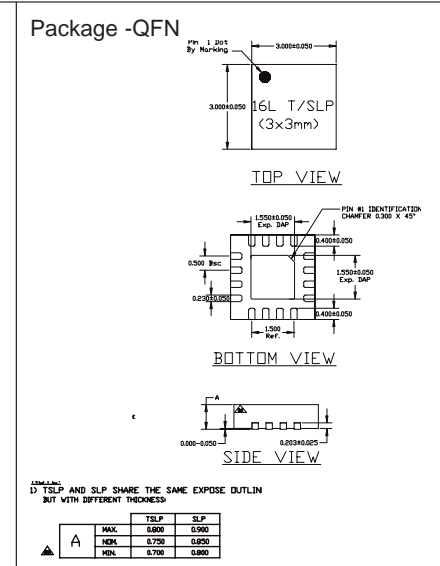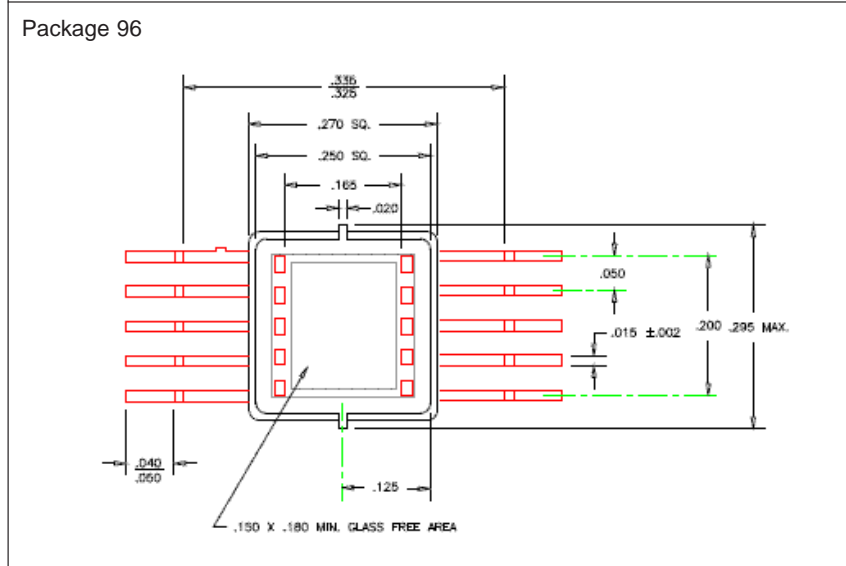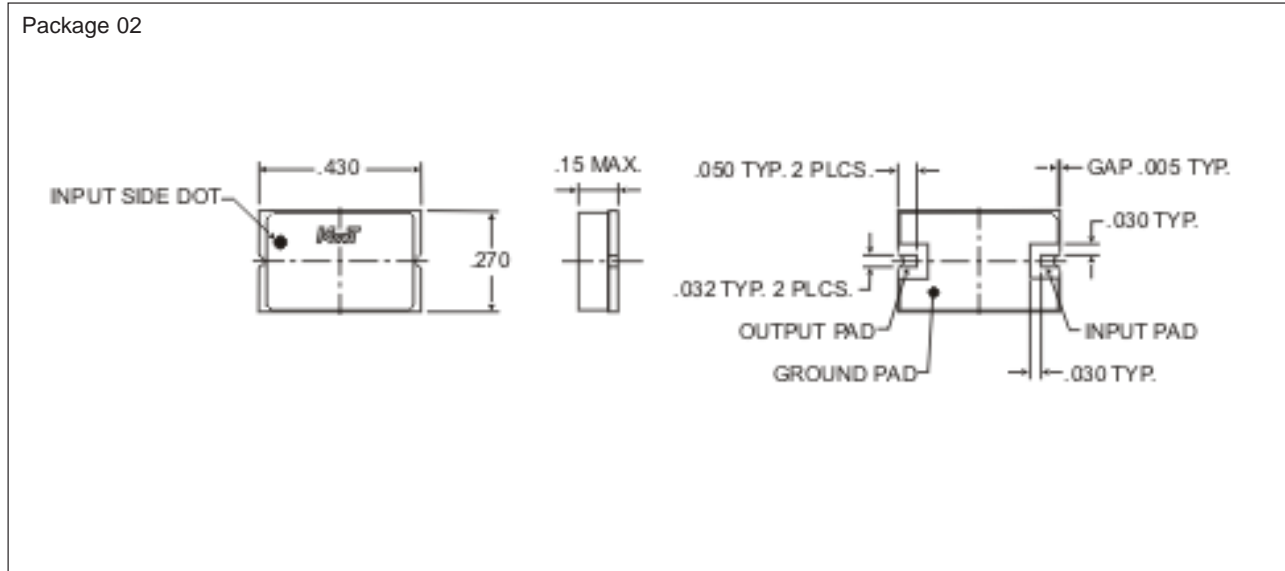

Dimensions in mm and inches (1 mm = 0.0394")

D1 DE 150

N/C - AN DCB metalized bottom heatsink.
2500 Vrms isolation between leads.
LEADS - Full Silver plating.

D2 DE 275

N/C - AN DCB metalized bottom heatsink.
2500 Vrms isolation between leads.
LEADS - Full Silver plating.

D3 DE 275x2

N/C - AN DCB metalized bottom heatsink.
2500 Vrms isolation between leads.
LEADS - Full Silver plating.

D4 DE 375

N/C - AN DCB metalized bottom heatsink.
2500 Vrms isolation between leads.
LEADS - Full Silver plating.

DE 475

N/C - AN DCB metalized bottom heatsink.
2500 Vrms isolation between leads.
LEADS - Full Silver plating.

Package 754


DIM	INCHES		MILIMETERS	
	MIN	MAX	MIN	MAX
A	1.330	1.350	33.79	34.21
B	0.370	0.100	9.40	10.41
C	0.190	0.230	4.83	5.84
D	0.215	0.235	5.47	5.96
E	0.050	0.070	1.27	1.77
G	0.430	0.440	10.92	11.18
H	0.102	0.112	2.59	2.84
J	0.004	0.006	0.11	0.15
K	0.185	0.215	4.83	5.33
N	0.845	0.875	21.46	22.23
Q	0.060	0.070	1.52	1.78
R	0.390	0.410	9.91	10.41
U	1.100 BSC		27.94 BSC	

DE275-IC

DE150-IC


Dimensions in mm and inches (1 mm = 0.0394")

X010b ISOPLUS220™ AC

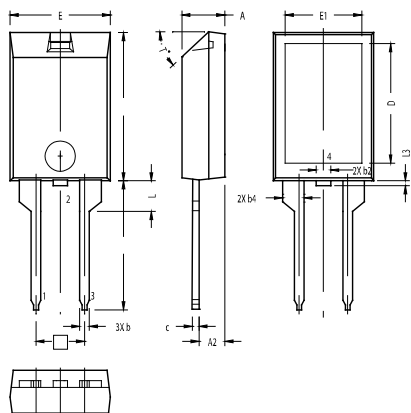


SYM	INCHES		MILLIMETER	
	MIN	MAX	MIN	MAX
A	.169	.185	4.30	4.70
A1	.028	.035	0.70	0.90
A2	.098	.118	2.50	3.00
b	.035	.047	0.90	1.20
b1	.080	.095	2.03	2.41
b2	.054	.064	1.37	1.63
c	.028	.035	0.70	0.90
D	.551	.591	14.00	15.00
D1	.512	.539	13.00	13.70
E	.394	.433	10.00	11.00
E1	.331	.346	8.40	8.80
e	.100 BSC		2.54 BSC	
L	.512	.551	13.00	14.00
L1	.118	.138	3.00	3.50
L2	.035	.051	0.90	1.30
L3	.047	.059	1.20	1.50


X011a TO-263 AA (D²PAK)

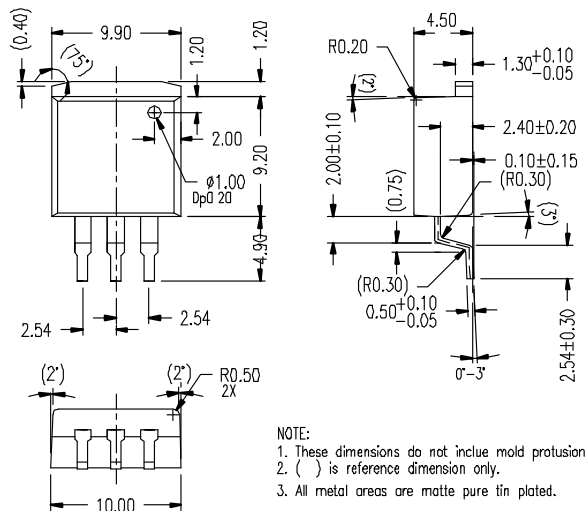

NOTE:
 1. These dimensions do not include mold protrusion
 2. () is reference dimension only.
 3. All metal areas are matte pure tin plated.

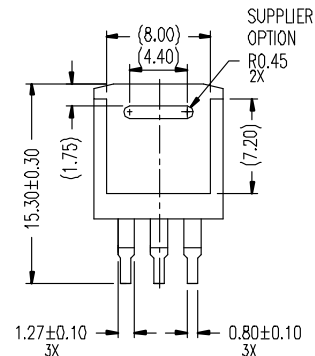

X011b TO-263 AB (D²PAK)

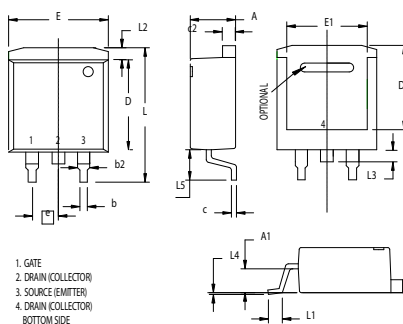


1. GATE
2. DRAIN (COLLECTOR)
3. SOURCE (EMITTER)
4. DRAIN (COLLECTOR)

Note: 1. All metal surface are solder plated except trimmed area.

SYM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	.160	.190	4.06	4.83
A1	.080	.110	2.03	2.79
b	.020	.039	0.51	0.99
b2	.045	.055	1.14	1.40
c	.016	.029	0.40	0.74
c2	.045	.055	1.14	1.40
D	.354	.370	9.00	9.40
D1	.315	.350	8.00	8.89
E	.380	.410	9.65	10.41
E1	.245	.320	6.22	8.13
e	.100 BSC		2.54 BSC	
L	.516	.539	13.10	13.70
L1	.047	.071	1.20	1.80
L2	.040	.055	1.02	1.40
L3	.040	.060	1.02	1.52
L4	0	.004	0	0.10
L5	.110	.126	2.80	3.20


X012a TO-263 (5)

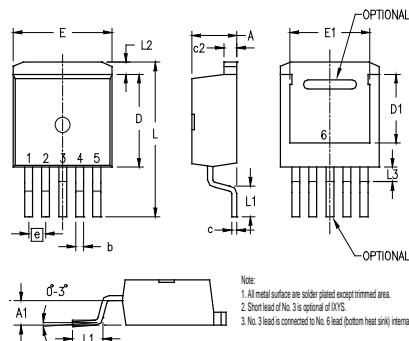

Note:
 1. All metal surface are solder plated except trimmed area.
 2. Short lead of No. 5 is optional at IXYS.
 3. No. 3 lead is connected to No. 6 lead (bottom heat sink) internally.

SYM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	.165	.189	4.20	4.80
A1	.083	.106	2.10	2.70
b	.024	.039	0.60	0.99
c	.016	.028	0.40	0.70
c2	.047	.055	1.20	1.40
D	.346	.374	8.80	9.50
D1	.260	.283	6.60	7.20
E	.380	.406	9.65	10.30
E1	.295	.323	7.50	8.20
e	.067 BSC		1.70 BSC	
L	.583	.622	14.80	15.80
L1	.088	.112	2.24	2.84
L2	.039	.055	1.00	1.40
L3	.047	.067	1.20	1.70


X012b TO-263 (7) c) middle leg cut

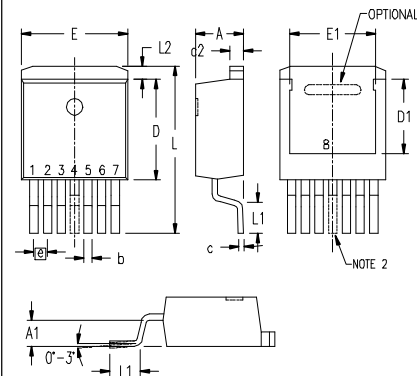

SYM	INCHES		MILLIMETER	
	MIN	MAX	MIN	MAX
A	.165	.181	4.20	4.60
A1	.096	.108	2.45	2.75
b	.026	.035	0.65	0.90
c	.016	.024	0.40	0.60
c2	.045	.055	1.14	1.40
D	.330	.340	8.38	8.64
D1	.240	.250	6.10	6.35
E	.394	.406	10.00	10.30
E1	.290	.315	7.34	8.00
e	.050 BSC		1.27 BSC	
L	.580	.620	14.73	15.75
L1	.088	.112	2.24	2.84
L2	.053	.061	1.35	1.55


Dimensions in mm and inches (1 mm = 0.0394")

X013 PLUS220™ (SMD)

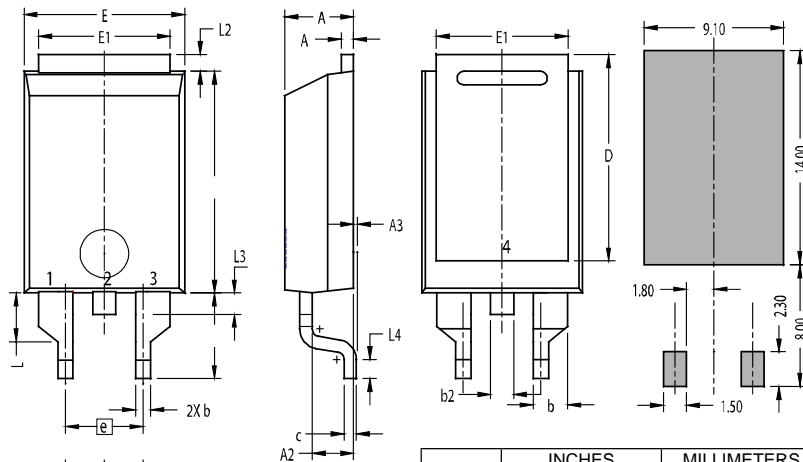


SYM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	.169	.185	4.30	4.70
A1	.028	.035	0.70	0.90
A2	.098	.118	2.50	3.00
A3	.000	.010	0.00	0.25
b	.035	.047	0.90	1.20
b1	.080	.095	2.03	2.41
b2	.054	.064	1.37	1.63
c	.028	.035	0.70	0.90
D	.551	.591	14.00	15.00
D1	.512	.539	13.00	13.70
E	.394	.433	10.00	11.00
E1	.331	.346	8.40	8.80
e	.200 BSC		5.08 BSC	
L	.209	.228	5.30	5.80
L1	.118	.138	3.50	3.50
L2	.035	.051	1.30	1.30
L3	.047	.059	1.50	1.50
L4	.039	.059	1.50	1.50

X014a TO-247 AD

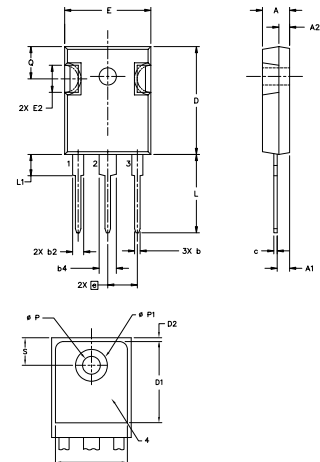


Symbol	Inches		Millimeters	
	min	max	min	max
A	0.185	0.209	4.70	5.30
A1	0.087	0.102	2.21	2.59
A2	0.059	0.098	1.50	2.49
D	0.819	0.845	20.79	21.45
E	0.610	0.640	15.48	16.24
E2	0.170	0.216	4.31	5.48
e	0.215 BSC		5.46 BSC	
L	0.780	0.800	19.80	20.30
L1	-	0.177	-	4.49
ØP	0.140	0.144	3.55	3.65
Q	0.212	0.244	5.38	6.19
S	0.242 BSC		6.14 BSC	
b	0.039	0.055	0.99	1.40
b2	0.065	0.094	1.65	2.39
b4	0.102	0.135	2.59	3.43
c	0.015	0.035	0.38	0.89
D1	0.515	-	13.07	-
D2	0.020	0.053	0.51	1.35
E1	0.530	-	13.45	-
ØP1	-	0.291	-	7.39

X014b TO-247 AD

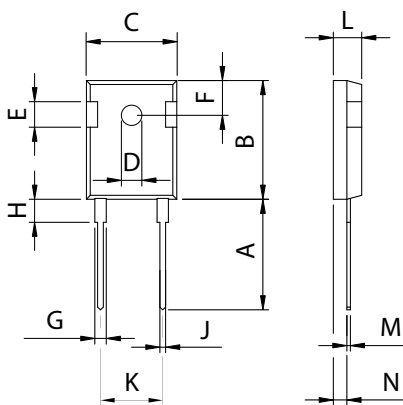


Dim.	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	19.81	20.32	0.780	0.800
B	20.80	21.46	0.819	0.845
C	15.75	16.26	0.610	0.640
D	3.55	3.65	0.140	0.144
E	4.32	5.49	0.170	0.216
F	5.4	6.2	0.212	0.244
G	1.65	2.13	0.065	0.084
H	-	4.5	-	0.177
J	1.0	1.4	0.040	0.055
K	10.8	11.0	0.426	0.433
L	4.7	5.3	0.185	0.209
M	0.4	0.8	0.016	0.031
N	1.5	2.49	0.087	0.102

X015a PLUS247™

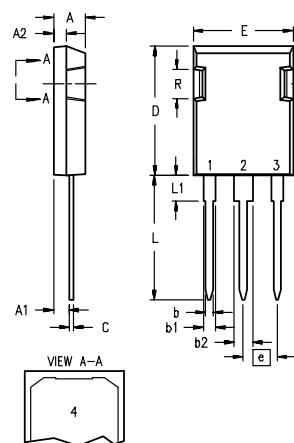

Dim.	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	4.83	5.21	0.19	0.205
A1	2.29	2.54	0.09	0.1
A2	1.91	2.16	0.075	0.085
b	1.14	1.4	0.045	0.055
b1	1.91	2.15	0.075	0.085
b2	2.92	3.20	0.115	0.126
C	0.61	0.8	0.024	0.031
D	20.8	21.34	0.819	0.84
E	15.75	16.13	0.62	0.635
e	5.45 BSC		.215 BSC	
L	19.81	20.32	0.78	0.8
L1	3.81	4.32	0.15	0.17
Q	5.59	6.2	0.22	0.244
R	4.32	4.83	0.17	0.19

X016a ISOPLUS247™

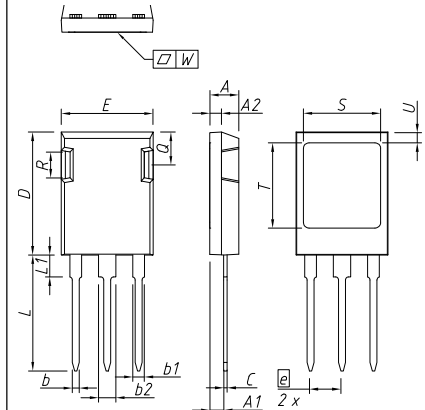

DIM.	MILLIMETER		INCHES	
	MIN	MAX	MIN	MAX
A	4,83	5,21	0,190	0,205
A1	2,29	2,54	0,090	0,100
A2	1,91	2,16	0,075	0,085
b	1,14	1,40	0,045	0,055
b1	1,91	2,15	0,075	0,085
b2	2,92	3,20	0,115	0,126
C	0,61	0,83	0,024	0,033
D	20,80	21,34	0,819	0,840
E	15,75	16,13	0,620	0,635
e	5,45 BSC		0,215 BSC	
L	19,81	20,60	0,780	0,811
L1	3,81	4,38	0,150	0,172
Q	5,59	6,20	0,220	0,244
R	4,32	4,85	0,170	0,191
S	13,21	13,72	0,520	0,540
T	15,75	16,26	0,620	0,640
U	1,65	2,03	0,065	0,080
W	-	0,10	-	0,004

Die konvexe Form des Substrates ist typ. < 0.04 mm über der Kunststoffoberfläche der Bauelemente.
The convex bow of substrate is typ. < 0.04 mm over plastic surface level of device bottom side.
Die Gehäuseabmessungen entsprechen dem Typ TO-247 AD gemäß JEDEC außer Schraubloch und L_{max}.
This drawing will meet all dimensions requirements of JEDEC outline TO-247 AD except screw hole and except L_{max}.

Dimensions in mm and inches (1 mm = 0.0394")

X016b ISOPLUS247™

SYM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	.190	.205	4.83	5.21
A1	.090	.100	2.29	2.54
A2	.075	.085	1.91	2.16
b	.045	.055	1.14	1.40
b1	.075	.084	1.91	2.13
b2	.115	.123	2.92	3.12
c	.024	.031	0.61	0.80
D	.819	.840	20.80	21.34
E	.620	.635	15.75	16.13
e	.430 BSC		10.92 BSC	
L	.780	.800	19.81	20.32
L1	.150	.170	3.81	4.32
L2	0	.100	0	2.54
Q	.220	.244	5.59	6.20
R	.170	.190	4.32	4.83
S	.520	.540	13.21	13.72
T	.620	.640	15.75	16.26
U	.065	.080	1.65	2.03

X017a TO-3P

All metal area are tin plated.

SYM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	.185	.193	4.70	4.90
A1	.051	.059	1.30	1.50
A2	.057	.065	1.45	1.65
b	.035	.045	0.90	1.15
b2	.075	.087	1.90	2.20
b4	.114	.126	2.90	3.20
c	.022	.031	0.55	0.80
D	.780	.791	19.80	20.10
D1	.665	.677	16.90	17.20
E	.610	.622	15.50	15.80
E1	.531	.539	13.50	13.70
e	.215 BSC		5.45 BSC	
L	.779	.795	19.80	20.20
L1	.134	.142	3.40	3.60
L2	0	.055	0	1.40
ØP	.126	.134	3.20	3.40
ØP1	.272	.280	6.90	7.10
S	.193	.201	4.90	5.10

X017b TO-3P

All metal area are matte tin plated.

SYM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	.185	.193	4.70	4.90
A1	.051	.059	1.30	1.50
A2	.057	.065	1.45	1.65
b	.035	.045	0.90	1.15
b2	.075	.087	1.90	2.20
b4	.114	.126	2.90	3.20
c	.022	.031	0.55	0.80
D	.780	.799	19.80	20.30
D1	.665	.677	16.90	17.20
E	.610	.622	15.50	15.80
E1	.531	.539	13.50	13.70
e	.215 BSC		5.45 BSC	
L	.779	.795	19.80	20.20
L1	.134	.142	3.40	3.60
L2	0	.055	0	1.40
ØP	.126	.134	3.20	3.40
ØP1	.272	.280	6.90	7.10
S	.193	.201	4.90	5.10

X018 TO-268 I³PAK

NOTE: ALL METAL AREA ARE SOLDER PLATED.

- 1 - GATE
- 2 - DRAIN (COLLECTOR)
- 3 - SOURCE (EMITTER)
- 4 - DRAIN (COLLECTOR)

SYM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	.193	.201	4.90	5.10
A1	.106	.114	2.70	2.90
b	.045	.057	1.15	1.45
b2	.075	.083	1.90	2.10
C	.016	.026	0.40	0.65
C2	.057	.063	1.45	1.60
D	.543	.551	13.80	14.00
D1	.488	.500	12.40	12.70
E	.624	.632	15.85	16.05
E1	.524	.535	13.30	13.60
e	.215 BSC		5.45 BSC	
H	1.365	1.395	34.67	35.43
L	.780	.800	19.81	20.32
L1	.079	.091	2.00	2.30
L2	.039	.045	1.00	1.15

X019 TO-268 AA (D³PAK)

RECOMMENDED MINIMUM FOOT PRINT FOR SMD


SYM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	.193	.201	4.90	5.10
A1	.106	.114	2.70	2.90
A2	.001	.010	0.02	0.25
b	.045	.057	1.15	1.45
b2	.075	.083	1.90	2.10
C	.016	.026	0.40	0.65
C2	.057	.063	1.45	1.60
D	.543	.551	13.80	14.00
D1	.488	.500	12.40	12.70
E	.624	.632	15.85	16.05
E1	.524	.535	13.30	13.60
e	.215 BSC		5.45 BSC	
H	.736	.752	18.70	19.10
L	.094	.106	2.40	2.70
L1	.047	.055	1.20	1.40
L2	.039	.045	1.00	1.15
L3	.010 BSC		0.25 BSC	
L4	.150	.161	3.80	4.10

X020a TO-264 AA


Back side Rückseite

SYM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	4.82	5.13	.190	.202
A1	2.54	2.89	.100	.114
A2	2.00	2.10	.079	.083
b	1.12	1.42	.044	.056
b1	2.39	2.69	.094	.106
b2	2.90	3.09	.114	.122
c	0.53	0.83	.021	.033
D	25.91	26.16	1.02	1.03
E	19.81	19.96	.780	.786
e	5.46 BSC		.215 BSC	
J	0.00	0.25	.000	.010
K	0.00	0.25	.000	.010
L	20.32	20.83	.800	.820
L1	2.29	2.59	.090	.102
P	3.17	3.66	.125	.144
Q	6.07	6.27	.239	.247
Q1	8.38	8.69	.330	.342
R	3.81	4.32	.150	.170
R1	1.78	2.29	.070	.090
S	6.04	6.30	.238	.248
T	1.57	1.83	.062	.072


Dimensions in mm and inches (1 mm = 0.0394")

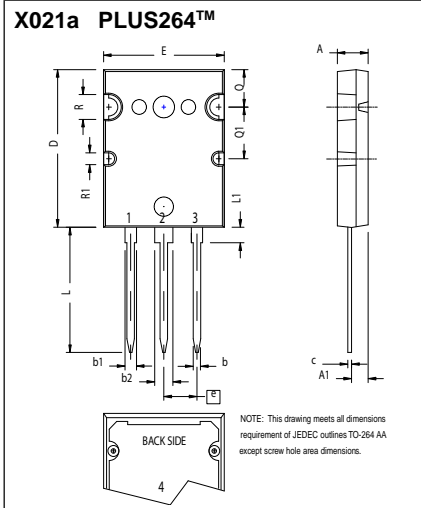


SYM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	.185	.209	4.70	5.31
A1	.102	.118	2.59	3.00
b	.037	.055	0.94	1.40
b1	.087	.102	2.21	2.59
b2	.110	.126	2.79	3.20
c	.017	.029	0.43	0.74
D	1.007	1.047	25.58	26.59
E	.760	.799	19.30	20.29
e	.215 BSC		5.46 BSC	
L	.779	.842	19.79	21.39
L1	.087	.102	2.21	2.59
Q	.240	.256	6.10	6.50
Q1	.330	.346	8.38	8.79
∅R	.155	.187	3.94	4.75
∅R1	.085	.093	2.16	2.36

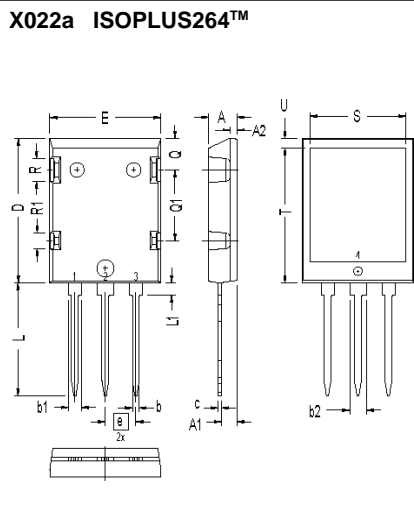





SYM	INCHES		MILLIMETER	
	MIN	MAX	MIN	MAX
A	.190	.205	4.83	5.21
A1	.102	.118	2.59	3.00
A2	.046	.055	1.17	1.40
b	.045	.055	1.14	1.40
b1	.087	.102	2.21	2.59
b2	.111	.126	2.82	3.20
c	.020	.029	0.51	0.74
D	1.020	1.040	25.91	26.42
E	.770	.799	19.56	20.29
e	.215 BSC		5.46 BSC	
L	.780	.820	19.81	20.83
L1	.080	.102	2.03	2.59
Q	.210	.235	5.33	5.97
Q1	.490	.513	12.45	13.03
R	.150	.180	3.81	4.57
R1	.100	.130	2.54	3.30
S	.668	.690	16.97	17.53
T	.801	.821	20.34	20.85
U	.085	.080	1.65	2.03

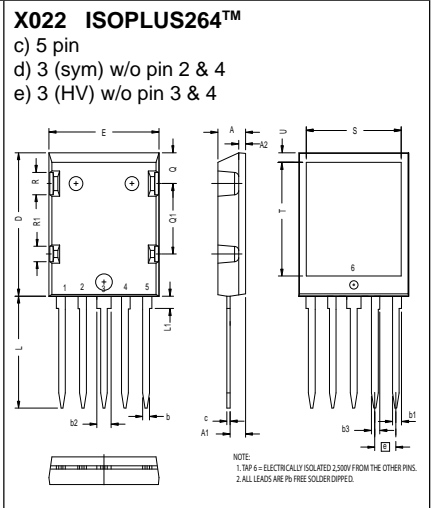

SYM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	.190	.205	4.83	5.21
A1	.102	.118	2.59	3.00
A2	.046	.055	1.17	1.40
b	.045	.055	1.14	1.40
b1	.063	.072	1.60	1.83
b2	.100	.110	2.54	2.79
b3	.058	.068	1.47	1.73
c	.020	.029	0.51	0.74
D	1.020	1.040	25.91	26.42
E	.770	.799	19.56	20.29
e	.150 BSC		3.81 BSC	
L	.780	.820	19.81	20.83
L1	.080	.102	2.03	2.59
Q	.210	.235	5.33	5.97
Q1	.490	.513	12.45	13.03
R	.150	.180	3.81	4.57
R1	.100	.130	2.54	3.30
S	.668	.690	16.97	17.53
T	.801	.821	20.34	20.85
U	.085	.080	1.65	2.03

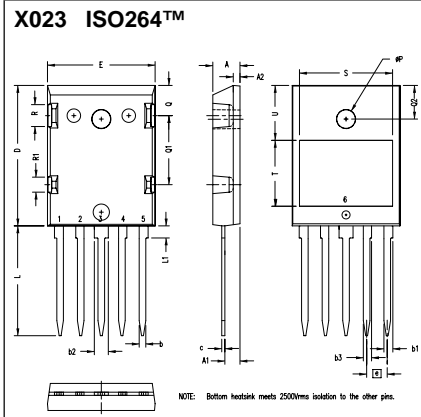


SYM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	.190	.205	4.83	5.21
A1	.102	.118	2.59	3.00
A2	.046	.055	1.17	1.40
b	.045	.055	1.14	1.40
b1	.063	.072	1.60	1.83
b2	.100	.110	2.54	2.79
b3	.058	.068	1.47	1.73
c	.020	.029	0.51	0.74
D	1.020	1.040	25.91	26.42
E	.770	.799	19.56	20.29
e	.150 BSC		3.81 BSC	
L	.780	.820	19.81	20.83
L1	.080	.102	2.03	2.59
P	.130	.145	3.30	3.68
Q	.210	.235	5.33	5.97
Q1	.490	.513	12.45	13.03
Q2	.235	.255	5.96	6.48
R	.150	.180	3.81	4.57
R1	.100	.130	2.54	3.30
S	.668	.690	16.97	17.53
T	.470	.490	11.94	12.45
U	.390	.410	9.91	10.41

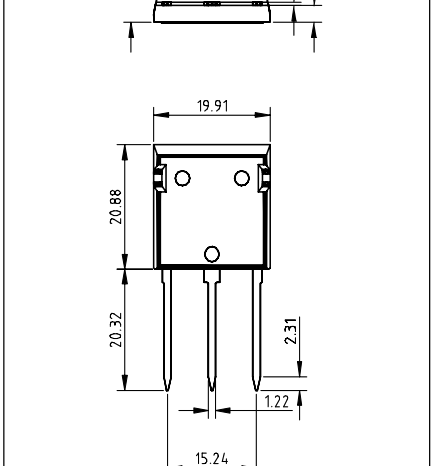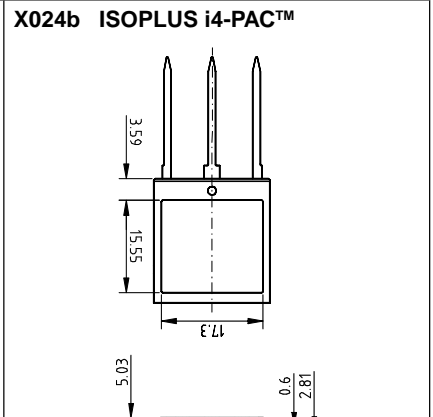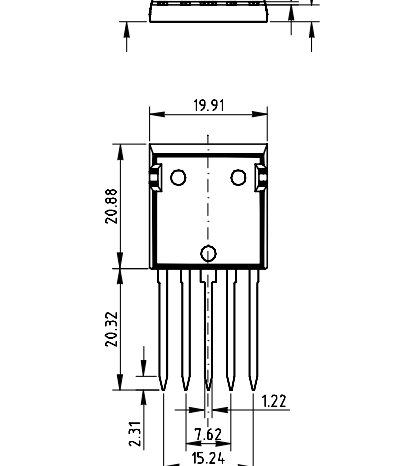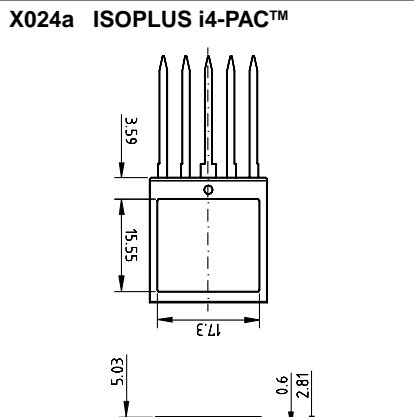


Dimensions in mm and inches (1 mm = 0.0394")


X024c ISOPLUS i4-PAC™

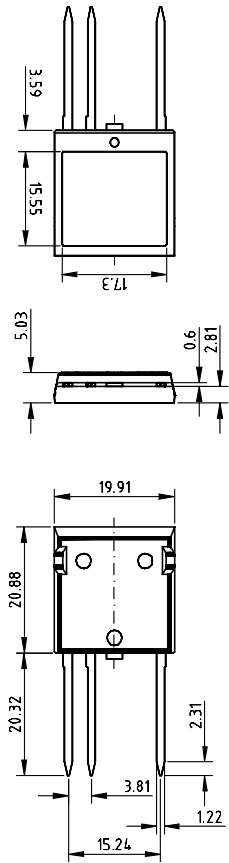

X024d ISOPLUS i4-PAC™

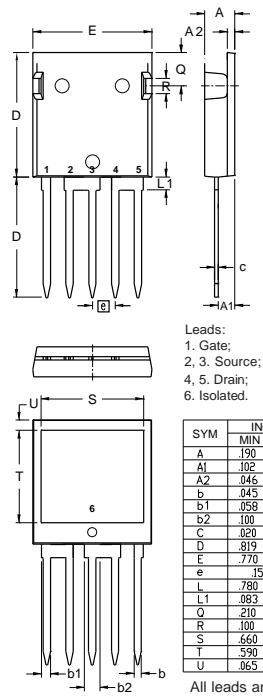


X025a GBFP

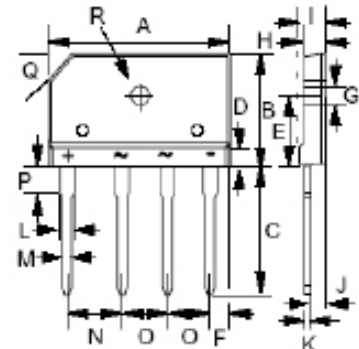

GBJ		
DIM.	MIN.	MAX.
A	29.70	30.30
B	19.70	20.30
C	17.0	18.0
D	4.70	4.90
E	10.80	11.20
F	2.30	2.70
G	3.10	3.40
H	3.40	3.80
I	4.40	4.80
J	2.50	2.90
K	0.80	0.80
L	2.00	2.40
M	0.90	1.10
N	9.80	10.20
O	7.30	7.70
P	3.80	4.20
Q	(3.0) x 45°	
R	3.10 ϕ	3.40 ϕ

All Dimensions in millimeter

X025b GUPF

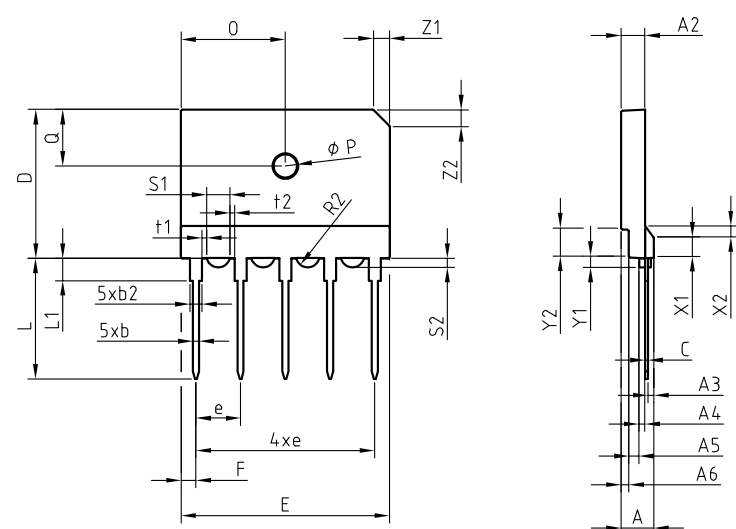


Size mm	typical
A	5.50
A2	4.00
A3	1.00
A4	1.00
A5	1.70
A6	1.30
b	1.00
b2	2.00
C	0.50
D	25.00
E	35.00
e	7.50
F	2.50
L	20.24


Size mm	typical
L1	3.74
O	17.50
ϕP	4.00
Q	9.50
R (rad.)	1.77
s1	3.50
s2	1.50
t1	1.00
t2	1.00
x1	3.59
x2	2.01
y1	1.71
y2	4.73
z1	2.73

Dimensions in mm and inches (1 mm = 0.0394")


X026a ISOPLUS-DIL™ (SL)

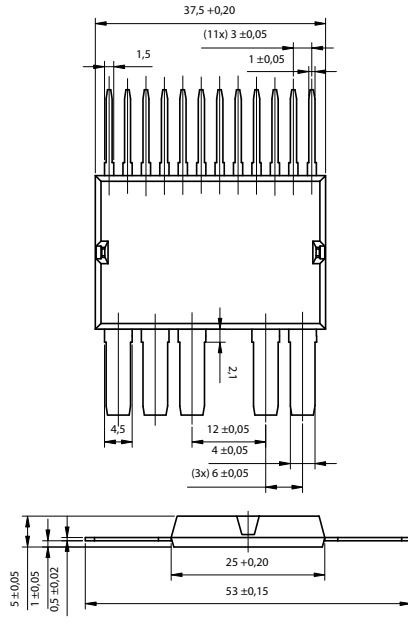


X026b ISOPLUS-DIL™ (BL)

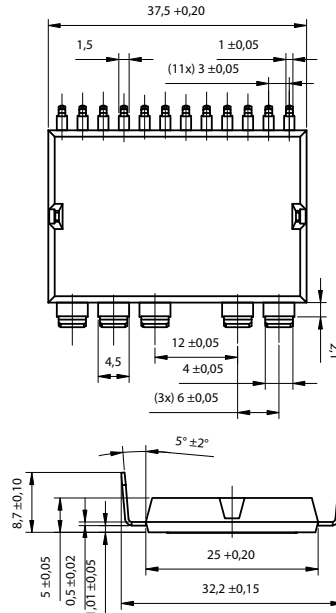

X026c ISOPLUS™-DIL (SMD)

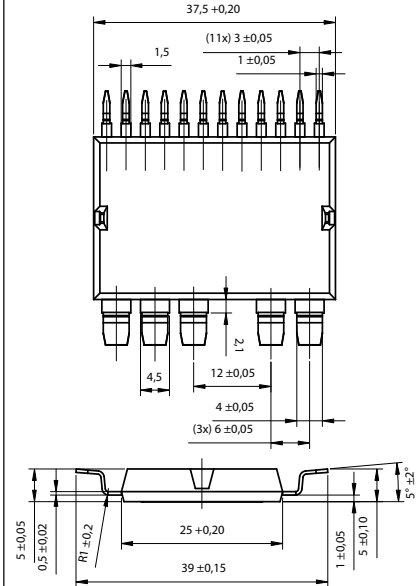


X027a SOT-227 B miniBLOC
X027b SOT-227 UI miniBLOC

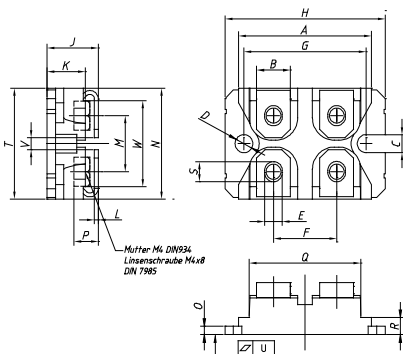

SYM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	31.50	31.88	1.240	1.255
B	7.80	8.20	0.307	0.323
C	4.09	4.29	0.161	0.169
D	4.09	4.29	0.161	0.169
E	4.09	4.29	0.161	0.169
F	14.91	15.11	0.587	0.595
G	30.12	30.30	1.186	1.193
H	37.80	38.23	1.489	1.505
J	11.68	12.22	0.460	0.481
K	8.92	9.60	0.351	0.378
L	0.76	0.84	0.030	0.033
M	12.60	12.85	0.496	0.506
N	25.15	25.42	0.990	1.001
O	1.98	2.13	0.078	0.084
P	4.95	5.97	0.195	0.235
Q	26.54	26.90	1.045	1.059
R	3.94	4.42	0.155	0.174
S	4.72	4.85	0.186	0.191
T	24.59	25.07	0.968	0.987
U	0.05	0.10	0.002	0.004
V	3.30	4.57	0.130	0.180
W	19.81	21.08	0.780	0.830


X028 ISOPLUS227™

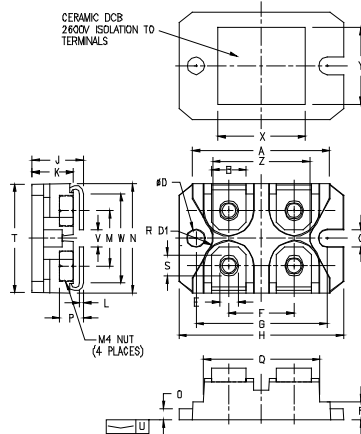


SYM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	1.240	1.270	31.50	32.26
B	.310	.330	7.87	8.38
C	.155	.165	3.94	4.19
D	.155	.165	3.94	4.19
D1	.150	.157	3.81	3.98
E	.160	.168	4.06	4.27
F	.587	.595	14.91	15.11
G	1.186	1.193	30.12	30.30
H	1.489	1.505	37.80	38.23
J	.465	.481	11.81	12.22
K	.371	.380	9.40	9.65
L	.030	.033	0.76	0.84
M	.496	.506	12.60	12.85
N	.990	1.001	25.15	25.42
O	.100	.105	2.54	2.67
P	.195	.235	4.95	5.97
Q	1.045	1.059	26.54	26.90
R	.160	.170	4.06	4.32
S	.186	.191	4.72	4.85
T	.968	.987	24.59	25.07
U	.001	.002	0.003	0.005
V	.130	.160	3.30	4.06
W	.780	.830	19.81	21.08
X	.770	.810	19.56	20.57
Y	.680	.720	17.27	18.29
Z	.885	.892	22.48	22.66

Dimensions in mm and inches (1 mm = 0.0394")


X100 Slim-PAC
See data sheet for pin arrangement

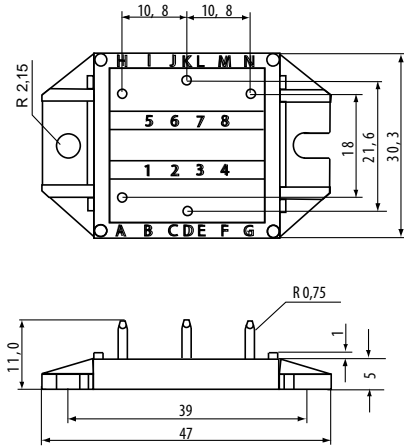


X101 ECO-PAC1
See data sheet for pin arrangement

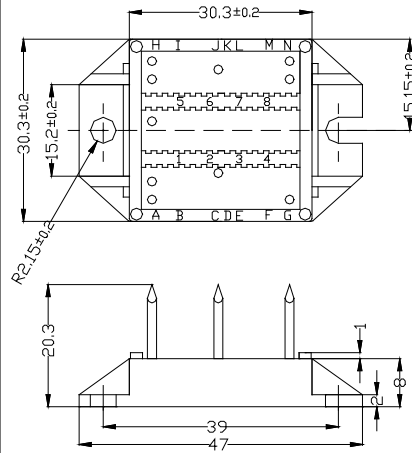


X102 ECO-PAC2
See data sheet for pin arrangement

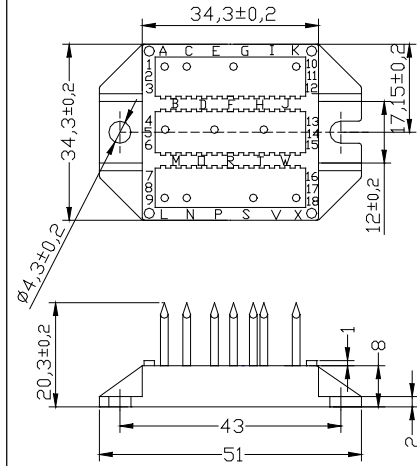


X103 V1-A-Pack
See data sheet for pin arrangement

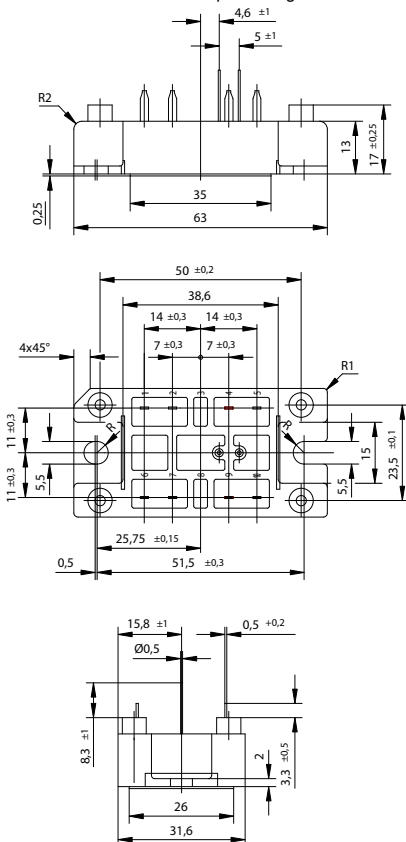


X104 V2-Pack
See data sheet for pin arrangement

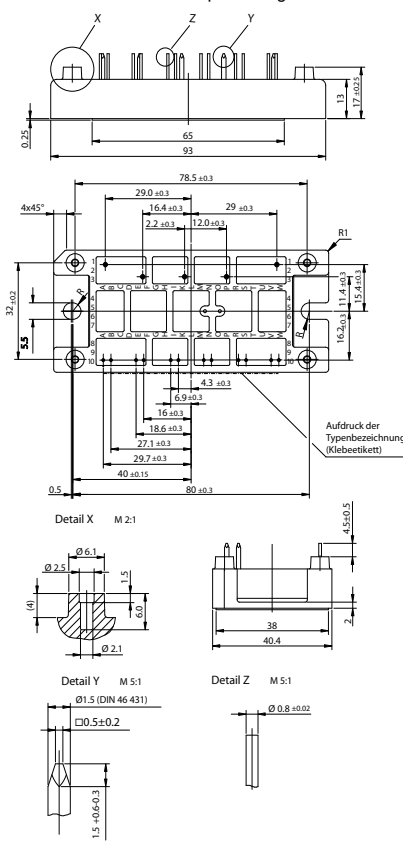

X105 V1-B-Pack
a: pin length = 31 mm
b: pin length = 16 mm

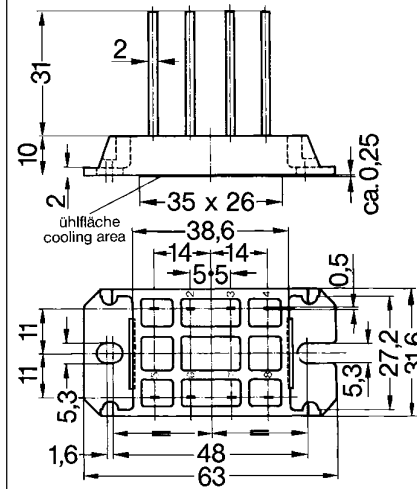


Dimensions in mm and inches (1 mm = 0.0394")

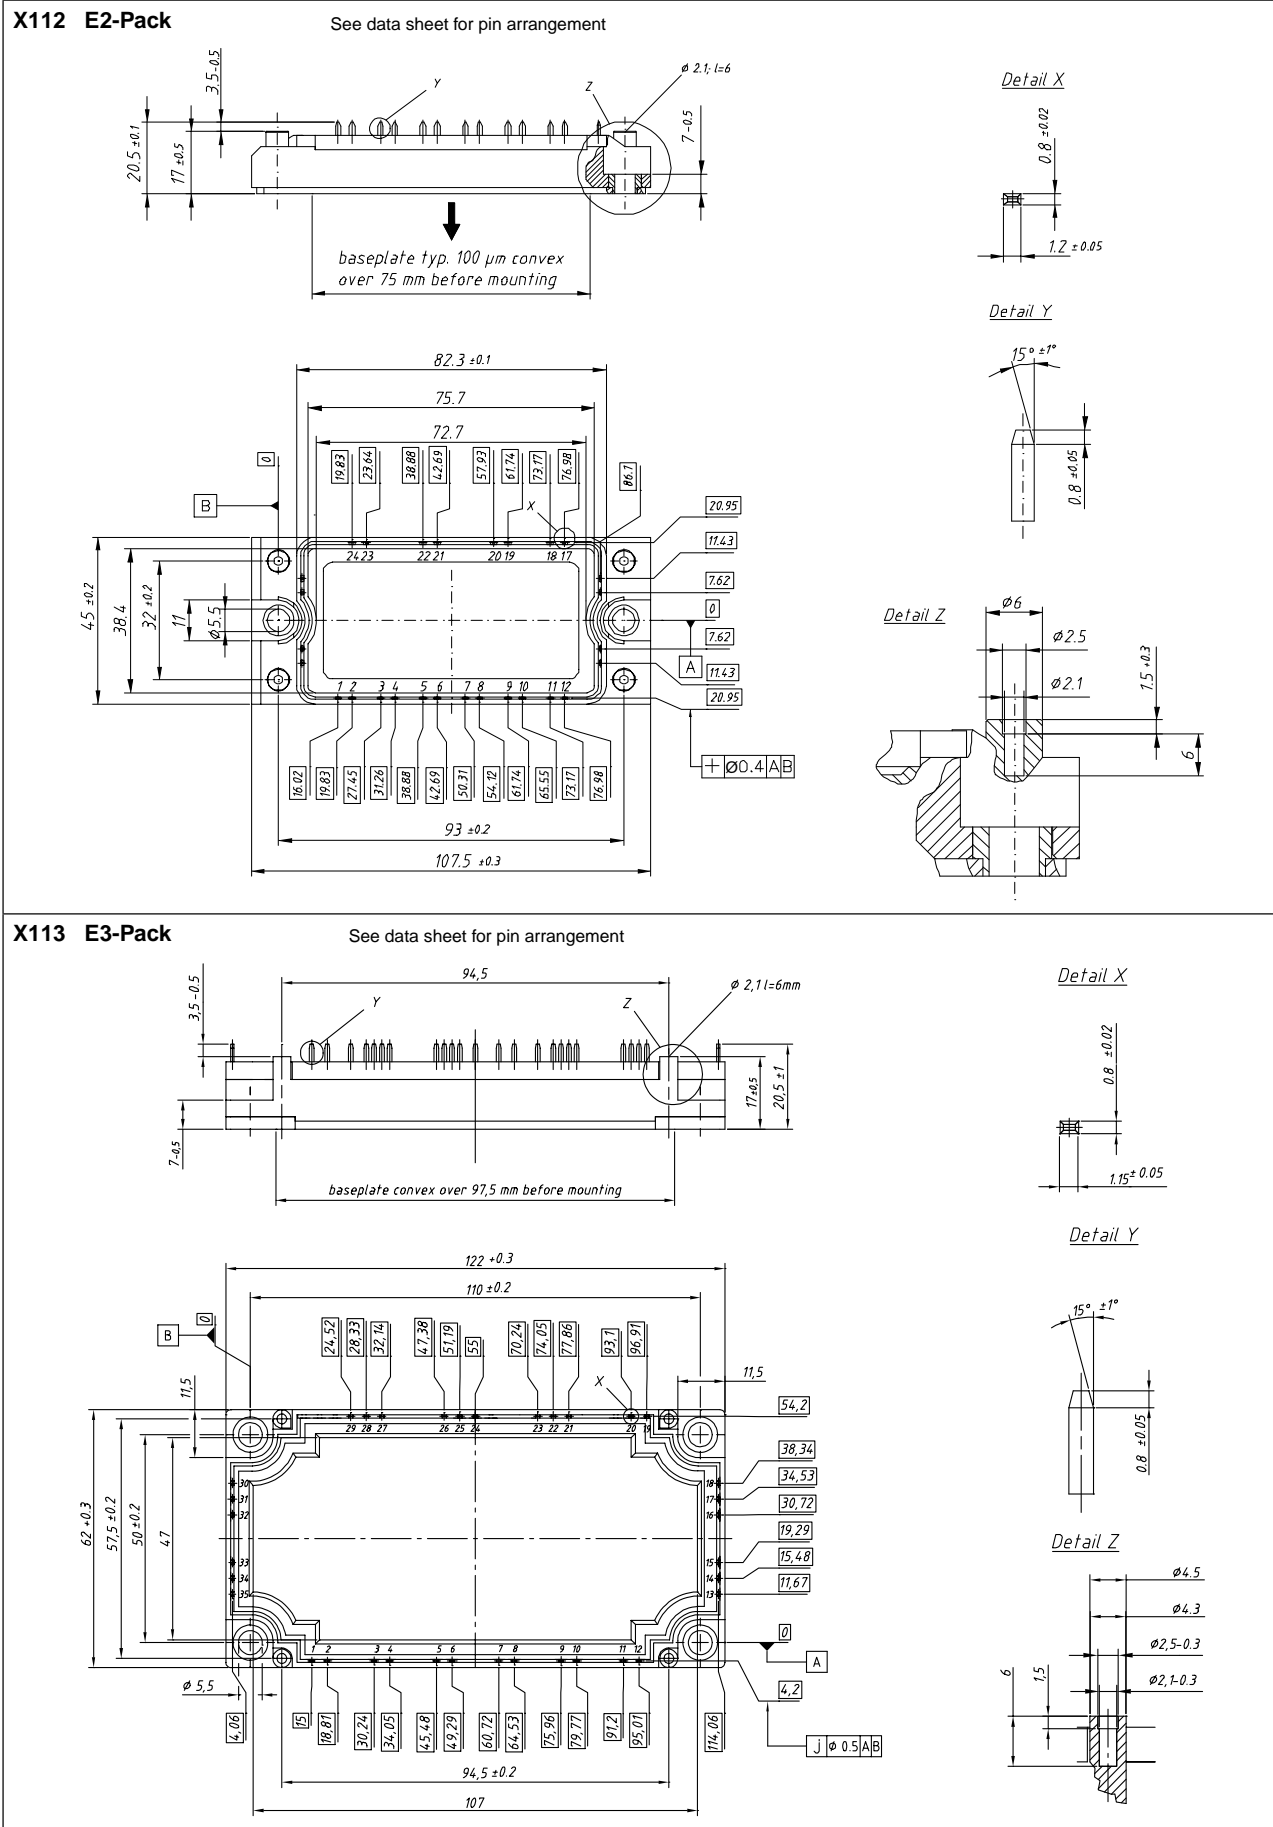


Dimensions in mm and inches (1 mm = 0.0394")

X114 E9-Pack

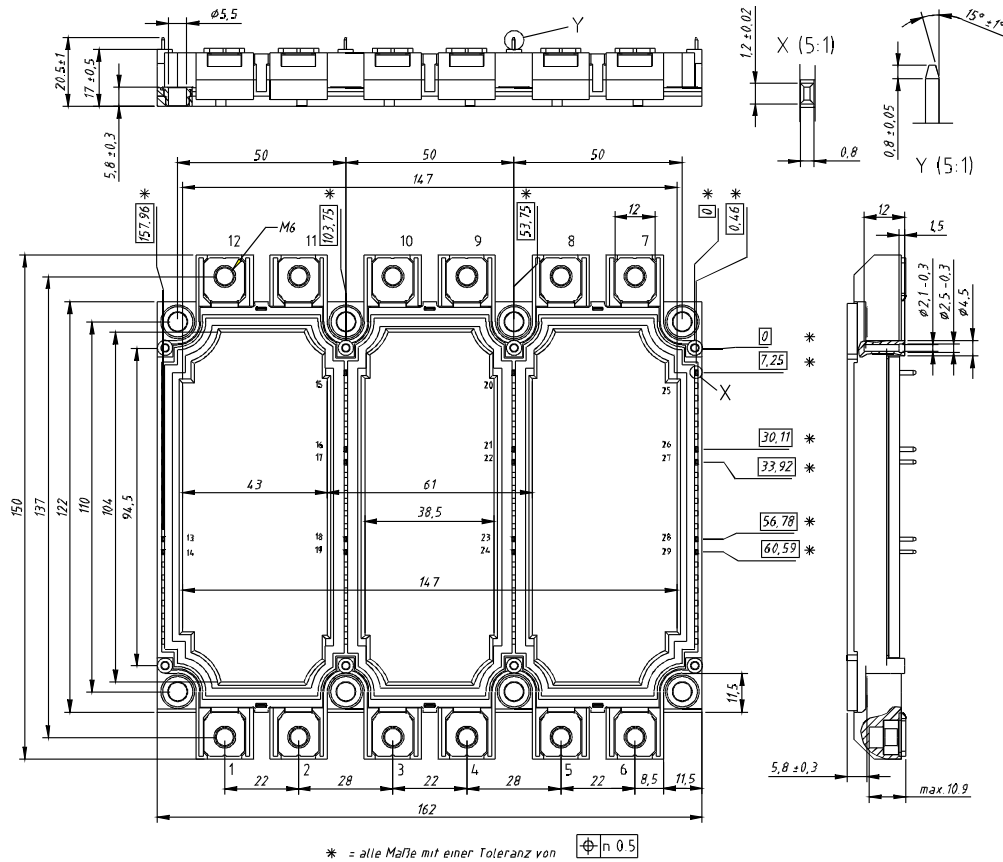


X115 FO-A

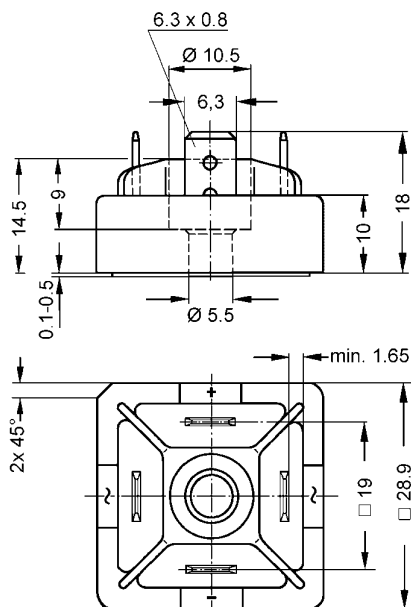


X116 FO-B







a: VUO
b: w/o terminal c (VBO)

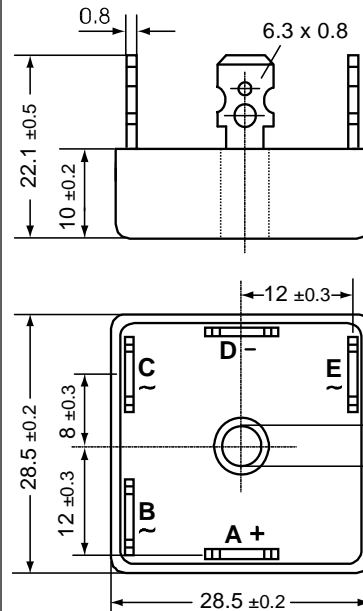

X117a FO-F-A

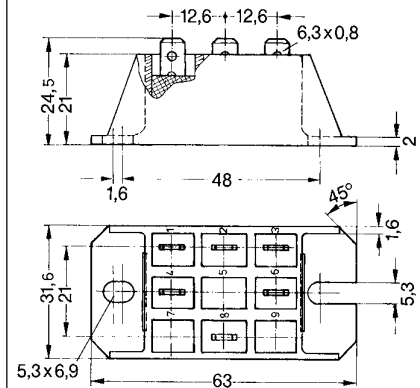

Dimensions in mm and inches (1 mm = 0.0394")

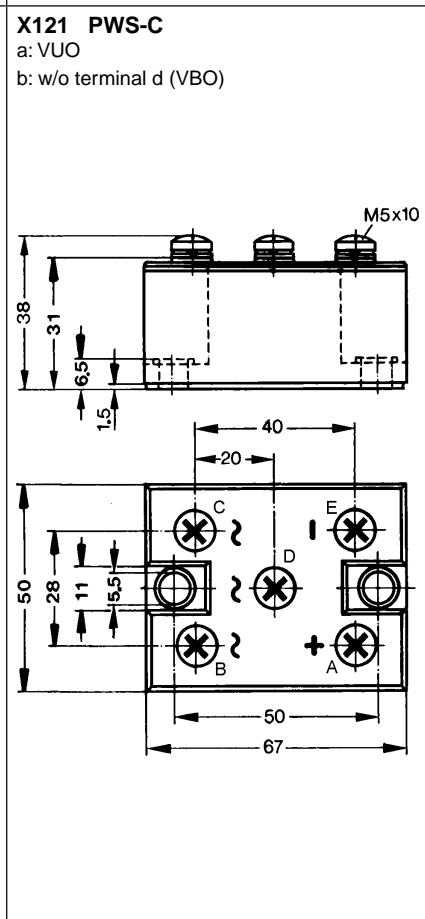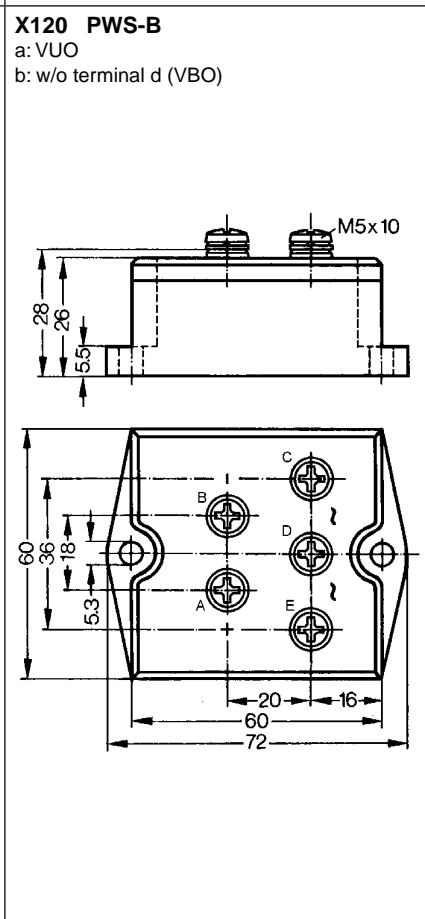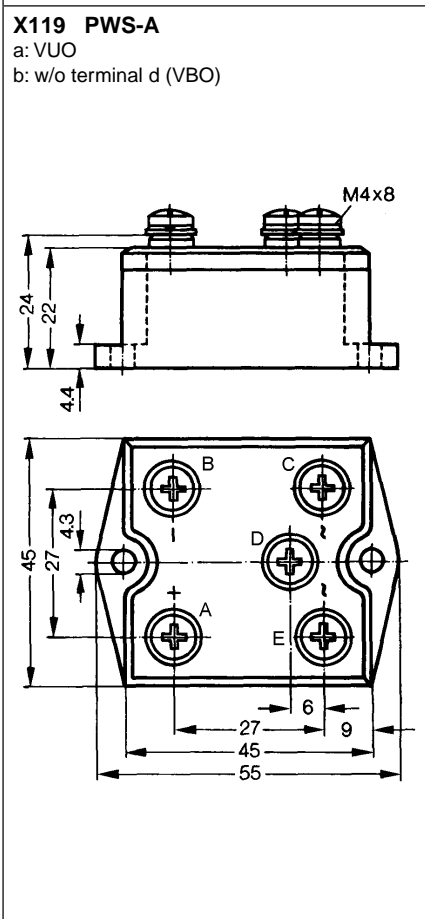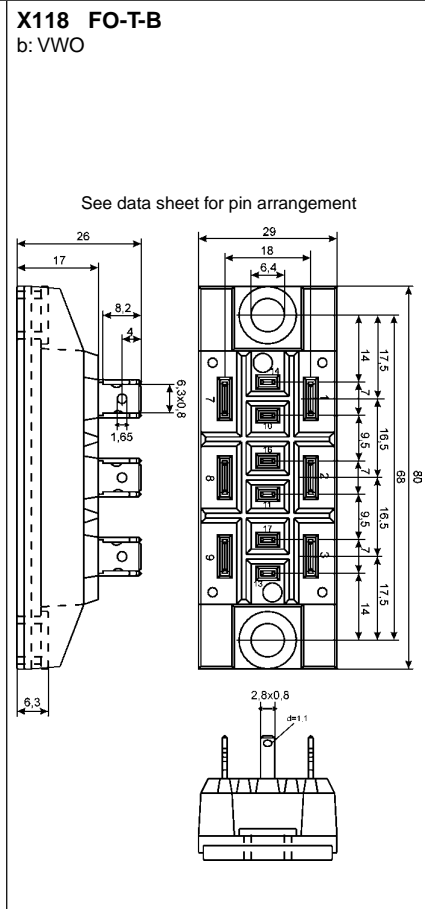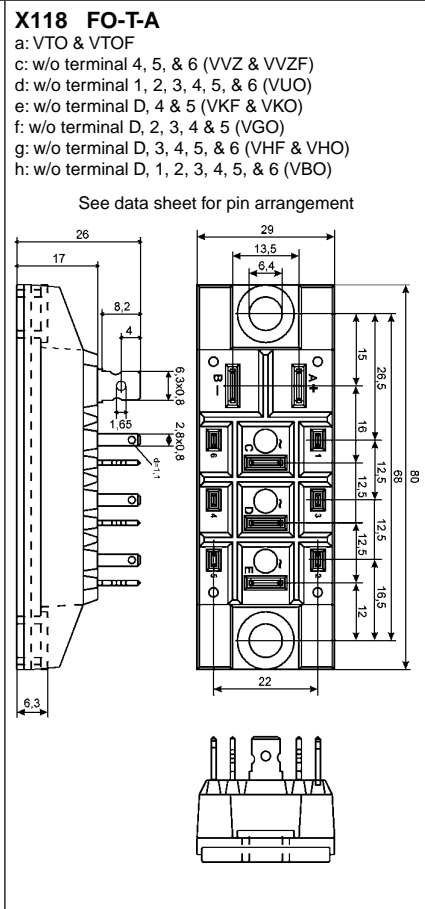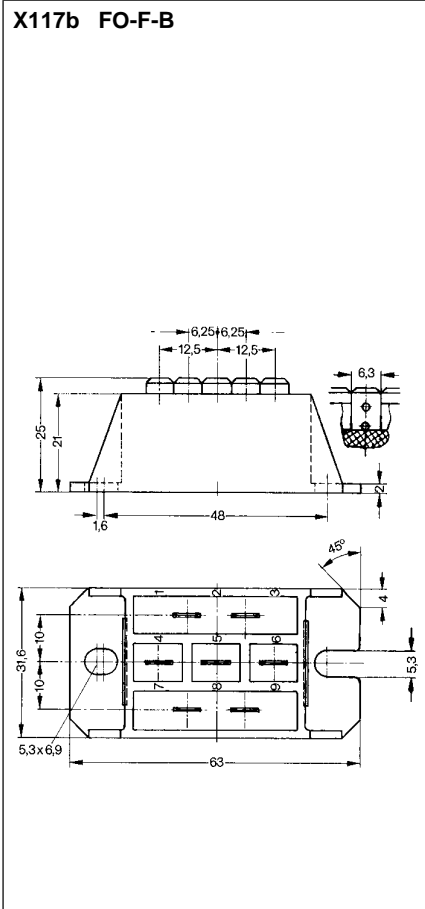

Dimensions in mm and inches (1 mm = 0.0394")

<p>X127 Y4-M5 a: w/o pin 8 up to 11 (MII) b: w/o pin 6 up to 11 (MID) c: w/o pin 4, 5 & 8 up to 11 (MDI)</p>	<p>X128 Y3-DCB a: w/o pin 4 up to 7 (VMM, MII) b: w/o pin 4 up to 9 (MID) c: w/o pin 4 up to 7, 10 & 11 (MDI) d: w/o terminal 3 and pin 6 up to 11 (VMO)</p>	<p>X129 Y2-DCB a: + Kelvin contact (MCC) b: + Kelvin contact, w/o pin 6 & 7 (MCD) c: w/o pin 4, 5, 6 & 7 (MDD)</p>
<p>X130 Y3-Li a: w/o pin 4 up to 7, low inductance (VMM, MII) b: w/o pin 4 up to 9, low inductance (MID) c: w/o pin 4 up to 7, 10 & 11, low inductance (MDI) d: w/o terminal 1 & pin 6 up to 11, low ind. (VMO) e: w/o pin 4 & 5, low ind. ((VMM, MII) + NTC) f: w/o pin 4, 5, 8 & 9, low ind. ((MID) + NTC)</p>	<p>X131 Y1-CU a: + Kelvin contact (MCC) b: + Kelvin contact, w/o pin 6 & 7 (MCD) c: w/o pin 4, 5, 6 & 7 (MDD)</p>	<p>X132 Y1-2-CU a: + Kelvin contact and pin 6 & 7 (MCO) b: w/o pin 4, 5, 6 & 7 (MDO)</p>

Dimensions in mm and inches (1 mm = 0.0394")

<p>X200 Metal-can</p> <p>Technical drawing of the X200 Metal-can package. It shows a side view with dimensions: 0.8, 1.5, 8, 1.5, 8.2, 14.9, 30.5, and 76. A detail view at the top shows a lead with diameter 0.8 and length 1.5. The package height is 76 mm, and the lead length is 30.5 mm. Labels A and K indicate specific features.</p>	<p>X201 FP-Case (oilproof)</p> <p>Technical drawing of the X201 FP-Case (oilproof) package. It shows two views: a top view and a side view. Dimensions include 1.2, 7.5, 1.5, 10, 11.5, 9, 0.8, 4, 1, and 0.5. Labels K and A indicate specific features.</p>	<p>X202 BOD-Package</p> <p>Technical drawing of the X202 BOD-Package. It shows a top view and a side view. Dimensions include 54.5, 7.4, 19, 6, 45.7, 0.8, and 7.5.</p>

Dimensions in mm and inches (1 mm = 0.0394")

Dim.	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	38.61	39.12	1.520	1.540
B	-	22.22	-	0.875
C	6.40	11.4	0.252	0.449
D	1.45	1.60	0.057	0.063
E	1.52	3.43	0.060	0.135
F	30.15	BSC	1.187	BSC
G	10.67	11.17	0.420	0.440
H	5.21	5.71	0.205	0.225
J	16.64	17.14	0.655	0.675
K	11.18	12.19	0.440	0.480
Q	3.84	4.19	0.151	0.165
R	25.16	26.66	0.991	1.05

X203 TO-204 AE

X204 DO-203 AA [M] (DO-4)

X205 DO-203 AA [UNF] (DO-4)


X206a DO-203 AB [UNF] (DO-5)
X206b DO-203 AB [M] (DO-5)

X207 DO-203 AB (DO-5)


X208 TO-64

Dimensions in mm and inches (1 mm = 0.0394")


X209 TO-208 AA (TO-48)

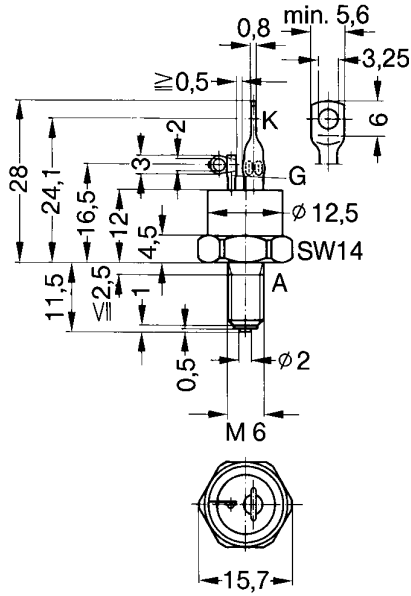


X210 TO-208 AC (TO-65)

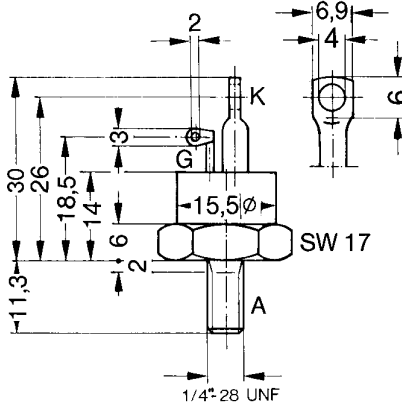


X251 UGE-single

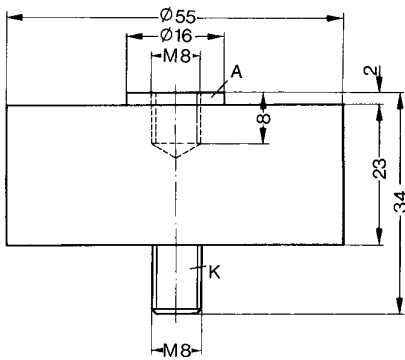







X252 UGB 1~

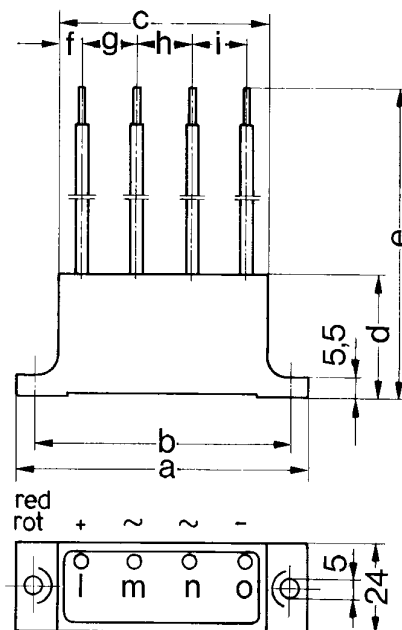

X253 UGD 3~

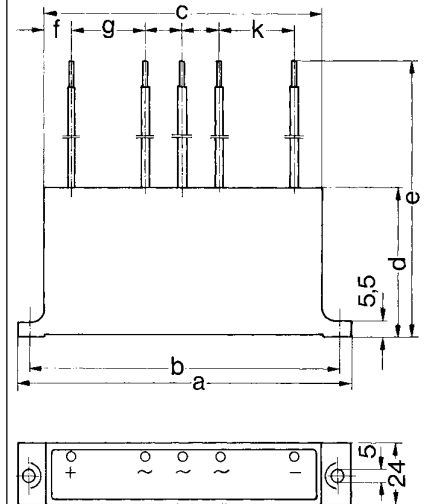

Dimensions in mm and inches (1 mm = 0.0394")

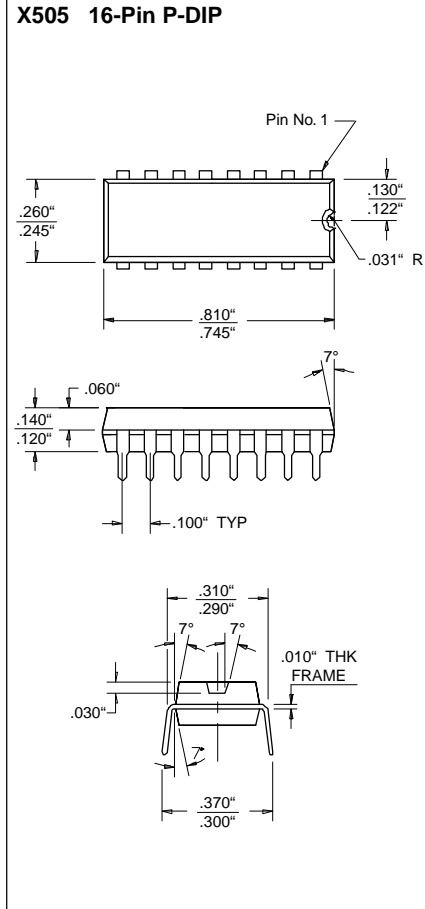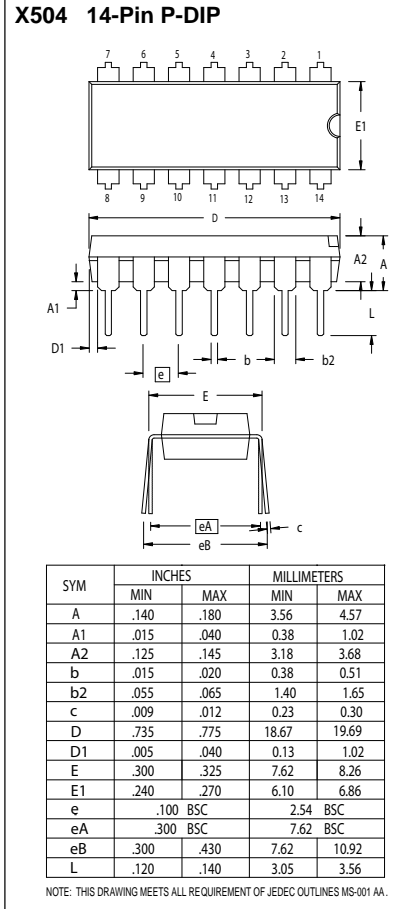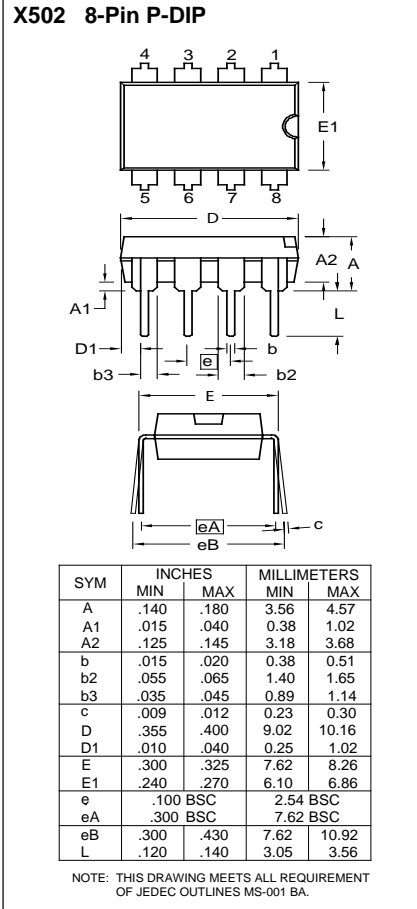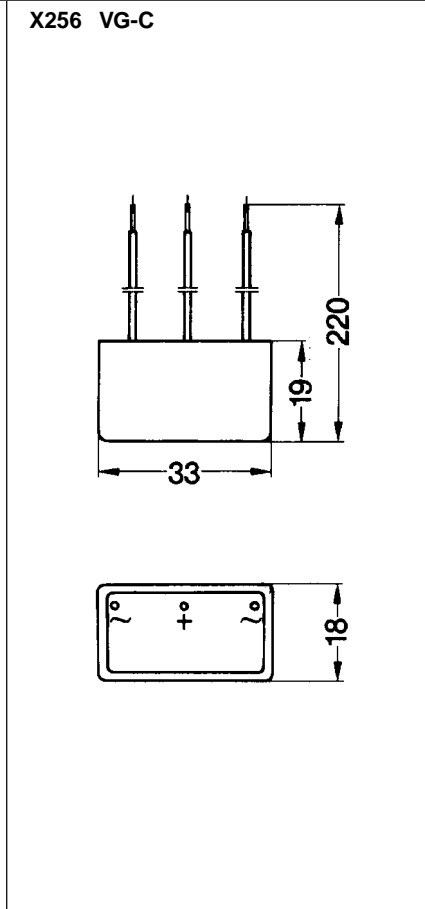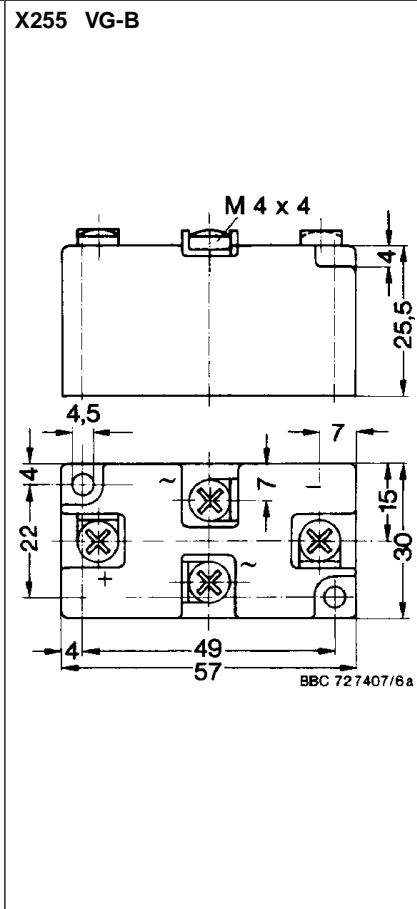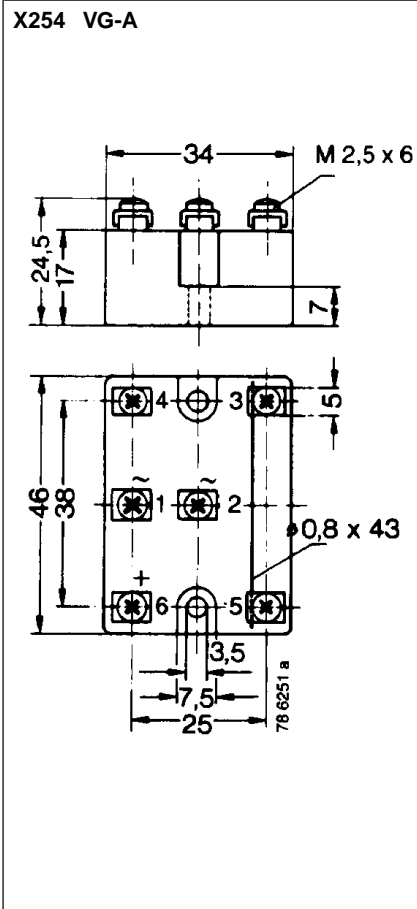

Dimensions in mm and inches (1 mm = 0.0394")

X506 18-pin P-DIP

DIM.	INCH		MM.		NOTE
	MIN.	MAX.	MIN.	MAX.	
A	.0532	.0688	1.35	1.75	---
A1	.0040	.0098	.10	.25	---
B	.013	.020	.33	.51	---
C	.0075	.0098	.19	.25	---
D	.1890	.1968	4.80	5.00	②
E	.1497	.1574	3.80	4.00	②
F	.050	BSC	1.27	BSC	---
H	.2284	.2440	5.80	6.20	---
J	.0099	.0196	.25	.50	---
K	0°	8°	0°	8°	---
L	.016	.050	.40	1.27	---

① Controlling dimensions: Millimeters unless otherwise specified
 ② Dimensions D and E do not include mold protrusions
 3. Molded package shall conform to JEDEC standard configuration MS-012 Variation AA

X512 8-pin SOIC/SOP X512a 8-pin SOIC-CT/SOP-CT

SYM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	.033	.047	0.85	1.20
A1	.002	.006	0.05	0.15
A2	.031	.041	0.80	1.05
b	.007	.012	0.19	0.30
c	.003	.008	0.09	0.20
D	.193	.201	4.90	5.10
E	.252	BSC	6.40	BSC
E1	.169	.177	4.30	4.50
e	.0256	BSC	0.65	BSC
L	.018	.030	0.45	0.75
S	.012	.020	0.30	0.50

NOTE: 1. THIS DRAWING MEETS ALL DIMENSIONAL REQUIREMENT OF JEDEC OUTLINES MS-013 AB-1.
 2. CONTROLLING DIMENSIONS: MILLIMETER.

X514 14-pin SOIC/SOP X514a 14-pin SOIC-CT/SOP-CT

SYM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	.053	.069	1.35	1.75
A1	.004	.010	0.10	0.25
B	.013	.020	0.33	0.51
C	.008	.010	0.20	0.25
D	.386	.394	9.80	10.00
E	.150	.157	3.81	3.99
e	.050	BSC	1.27	BSC
H	.228	.244	5.80	6.20
h	.010	.020	0.25	0.50
L	.016	.050	0.40	1.27
α	0°	8°	0°	8°

X515 16-Pin SOIC/SOP X515a 16-Pin SOIC-CT/SOP-CT

SYM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	.093	.104	2.35	2.65
A1	.004	.012	0.10	0.30
B	.013	.020	0.33	0.51
C	.009	.013	0.23	0.32
D	.398	.413	10.10	10.50
E	.291	.299	7.40	7.60
e	.050	BSC	1.27	BSC
H	.394	.419	10.00	10.65
h	.010	.029	0.25	0.75
L	.016	.050	0.40	1.27
M	.240	.260	6.10	6.60
N	.190	.210	4.83	5.33
α	0°	8°	0°	8°

X516 16-Pin SOIC/SOP (W) X516a 16-Pin SOIC-CT/SOP-CT (W)

SYM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	.093	.104	2.35	2.65
A1	.004	.012	0.10	0.30
B	.013	.020	0.33	0.51
C	.009	.013	0.23	0.32
D	.398	.413	10.10	10.50
E	.291	.299	7.40	7.60
e	.050	BSC	1.27	BSC
H	.394	.419	10.00	10.65
h	.010	.029	0.25	0.75
L	.016	.050	0.40	1.27
M	.240	.260	6.10	6.60
N	.190	.210	4.83	5.33
α	0°	8°	0°	8°

X519 28-Pin SOIC/SOP X519a 28-Pin SOIC-CT/SOP-CT

SYM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	.093	.104	2.35	2.65
A1	.004	.012	.10	.30
B	.013	.020	.33	.51
C	.009	.013	.23	.32
D	.697	.713	17.70	18.10
E	.291	.299	7.40	7.60
e	.050	BSC	1.27	BSC
H	.394	.419	10.00	10.65
h	.010	.029	.25	.75
L	.016	.050	.40	1.27
α	0°	8°	0°	8°

NOTE: This drawing will meet all dimensions requirement of JEDEC MS-013 AE

Dimensions in mm and inches (1 mm = 0.0394")

