

General purpose (dual digital transistors)

EMH10 / UMH10N / IMH10A

●Features


- 1) Two DTC123J chips in a EMT or UMT or SMT package.
- 2) Mounting possible with EMT3 or UMT3 or SMT3 automatic mounting machines.
- 3) Transistor elements are independent, eliminating interference.
- 4) Mounting cost and area can be cut in half.

●Structure

Epitaxial planar type
 NPN silicon transistor
 (Built-in resistor type)

The following characteristics apply to both DT_{r1} and DT_{r2}.

●Equivalent circuit



●Packaging specifications

Type	Package Code	Taping		
		T2R	TN	T110
	Basic ordering unit (pieces)	8000	3000	3000
EMH10		○	-	-
UMH10N		-	○	-
IMH10A		-	-	○

●External dimensions (Units : mm)

EMH10

Each lead has same dimensions

Abbreviated symbol : H10

ROHM : EMT6

UMH10N

Each lead has same dimensions

Abbreviated symbol : H10

ROHM : UMT6
EIAJ : SC-88

IMH10A

Each lead has same dimensions

Abbreviated symbol : H10

ROHM : SMT6
EIAJ : SC-74

Transistors

● Absolute maximum ratings (Ta=25°C)

Parameter	Symbol	Limits	Unit		
Supply voltage	V _{CC}	50	V		
Input voltage	V _{IN}	12	V		
		-5			
Output current	I _O	100	mA		
	I _{C (Max.)}	100	mA		
Power dissipation	EMH10,UMH10N IMH10A	P _d	150 (TOTAL)	mW	*1 *2
			300 (TOTAL)		
Storage temperature	T _{stg}	-55~+150	°C		

*1 120mW per element must not be exceeded.
*2 200mW per element must not be exceeded.

● Electrical characteristics (Ta=25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Input voltage	V _{I (off)}	-	-	0.5	V	V _{CC} =5V, I _O =100μA
	V _{I (on)}	1.1	-	-		V _O =0.3V, I _O =5mA
Output voltage	V _{O (on)}	-	0.1	0.3	V	I _O /I _I =5mA/0.25mA
Input current	I _I	-	-	3.6	mA	V _I =5V
Output current	I _{O (off)}	-	-	0.5	μA	V _{CC} =50V, V _I =0V
DC current gain	G _I	80	-	-	-	V _O =5V, I _O =10mA
Transition frequency	f _T	-	250	-	MHz	V _{CE} =10mA, I _E =-5mA, f=100MHz *
Input resistance	R _I	1.54	2.2	2.86	kΩ	-
Resistance ratio	R ₂ /R ₁	17	21	26	-	-

* Transition frequency of the device

● Electrical characteristic curves

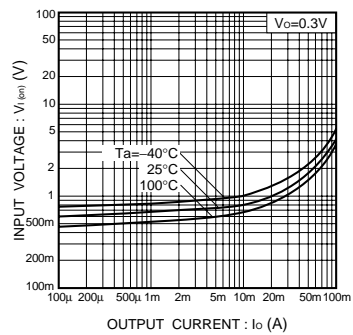


Fig.1 Input voltage vs. output current (ON characteristics)




Fig.2 Output current vs. input voltage (OFF characteristics)

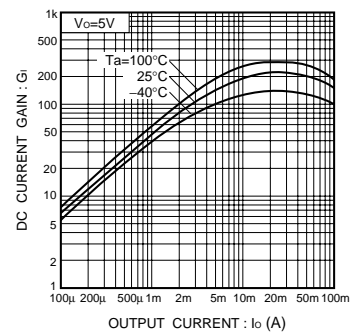


Fig.3 DC current gain vs. output current

Transistors

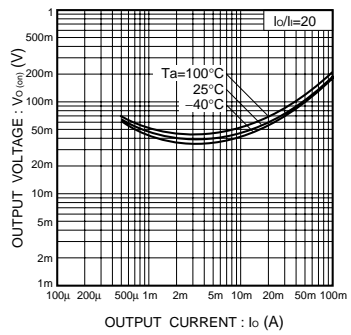


Fig.4 Output voltage vs. output current

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.