


## PNP Silicon High-Voltage Transistor

**BF 623**

- Suitable for video output stages in TV sets
- High breakdown voltage
- Low collector-emitter saturation voltage
- Low capacitance
- Complementary type: BF 622 (NPN)

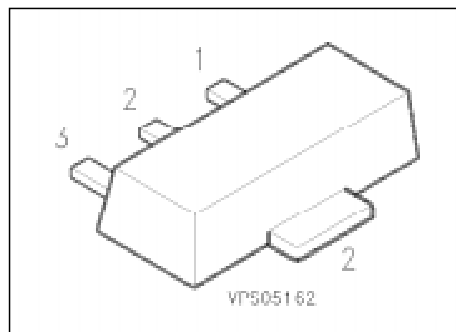

Type	Marking	Ordering Code (tape and reel)	Pin Configuration			Package <sup>1)</sup>
			1	2	3	
BF 623	DB	Q62702-F1053	B	C	E	SOT-89

### Maximum Ratings

Parameter	Symbol	Values	Unit
Collector-emitter voltage	$V_{CE0}$	250	V
Collector-base voltage	$V_{CB0}$	250	
Collector-emitter voltage, $R_{BE} = 2.7 \text{ k}\Omega$	$V_{CER}$	250	
Emitter-base voltage	$V_{EB0}$	5	
Collector current	$I_C$	50	mA
Peak collector current	$I_{CM}$	100	
Total power dissipation, $T_s = 120 \text{ }^\circ\text{C}$	$P_{tot}$	1	W
Junction temperature	$T_j$	150	$^\circ\text{C}$
Storage temperature range	$T_{stg}$	- 65 ... + 150	

### Thermal Resistance

Junction - ambient <sup>2)</sup>	$R_{th \text{ JA}}$	$\leq 90$	K/W
Junction - soldering point	$R_{th \text{ JS}}$	$\leq 30$	

1) For detailed information see chapter Package Outlines.

2) Package mounted on epoxy pcb 40 mm × 40 mm × 1.5 mm/6 cm<sup>2</sup> Cu.

**Electrical Characteristics**at  $T_A = 25\text{ °C}$ , unless otherwise specified.

Parameter	Symbol	Values			Unit
		min.	typ.	max.	

**DC characteristics**

Collector-emitter breakdown voltage $I_C = 1\text{ mA}$ $I_C = 10\text{ }\mu\text{A}$ , $R_{BE} = 2.7\text{ k}\Omega$	$V_{(BR)CE0}$ $V_{(BR)CER}$	250 250	– –	– –	V
Collector-base breakdown voltage $I_C = 10\text{ }\mu\text{A}$	$V_{(BR)CB0}$	250	–	–	
Emitter-base breakdown voltage $I_E = 10\text{ }\mu\text{A}$	$V_{(BR)EB0}$	5	–	–	
Collector cutoff current $V_{CB} = 200\text{ V}$ $V_{CB} = 200\text{ V}$ , $T_A = 150\text{ °C}$	$I_{CB0}$	– –	– –	100 20	nA $\mu\text{A}$
Collector cutoff current $V_{CE} = 200\text{ V}$ , $R_{BE} = 2.7\text{ k}\Omega$ $V_{CE} = 200\text{ V}$ , $R_{BE} = 2.7\text{ k}\Omega$ , $T_A = 150\text{ °C}$	$I_{CER}$	– –	– –	1 50	$\mu\text{A}$
Emitter cutoff current $V_{EB} = 5\text{ V}$	$I_{EB0}$	–	–	10	
DC current gain <sup>1)</sup> $I_C = 25\text{ mA}$ , $V_{CE} = 20\text{ V}$	$h_{FE}$	50	–	–	–
Collector-emitter saturation voltage <sup>1)</sup> $I_C = 10\text{ mA}$ , $I_B = 1\text{ mA}$	$V_{CEsat}$	–	–	0.5	V
Base-emitter saturation voltage <sup>1)</sup> $I_C = 10\text{ mA}$ , $I_B = 1\text{ mA}$	$V_{BEsat}$	–	–	1	


**AC characteristics**

Transition frequency $I_C = 10\text{ mA}$ , $V_{CE} = 10\text{ V}$ , $f = 20\text{ MHz}$	$f$	–	100	–	MHz
Output capacitance $V_{CB} = 30\text{ V}$ , $f = 1\text{ MHz}$	$C_{obo}$	–	1.2	–	pF

1) Pulse test:  $t \leq 300\text{ }\mu\text{s}$ ,  $D = 2\text{ %}$ .


**Total power dissipation**  $P_{tot} = f(T_A^*; T_S)$

\* Package mounted on epoxy

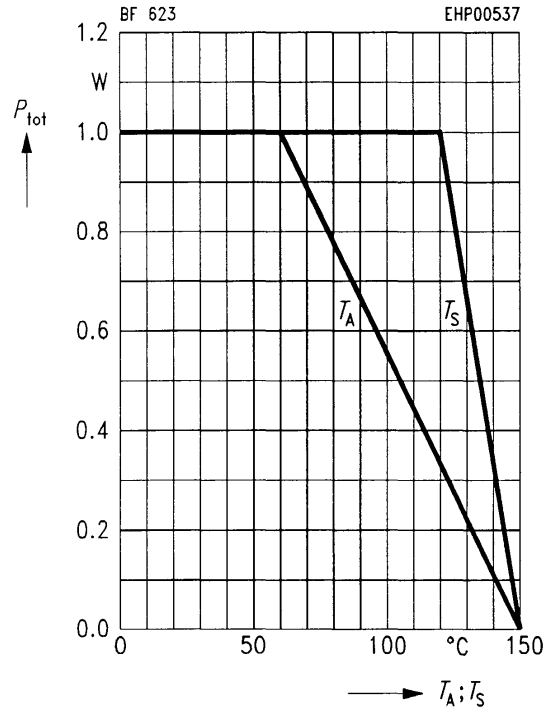


**Output capacitance**  $C_{obo} = f(V_{CE})$

$f = 1 \text{ MHz}$

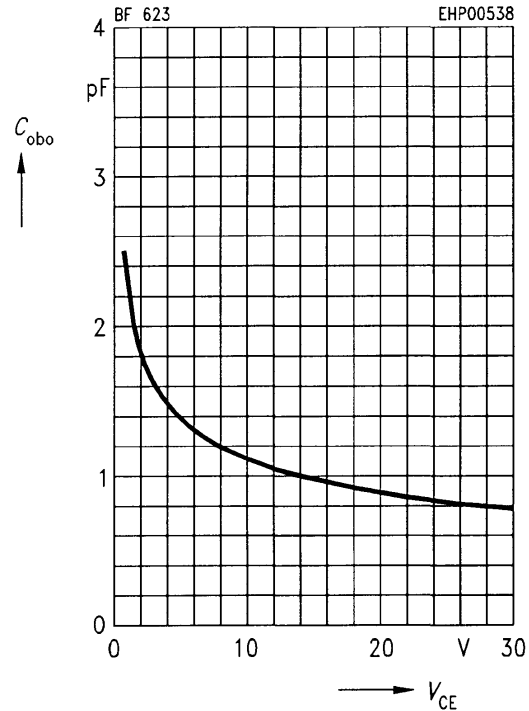


**Permissible pulse load**  $P_{tot \text{ max}}/P_{tot \text{ DC}} = f(t_p)$

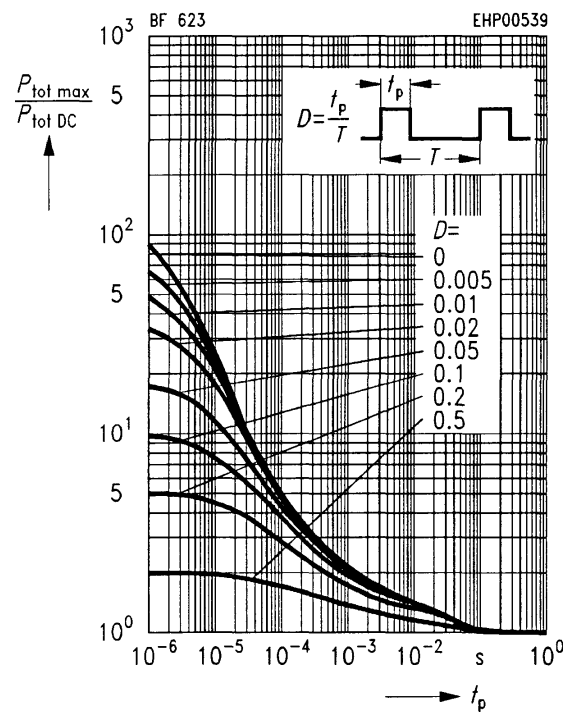


**Transition frequency**  $f_T = f(I_C)$

$V_{CE} = 10 \text{ V}, f = 20 \text{ MHz}$

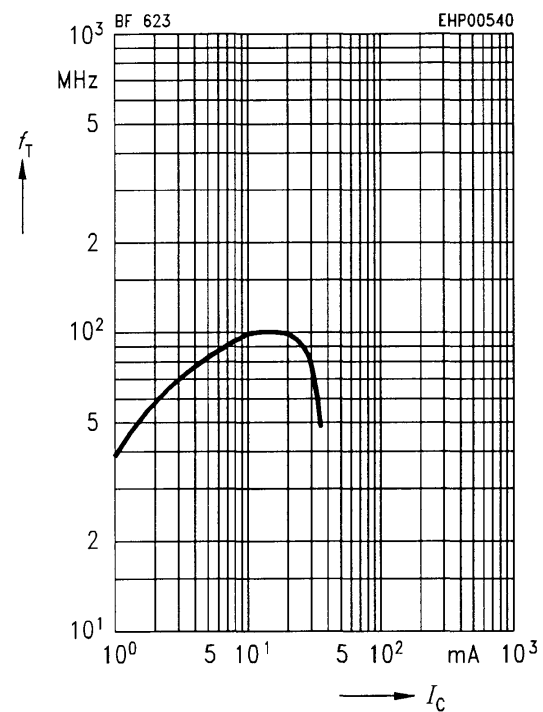


**Collector current  $I_C = f(V_{BE})$**

$V_{CE} = 20\text{ V}$

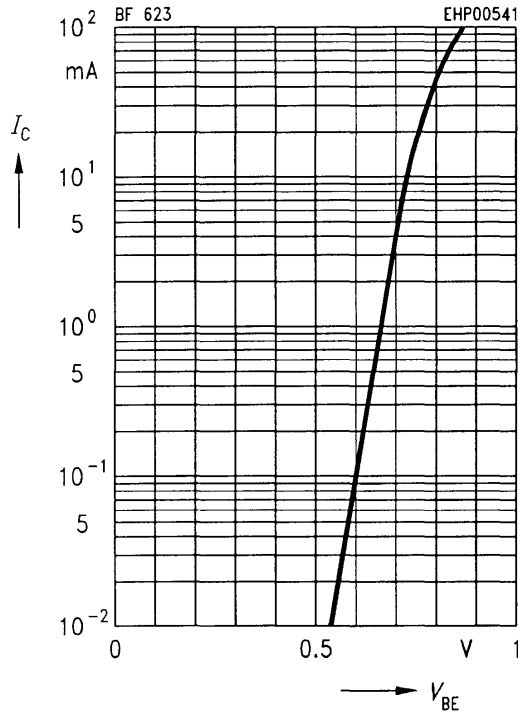

**DC current gain  $h_{FE} = f(I_C)$**

$V_{CE} = 20\text{ V}$

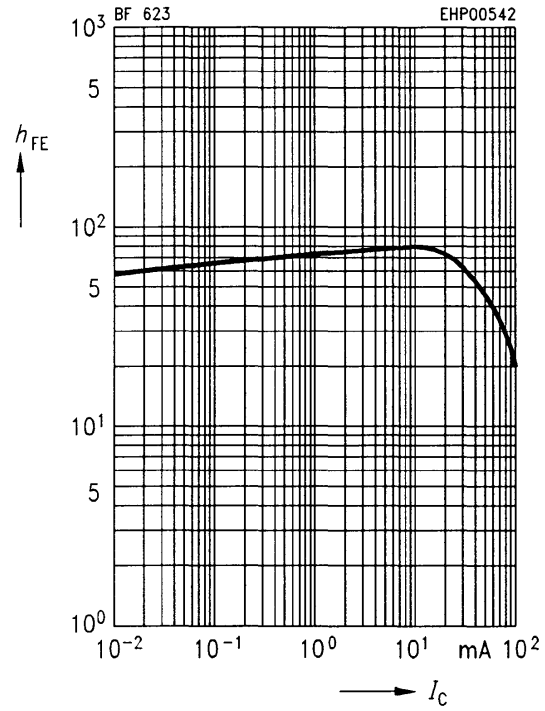

**Collector cutoff current  $I_{CB0} = f(T_A)$**

$V_{CB} = 200\text{ V}$

