

# Quad 2-input NAND Schmitt trigger

## BU4093B / BU4093BF / BU4093BFV


The BU4093B, BU4093BF, and BU4093BFV are 4-circuit, 2-input NAND gates whose input pins all have a Schmitt trigger function.

As the circuit threshold voltages are different when the input waveform rises and when it falls ( $V_{IH}$ ,  $V_{IL}$ ), they can be used for line receivers, waveform rectification, multivibrators, and other purposes in addition to the customary usage as a NAND gate. They may be used in place of the BU4011B which uses the same pin connection.

### ●Features

- 1) Low power dissipation.
- 2) Wide range of operating power supply voltages.
- 3) High input impedance.
- 4) High fan-out.
- 5) Direct drive of 2 L-TTL inputs and 1 LS-TTL input.

### ●Block diagram

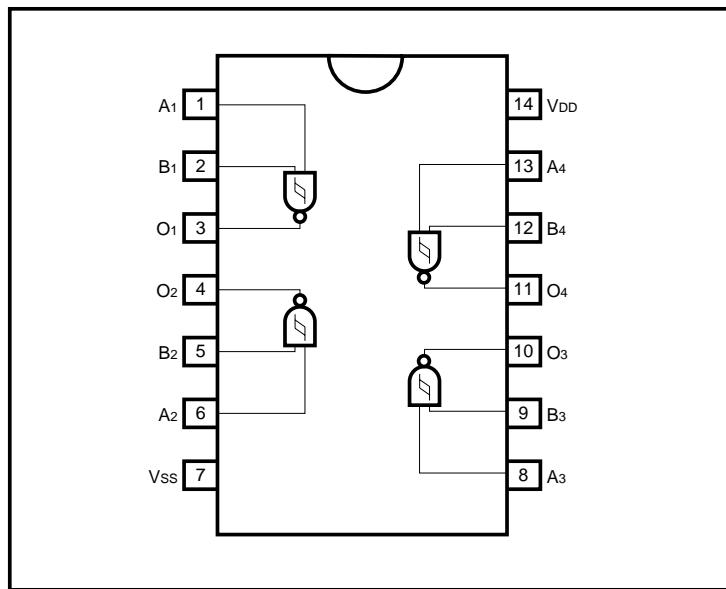

### ●Truth table

INPUT		OUTPUT
A	B	
L	L	H
L	H	H
H	L	H
H	H	L

● Absolute maximum ratings (V<sub>ss</sub> = 0V, Ta = 25°C)

Parameter	Symbol	Limits	Unit
Power supply voltage	V <sub>DD</sub>	– 0.3 ~ + 18	V
Power dissipation	P <sub>d</sub>	1000 (DIP), 450 (SOP), 350 (SSOP)	mW
Operating temperature	T <sub>opr</sub>	– 40 ~ + 85	°C
Storage temperature	T <sub>stg</sub>	– 55 ~ + 150	°C
Input voltage	V <sub>IN</sub>	– 0.3 ~ V <sub>DD</sub> + 0.3	V

## ● Electrical characteristics

DC characteristics (unless otherwise noted, V<sub>ss</sub> = 0V, Ta = 25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	V <sub>DD</sub> (V)	Conditions	Measurement circuit
						5		
Input high level voltage	V <sub>IH</sub>	3.5	—	—	V	10	—	Fig.1
		7.0	—	—		15		
		11.0	—	—		—		
Input low level voltage	V <sub>IL</sub>	—	—	1.5	V	5	—	Fig.1
		—	—	3.0		10		
		—	—	4.0		15		
Input high level current	I <sub>IH</sub>	—	—	0.3	μA	15	V <sub>IH</sub> = 15V	Fig.1
Input low level current	I <sub>IL</sub>	—	—	– 0.3	μA	15	V <sub>IL</sub> = 0V	Fig.1
Output high level voltage	V <sub>OH</sub>	4.95	—	—	V	5	I <sub>O</sub> = 0mA	Fig.1
		9.95	—	—		10		
		14.95	—	—		15		
Output low level voltage	V <sub>OL</sub>	—	—	0.05	V	5	I <sub>O</sub> = 0mA	Fig.1
		—	—	0.05		10		
		—	—	0.05		15		
Output high level current	I <sub>OH</sub>	– 0.44	—	—	mA	5	V <sub>OH</sub> = 4.6V	Fig.1
		– 1.1	—	—		10		
		– 3.0	—	—		15		
Output low level current	I <sub>OL</sub>	0.44	—	—	mA	5	V <sub>OL</sub> = 0.4V	Fig.1
		1.1	—	—		10		
		3.0	—	—		15		
Static current dissipation	I <sub>DD</sub>	—	—	1	μA	5	V <sub>I</sub> = V <sub>DD</sub> or GND	Fig.1
		—	—	2		10		
		—	—	4		15		
Hysteresis voltage	V <sub>H</sub>	0.17	—	0.39	V	5	—	Fig.3
		0.25	—	0.60		10		
		0.33	—	0.90		15		

Switching characteristics (unless otherwise noted,  $V_{SS} = 0V$ ,  $T_a = 25^\circ C$ ,  $C_L = 50pF$ )

Parameter	Symbol	Min.	Typ.	Max.	Unit.	$V_{DD}$ (V)	Conditions	Measurement circuit
Output rise time	$t_{TLH}$	—	100	—	ns	5	—	Fig.2
		—	50	—		10		
		—	40	—		15		
Output fall time	$t_{THL}$	—	100	—	ns	5	—	Fig.2
		—	50	—		10		
		—	40	—		15		
Propagation delay time, "L" to "H"	$t_{PLH}$	—	125	—	ns	5	—	Fig.2
		—	50	—		10		
		—	40	—		15		
Propagation delay time, "H" to "L"	$t_{PHL}$	—	125	—	ns	5	—	Fig.2
		—	50	—		10		
		—	40	—		15		
Input capacitance	$C_{IN}$	—	5	—	pF	—	—	—

### ● Measurement circuits

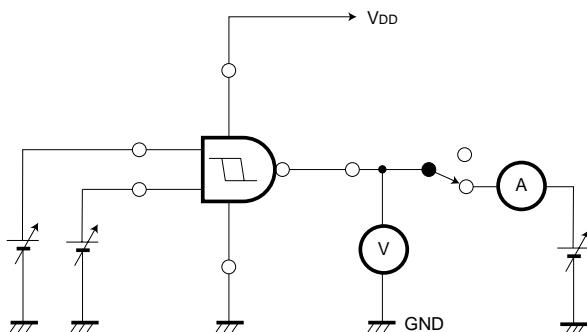


Fig. 1 DC characteristics

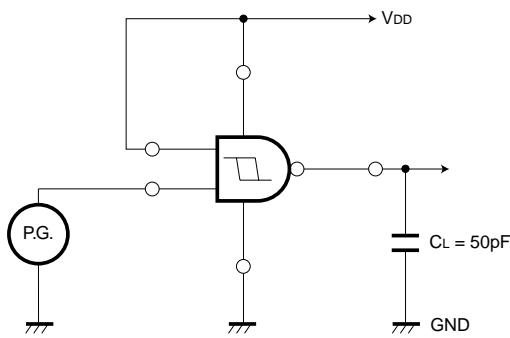


Fig. 2 Switching characteristic

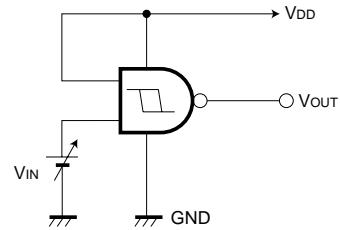
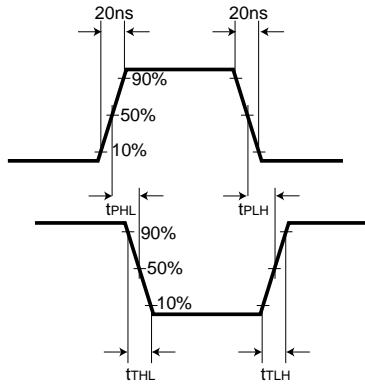


Fig. 3 Hysteresis voltage

● Electrical characteristic curve

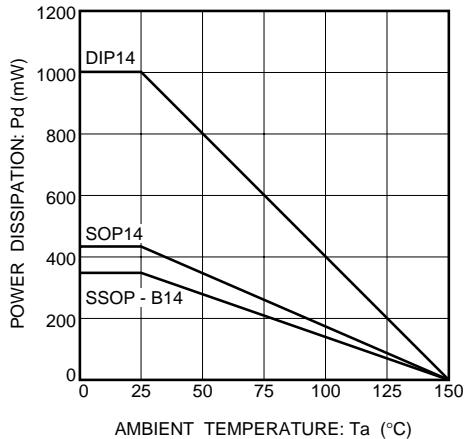


Fig. 4 Power dissipation vs. Ta

● External dimensions (Units: mm)

