


- o General-Purpose Pre-Amplifier
- o Voltage Amplifier Application
  
- Low Noise
- Operates from a Wide Range of Power Supplies
- High Voltage Gain

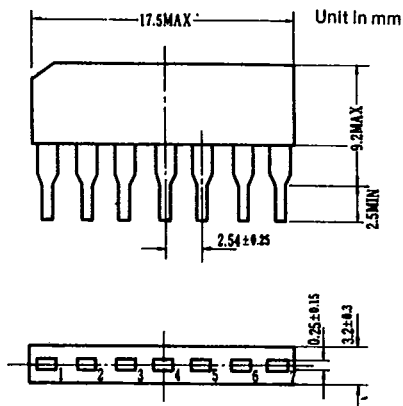

### MAXIMUM RATINGS ( $T_a = 25^\circ\text{C}$ )

CHARACTERISTIC	SYMBOL	RATING	UNIT
Supply Voltage	$V_{CC}$	15	V
Power Dissipation (Note)	$P_D$	200	mW
Operating Temperature	$T_{opr}$	$-30 \sim 75$	$^\circ\text{C}$
Storage Temperature	$T_{stg}$	$-55 \sim 125$	$^\circ\text{C}$


(Note)

Derated above

$T_a = 25^\circ\text{C}$  in the

proportion of 2mW/ $^\circ\text{C}$

### EQUIVALENT CIRCUIT




### ELECTRICAL CHARACTERISTICS ( $V_{CC} = 8\text{V}$ , $R_L = 51\text{k}\Omega$ , $T_a = 25^\circ\text{C}$ )


CHARACTERISTIC	SYMBOL	TEST CIRCUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Supply Current	$I_{CC}$	1	$V_{IN} = 0$	-	1.5	2.1	mA
Voltage Gain (1) (Open Loop)	$G_V(1)$	1	$f = 1\text{kHz}$	75	78	82	dB
Voltage Gain (2) (Closed Loop)	$G_V(2)$	2	$f = 1\text{kHz}$ , $R_{NF} = 35\text{k}\Omega$	46.5	-	52.5	dB
Max. Output Voltage	$V_{OM}$	2	$f = 1\text{kHz}$ , $K_F = 1\%$ (below)	1.0	-	-	$V_{rms}$
Equivalent Input Noise Voltage	$V_{NI}$	3	$R_g = 2.2\text{k}\Omega$ NAB 1kHz Gain Converted with $G_V$ (1kHz)	-	2.0	-	$\mu\text{V}_{rms}$

TEST CIRCUIT


1.  $I_{CO}, Q_V(1)$

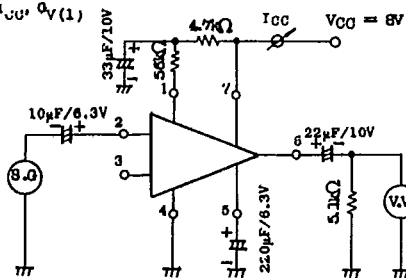

2.  $Q_V(2), V_{OM}$

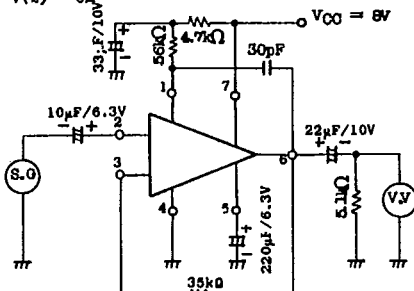


3.  $V_{NI}$

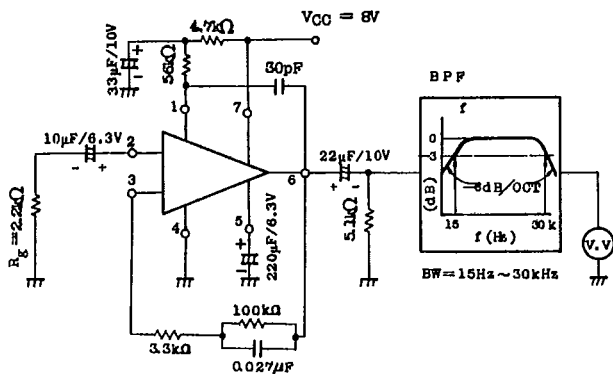


4. EQUALIZER AMPLIFIER FOR CASSETTE TAPE RECORDER


Gain = 35dB (1kHz)

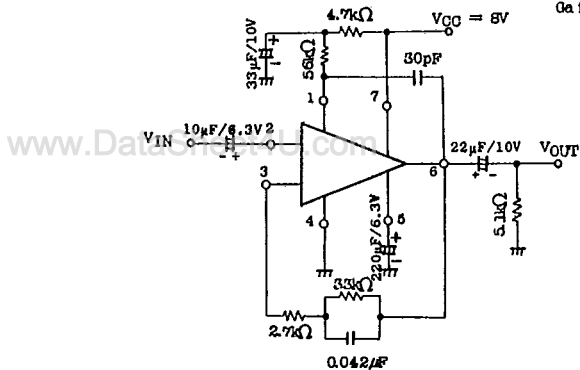


THD -  $V_{OUT}$  (TEST CIRCUIT 4)

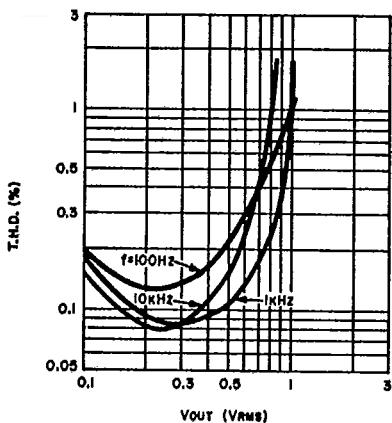


$V_{OUT}$  -  $V_{IN}$  (TEST CIRCUIT 4)

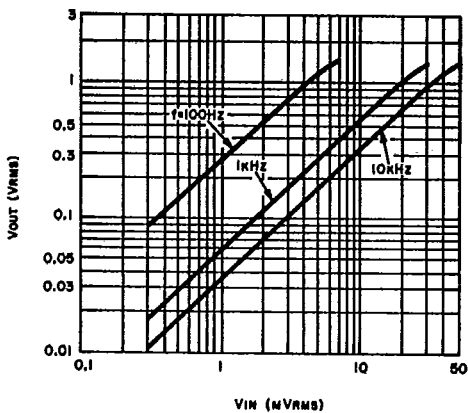

$I_{CC}, V_{OM}, G_V(f) - V_{CC}$  (TEST CIRCUIT 1,2)

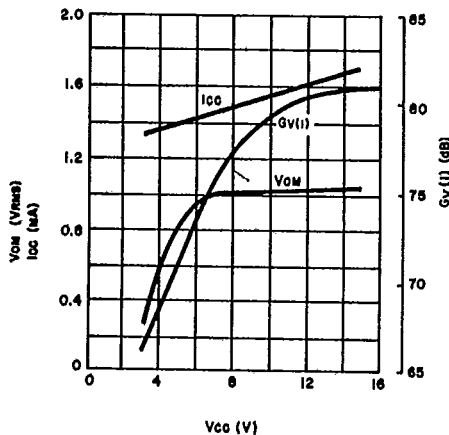

$G_Z - F$  (TEST CIRCUIT 1,4)

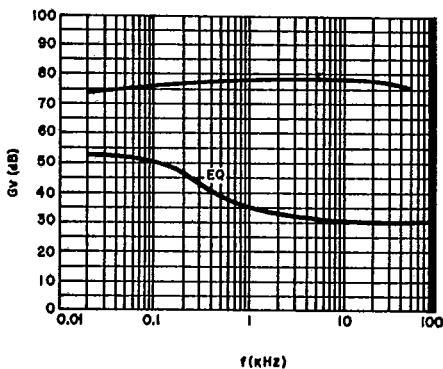

APPLICATION CIRCUIT

NAB 9,8cm/sec EQUALIZER AMPLIFIER FOR CAR-STEREO

Gain = 35dB ( 1kHz )

