


ECM Epoxy Coated Axial Chokes


EC22/24/36/46 Series

- 4 Component Sizes
- Pre-forming options
- Excellent Humidity Resistance
- Low Cost
- Typical Reel Size 5000pcs

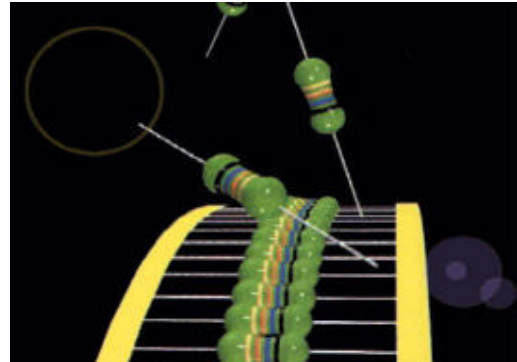

This range of axial chokes from ECM offer a common and highly cost effective answer to the majority of coiled inductor requirements. Available in four sizes **EC22**, **EC24**, **EC36** and **EC46**, they are specially designed to offer high 'Q' and perfect humidity resistance, these reliable and highly durable components are suitable for a wide range of consumer electronic applications.

COMPONENT OUTLINE

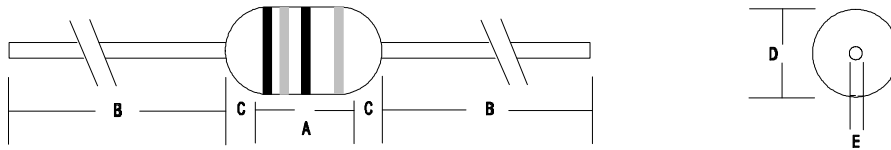

DIMENSIONS (mm)

| TYPE | a | b | c | d \varnothing | e \varnothing |
|------|-----|----|-----|-----------------|-----------------|
| EC22 | 2.0 | 28 | 1.5 | 2.8 | 0.50 |
| EC24 | 4.0 | 28 | 2.0 | 3.0 | 0.50 |
| EC36 | 6.0 | 28 | 2.0 | 4.0 | 0.65 |
| EC46 | 6.0 | 28 | 2.0 | 5.0 | 0.65 |

MARKING BANDS = first significant figure, second significant figure, multiplier, tolerance (%)

| | Black | Brown | Red | Orange | Yellow | Green | Blue | Violet | Grey | White | Silver | Gold |
|--------------------|---------|-------|-----|--------|--------|-------|------|--------|------|-------|--------|--------|
| Significant | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | - | - |
| Multiplier | 1 | 10 | 100 | 1000 | 10000 | - | - | - | - | - | - | - |
| Tolerance | +/- 20% | - | - | - | - | - | - | - | - | - | +/-10% | +/- 5% |

ECM Electronics Limited, Penmaen House, Ashington, West Sussex, RH20 3JR, UK
 Tel: +44(0)1903 892810: Fax: +44(0)1903 892738. Email: ecm@ecmelectronics.co.uk

Although we have attempted to accurately reflect the products we market. ECM reserve the right without prior notice to discontinue any product or make design changes we believe necessary.

ECM Epoxy Coated Axial Chokes

| ECM Part | L (mH) | Tol % | Q Min. (**MHz) | SRF Min. (MHz) | R_{DC} MAX (W) | I_{DC} I_N (mA) |
|-----------------|---------------|--------------|-----------------------|-----------------------|-------------------------------|--|
|-----------------|---------------|--------------|-----------------------|-----------------------|-------------------------------|--|

EC22 Series

| | | | | | | |
|-----------|-----------------|-----|----|-----|-------|-----|
| EC22T-R10 | 0.10 @25.2 MHz | K,M | 40 | 250 | 0.12 | 790 |
| EC22T-R12 | 0.12 @25.2 MHz | K,M | 40 | 230 | 0.14 | 790 |
| EC22T-R15 | 0.15 @25.2 MHz | K,M | 40 | 210 | 0.16 | 790 |
| EC22T-R18 | 0.18 @25.2 MHz | K,M | 40 | 190 | 0.18 | 745 |
| EC22T-R22 | 0.22 @25.2 MHz | K,M | 40 | 175 | 0.20 | 705 |
| EC22T-R27 | 0.27 @25.2 MHz | K,M | 40 | 160 | 0.22 | 670 |
| EC22T-R33 | 0.33 @25.2 MHz | K,M | 40 | 150 | 0.24 | 645 |
| EC22T-R39 | 0.39 @25.2 MHz | K,M | 50 | 150 | 0.27 | 605 |
| EC22T-R47 | 0.47 @25.2 MHz | K,M | 50 | 150 | 0.30 | 575 |
| EC22T-R56 | 0.56 @25.2 MHz | K,M | 50 | 150 | 0.34 | 540 |
| EC22T-R68 | 0.68 @25.2 MHz | K,M | 50 | 120 | 0.38 | 510 |
| EC22T-R82 | 0.82 @25.2 MHz | K,M | 40 | 120 | 0.43 | 480 |
| EC22T-1R0 | 1.0 @25.2 MHz | J,K | 40 | 120 | 0.46 | 465 |
| EC22T-1R2 | 1.2 @7.96 MHz | J,K | 30 | 100 | 0.52 | 435 |
| EC22T-1R5 | 1.5 @7.96 MHz | J,K | 30 | 80 | 0.57 | 415 |
| EC22T-1R8 | 1.8 @7.96 MHz | J,K | 30 | 66 | 0.60 | 405 |
| EC22T-2R2 | 2.2 @7.96 MHz | J,K | 30 | 60 | 0.65 | 390 |
| EC22T-2R7 | 2.7 @7.96 MHz | J,K | 30 | 54 | 0.73 | 370 |
| EC22T-3R3 | 3.3 @7.96 MHz | J,K | 40 | 36 | 0.82 | 345 |
| EC22T-3R9 | 3.9 @7.96 MHz | J,K | 40 | 32 | 0.90 | 330 |
| EC22T-4R7 | 4.7 @7.96 MHz | J,K | 40 | 30 | 1.00 | 315 |
| EC22T-5R6 | 5.6 @7.96 MHz | J,K | 40 | 38 | 1.10 | 300 |
| EC22T-6R8 | 6.8 @7.96 MHz | J,K | 40 | 27 | 1.20 | 285 |
| EC22T-8R2 | 8.2 @7.96 MHz | J,K | 40 | 26 | 1.30 | 275 |
| EC22T-100 | 10 @7.96 MHz | J,K | 40 | 24 | 1.40 | 265 |
| EC22T-120 | 12 @2.52 MHz | J,K | 40 | 22 | 1.50 | 255 |
| EC22T-150 | 15 @2.52 MHz | J,K | 40 | 19 | 2.30 | 245 |
| EC22T-180 | 18 @2.52 MHz | J,K | 50 | 18 | 2.40 | 225 |
| EC22T-220 | 22 @2.52 MHz | J,K | 50 | 17 | 2.90 | 210 |
| EC22T-270 | 27 @2.52 MHz | J,K | 50 | 15 | 3.00 | 200 |
| EC22T-330 | 33 @2.52 MHz | J,K | 50 | 14 | 4.80 | 160 |
| EC22T-390 | 39 @2.52 MHz | J,K | 50 | 12 | 5.30 | 150 |
| EC22T-470 | 47 @2.52 MHz | J,K | 50 | 11 | 5.80 | 145 |
| EC22T-560 | 56 @2.52 MHz | J,K | 50 | 10 | 7.40 | 140 |
| EC22T-680 | 68 @2.52 MHz | J,K | 50 | 9.5 | 8.25 | 130 |
| EC22T-820 | 82 @2.52 MHz | J,K | 50 | 9 | 9.50 | 100 |
| EC22T-101 | 100 @2.52 MHz | J,K | 50 | 7 | 14.50 | 95 |
| EC22T-121 | 120 @ 0.796 MHz | J,K | 50 | 6.5 | 16.00 | 85 |
| EC22T-151 | 150 @ 0.796 MHz | J,K | 30 | 5.5 | 18.50 | 80 |
| EC22T-181 | 180 @ 0.796 MHz | J,K | 30 | 5.2 | 20.00 | 75 |
| EC22T-221 | 220 @ 0.796 MHz | J,K | 30 | 4.7 | 22.00 | 70 |

TOLERANCES J=5%; K= 10%; M=20%.

ECM Electronics Limited, Penmaen House, Ashington, West Sussex, RH20 3JR, UK
Tel: +44(0)1903 892810: Fax: +44(0)1903 892738. Email: ecm@ecmelectronics.co.uk

Although we have attempted to accurately reflect the products we market. ECM reserve the right without prior notice to discontinue any product or make design changes we believe necessary.

Issue 1

ECM Epoxy Coated Axial Chokes

| ECM Part | L (mH) | Tol % | Q Min. (**MHz) | SRF Min. (MHz) | R_{DC} MAX (W) | I_{DC} I_N (mA) |
|-----------------|---------------|--------------|-----------------------|-----------------------|-------------------------------|--|
|-----------------|---------------|--------------|-----------------------|-----------------------|-------------------------------|--|

EC24 Series

| | | | | | | |
|-----------|-----------------|-----|----|------|------|-----|
| EC24T-R10 | 0.10 @25.2 MHz | K,M | 40 | 470 | 0.08 | 700 |
| EC24T-R12 | 0.12 @25.2 MHz | K,M | 40 | 450 | 0.08 | 700 |
| EC24T-R15 | 0.15 @25.2 MHz | K,M | 40 | 430 | 0.09 | 700 |
| EC24T-R18 | 0.18 @25.2 MHz | K,M | 40 | 410 | 0.10 | 700 |
| EC24T-R22 | 0.22 @25.2 MHz | K,M | 40 | 380 | 0.12 | 700 |
| EC24T-R27 | 0.27 @25.2 MHz | K,M | 40 | 360 | 0.15 | 680 |
| EC24T-R33 | 0.33 @25.2 MHz | K,M | 40 | 350 | 0.16 | 680 |
| EC24T-R39 | 0.39 @25.2 MHz | K,M | 40 | 320 | 0.18 | 680 |
| EC24T-R47 | 0.47 @25.2 MHz | K,M | 40 | 300 | 0.26 | 650 |
| EC24T-R56 | 0.56 @25.2 MHz | K,M | 40 | 280 | 0.38 | 500 |
| EC24T-R68 | 0.68 @25.2 MHz | K,M | 40 | 250 | 0.42 | 500 |
| EC24T-R82 | 0.82 @25.2 MHz | K,M | 40 | 200 | 0.55 | 450 |
| EC24T-1R0 | 1.0 @25.2 MHz | J,K | 40 | 180 | 0.12 | 700 |
| EC24T-1R2 | 1.2 @7.96 MHz | J,K | 40 | 165 | 0.18 | 700 |
| EC24T-1R5 | 1.5 @7.96 MHz | J,K | 45 | 150 | 0.20 | 700 |
| EC24T-1R8 | 1.8 @7.96 MHz | J,K | 50 | 125 | 0.23 | 655 |
| EC24T-2R2 | 2.2 @7.96 MHz | J,K | 50 | 85 | 0.25 | 630 |
| EC24T-2R7 | 2.7 @7.96 MHz | J,K | 50 | 80 | 0.28 | 595 |
| EC24T-3R3 | 3.3 @7.96 MHz | J,K | 50 | 75 | 0.30 | 575 |
| EC24T-3R9 | 3.9 @7.96 MHz | J,K | 45 | 65 | 0.32 | 555 |
| EC24T-4R7 | 4.7 @7.96 MHz | J,K | 45 | 45 | 0.35 | 530 |
| EC24T-5R6 | 5.6 @7.96 MHz | J,K | 45 | 36 | 0.40 | 500 |
| EC24T-6R8 | 6.8 @7.96 MHz | J,K | 40 | 30 | 0.45 | 470 |
| EC24T-8R2 | 8.2 @7.96 MHz | J,K | 40 | 28 | 0.55 | 425 |
| EC24T-100 | 10 @7.96 MHz | J,K | 40 | 22 | 0.72 | 370 |
| EC24T-120 | 12 @2.52 MHz | J,K | 45 | 20 | 0.80 | 350 |
| EC24T-150 | 15 @2.52 MHz | J,K | 50 | 16 | 0.88 | 335 |
| EC24T-180 | 18 @2.52 MHz | J,K | 50 | 15 | 1.00 | 315 |
| EC24T-220 | 22 @2.52 MHz | J,K | 50 | 13 | 1.20 | 285 |
| EC24T-270 | 27 @2.52 MHz | J,K | 50 | 11 | 1.35 | 270 |
| EC24T-330 | 33 @2.52 MHz | J,K | 50 | 10 | 1.50 | 255 |
| EC24T-390 | 39 @2.52 MHz | J,K | 50 | 9.5 | 1.70 | 240 |
| EC24T-470 | 47 @2.52 MHz | J,K | 60 | 8.5 | 2.30 | 205 |
| EC24T-560 | 56 @2.52 MHz | J,K | 60 | 7.5 | 2.60 | 195 |
| EC24T-680 | 68 @2.52 MHz | J,K | 60 | 6.5 | 3.20 | 185 |
| EC24T-820 | 82 @2.52 MHz | J,K | 60 | 6.0 | 3.50 | 175 |
| EC24T-101 | 100 @2.52 MHz | J,K | 60 | 5.5 | 3.80 | 165 |
| EC24T-121 | 120 @ 0.796 MHz | J,K | 60 | 5.4 | 3.80 | 160 |
| EC24T-151 | 150 @ 0.796 MHz | J,K | 60 | 4.75 | 4.40 | 150 |
| EC24T-181 | 180 @ 0.796 MHz | J,K | 60 | 4.35 | 5.00 | 140 |
| EC24T-221 | 220 @ 0.796 MHz | J,K | 60 | 4.0 | 5.70 | 130 |

TOLERANCES J=5%; K= 10%; M=20%.

**** = Test Frequency as specified in 'L' column**

ECM Electronics Limited, Penmaen House, Ashington, West Sussex, RH20 3JR, UK
Tel: +44(0)1903 892810: Fax: +44(0)1903 892738. Email: ecm@ecmelectronics.co.uk

Although we have attempted to accurately reflect the products we market. ECM reserve the right without prior notice to discontinue any product or make design changes we believe necessary.

Issue 1

ECM Epoxy Coated Axial Chokes

| ECM Part | L (µH) | Tol % | Q Min. (**MHz) | SRF Min. (MHz) | R_{DC} MAX (W) | I_{DC} I_N (mA) |
|-----------------|---------------|--------------|-----------------------|-----------------------|-------------------------------|--|
|-----------------|---------------|--------------|-----------------------|-----------------------|-------------------------------|--|

EC24 Series continued...

| | | | | | | |
|-----------|------------------|-----|----|------|-------|-----|
| EC24T-271 | 270 @ 0.796 MHz | J,K | 60 | 3.7 | 6.50 | 120 |
| EC24T-331 | 330 @ 0.796 MHz | J,K | 60 | 3.4 | 9.50 | 100 |
| EC24T-391 | 390 @ 0.796 MHz | J,K | 60 | 2.8 | 10.50 | 95 |
| EC24T-471 | 470 @ 0.796 MHz | J,K | 60 | 2.4 | 12.50 | 90 |
| EC24T-561 | 560 @ 0.796 MHz | J,K | 60 | 2.2 | 14.50 | 85 |
| EC24T-681 | 680 @ 0.796 MHz | J,K | 60 | 2.0 | 18.00 | 75 |
| EC24T-821 | 820 @ 0.796 MHz | J,K | 60 | 1.6 | 23.70 | 65 |
| EC24T-102 | 1000 @ 0.796 MHz | J,K | 60 | 1.15 | 30.00 | 60 |

EC36 Series

| | | | | | | |
|-----------|----------------|-----|----|-----|------|-----|
| EC36T-R10 | 0.10 @25.2 MHz | J,K | 50 | 470 | 0.04 | 900 |
| EC36T-R12 | 0.12 @25.2 MHz | J,K | 50 | 450 | 0.06 | 900 |
| EC36T-R15 | 0.15 @25.2 MHz | J,K | 50 | 430 | 0.07 | 700 |
| EC36T-R18 | 0.18 @25.2 MHz | J,K | 50 | 410 | 0.07 | 700 |
| EC36T-R22 | 0.22 @25.2 MHz | J,K | 50 | 380 | 0.08 | 700 |
| EC36T-R27 | 0.27 @25.2 MHz | J,K | 50 | 340 | 0.09 | 680 |
| EC36T-R33 | 0.33 @25.2 MHz | J,K | 50 | 300 | 0.10 | 680 |
| EC36T-R39 | 0.39 @25.2 MHz | J,K | 50 | 280 | 0.12 | 680 |
| EC36T-R47 | 0.47 @25.2 MHz | J,K | 50 | 250 | 0.16 | 650 |
| EC36T-R56 | 0.56 @25.2 MHz | J,K | 50 | 230 | 0.18 | 600 |
| EC36T-R68 | 0.68 @25.2 MHz | J,K | 50 | 210 | 0.22 | 550 |
| EC36T-R82 | 0.82 @25.2 MHz | J,K | 50 | 172 | 0.24 | 980 |
| EC36T-1R0 | 1.0 @25.2 MHz | J,K | 50 | 157 | 0.09 | 920 |
| EC36T-1R2 | 1.2 @7.96 MHz | J,K | 50 | 144 | 0.10 | 880 |
| EC36T-1R5 | 1.5 @7.96 MHz | J,K | 50 | 131 | 0.23 | 830 |
| EC36T-1R8 | 1.8 @7.96 MHz | J,K | 55 | 121 | 0.25 | 790 |
| EC36T-2R2 | 2.2 @7.96 MHz | J,K | 55 | 110 | 0.28 | 750 |
| EC36T-2R7 | 2.7 @7.96 MHz | J,K | 60 | 100 | 0.30 | 720 |
| EC36T-3R3 | 3.3 @7.96 MHz | J,K | 65 | 94 | 0.34 | 670 |
| EC36T-3R9 | 3.9 @7.96 MHz | J,K | 65 | 86 | 0.37 | 640 |
| EC36T-4R7 | 4.7 @7.96 MHz | J,K | 70 | 80 | 0.39 | 620 |
| EC36T-5R6 | 5.6 @7.96 MHz | J,K | 70 | 74 | 0.43 | 590 |
| EC36T-6R8 | 6.8 @7.96 MHz | J,K | 75 | 58 | 0.48 | 550 |
| EC36T-8R2 | 8.2 @7.96 MHz | J,K | 80 | 53 | 0.52 | 530 |
| EC36T-100 | 10 @7.96 MHz | J,K | 85 | 45 | 0.58 | 500 |
| EC36T-120 | 12 @2.52 MHz | J,K | 75 | 30 | 0.63 | 480 |
| EC36T-150 | 15 @2.52 MHz | J,K | 70 | 20 | 0.72 | 460 |
| EC36T-180 | 18 @2.52 MHz | J,K | 65 | 14 | 0.77 | 430 |
| EC36T-220 | 22 @2.52 MHz | J,K | 40 | 9.9 | 0.84 | 410 |
| EC36T-270 | 27 @2.52 MHz | J,K | 55 | 7.6 | 0.94 | 390 |

TOLERANCES J=5%; K= 10%; M=20%.

**** = Test Frequency as specified in 'L' column**

ECM Electronics Limited, Penmaen House, Ashington, West Sussex, RH20 3JR, UK
Tel: +44(0)1903 892810: Fax: +44(0)1903 892738. Email: ecm@ecmelectronics.co.uk

Although we have attempted to accurately reflect the products we market. ECM reserve the right without prior notice to discontinue any product or make design changes we believe necessary.

ECM Epoxy Coated Axial Chokes

| ECM Part | L (mH) | Tol % | Q Min. (**MHz) | SRF Min. (MHz) | R _{DC} MAX (W) | I _{DC} I _N (mA) |
|----------|--------|-------|----------------|----------------|-------------------------|-------------------------------------|
|----------|--------|-------|----------------|----------------|-------------------------|-------------------------------------|

EC36 Series continued...

| | | | | | | |
|-----------|------------------|-----|----|------|-------|-----|
| EC36T-330 | 33 @ 2.52 MHz | J,K | 55 | 6.3 | 1.03 | 370 |
| EC36T-390 | 39 @ 2.52 MHz | J,K | 50 | 6.3 | 1.12 | 350 |
| EC36T-470 | 47 @ 2.52 MHz | J,K | 45 | 6.3 | 1.22 | 340 |
| EC36T-560 | 56 @ 2.52 MHz | J,K | 40 | 6.2 | 1.34 | 320 |
| EC36T-680 | 68 @ 2.52 MHz | J,K | 40 | 5.7 | 1.47 | 305 |
| EC36T-820 | 82 @ 2.52 MHz | J,K | 35 | 5.3 | 1.62 | 290 |
| EC36T-101 | 100 @ 2.52 MHz | J,K | 30 | 4.8 | 1.80 | 275 |
| EC36T-121 | 120 @ 0.796 MHz | J,K | 70 | 3.8 | 3.70 | 185 |
| EC36T-151 | 150 @ 0.796 MHz | J,K | 70 | 3.5 | 4.20 | 175 |
| EC36T-181 | 180 @ 0.796 MHz | J,K | 70 | 3.3 | 4.60 | 165 |
| EC36T-221 | 220 @ 0.796 MHz | J,K | 70 | 3.0 | 5.10 | 155 |
| EC36T-271 | 270 @ 0.796 MHz | J,K | 65 | 2.8 | 5.80 | 145 |
| EC36T-331 | 330 @ 0.796 MHz | J,K | 65 | 2.6 | 6.40 | 137 |
| EC36T-391 | 390 @ 0.796 MHz | J,K | 65 | 2.4 | 7.00 | 133 |
| EC36T-471 | 470 @ 0.796 MHz | J,K | 60 | 2.25 | 7.70 | 126 |
| EC36T-561 | 560 @ 0.796 MHz | J,K | 60 | 2.1 | 8.50 | 120 |
| EC36T-681 | 680 @ 0.796 MHz | J,K | 55 | 1.95 | 9.40 | 113 |
| EC36T-821 | 820 @ 0.796 MHz | J,K | 55 | 1.85 | 12.00 | 100 |
| EC36T-102 | 1000 @ 0.796 MHz | J,K | 50 | 1.4 | 17.40 | 100 |

EC46 Series

| | | | | | | |
|-----------|---------------|-----|----|---|-----|-----|
| EC46T-102 | 1.0 @ 252 MHz | J,K | 90 | - | 8 | 233 |
| EC46T-122 | 1.2 @ 252 MHz | J,K | 90 | - | 9 | 215 |
| EC46T-152 | 1.5 @ 252 MHz | J,K | 90 | - | 10 | 200 |
| EC46T-182 | 1.8 @ 252 MHz | J,K | 90 | - | 11 | 188 |
| EC46T-222 | 2.2 @ 252 MHz | J,K | 90 | - | 14 | 176 |
| EC46T-272 | 2.7 @ 252 MHz | J,K | 90 | - | 18 | 170 |
| EC46T-332 | 3.3 @ 252 MHz | J,K | 90 | - | 22 | 162 |
| EC46T-392 | 3.9 @ 252 MHz | J,K | 90 | - | 26 | 156 |
| EC46T-472 | 4.7 @ 252 MHz | J,K | 90 | - | 30 | 147 |
| EC46T-562 | 5.6 @ 252 MHz | J,K | 70 | - | 34 | 140 |
| EC46T-682 | 6.8 @ 252 MHz | J,K | 70 | - | 45 | 140 |
| EC46T-822 | 8.2 @ 252 MHz | J,K | 50 | - | 60 | 137 |
| EC46T-103 | 10 @ 252 MHz | J,K | 50 | - | 70 | 130 |
| EC46T-123 | 12 @ 79.6 MHz | J,K | 50 | - | 82 | 117 |
| EC46T-153 | 15 @ 79.6 MHz | J,K | 50 | - | 89 | 108 |
| EC46T-183 | 18 @ 79.6 MHz | J,K | 40 | - | 140 | 100 |
| EC46T-223 | 22 @ 79.6 MHz | J,K | 40 | - | 170 | 93 |
| EC46T-253 | 25 @ 79.6 MHz | J,K | 40 | - | 185 | 88 |
| EC46T-273 | 27 @ 79.6 MHz | J,K | 40 | - | 210 | 82 |

TOLERANCES J=5%; K= 10%; M=20%.

** = Test Frequency as specified in 'L' column

ECM Electronics Limited, Penmaen House, Ashington, West Sussex, RH20 3JR, UK
Tel: +44(0)1903 892810; Fax: +44(0)1903 892738. Email: ecm@ecmelectronics.co.uk

Although we have attempted to accurately reflect the products we market. ECM reserve the right without prior notice to discontinue any product or make design changes we believe necessary.

ECM Epoxy Coated Axial Chokes

| <i>ECM Part</i> | <i>L (mH)</i> | <i>Tol %</i> | <i>Q Min. (**MHz)</i> | <i>SRF Min. (MHz)</i> | <i>R_{DC} MAX (W)</i> | <i>I_{DC} I_N (mA)</i> |
|-----------------|---------------|--------------|-----------------------|-----------------------|-------------------------------|--|
|-----------------|---------------|--------------|-----------------------|-----------------------|-------------------------------|--|

EC46 Series continued...

| | | | | | | |
|------------|----------------|-----|----|---|-----|----|
| EC46T-333K | 33 @ 79.6 MHz | J,K | 30 | - | 240 | 75 |
| EC46T-393K | 39 @ 79.6 MHz | J,K | 30 | - | 250 | 60 |
| EC46T-473K | 47 @ 79.6 MHz | J,K | 30 | - | 340 | 60 |
| EC46T-563K | 56 @ 79.6 MHz | J,K | 30 | - | 390 | 55 |
| EC46T-683K | 68 @ 79.6 MHz | J,K | 30 | - | 440 | 40 |
| EC46T-823K | 82 @ 79.6 MHz | J,K | 30 | - | 550 | 30 |
| EC46T-104K | 100 @ 79.6 MHz | J,K | 30 | - | 640 | 18 |

TOLERANCES J=5%; K= 10%; M=20%.

** = Test Frequency as specified in 'L' column