



SAW Components

Data Sheet B9012






Features

- Low-loss RF filter for mobile telephone EGSM system, transmit path
- Low amplitude ripple
- Usable passband 35 MHz
- Unbalanced to balanced operation
- Impedance transformation from 100 Ω to 50 Ω
- Suitable for GPRS class 1 to 12
- Ceramic package for **Surface Mounted Technology (SMT)**
- Pb-free

Terminals

- Ni, gold-plated


Chip sized SAW package **DCS6S**

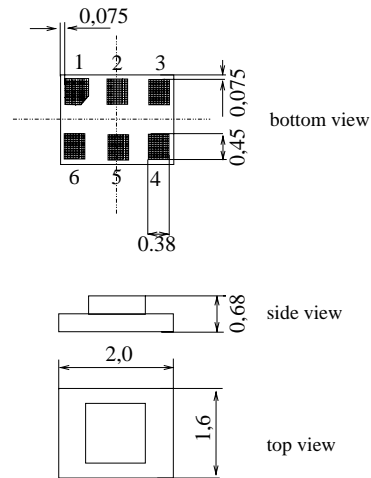

Dimensions in mm, approx. weight 0,010 g

Pin configuration

- | | |
|---------|-------------------|
| 4, 6 | Balanced inputs |
| 2 | Unbalanced output |
| 1, 3 | Output ground |
| 1, 3, 5 | To be grounded |



Type	Ordering code	Marking and Package according to	Packing according to
B9012	B39901-B9012-K210	C61157-A7-A115	F61074-V8152-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T	- 30 / + 85	°C	Machine Model, 10 pulses peak power of GSM signal, duty cycle 4:8
Storage temperature range	T_{stg}	- 40 / + 85	°C	
DC voltage	V_{DC}	5	V	
ESD voltage	V_{ESD}^*	100*	V	
Input power at GSM850, GSM900, GSM1800 and GSM1900 Tx bands	P_{IN}	13	dBm	

* - acc. to JESD22-A115A (Machine Model), 10 negative & 10 positive pulses



SAW Components

B9012

Low-Loss Filter for Mobile Communication

897,5 MHz

Data Sheet



Characteristics

Operating temperature range: $T = 25 \pm 2 \text{ }^\circ\text{C}$
 Terminating source impedance: $Z_S = 100 \text{ } \Omega$ (balanced) || 82 nH
 Terminating load impedance: $Z_L = 50 \text{ } \Omega$

		min.	typ.	max.	
Center frequency	f_C	—	897,5	—	MHz
Maximum insertion attenuation	α_{\max}	—	2,4	2,9	dB
880,0 ... 915,0 MHz					
Amplitude ripple (p-p)	$\Delta\alpha$	—	0,8	1,5	dB
880,0 ... 915,0 MHz					
Input VSWR		—	1,8	2,0	
880,0 ... 915,0 MHz					
Output VSWR		—	1,8	2,0	
880,0 ... 915,0 MHz					
Output phase balance ($\phi(S_{31}) - \phi(S_{21}) + 180^\circ$)		-10	—	10	degree
880,0 ... 915,0 MHz					
Output amplitude balance ($ S_{31}/S_{21} $)		-1,0	—	1,0	dB
880,0 ... 915,0 MHz					
Diff. to common mode suppression	S_{sc12}				
880,0 ... 915,0 MHz		18	26	—	dB
1760,0 ... 1830,0 MHz		18	41	—	
2640,0 ... 2745,0 MHz		18	32	—	
Attenuation	α				
0,0 ... 800,0 MHz		45	56	—	dB
800,0 ... 860,0 MHz		25	42	—	
860,0 ... 870,0 MHz		13	26	—	
925,0 ... 935,0 MHz		9	15	—	
935,0 ... 1805,0 MHz		25	31	—	
1805,0 ... 3660,0 MHz		30	36	—	
3660,0 ... 6000,0 MHz		15	30	—	



SAW Components

B9012

Low-Loss Filter for Mobile Communication

897,5 MHz

Data Sheet



Characteristics

Operating temperature range: $T = -10 \dots +80 \text{ }^\circ\text{C}$
 Terminating source impedance: $Z_S = 100 \text{ } \Omega$ (balanced) || 82 nH
 Terminating load impedance: $Z_L = 50 \text{ } \Omega$

		min.	typ.	max.	
Center frequency	f_C	—	897,5	—	MHz
Maximum insertion attenuation	α_{\max}	—	2,6	3,0	dB
880,0 ... 915,0 MHz					
Amplitude ripple (p-p)	$\Delta\alpha$	—	1,0	1,5	dB
880,0 ... 915,0 MHz					
Input VSWR		—	1,8	2,0	
880,0 ... 915,0 MHz					
Output VSWR		—	1,8	2,0	
880,0 ... 915,0 MHz					
Output phase balance ($\phi(S_{31}) - \phi(S_{21}) + 180^\circ$)		-10	—	10	degree
880,0 ... 915,0 MHz					
Output amplitude balance ($ S_{31}/S_{21} $)		-1,0	—	1,0	dB
880,0 ... 915,0 MHz					
Diff. to common mode suppression	S_{sc12}				
880,0 ... 915,0 MHz		18	26	—	dB
1760,0 ... 1830,0 MHz		18	41	—	
2640,0 ... 2745,0 MHz		18	32	—	
Attenuation	α				
0,0 ... 800,0 MHz		45	56	—	dB
800,0 ... 860,0 MHz		25	42	—	
860,0 ... 870,0 MHz		12	26	—	
925,0 ... 935,0 MHz		8	15	—	
935,0 ... 1805,0 MHz		25	31	—	
1805,0 ... 3660,0 MHz		30	36	—	
3660,0 ... 6000,0 MHz		15	30	—	



SAW Components

B9012

Low-Loss Filter for Mobile Communication

897,5 MHz

Data Sheet




Characteristics

Operating temperature range: $T = -30 \dots +85 \text{ }^\circ\text{C}$
 Terminating source impedance: $Z_S = 100 \text{ } \Omega$ (balanced) || 82 nH
 Terminating load impedance: $Z_L = 50 \text{ } \Omega$


		min.	typ.	max.	
Center frequency	f_C	—	897,5	—	MHz
Maximum insertion attenuation	α_{\max}	—	2,7	3,7	dB
880,0 ... 915,0	MHz				
Amplitude ripple (p-p)	$\Delta\alpha$	—	1,2	2,2	dB
880,0 ... 915,0	MHz				
Input VSWR		—	1,8	2,0	
880,0 ... 915,0	MHz				
Output VSWR		—	1,8	2,0	
880,0 ... 915,0	MHz				
Output phase balance ($\phi(S_{31}) - \phi(S_{21}) + 180^\circ$)		-10	—	10	degree
880,0 ... 915,0	MHz				
Output amplitude balance ($ S_{31}/S_{21} $)		-1,0	—	1,0	dB
880,0 ... 915,0	MHz				
Diff. to common mode suppression	S_{sc12}				
880,0 ... 915,0	MHz	18	26	—	dB
1760,0 ... 1830,0	MHz	18	41	—	
2640,0 ... 2745,0	MHz	18	32	—	
Attenuation	α				
0,0 ... 800,0	MHz	45	56	—	dB
800,0 ... 860,0	MHz	25	42	—	
860,0 ... 870,0	MHz	12	26	—	
925,0 ... 935,0	MHz	8	13	—	
935,0 ... 1805,0	MHz	25	30	—	
1805,0 ... 3660,0	MHz	30	36	—	
3660,0 ... 6000,0	MHz	15	30	—	



Transfer function (measurement)

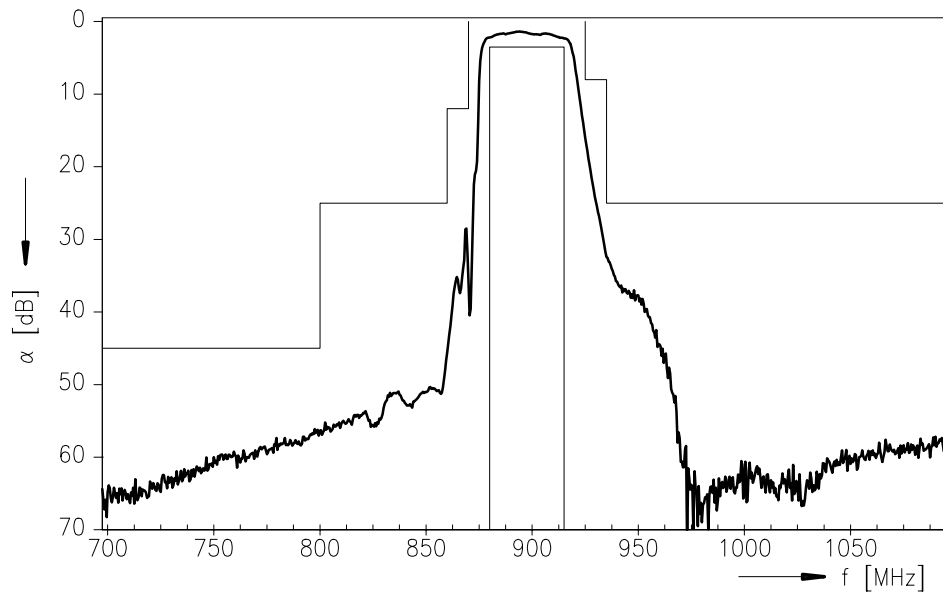

Transfer function (wideband measurement)

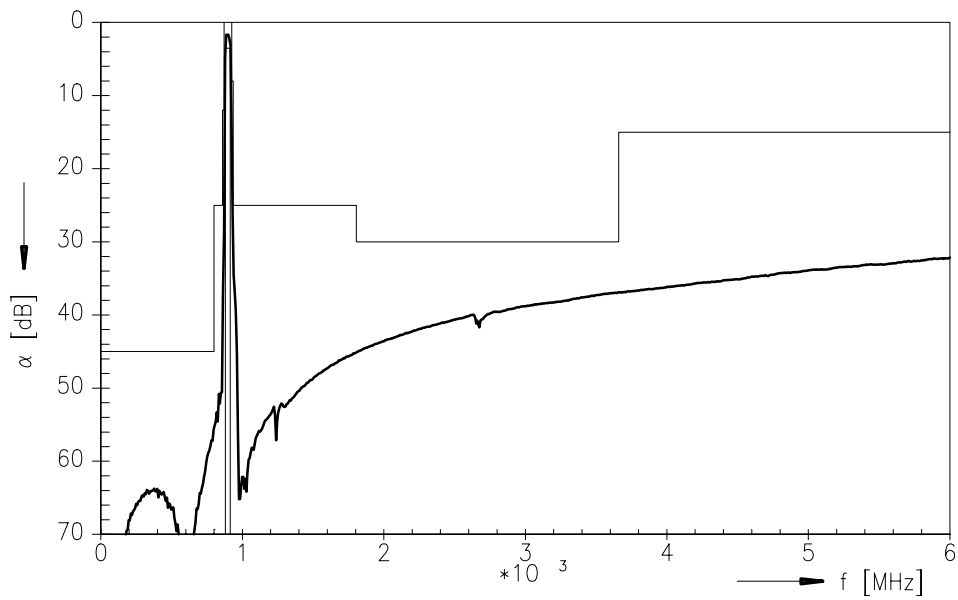



SAW Components

B9012

Low-Loss Filter for Mobile Communication

897,5 MHz

Data Sheet



Published by EPCOS AG

Surface Acoustic Wave Components Division, SAW MC WT

P.O. Box 80 17 09, 81617 Munich, GERMANY

© EPCOS AG 2004. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.