



SAW Components

Data Sheet B5002





SAW Components

B5002

Low-Loss Filter

398,0 MHz

Data Sheet


Features

- Low-loss IF filter for W-CDMA base station, Tx
- 20 MHz usable bandwidth
- Very low passband ripple
- Ceramic SMD package

Terminals

- Gold plated


Ceramic package QCC8C

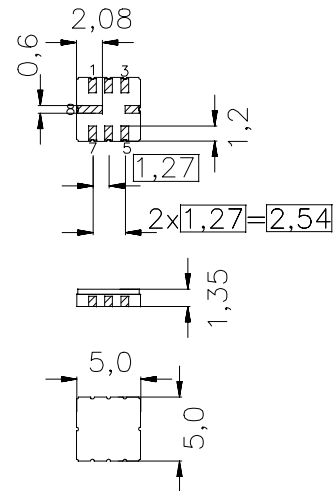

Dim. in mm, approx. weight 0,1 g

Pin configuration

- | | |
|------|----------------|
| 2 | Input |
| 3 | Input ground |
| 6 | Output |
| 7 | Output ground |
| 1, 5 | To be grounded |
| 4, 8 | Case ground |



Type	Ordering code	Marking and Package according to	Packing according to
B5002	B39401-B5002-U310	C61157-A7-A56	F61074-V8169-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T	-40 / +85	°C
Storage temperature range	T_{stg}	-40 / +85	°C
DC voltage	V_{DC}	5	V
Source power	P_s	10	dBm



Data Sheet

Characteristics

Operating temperature range: $T = -40 \dots +85 \text{ }^\circ\text{C}$
 Terminating source impedance: $Z_S = 50 \text{ } \Omega$ unbalanced and matching network
 Terminating load impedance: $Z_L = 50 \text{ } \Omega$ unbalanced and matching network

		min.	typ.	max.	
Nominal frequency	f_N	—	398,0	—	MHz
Minimum insertion attenuation $f_N - 7,50 \text{ MHz} \dots f_N + 7,50 \text{ MHz}$	α_{\min}	—	3,3	4,0	dB
Maximum insertion attenuation (in passband) $f_N - 7,50 \text{ MHz} \dots f_N + 7,50 \text{ MHz}$	α_{\max}	—	3,8	5,0	dB
Pass bandwidth $\alpha_{\text{rel}} \leq 1,0 \text{ dB}$	$B_{1,0\text{dB}}$	20	26	—	MHz
Amplitude ripple (p-p) $f_N - 1,92 \text{ MHz} \dots f_N + 1,92 \text{ MHz}$ $f_N - 7,50 \text{ MHz} \dots f_N + 7,50 \text{ MHz}$	$\Delta\alpha$	—	0,2 0,4	0,5 1,0	dB dB
Deviation from linear phase (rms) $f_N - 1,92 \text{ MHz} \dots f_N + 1,92 \text{ MHz}$ $f_N - 7,50 \text{ MHz} \dots f_N + 7,50 \text{ MHz}$	$\Delta\varphi$	—	0,1 1,0	0,5 3,0	$^\circ$ $^\circ$
Relative attenuation (relative to α_{\min}) 100 MHz ... 335 MHz 335 MHz ... 338 MHz 338 MHz ... 365 MHz 365 MHz ... 368 MHz 448 MHz ... 3 GHz	α_{rel}	15 38 15 35 15	60 60 60 45 45	— — — — —	dB dB dB dB dB
Input return loss (in passband) $f_N - 7,50 \text{ MHz} \dots f_N + 7,50 \text{ MHz}$		6	8	—	dB
Output return loss (in passband) $f_N - 7,50 \text{ MHz} \dots f_N + 7,50 \text{ MHz}$		8	10	—	dB
Temperature coefficient of frequency	TC_f	—	-70	—	ppm/K



SAW Components


B5002

Low-Loss Filter

398,0 MHz

Data Sheet

Matching network to 50 Ω

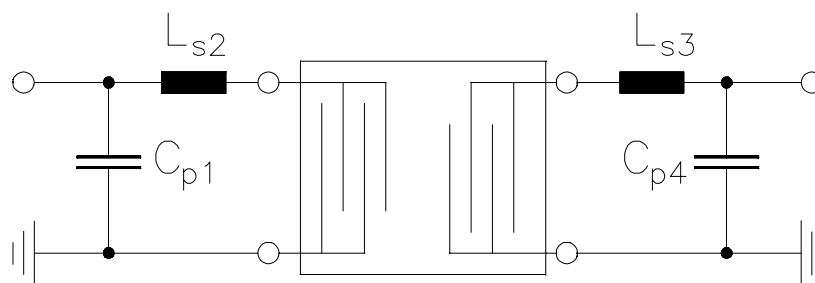

$$C_{p1} = 3,3 \text{ pF}$$

$$L_{s2} = 10 \text{ nH}$$

$$L_{s3} = 12 \text{ nH}$$


$$C_{p4} = 2,2 \text{ pF}$$

Element values depend upon board layout




Data Sheet

Transfer function

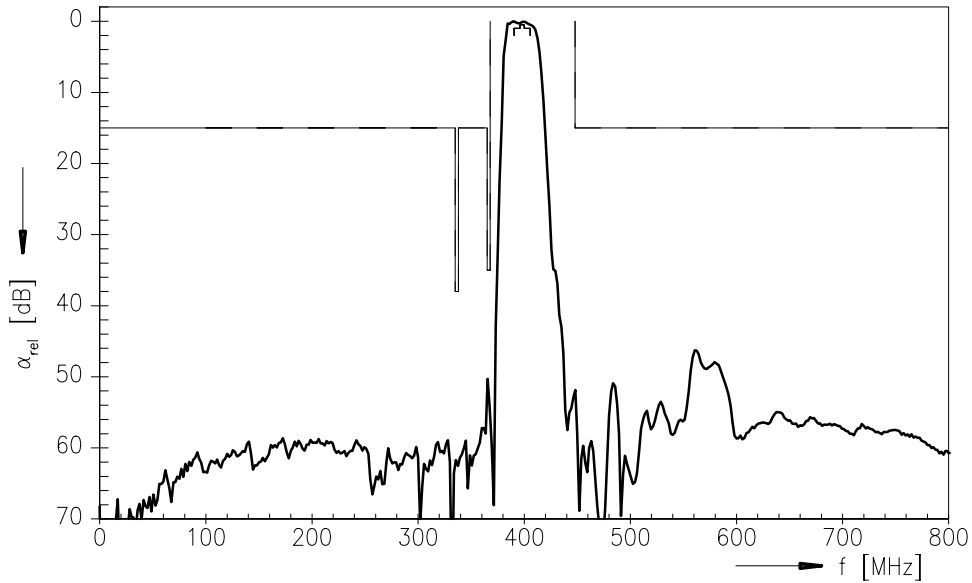

Transfer function (pass band)

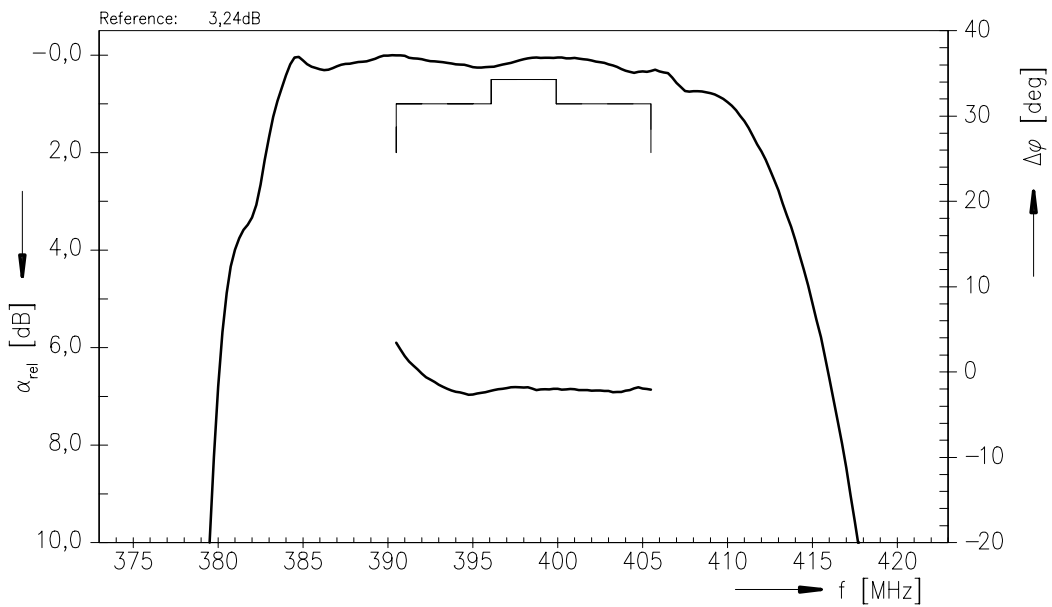



SAW Components

B5002

Low-Loss Filter

398,0 MHz

Data Sheet

Published by EPCOS AG
Surface Acoustic Wave Components Division, SAW MC
P.O. Box 80 17 09, 81617 Munich, GERMANY

© EPCOS AG 2004. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.