



SAW Components

Data Sheet B4133





SAW Components

B4133

Low-Loss Filter for Mobile Communication

1842,5 MHz

Data Sheet




Ceramic package DCC6D

Features

- Low-loss RF filter for mobile telephone PCN systems, receive path
- Low amplitude ripple
- Usable passband 75 MHz
- Unbalanced to balanced operation
- Package for **Surface Mounted Technology (SMT)**
- Ceramic SMD package

Terminals


- Ni, gold-plated

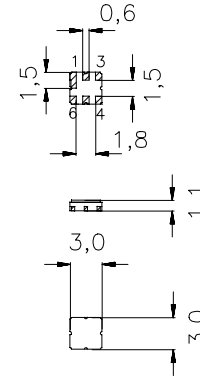

Dimensions in mm, approx. weight 0,037 g

Pin configuration

- 2 Input, unbalanced
- 4, 6 Output, balanced
- 1, 3 Input ground
- 1, 3, 5 To be grounded



Type	Ordering code	Marking and Package according to	Packing according to
B4133	B39182-B4133-U510	C61157-A7-A68	F61074-V8089-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T	- 10 / + 75	°C	
Storage temperature range	T_{stg}	- 40 / + 85	°C	
DC voltage	V_{DC}	5	V	
Input power max.	P_{IN}			source/load impedance 50Ω/50Ω
		5	dBm	peak power of GSM signal duty cycle 1:8
		0	dBm	



SAW Components

B4133

Low-Loss Filter for Mobile Communication

1842,5 MHz

Data Sheet




Characteristics

Operating Temperature Range: $T = +25 \pm 2^\circ \text{C}$
 Terminating source impedance: $Z_S = 50 \Omega$ (unbalanced)
 Terminating load impedance: $Z_L = 50 \Omega \parallel 1 \text{ pF}$ (balanced)

		min.	typ.	max.	
Center frequency	f_C	—	1842,5	—	MHz
Maximum insertion attenuation	α_{\max}	—	3,1	3,8	dB
1805,0 ... 1880,0 MHz					
Amplitude ripple (p-p)	$\Delta\alpha$	—	0,8	1,8	dB
1805,0 ... 1880,0 MHz					
Attenuation	α				dB
0,0 ... 1160,0 MHz		37	42	—	
1160,0 ... 1430,0 MHz		30	45	—	
1430,0 ... 1705,0 MHz		20	24	—	
1705,0 ... 1785,0 MHz		10	12	—	
1920,0 ... 1980,0 MHz		10	13	—	
1980,0 ... 2100,0 MHz		20	23	—	
2100,0 ... 6000,0 MHz		20	28	—	

Matching network to 50Ω load with $C_L = 1 \text{ pF}$





SAW Components

B4133

Low-Loss Filter for Mobile Communication

1842,5 MHz

Data Sheet




Characteristics

Operating Temperature Range: $T = -10$ to $+75^{\circ}\text{C}$
 Terminating source impedance: $Z_S = 50\ \Omega$ (unbalanced)
 Terminating load impedance: $Z_L = 50\ \Omega \parallel 1\ \text{pF}$ (balanced)

		min.	typ.	max.	
Center frequency	f_C	—	1842,5	—	MHz
Maximum insertion attenuation	α_{\max}	—	3,2	4,3	dB
	1805,0 ... 1880,0 MHz				
Amplitude ripple (p-p)	$\Delta\alpha$	—	0,9	2,3	dB
	1805,0 ... 1880,0 MHz				
Attenuation	α				dB
	0,0 ... 1160,0 MHz	37	42	—	dB
	1160,0 ... 1430,0 MHz	30	45	—	dB
	1430,0 ... 1705,0 MHz	20	24	—	dB
	1705,0 ... 1785,0 MHz	9	12	—	dB
	1920,0 ... 1980,0 MHz	9	12	—	dB
	1980,0 ... 2100,0 MHz	20	23	—	dB
	2100,0 ... 6000,0 MHz	20	28	—	dB

Matching network to $50\ \Omega$ load with $C_L = 1\ \text{pF}$





SAW Components

B4133


Low-Loss Filter for Mobile Communication

1842,5 MHz


Data Sheet



Transfer function

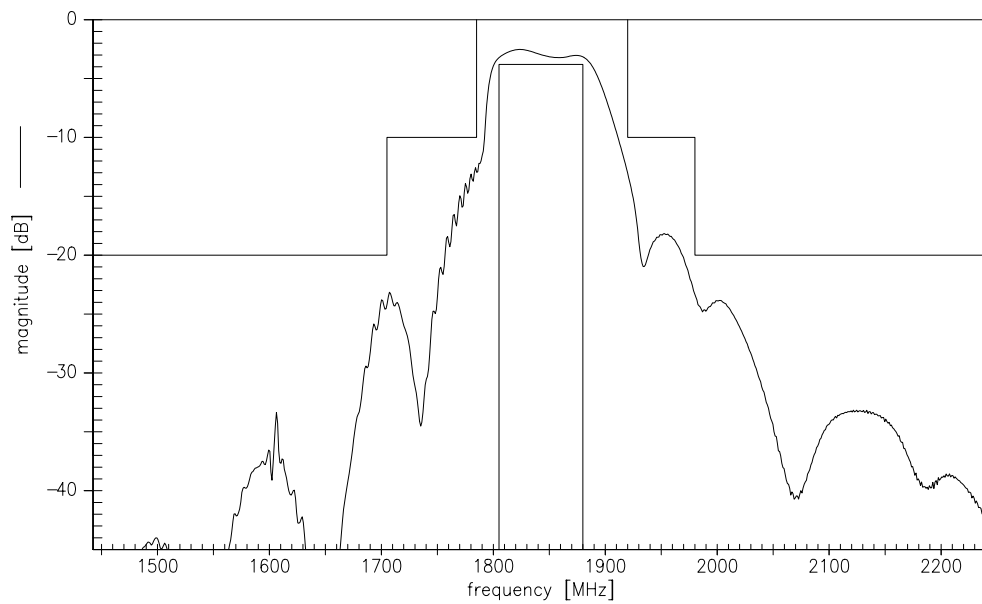

Transfer function (wide band)

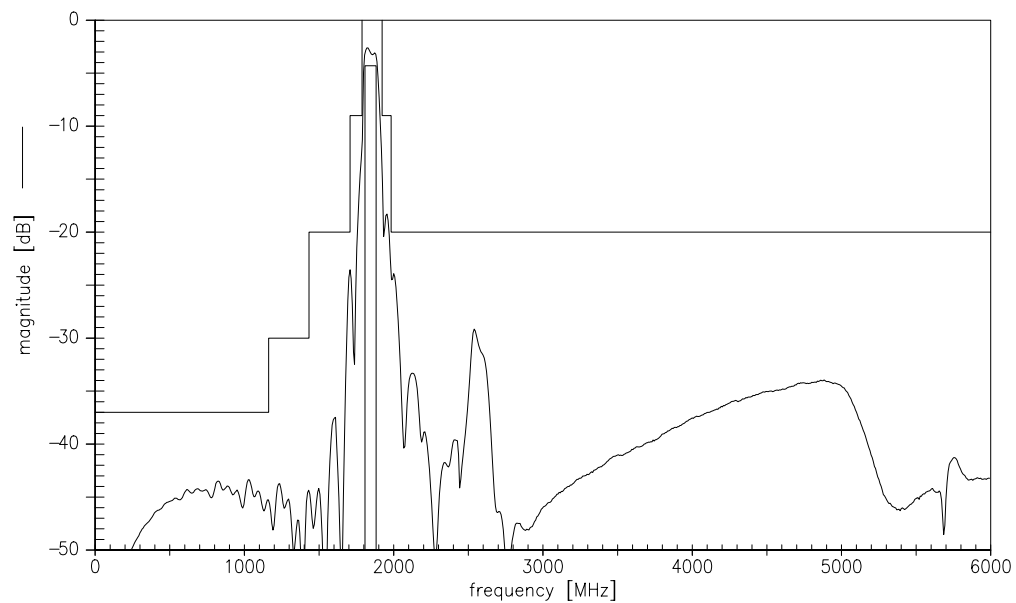



SAW Components

B4133

Low-Loss Filter for Mobile Communication

1842,5 MHz

Data Sheet



Published by EPCOS AG
Surface Acoustic Wave Components Division, OFW E MF
P.O. Box 80 17 09, D-81617 München

© EPCOS AG 1999. All Rights Reserved.

As far as patents or other rights of third parties are concerned, liability is only assumed for components per se, not for applications, processes and circuits implemented within components or assemblies.

The information describes the type of component and shall not be considered as assured characteristics.

Terms of delivery and rights to change design reserved.

For questions on technology, prices and delivery please contact the sales offices of EPCOS AG or the international representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our sales offices.