




THIS DRAWING IS UNAPPROVED FOR REVISIONS
 © SPANISH BY THE ELECTRONICS CORPORATION ALL RIGHTS RESERVED

REV	DATE	BY	CHK	APP	REVISIONS
AJ	00				DESIGN
FZ					REV PER ECO 06-03805

- △ USE WITH AMP HAND TOOL 220190-1
- △ CABLE USED WITHOUT SPACER.
- △ CABLE USED WITH SPACER.
- 4. SEE I.S. SHEET 9780

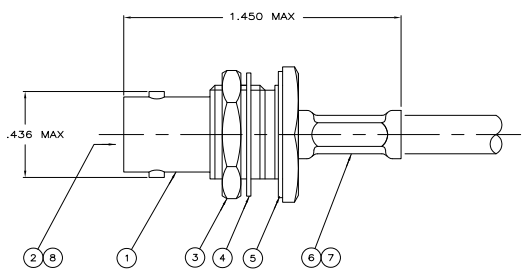


VIEW A



VIEW B

RECOMMENDED STRIP LENGTH

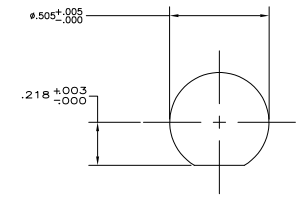

SUGGESTED PANEL CUTOUT

OBsolete	RG-58/U, 58A/U, 58B/U, 58C/U & BELDEN 88240	A	.068	.213	58465-1	-	-	9-221132-0	329633	1-329632-2	1-329631-2	413774-5	413772-1	9-413771-0
OBsolete	BELDEN 89907, 9907 & RG-141	A	.068	.213	58465-1	-	-	9-221132-0	329633	1-329632-2	1-329631-2	2-413774-5	413772-1	413771-6
OBsolete	RG-180 & RG-195	A	.068	.178	58465-3	-	-	9-413658-1	329633	1-329632-2	1-329631-2	2-413774-0	413772-3	413771-5
OBsolete	RG-179 & RG-187	A	.068	.178	58465-3	-	227194-3	9-413658-0	329633	1-329632-2	1-329631-2	2-413774-0	413772-3	413771-4
OBsolete	RG-174, RG-188 & RG-316	A	.068	.178	58465-3	-	227194-3	9-413658-0	329633	1-329632-2	1-329631-2	1-413774-5	413772-3	413771-3
OBsolete	RG-62/U, 62A/U, 62B/U	B	.068	.255	58465-1	227423-1	-	9-221132-1	329633	1-329632-2	1-329631-2	1-413774-0	413772-2	413771-2
OBsolete	RG-59/U, 59A/U, 59B/U & BELDEN 86241	A	.068	.213	58465-1	-	-	9-221132-0	329633	1-329632-2	1-329631-2	413774-5	413772-1	413771-1
OBsolete	RG-58/U, 58A/U, 58B/U, 58C/U & BELDEN 88240	A	.068	.213	58465-1	-	-	9-221132-0	329633	1-329632-2	1-329631-2	413774-5	413772-1	413771-1

FOR USE WITH CABLE	VIEW	CONTACT CRIMP (HEX)	FERRULE CRIMP (HEX)	DIE SET	SPACER QTY=1	TUBING QTY=1	FERRULE QTY=1	GASKET QTY=1	LOCKWASHER QTY=1	JAM NUT QTY=1	CONTACT QTY=1	JACK ASSEMBLY QTY=1	PART NUMBER
					8	7	6	5	4	3	2	1	

THIS DRAWING IS A CONTROLLED DOCUMENT

DESIGNED BY: J. CABOT
 DRAWN BY: J. MAGARO
 CHECKED BY: M. PHILLIPS
 APPROVED BY: M. PHILLIPS

DATE: 2/6/2007
 DRAWING NO: A100779
 REV: 0

THE ELECTRONICS CORPORATION
 HARRISBURG, PA 17105-3608
 JACK, BULKHEAD, HEX CRIMP,
 COMMERCIAL ENG