

MM58342 High Voltage Display Driver

General Description

The MM58342 is a monolithic MOS integrated circuit utilizing CMOS metal gate low threshold P- and N-channel devices. It is available both in 28-pin molded dual-in-line packages or as dice. The MM58342 is particularly suited for driving high voltage (35V max) vacuum fluorescent (VF) displays (e.g., a 20-digit alphanumeric or dot matrix display).

Applications

- COPS™ or microprocessor-driven displays
- Instrumentation readouts
- Industrial control indicator
- Digital clock, thermostat, counter, voltmeter
- Word processor text displays

- Automotive dashboards

Features

- Direct interface to high voltage display
- Serial data input
- No external resistors required
- Wide display power supply operation
- LSTTL compatible inputs
- Software compatible with NS display driver family
- Compatible with alphanumeric or dot matrix displays
- Display blanking control input
- Simple to cascade

Block Diagram

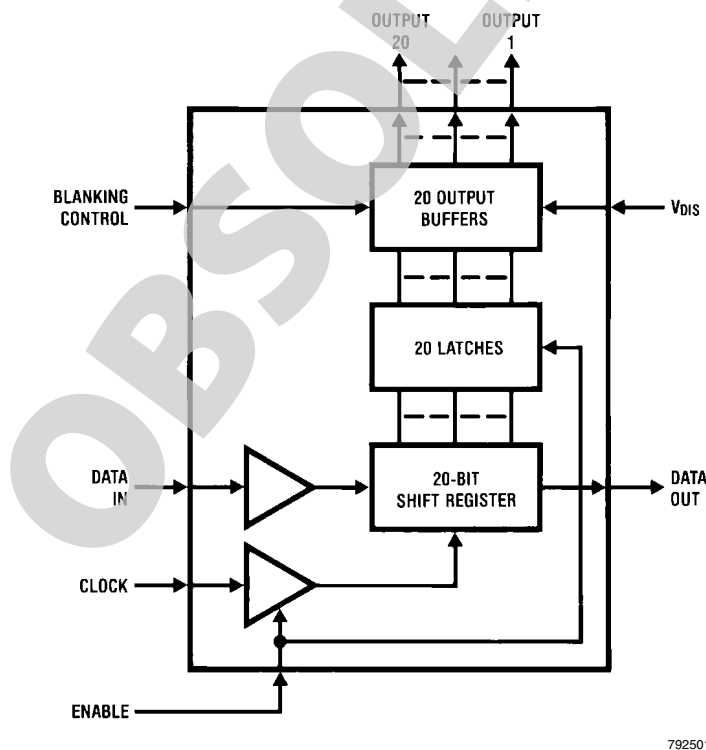


FIGURE 1.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Voltage at Any Input Pin	$V_{DD} + 0.3V$ to $V_{SS} - 0.3V$
Voltage at Any Display Pin	V_{DD} to $V_{DD} - 36.5V$ $V_{DD} + IV_{DIS}$
Storage Temperature	$-65^{\circ}C$ to $+150^{\circ}C$
Power Dissipation at $25^{\circ}C$	2.03W (Note 2)

Molded DIP Package, Socket Mount	1.83W (Note 3)
Junction Temperature	$130^{\circ}C$
Lead Temperature (Soldering, 10 sec.)	$260^{\circ}C$

Operating Conditions

	Min	Max	Units
Supply Voltage (V_{DD})	4.5	5.5	V
$V_{SS} = 0V$			
Display Voltage (V_{DIS})	-30	-10	V
Temperature Range	-40	+85	$^{\circ}C$

Electrical Characteristics $T_A = -40^{\circ}C$ to $+85^{\circ}C$, $V_{DD} = 5V \pm 0.5V$, $V_{SS} = 0V$ unless otherwise specified

Symbol	Parameter	Conditions	Min	Typ	Max	Units
I_{DD}	Power Supply Currents	$V_{IN} = V_{SS}$ or V_{DD} , $V_{SS} = 0V$, V_{DIS} Disconnected			150	μA
I_{DIS}		$V_{DD} = 5.5V$, $V_{SS} = 0V$, $V_{DIS} = -30V$ All Outputs Low			10	mA
V_{IL}	Input Logic Levels DATA IN, CLOCK ENABLE, BLANK Logic "0"				0.8	V
V_{IH}	Logic "1"	(Note 4)	2.4			V
V_{OL}	Data Output Logic Levels Logic "0"	$I_{OUT} = 400 \mu A$			0.4	V
V_{OH}	Logic "1"	$I_{OUT} = -10 \mu A$	$V_{DD} - 0.5$			V
V_{OH}	Logic "1"	$I_{OUT} = -500 \mu A$	2.8			V
I_{IN}	Input Currents DATA IN, CLOCK ENABLE, BLANK	$V_{IN} = 0V$ or V_{DD}	-10		10	μA
C_{IN}	Input Capacitance DATA IN, CLOCK ENABLE, BLANK				15	pF
R_{OFF}	Display Output Impedances Output Off (Figure 3)	$V_{DD} = 5.5V$, $V_{SS} = 0V$ $V_{DIS} = -10V$ $V_{DIS} = -20V$ $V_{DIS} = -30V$	55 60 65		250 300 400	k Ω k Ω k Ω
R_{ON}	Output On (Figure 4)	$V_{DIS} = -10V$ $V_{DIS} = -20V$ $V_{DIS} = -30V$		700 600 500	800 750 680	Ω Ω Ω
V_{DOL}	Display Output Low Voltage	$V_{DD} = 5.5V$, $I_{OUT} =$ Open Circuit, $-30V \leq V_{DIS} \leq -10V$	V_{DIS}		$V_{DIS} + 2$	V

AC Electrical Characteristics $T_A = -40^{\circ}C$ to $+85^{\circ}C$, $V_{DD} = 5V \pm 0.5V$

Symbol	Parameter	Conditions	Min	Typ	Max	Units
f_C	Clock Input Frequency	(Notes 6, 7)			800	kHz
t_H	High Time		300			ns
t_L	Low Time		300			ns
t_{DS}	Data Input Set-Up Time		100			ns
t_{DH}	Hold Time		100			ns
	Enable Input	(Note 5)				

Symbol	Parameter	Conditions	Min	Typ	Max	Units
t_{ES}	Set-Up Time		100			ns
t_{EH}	Hold Time		100			ns
t_{CDO}	Data Output Clock Low to Data Out Time	$C_L = 50 \text{ pF}$			500	ns

Note 1: Absolute Maximum Ratings indicate limits beyond which damage to the device may occur.

Note 2: Molded DIP Package, Board Mount, $\theta_{JA} = 52^\circ\text{C/W}$, derate 19.2 mW/ $^\circ\text{C}$ above 25 $^\circ\text{C}$.

Note 3: Molded DIP Package, Socket Mount, $\theta_{JA} = 58^\circ\text{C/W}$, derate 17.2 mW/ $^\circ\text{C}$ above 25 $^\circ\text{C}$.

Note 4: 74LSTTL $V_{OH} = 2.7\text{V}$ @ $I_{OUT} = -400 \mu\text{A}$, TTL $V_{OH} = 2.4\text{V}$ @ $I_{OUT} = -400 \mu\text{A}$.

Note 5: For timing purposes, the signals ENABLE and BLANK can be considered to be totally independent of each other.

Note 6: AC input waveform specification for test purposes: $t_r, t_f \leq 20 \text{ ns}$, $f = 800 \text{ kHz}$, 50% $\pm 10\%$ duty cycle.

Note 7: Clock input rise and fall times must not exceed 5 μs .

Connection Diagrams

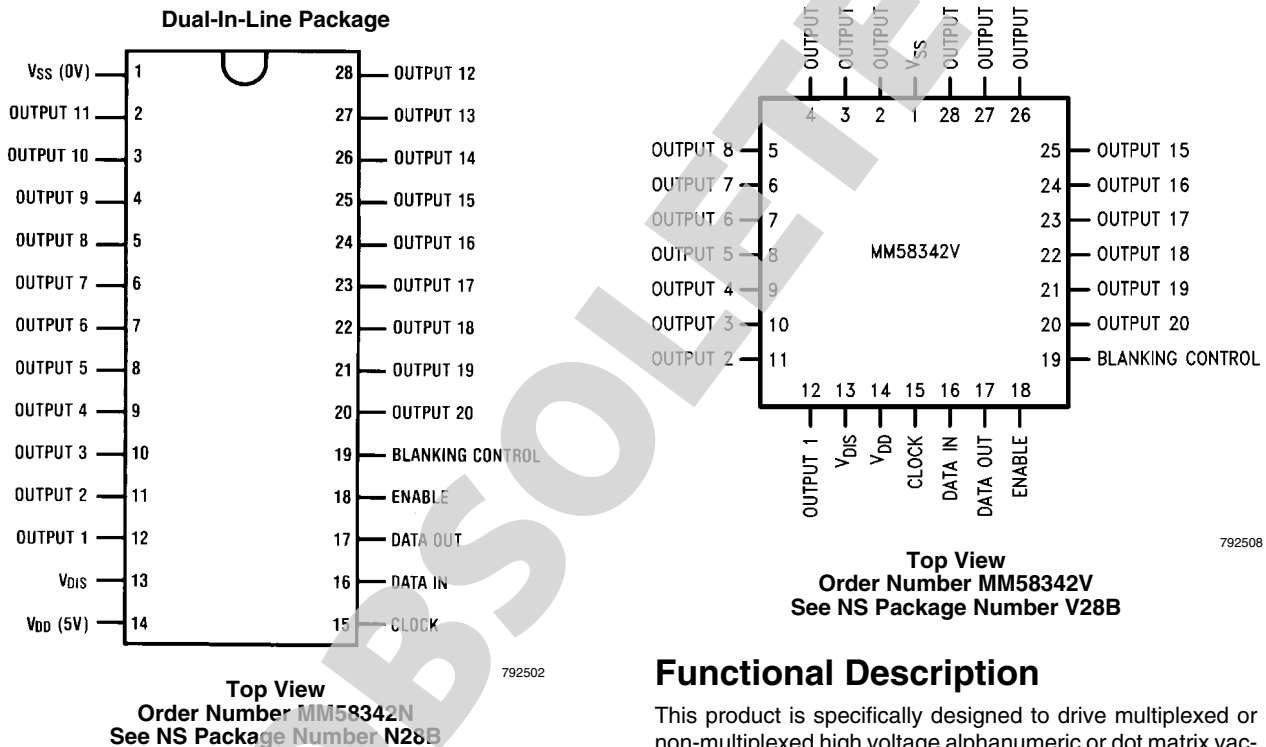


FIGURE 2.

Functional Description

This product is specifically designed to drive multiplexed or non-multiplexed high voltage alphanumeric or dot matrix vacuum fluorescent (VF) displays. Character generation is done externally in the microprocessor, with a serial data path to the display driver. The MM58342 uses three signals, DATA IN, CLOCK and ENABLE, where ENABLE acts as an external load signal. Display blanking can be achieved by means of the BLANKING CONTROL input, and a logic "1" will turn off all sections of the display. A block diagram of the MM58342 is shown in Figure 1.

Figure 2 shows the pinout of the MM58342 device, where output 1 (pin 12) is equivalent to bit 1 (i.e., the first bit of data to be loaded into the shift register following ENABLE high). A logic "1" at the input will turn on the corresponding display digit/segment/dot output.

A significant reduction in discrete board components can be achieved by use of the MM58342, because external pull-down resistors are not required. Due to the nature of the output stage, both its on and off impedance values vary as a function of the display voltage applied. However, Figures 3, 4 show that this output impedance will remain constant for a fixed value of display voltage.

Figure 5 demonstrates the critical timing requirements between CLOCK and DATA IN for the MM58342.

To clear (reset) the display driver at power on or any time, the following flushing routine may be used. With the enable signal high, clock in 20 zeroes. Drive the enable signal low and the display will be blank. It is recommended to clear the driver at power on.

In Figure 6, the ENABLE signal acts as an envelope, and only while this signal is at a logic "1" does the circuit accept CLOCK input signals. Data is transferred and shifted in the internal shift register on the rising clock edge, i.e., "0"–"1" transition. When the ENABLE signal goes low, the contents of the shift

registers are latched, and the display will show new data. During data transfer, the display will show old data. DATA OUT is also provided on the MM58342 being output on the falling edge. At any time, the display may be blanked under processor control, using the BLANKING CONTROL input.

Figure 7 shows a schematic diagram of a microprocessor-based system where the MM58342 is used to provide the grid drive for a 40-digit 2 line 5 x 7 multiplexed vacuum fluorescent (VF) display. The anode drive in this example is provided by another member of the high voltage display driver family, namely the MM58348, which does not require an extremely generated load signal.

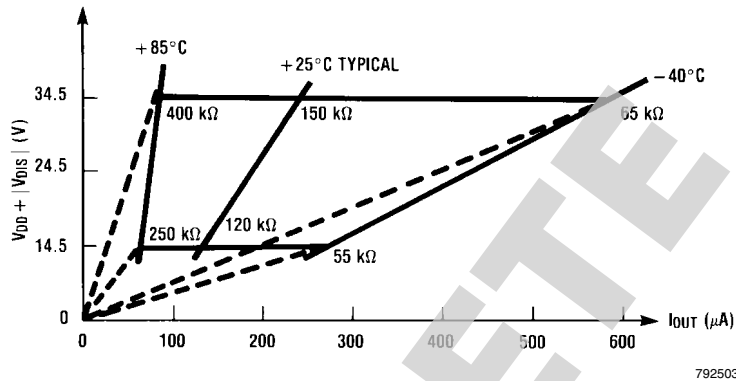


FIGURE 3. Output Impedance Off

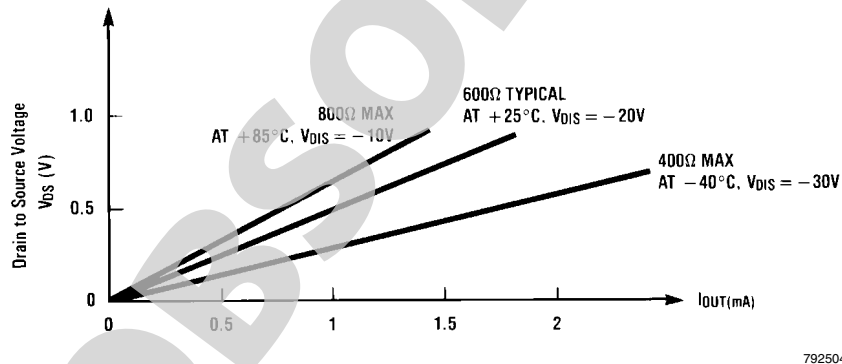


FIGURE 4. Output Impedance On

Timing Diagrams

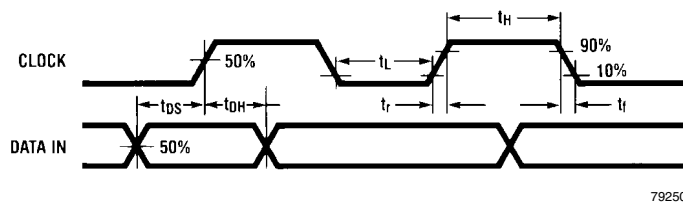


FIGURE 5. Clock and Data Timings

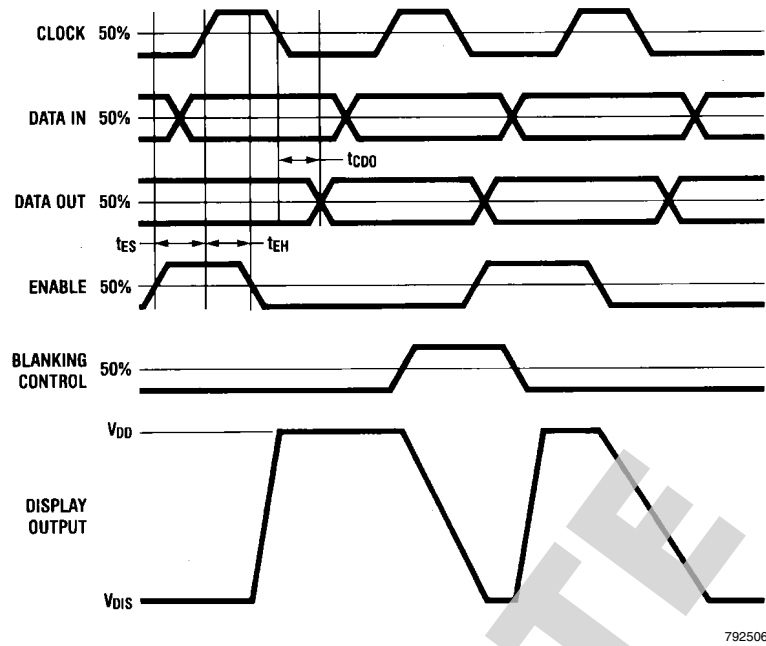


FIGURE 6. Timings (Data Format)

Typical Application


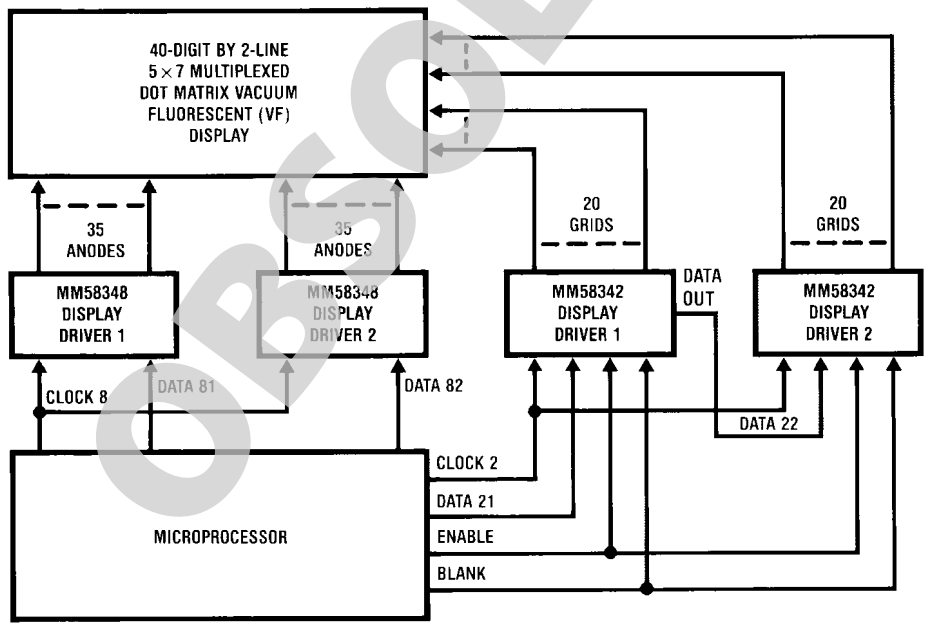


FIGURE 7. Microprocessor-Controlled Word Processor


Physical Dimensions inches (millimeters) unless otherwise noted

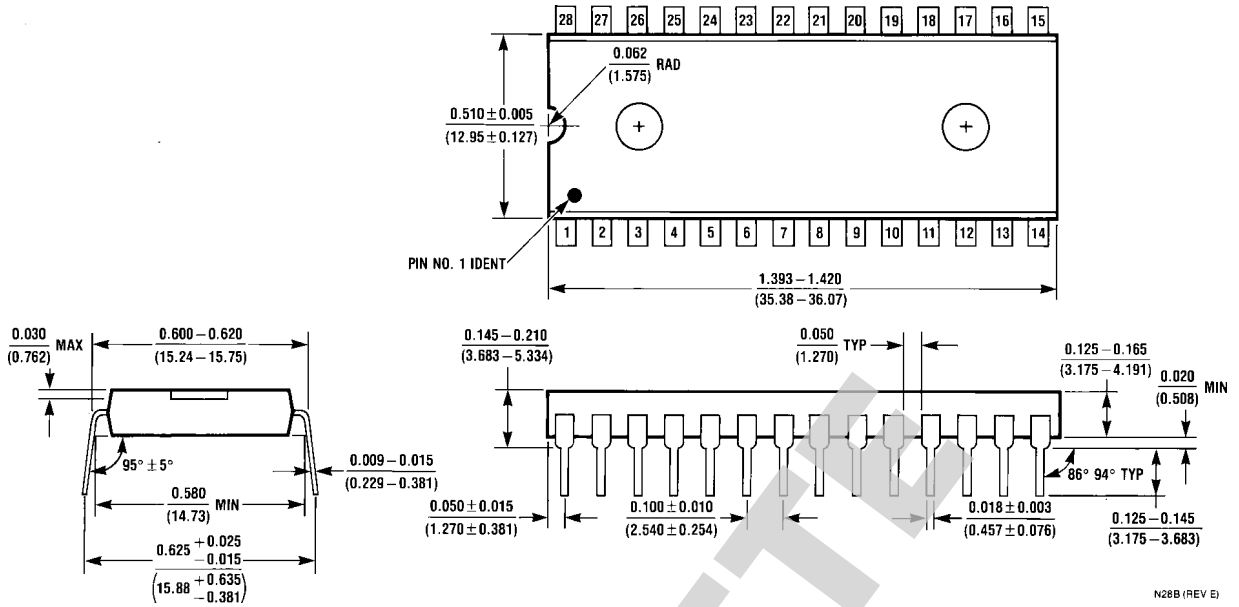

Molded Dual-In-Line Package (N)
Order Number MM58342N
NS Package Number N28B

N28B (REV E)

OBSOLETE

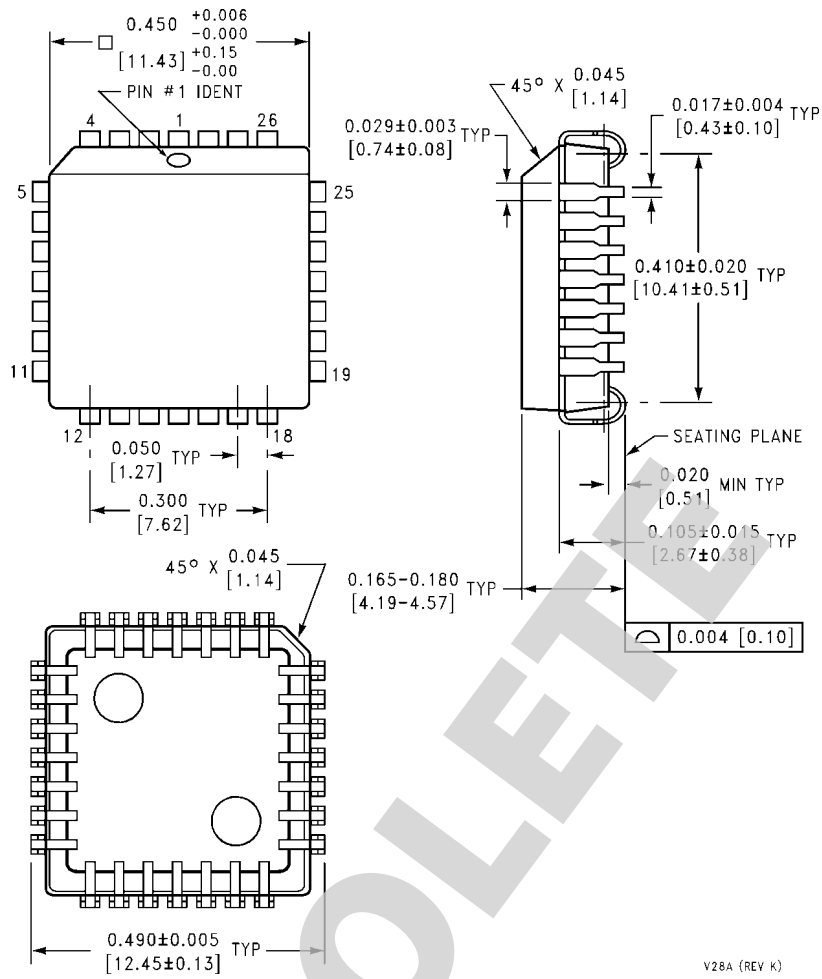

Plastic Chip Carrier (V)
 Order Number MM58342V
 NS Package Number V28A

V28A (REV K)

Notes

For more National Semiconductor product information and proven design tools, visit the following Web sites at:

Products		Design Support	
Amplifiers	www.national.com/amplifiers	WEBENCH® Tools	www.national.com/webench
Audio	www.national.com/audio	App Notes	www.national.com/appnotes
Clock and Timing	www.national.com/timing	Reference Designs	www.national.com/refdesigns
Data Converters	www.national.com/adc	Samples	www.national.com/samples
Interface	www.national.com/interface	Eval Boards	www.national.com/evalboards
LVDS	www.national.com/lvds	Packaging	www.national.com/packaging
Power Management	www.national.com/power	Green Compliance	www.national.com/quality/green
Switching Regulators	www.national.com/switchers	Distributors	www.national.com/contacts
LDOs	www.national.com/ldo	Quality and Reliability	www.national.com/quality
LED Lighting	www.national.com/led	Feedback/Support	www.national.com/feedback
Voltage Reference	www.national.com/vref	Design Made Easy	www.national.com/easy
PowerWise® Solutions	www.national.com/powerwise	Solutions	www.national.com/solutions
Serial Digital Interface (SDI)	www.national.com/sdi	Mil/Aero	www.national.com/milaero
Temperature Sensors	www.national.com/tempsensors	Solar Magic®	www.national.com/solarmagic
Wireless (PLL/VCO)	www.national.com/wireless	Analog University®	www.national.com/AU

THE CONTENTS OF THIS DOCUMENT ARE PROVIDED IN CONNECTION WITH NATIONAL SEMICONDUCTOR CORPORATION ("NATIONAL") PRODUCTS. NATIONAL MAKES NO REPRESENTATIONS OR WARRANTIES WITH RESPECT TO THE ACCURACY OR COMPLETENESS OF THE CONTENTS OF THIS PUBLICATION AND RESERVES THE RIGHT TO MAKE CHANGES TO SPECIFICATIONS AND PRODUCT DESCRIPTIONS AT ANY TIME WITHOUT NOTICE. NO LICENSE, WHETHER EXPRESS, IMPLIED, ARISING BY ESTOPPEL OR OTHERWISE, TO ANY INTELLECTUAL PROPERTY RIGHTS IS GRANTED BY THIS DOCUMENT.

TESTING AND OTHER QUALITY CONTROLS ARE USED TO THE EXTENT NATIONAL DEEMS NECESSARY TO SUPPORT NATIONAL'S PRODUCT WARRANTY. EXCEPT WHERE MANDATED BY GOVERNMENT REQUIREMENTS, TESTING OF ALL PARAMETERS OF EACH PRODUCT IS NOT NECESSARILY PERFORMED. NATIONAL ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR BUYER PRODUCT DESIGN. BUYERS ARE RESPONSIBLE FOR THEIR PRODUCTS AND APPLICATIONS USING NATIONAL COMPONENTS. PRIOR TO USING OR DISTRIBUTING ANY PRODUCTS THAT INCLUDE NATIONAL COMPONENTS, BUYERS SHOULD PROVIDE ADEQUATE DESIGN, TESTING AND OPERATING SAFEGUARDS.

EXCEPT AS PROVIDED IN NATIONAL'S TERMS AND CONDITIONS OF SALE FOR SUCH PRODUCTS, NATIONAL ASSUMES NO LIABILITY WHATSOEVER, AND NATIONAL DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY RELATING TO THE SALE AND/OR USE OF NATIONAL PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

LIFE SUPPORT POLICY


NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS PRIOR WRITTEN APPROVAL OF THE CHIEF EXECUTIVE OFFICER AND GENERAL COUNSEL OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

Life support devices or systems are devices which (a) are intended for surgical implant into the body, or (b) support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in a significant injury to the user. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system or to affect its safety or effectiveness.

National Semiconductor and the National Semiconductor logo are registered trademarks of National Semiconductor Corporation. All other brand or product names may be trademarks or registered trademarks of their respective holders.

Copyright© 2008 National Semiconductor Corporation

For the most current product information visit us at www.national.com

 **National Semiconductor Americas Technical Support Center**
Email: support@nsc.com
Tel: 1-800-272-9959

National Semiconductor Europe Technical Support Center
Email: europe.support@nsc.com
German Tel: +49 (0) 180 5010 771
English Tel: +44 (0) 870 850 4288

National Semiconductor Asia Pacific Technical Support Center
Email: ap.support@nsc.com

National Semiconductor Japan Technical Support Center
Email: jpn.feedback@nsc.com