

LM199/LM299/LM399

Precision Reference

General Description

The LM199 series are precision, temperature-stabilized monolithic zeners offering temperature coefficients a factor of ten better than high quality reference zeners. Constructed on a single monolithic chip is a temperature stabilizer circuit and an active reference zener. The active circuitry reduces the dynamic impedance of the zener to about 0.5Ω and allows the zener to operate over 0.5 mA to 10 mA current range with essentially no change in voltage or temperature coefficient. Further, a new subsurface zener structure gives low noise and excellent long term stability compared to ordinary monolithic zeners. The package is supplied with a thermal shield to minimize heater power and improve temperature regulation.

The LM199 series references are exceptionally easy to use and free of the problems that are often experienced with ordinary zeners. There is virtually no hysteresis in reference voltage with temperature cycling. Also, the LM199 is free of voltage shifts due to stress on the leads. Finally, since the unit is temperature stabilized, warm up time is fast.

The LM199 can be used in almost any application in place of ordinary zeners with improved performance. Some ideal applications are analog to digital converters, calibration standards, precision voltage or current sources or precision

power supplies. Further in many cases the LM199 can replace references in existing equipment with a minimum of wiring changes.


The LM199 series devices are packaged in a standard hermetic TO-46 package inside a thermal shield. The LM199 is rated for operation from -55°C to $+125^\circ\text{C}$ while the LM299 is rated for operation from -25°C to $+85^\circ\text{C}$ and the LM399 is rated from 0°C to $+70^\circ\text{C}$.

Features

- Guaranteed $0.0001^\circ\text{C}^{-1}$ temperature coefficient
- Low dynamic impedance — 0.5Ω
- Initial tolerance on breakdown voltage — 2%
- Sharp breakdown at $400\ \mu\text{A}$
- Wide operating current — $500\ \mu\text{A}$ to 10 mA
- Wide supply range for temperature stabilizer
- Guaranteed low noise
- Low power for stabilization — 300 mW at 25°C
- Proven reliability, low-stress packaging in TO-46 integrated-circuit hermetic package, for low hysteresis after thermal cycling. 33 million hours MTBF at $T_A = +25^\circ\text{C}$ ($T_J = +86^\circ\text{C}$)

Connection Diagram

Metal Can Package (TO-46)



00571714

Top View
NS Package Number H04D

Ordering Information

Order Number	Initial Tolerance	Ambient Temperature	Package Marking	Transport Method	NSC Package
LM199AH	$\pm 2\%$	-50°C to $+125^\circ\text{C}$	LM199AH	Box of 500	H04A
LM199AH/883	$\pm 2\%$	-50°C to $+125^\circ\text{C}$	LM199AH/Q	Tray of 20	H04A
LM299H	$\pm 2\%$	-25°C to $+85^\circ\text{C}$	LM299H	Box of 500	H04A
LM399AH	$\pm 5\%$	0°C to $+70^\circ\text{C}$	LM399AH	Box of 500	H04A
LM399H	$\pm 5\%$	0°C to $+70^\circ\text{C}$	LM399H	Box of 500	H04A

Absolute Maximum Ratings (Note 1)

Specifications for Military/Aerospace products are not contained in this datasheet. Refer to the following Reliability Electrical Test Specifications documents: MNLM199A-X and SMD#5962-88561 .

Temperature Stabilizer Voltage LM199/LM299/LM399	40V	Reference to Substrate Voltage V _(RS) (Note 2) 40V -0.1V
Reverse Breakdown Current LM199/LM299/LM399	20 mA	Operating Temperature Range LM199 -55°C to +125°C
Forward Current LM199/LM299/LM399	1 mA	LM299 -25°C to +85°C
		LM399 -0°C to +70°C
		Storage Temperature Range -55°C to +150°C
		Soldering Information TO-46 package (10 sec.) +300°C

Electrical Characteristics (Notes 3, 6)

Parameter	Conditions	LM299H			LM399H			Units
		Min	Typ	Max	Min	Typ	Max	
Reverse Breakdown Voltage	0.5 mA ≤ I _R ≤ 10 mA	6.8	6.95	7.1	6.6	6.95	7.3	V
Reverse Breakdown Voltage Change with Current	0.5 mA ≤ I _R ≤ 10 mA		6	9		6	12	mV
Reverse Dynamic Impedance	I _R = 1 mA		0.5	1		0.5	1.5	Ω
Reverse Breakdown Temperature Coefficient	-25°C ≤ T _A ≤ 85°C 0°C ≤ T _A ≤ +70°C	LM299	0.00003	0.0001				%/°C
RMS Noise	10 Hz ≤ f ≤ 10 kHz		7	20		7	50	μV
Long Term Stability	Stabilized, 22°C ≤ T _A ≤ 28°C, 1000 Hours, I _R =1 mA ± 0.1%		20			20		ppm
Temperature Stabilizer Supply Current	T _A = 25°C, Still Air, V _S = 30V T _A = -55°C		8.5 22	14 28		8.5	15	mA
Temperature Stabilizer Supply Voltage		9		40	9		40	V
Warm-Up Time to 0.05%	V _S = 30V, T _A = 25°C		3			3		sec.
Initial Turn-on Current	9 ≤ V _S ≤ 40, T _A = +25°C, (Note 4)		140	200		140	200	mA

Electrical Characteristics (Notes 3, 6)

Parameter	Conditions	LM199AH			LM399AH			Units
		Min	Typ	Max	Min	Typ	Max	
Reverse Breakdown Voltage	0.5 mA ≤ I _R ≤ 10 mA	6.8	6.95	7.1	6.6	6.95	7.3	V
Reverse Breakdown Voltage Change with Current	0.5 mA ≤ I _R ≤ 10 mA		6	9		6	12	mV
Reverse Dynamic Impedance	I _R = 1 mA		0.5	1		0.5	1.5	Ω
Reverse Breakdown Temperature Coefficient	-55°C ≤ T _A ≤ +85°C +85°C ≤ T _A ≤ +125°C 0°C ≤ T _A ≤ +70°C	LM199A	0.00002 0.0005	0.00005 0.0010		0.00003	0.0001	%/°C %/°C %/°C
RMS Noise	10 Hz ≤ f ≤ 10 kHz		7	20		7	50	μV
Long Term Stability	Stabilized, 22°C ≤ T _A ≤ 28°C, 1000 Hours, I _R =1 mA ± 0.1%		20			20		ppm
Temperature Stabilizer Supply Current	T _A = 25°C, Still Air, V _S = 30V T _A = -55°C		8.5 22	14 28		8.5	15	mA
Temperature Stabilizer Supply Voltage		9		40	9		40	V
Warm-Up Time to 0.05%	V _S = 30V, T _A = 25°C		3			3		sec.
Initial Turn-on Current	9 ≤ V _S ≤ 40, T _A = +25°C, (Note 4)		140	200		140	200	mA

Electrical Characteristics (Notes 3, 6) (Continued)

Note 1: "Absolute Maximum Ratings" indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is functional, but do not guarantee specific performance limits.

Note 2: The substrate is electrically connected to the negative terminal of the temperature stabilizer. The voltage that can be applied to either terminal of the reference is 40V more positive or 0.1V more negative than the substrate.


Note 3: These specifications apply for 30V applied to the temperature stabilizer and $-55^{\circ}\text{C} \leq T_A \leq +125^{\circ}\text{C}$ for the LM199; $-25^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$ for the LM299 and $0^{\circ}\text{C} \leq T_A \leq +70^{\circ}\text{C}$ for the LM399.

Note 4: This initial current can be reduced by adding an appropriate resistor and capacitor to the heater circuit. See the performance characteristic graphs to determine values.

Note 5: Do not wash the LM199 with its polysulfone thermal shield in TCE.


Note 6: A military data sheet is available for the LM199AH/833 and LM199AH-SMD (SMD#5962-88561) upon request.

Functional Block Diagram

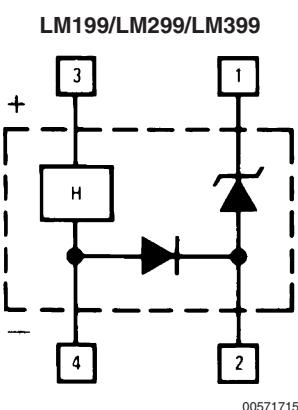


Typical Performance Characteristics

Reverse Characteristics

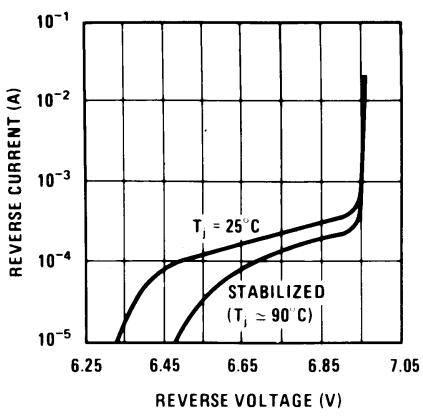


00571719

Reverse Voltage Change

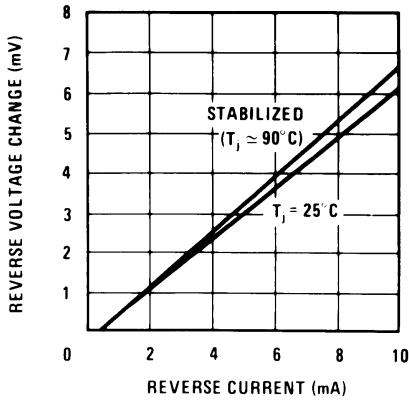


00571720

Dynamic Impedance

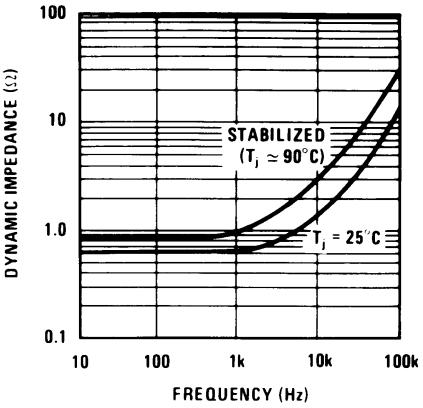


00571721

Zener Noise Voltage

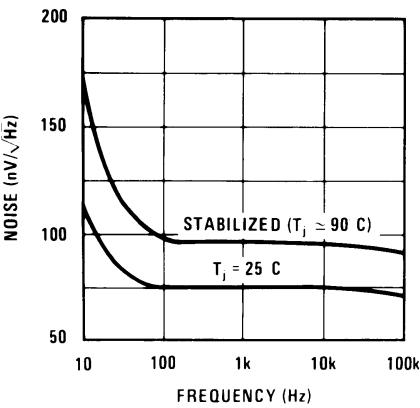


00571722

Stabilization Time

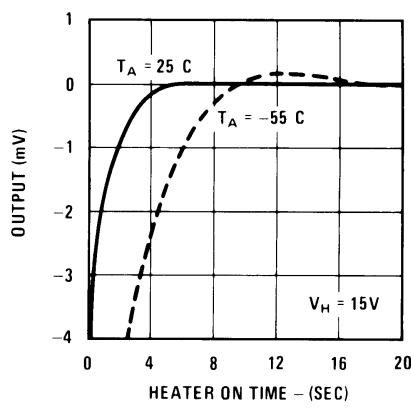

00571723


Heater Current

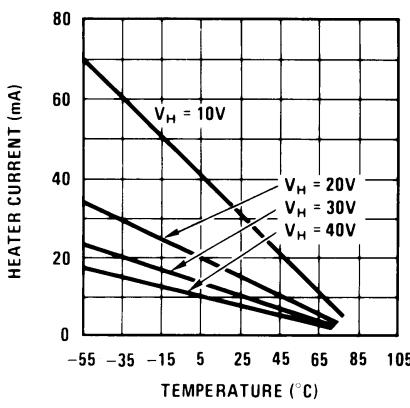

00571724


Typical Performance Characteristics (Continued)

Initial Heater Current

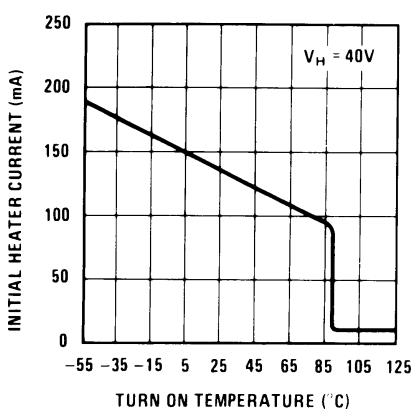


00571725

Heater Current (To Limit This Surge, See Next Graph)

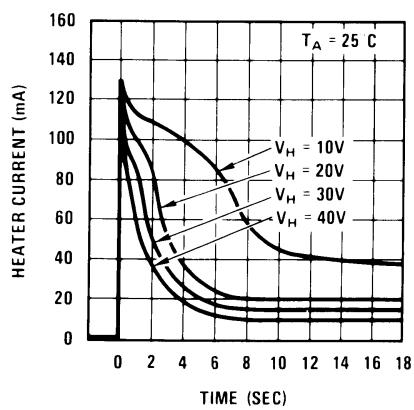

00571726


**Heater Surge Limit Resistor vs Minimum Supply Voltage
at Various Minimum Temperatures**

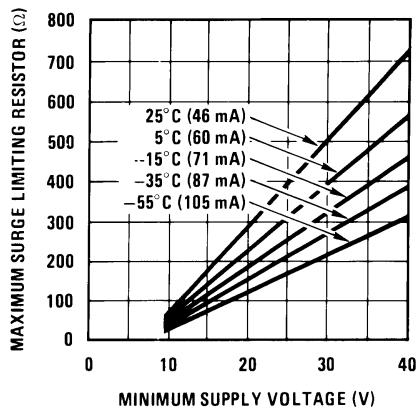

00571727


*Heater must be bypassed with a 2 μ F or larger tantalum capacitor if resistors are used.

Low Frequency Noise Voltage

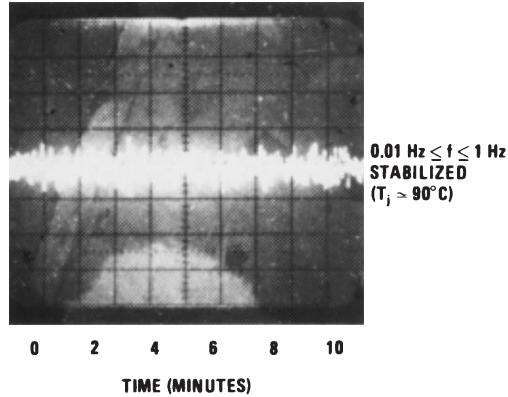

00571703


Response Time

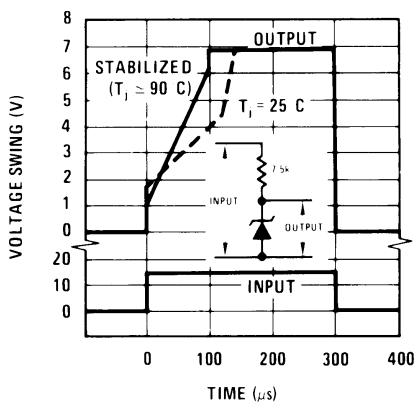

00571707


Typical Applications

Single Supply Operation




00571728

Negative Heater Supply with Positive Reference




00571730

Split Supply Operation




00571729

Buffered Reference With Single Supply

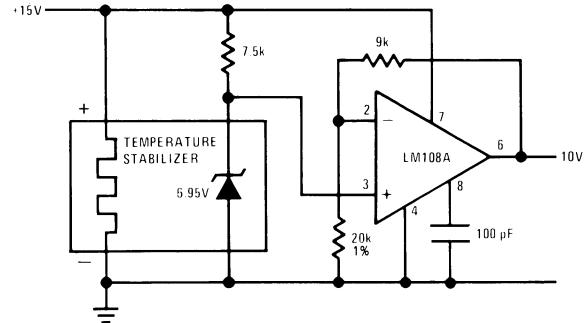

00571731


Positive Current Source

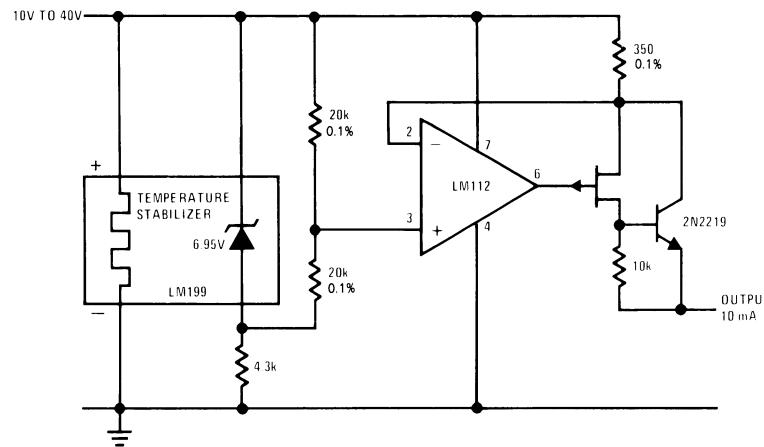

00571732


Typical Applications (Continued)

Standard Cell Replacement

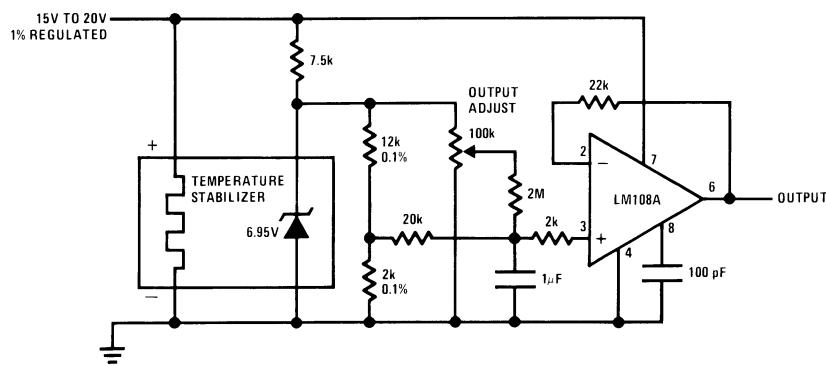


00571733

Negative Current Source

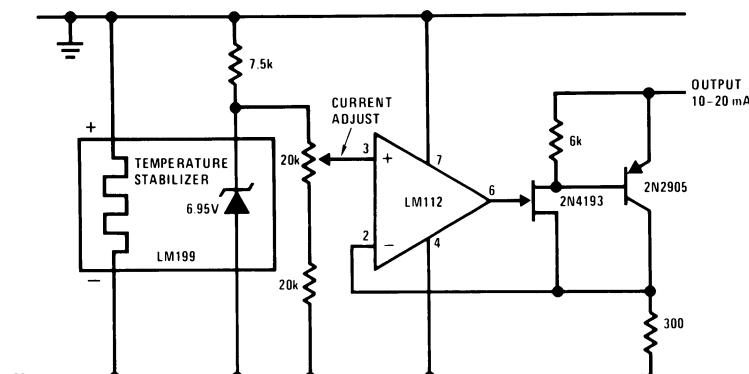


00571734

Square Wave Voltage Reference

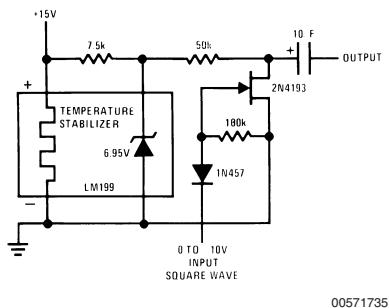

00571735

Portable Calibrator*

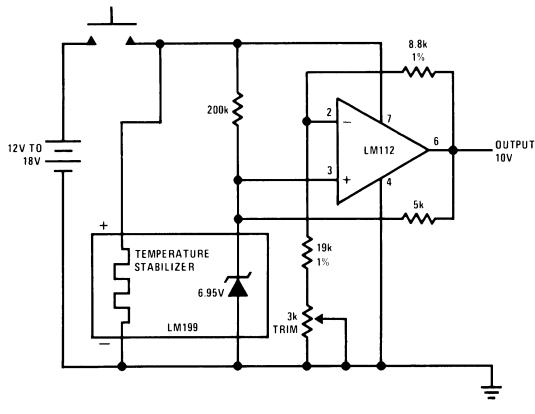


00571736

*Warm-up time 10 seconds; intermittent operation does not degrade long term stability.


Typical Applications (Continued)

14V Reference

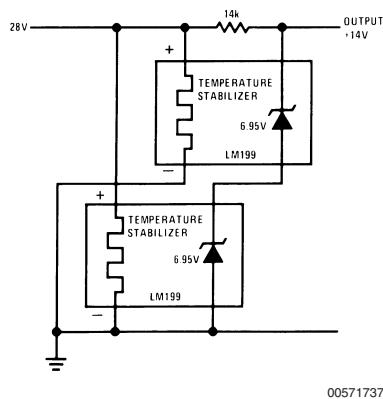

00571737


Precision Clamp*

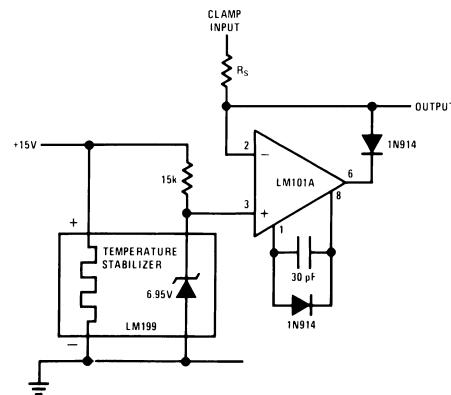

00571738


*Clamp will sink 5 mA when input goes more positive than reference

0V to 20V Power Reference

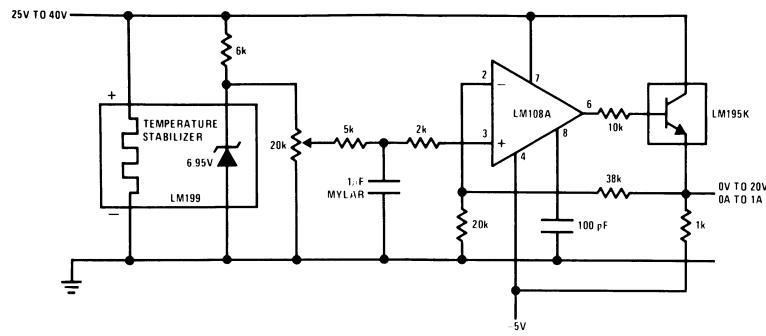

00571739


Bipolar Output Reference

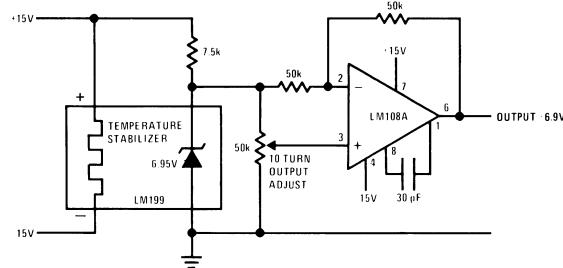

00571740


Schematic Diagrams

Temperature Stabilizer

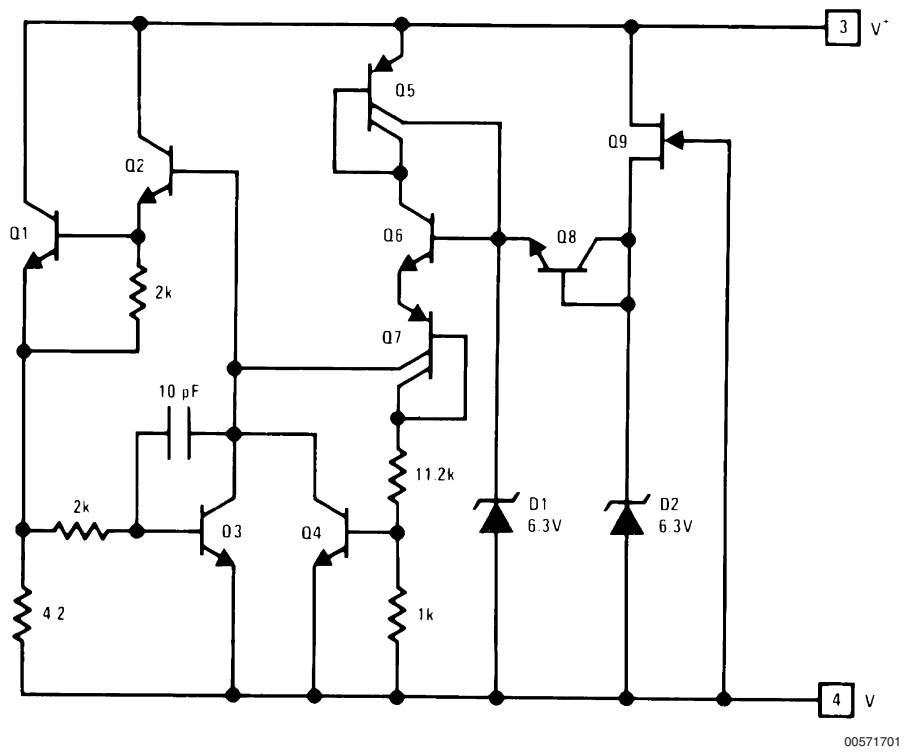

00571701

Reference

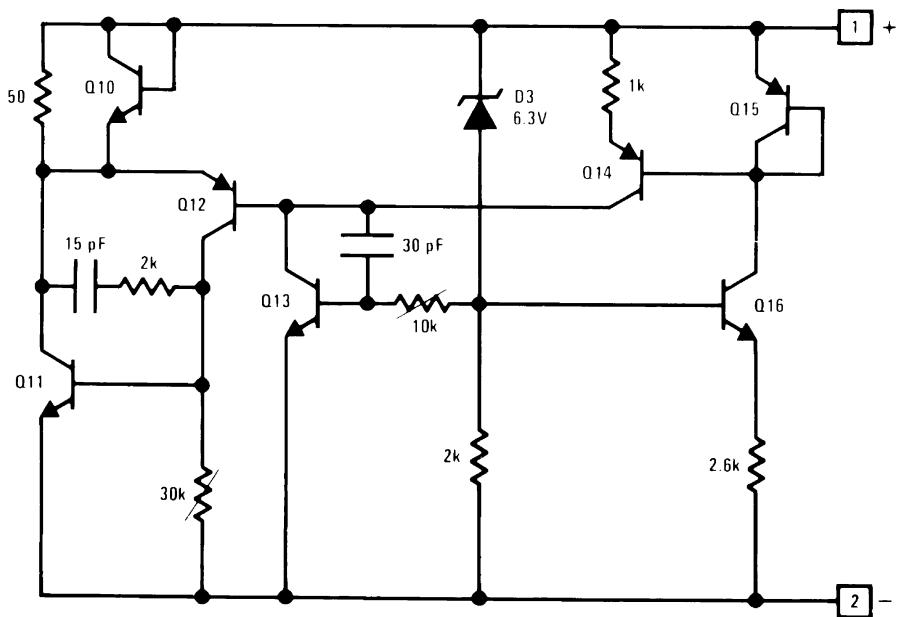


00571713

LM199/LM299/LM399 Precision Reference

Physical Dimensions inches (millimeters)

unless otherwise noted

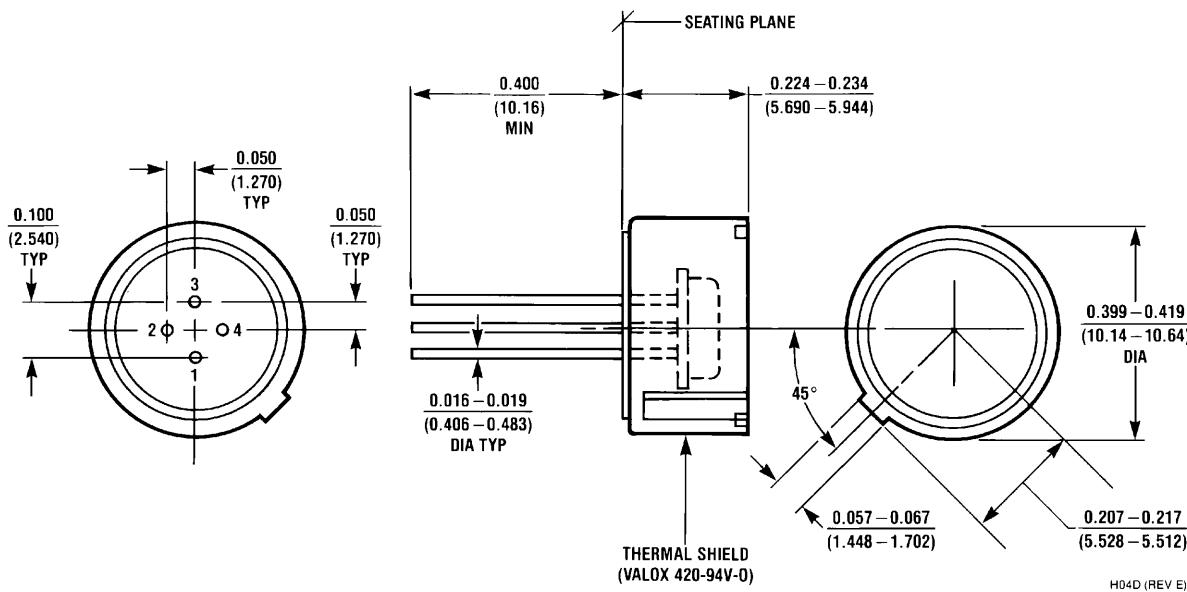

NS Package H04D

H04D (REV E)

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications.

For the most current product information visit us at www.national.com.

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT AND GENERAL COUNSEL OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

BANNED SUBSTANCE COMPLIANCE

National Semiconductor manufactures products and uses packing materials that meet the provisions of the Customer Products Stewardship Specification (CSP-9-111C2) and the Banned Substances and Materials of Interest Specification (CSP-9-111S2) and contain no "Banned Substances" as defined in CSP-9-111S2.



National Semiconductor
Americas Customer
Support Center
Email: new.feedback@nsc.com
Tel: 1-800-272-9959
www.national.com

National Semiconductor
Europe Customer Support Center
Fax: +49 (0) 180-530 85 86
Email: europe.support@nsc.com
Deutsch Tel: +49 (0) 69 9508 6208
English Tel: +44 (0) 870 24 0 2171
Français Tel: +33 (0) 1 41 91 8790

National Semiconductor
Asia Pacific Customer
Support Center
Email: ap.support@nsc.com

National Semiconductor
Japan Customer Support Center
Fax: 81-3-5639-7507
Email: jpn.feedback@nsc.com
Tel: 81-3-5639-7560