

OMRON®

OMRON NETWORK PRODUCTS

P1TX/RX4A-SX4 Interface Information & Reference Designs


ORIGINATOR:		LAST REVISED BY:		APPROVED BY:	
B. Peters		B. Peters 5/23/07			
Omron	SX4 Reference Design			DOCUMENT NO.	REV
				DOC00617	2.4
SHEET 1 OF 11					

P1xX4A-SX4-01 Reference Designs Rev 2.4

Table of Contents

1.0	Block Diagram	3
2.0	Microcontroller Circuit Design.....	3
3.0	Microcontroller Interface	4
4.0	I _{bias} and I _{mod} Settings	5
5.0	Mounting Configurations.....	7


ORIGINATOR:		LAST REVISED BY:		APPROVED BY:	
B. Peters		B. Peters 5/23/07			
Omron	SX4 Reference Design			DOCUMENT NO.	REV
				DOC00617	2.4
				SHEET 2 OF 11	

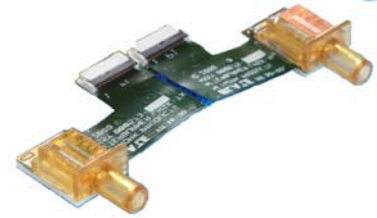

1.0 End of Life

The P1TX4A-SX4 and P1RX4A-SX4 will be replaced by the P1TX4C-SX4 and P1RX4C-SX4 in 2007. The new version will be compatible, via only change to the microcontroller code, with designs that adhere to Omron's reference design guidelines. This document only addresses the P1TX4A-SX4 and P1RX4A-SX4.

2.0 Block Diagram

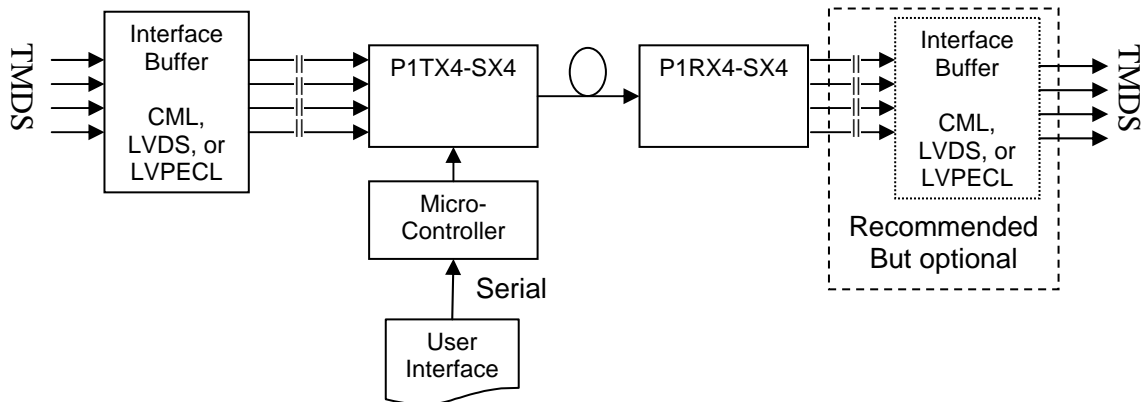


The input to the P1TX4A-SX4-01 must be AC-coupled.
The output from the P1RX4A-SX4-01 is CML.

3.0 Microcontroller Circuit Design

Within the P1TX4A-SX4, the modulation current, bias current, rise/fall time, duty cycle and temperature compensation, etc. are all programmed through a microcontroller serial interface.

Omron recommends the Atmel 8 bit ATtiny12V or ATtiny 13 microcontroller for use in interfacing with the SX4x-01 through the ZIF connector. Any equivalent microcontroller meeting the electrical and timing parameters of this microcontroller may be used.

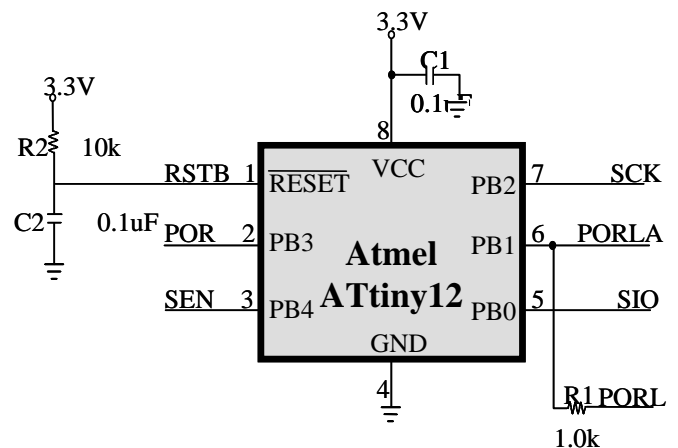


ORIGINATOR:		LAST REVISED BY:		APPROVED BY:	
B. Peters		B. Peters 5/23/07			
Omron	SX4 Reference Design			DOCUMENT NO.	REV
				DOC00617	2.4
SHEET 3 OF 11					

4.0 Microcontroller Interface

The P1TX4A-SX4 contains the AMCC S7022 laser driver that uses a three-line serial interface - serial clock (SCK), serial enable (SEN) and a bi-directional serial data input/output (SIO) - to enable the microcontroller to read/write to internal data registers. The serial clock signal is used as a reference for clocking data into and out of the serial input/output pin. The serial enable SEN enables the SCK and SIO signals. Data transfers can only occur when the serial enable line is asserted.

Data present on the serial data input/output pin is latched into a serial shift register on the rising edge of SCK. A complete data transfer is comprised of a

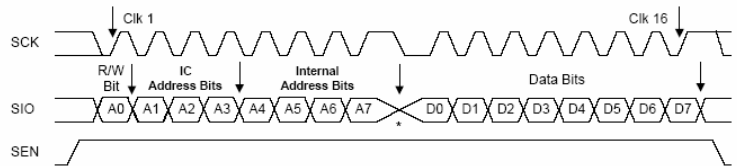

total of 16 bits. Each read or write operation requires a preamble of eight initial bits to be clocked into the serial interface, defined specifically for the SX4-Tx-01 as follows:

Function	Register Number	Address Bit				IC Address			R/W A0
		A7	A6	A5	A4	A3	A2	A1	
Laser Bias Output Current	1	0	0	0	0	1	1	1	
Laser Modulation Output Current	2	0	0	0	1	1	1	1	
Laser Modulation Current Temp coef.	3	0	0	1	0	1	1	1	
Wave Control Register 1	4	0	0	1	1	1	1	1	
Wave Control Register 2	5	0	1	0	0	1	1	1	
Wave Control Register 3	6	0	1	1	0	1	1	1	
Wave Control Register 4	7	0	1	1	1	1	1	1	
Status and Control Register	8	0	1	0	1	1	1	1	

Then, eight more bits are clocked into or out of the S7022 after the address bits. These bits contain the register data information, defined specifically for the SX4-Tx-01 as follows:

Function	Register Number	Bit							
		D7	D6	D5	D4	D3	D2	D1	D0
Laser Bias Output Current	1	0	0	I_{bias} (Section 4.0)					
Laser Modulation Output Current	2	0	0	I_{mod} (Section 4.0)					
Laser Modulation Current Tempco	3	0	0	0	1	1	0	0	0
Wave Control Register 1	4	0	0	0	0	1	1	1	1
Wave Control Register 2	5	0	0	0	1	0	0	0	0
Wave Control Register 3	6	1	1	1	1	1	1	1	1
Wave Control Register 4	7	1	1	1	1	1	1	1	1
Status and Control Register	8	1	0	0	1	1	1	1	1

ORIGINATOR:		LAST REVISED BY:		APPROVED BY:		
B. Peters		B. Peters 5/23/07				
Omron	SX4 Reference Design			DOCUMENT NO. DOC00617		REV 2.4
				SHEET 4 OF 11		

4.1 Software

To assist you in programming your microcontroller to work with Omron's OSAs, Omron can provide (upon written request) two pre-written, ready-to-load software files. The first file (s7022_tiny12.hex) is the flash file and the second file (s7022_initial_eeprom.eep) is the initial eeprom file. The initial Bias and Modulation currents in these files are set to the following values:

Bias 3.02mA → 00001011 (In Eeprom Register 40 (decimal) or 00101000 (binary))
 Mod 3.15mA → 00000111 (In Eeprom Register 41 (decimal) or 00101001 (binary))

4.2 Fuse Bits

You will also need to set the following Fuse bits:

For the ATtiny13			For the ATtiny12		
Fuse Bit	Value	State	Fuse Bit	Value	State
CKSEL0	0	default	CKSEL0	0	default
CKSEL1	1	default	CKSEL1	1	default
SUT0	0	default	CKSEL2	0	default
SUT1	1	default	CKSEL3	0	programmed
CKDIV8	0	default	RSTDISBL	1	default
WDTON	1	default	BODEN	0	programmed
EESAVE	1	default	BODLEVEL	0	default
RSTDISL	1	default	SPIEN	0	default
BODLEVEL0	1	default			
BODLEVEL1	0	programmed			
DWEN	1	default			
SELFPRGEN	1	default			

5.0 I_{bias} and I_{mod} Settings

The bias current (I_{bias}) and modulation current (I_{mod}) are parameters that must be set at that start of operation in order for the lasers to function. I_{bias} sets the drive current to ensure that it remains above the threshold current¹, yet is not so high as to reduce the transmission eye. I_{mod} sets the maximum AC signal that modulates

¹ Threshold Current: minimum current required for emission of light

ORIGINATOR:		LAST REVISED BY:		APPROVED BY:	
B. Peters		B. Peters 5/23/07			
Omron	SX4 Reference Design			DOCUMENT NO.	REV
				DOC00617	2.4
SHEET 5 OF 11					

the lasers during transmission. Because of normal variations in laser characteristics, the I_{bias} and I_{mod} setting will vary from one TOSA to the next (each P1TX4-SX4 is shipped with documentation showing its optical I_{bias} and I_{mod}). As such, Omron strongly recommends that any system using the P1TX4-SX4 should be designed to allow access to the microcontroller, and the ability to enter specific the codes for registers 1 and 2 to match the appropriate setting.

The I_{bias} and I_{mod} settings are 6-bit variables determined by converting the value (with each unit shipped) into a bit code per the table:


I_{bias}	I_{mod}	D5	D4	D3	D2	D1	D0
1.95	2.05	0	0	0	0	0	0
2.05	2.21	0	0	0	0	0	1
2.14	2.36	0	0	0	0	1	0
2.24	2.52	0	0	0	0	1	1
2.34	2.68	0	0	0	1	0	0
2.44	2.84	0	0	0	1	0	1
2.53	2.99	0	0	0	1	1	0
2.63	3.15	0	0	0	1	1	1
2.73	3.31	0	0	1	0	0	0
2.83	3.47	0	0	1	0	0	1
2.92	3.62	0	0	1	0	1	0
3.02	3.78	0	0	1	0	1	1
3.12	3.94	0	0	1	1	0	0
3.22	4.10	0	0	1	1	0	1
3.31	4.25	0	0	1	1	1	0
3.41	4.41	0	0	1	1	1	1
3.51	4.57	0	1	0	0	0	0
3.61	4.73	0	1	0	0	0	1
3.70	4.88	0	1	0	0	1	0
3.80	5.04	0	1	0	0	1	1
3.90	5.20	0	1	0	1	0	0
4.00	5.36	0	1	0	1	0	1
4.09	5.51	0	1	0	1	1	0
4.19	5.67	0	1	0	1	1	1
4.29	5.83	0	1	1	0	0	0
4.39	5.99	0	1	1	0	0	1
4.48	6.14	0	1	1	0	1	0
4.58	6.30	0	1	1	0	1	1
4.68	6.46	0	1	1	1	0	0
4.78	6.62	0	1	1	1	0	1
4.87	6.77	0	1	1	1	1	0
4.97	6.93	0	1	1	1	1	1

I_{bias}	I_{mod}	D5	D4	D3	D2	D1	D0
5.07	7.09	1	0	0	0	0	0
5.17	7.25	1	0	0	0	0	1
5.26	7.40	1	0	0	0	1	0
5.36	7.56	1	0	0	0	1	1
5.46	7.72	1	0	0	1	0	0
5.56	7.88	1	0	0	1	0	1
5.65	8.03	1	0	0	1	1	0
5.75	8.19	1	0	0	1	1	1
5.85	8.35	1	0	1	0	0	0
5.95	8.51	1	0	1	0	0	1
6.04	8.66	1	0	1	0	1	0
6.14	8.82	1	0	1	0	1	1
6.24	8.98	1	0	1	1	0	0
6.34	9.14	1	0	1	1	0	1
6.43	9.29	1	0	1	1	1	0
6.53	9.45	1	0	1	1	1	1
6.63	9.61	1	1	0	0	0	0
6.73	9.77	1	1	0	0	0	1
6.82	9.92	1	1	0	0	1	0
6.92	10.08	1	1	0	0	1	1
7.02	10.24	1	1	0	1	0	0
7.12	10.40	1	1	0	1	0	1
7.21	10.55	1	1	0	1	1	0
7.31	10.71	1	1	0	1	1	1
7.41	10.87	1	1	1	0	0	0
7.51	11.03	1	1	1	0	0	1
7.60	11.18	1	1	1	0	1	0
7.70	11.34	1	1	1	0	1	1
7.80	11.50	1	1	1	1	0	0
7.90	11.66	1	1	1	1	0	1
7.99	11.81	1	1	1	1	1	0
8.09	11.97	1	1	1	1	1	1

ORIGINATOR:		LAST REVISED BY:		APPROVED BY:	
B. Peters		B. Peters 5/23/07			
Omron	SX4 Reference Design	DOCUMENT NO.		REV	
		DOC00617		2.4	
		SHEET 6 OF 11			

6.0 Reference Design for TOSA Input Circuit

The enclosed schematics are provided as a reference design for creating an input circuit to the P1TX4A-SX4-01. **Omron highly recommends including all coupling capacitors. Excluding the coupling capacitors will jeopardize interoperability with future revisions of this product.**

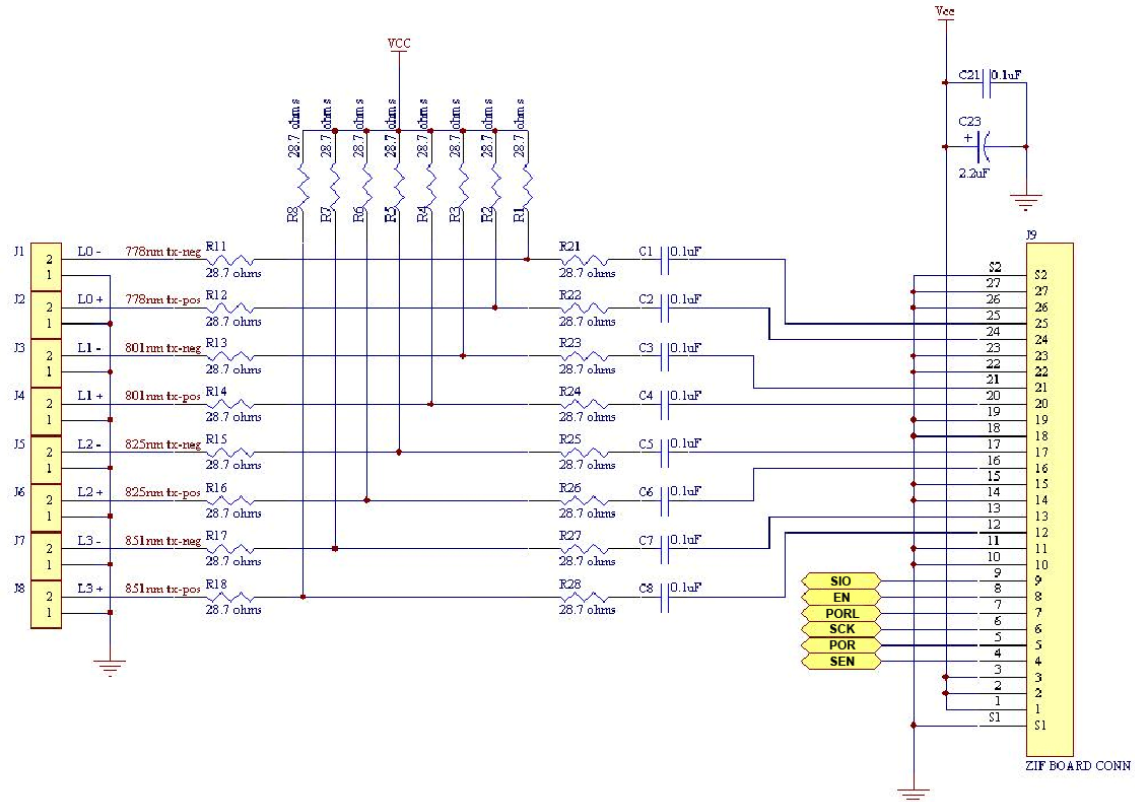


Input	R1 - R8	R11 - R18	R21 - R28	C1 - C8
LVDS	Open	Short	Short	0.1µF
LVPECL	Open	Short	Short	0.1µF
CML	Open	Short	Short	0.1µF
TMDs ²	28.7Ω	28.7Ω	28.7Ω	0.1µF

² Implementing this resistive network for TMDs will cause a 50% reduction in voltage delivered to the P1TX4C-SX4-01. Designers must ensure that regardless of the input circuit chosen, the minimum specified Differential Input Voltage (section 5 of the P1TX4A-SX4x-01 Datasheet) is achieved. A TMDs buffer chip can be installed as an alternative, which will not reduce the voltage.

ORIGINATOR:		LAST REVISED BY:		APPROVED BY:	
B. Peters		B. Peters 5/23/07			
Omron	SX4 Reference Design			DOCUMENT NO.	REV
				DOC00617	2.4
				SHEET 7 OF 11	

OMRON®


OMRON NETWORK PRODUCTS

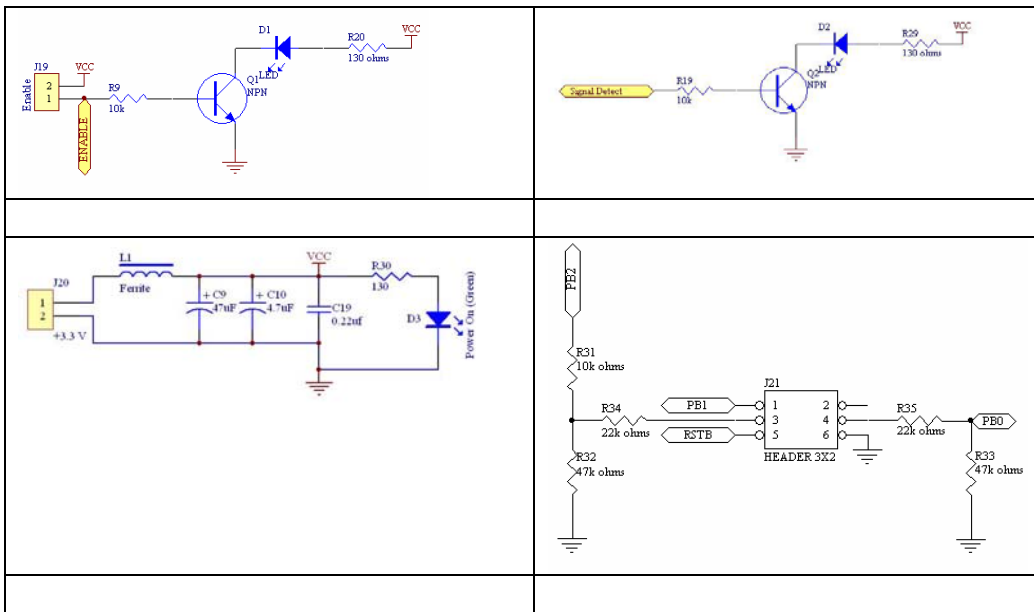

ORIGINATOR:		LAST REVISED BY:		APPROVED BY:	
B. Peters		B. Peters 5/23/07			
Omron	SX4 Reference Design			DOCUMENT NO.	REV
				DOC00617	2.4
SHEET 8 OF 11					

7.0 Reference Design for ROSA Output Circuit

Output	C11 - C18
LVDS	0.1μF
LVPECL	0.1μF
CML	Short
TMDS	Short

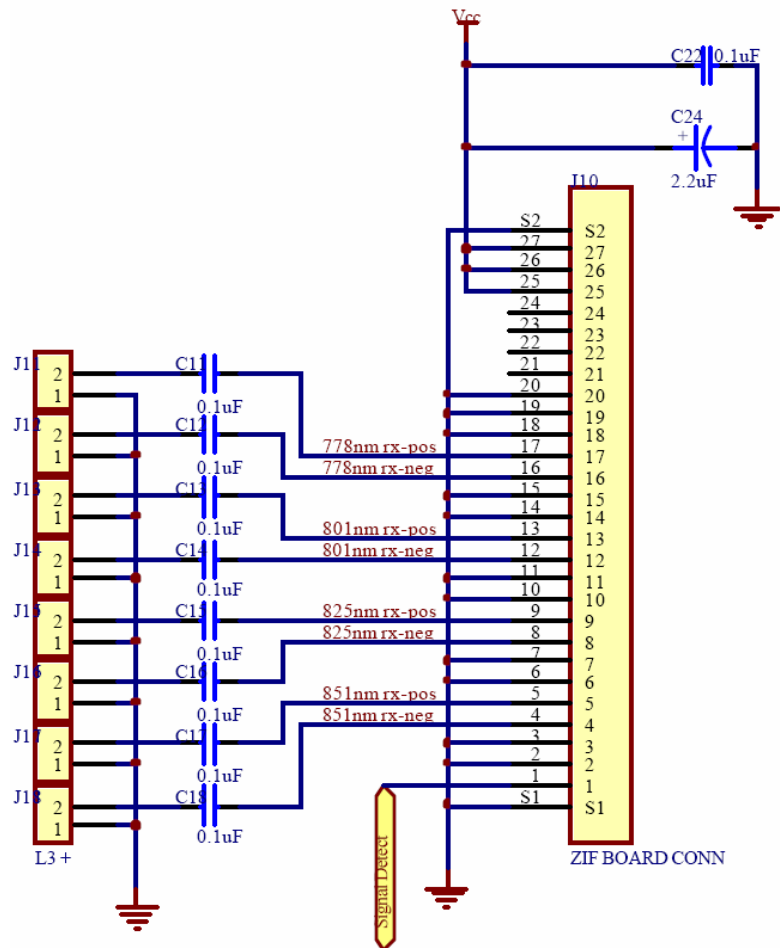


ORIGINATOR:		LAST REVISED BY:		APPROVED BY:	
B. Peters		B. Peters 5/23/07			
Omron	SX4 Reference Design	DOCUMENT NO.		REV	
		DOC00617		2.4	
SHEET 9 OF 11					

8.0 Using the Omron Connector

The following pin map can be used to assist when designing-in the Omron flex connector to be used with the Omron ROSA or TOSA. For description of pins, see the OSA data sheet.


Mating Board Pads

(Top View)




ZIF

(Top View)

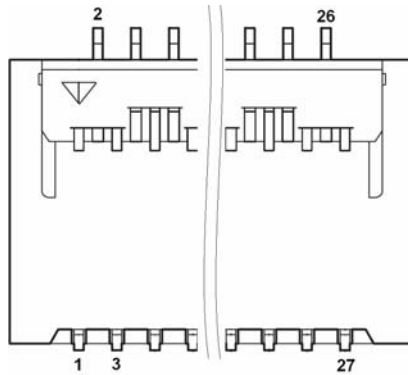

(Not to Scale)

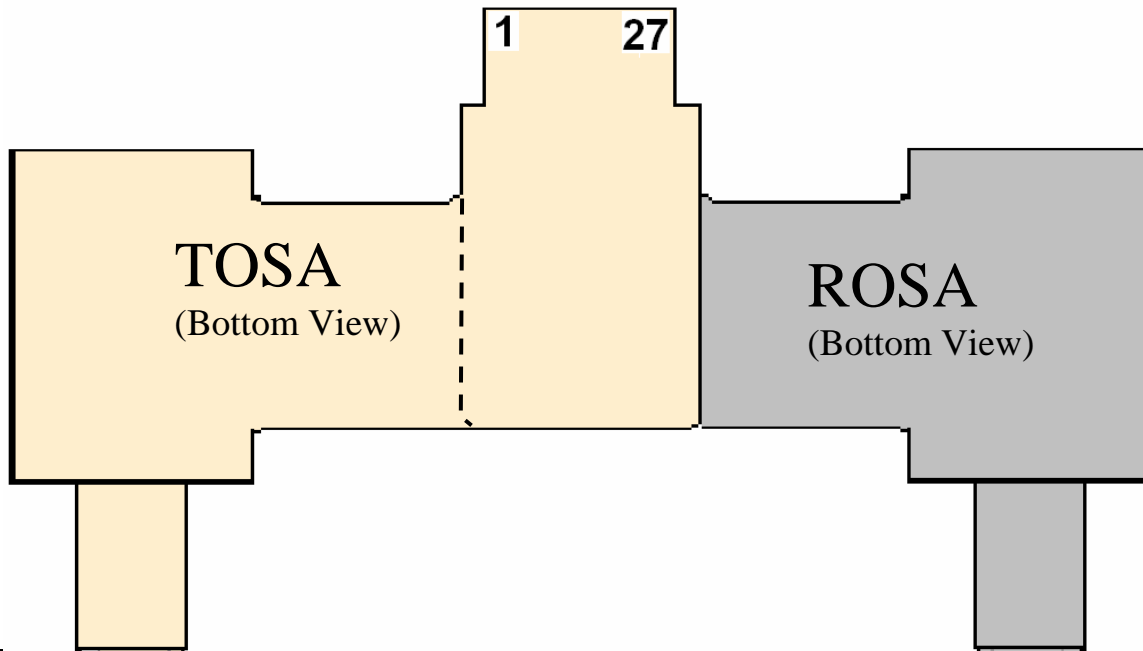

ORIGINATOR:		LAST REVISED BY:		APPROVED BY:	
B. Peters		B. Peters 5/23/07			
Omron	SX4 Reference Design			DOCUMENT NO.	REV
				DOC00617	2.4
SHEET 10 OF 11					

9.0 Mounting Configurations


Heat-sinking is critical to the life of the OSA, particularly the lasers. The OSA should be mounted upside down and in direct contact with a thermally conductive surface. The preferable surface is the main product's external metal housing, enabling heat transfer through the top of the product to the ambient environment. The two recommended configurations are:

9.1 Top Connect


For those with space available on the CDR board, the flex can be connected to the top of the main CDR board via a ZIF connector (e.g. Omron P/N XF2B-2745-31A).

9.2 Bottom-connect

For those with space constraints, the flex circuit can be connected to the bottom of the main board via the ZIF connector.

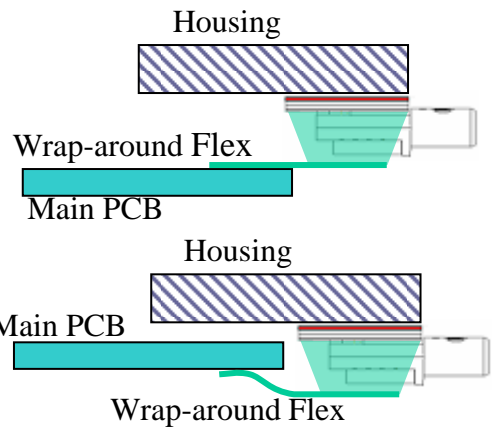

One of the unique benefits of the SX4 is that the ferrule is integrated into the OSA, eliminating the cost and complexity of a fiber pigtail and a connector sleeve. To optimize use of this feature, the OSA can be held in place by its wings and the ferrule via a clip, (example shown). By applying upward pressure to the bottom of the clip, the OSA will remain adequately seated for heat-sinking but still *float* to relieve any mechanically induced stress when the fiber is connected. In such a configuration, stress from the fiber (e.g. wiggle) will be transferred to the wing and the product housing, not the optical elements. We also strongly recommended placing a thermal pad (shown in red above) between the OSA and the heat-sink.

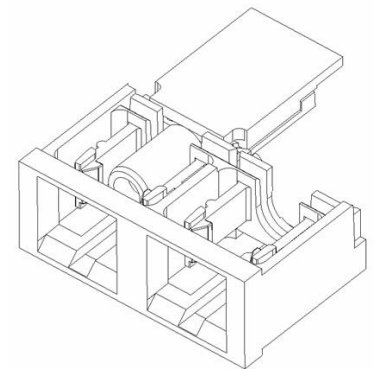

ORIGINATOR:		LAST REVISED BY:		APPROVED BY:	
B. Peters		B. Peters 5/23/07			
Omron	SX4 Reference Design			DOCUMENT NO.	REV
				DOC00617	2.4
SHEET 11 OF 11					

Omron Electronic Components, LLC

Terms and Conditions of Sales

I. GENERAL

- Definitions:** The words used herein are defined as follows.
 - Terms:** These terms and conditions
 - Seller:** Omron Electronic Components LLC and its subsidiaries
 - Buyer:** The buyer of Products, including any end user in section III through VI
 - Products:** Products and/or services of Seller
 - Including:** Including without limitation
- Offer/Acceptance:** These Terms are deemed part of all quotations, acknowledgments, invoices, purchase orders and other documents, whether electronic or in writing, relating to the sale of Products by Seller. Seller hereby objects to any Terms proposed in Buyer's purchase order or other documents which are inconsistent with, or in addition to, these Terms.
- Distributor:** Any distributor shall inform its customer of the contents after and including section III of these Terms.

II. SALES

- Prices/Payment:** All prices stated are current, subject to change without notice by Seller. Buyer agrees to pay the price in effect at the time the purchase order is accepted by Seller. Payments for Products received are due net 30 days unless otherwise stated in the invoice. Buyer shall have no right to set off any amounts against the amount owing in respect of this invoice.
- Discounts:** Cash discounts, if any, will apply only on the net amount of invoices sent to Buyer after deducting transportation charges, taxes and duties, and will be allowed only if (a) the invoice is paid according to Seller's payment terms and (b) Buyer has no past due amounts owing to Seller.
- Interest:** Seller, at its option, may charge Buyer 1.5% interest per month or the maximum legal rate, whichever is less, on any balance not paid within the stated terms.
- Orders:** Seller will accept no order less than 200 U.S. dollars net billing.
- Currencies:** If the prices quoted herein are in a currency other than U.S. dollars, Buyer shall make remittance to Seller at the then current exchange rate most favorable to Seller; provided that if remittance is not made when due, Buyer will convert the amount to U.S. dollars at the then current exchange rate most favorable to Seller available during the period between the due date and the date remittance is actually made.
- Governmental Approvals:** Buyer shall be responsible for all costs involved in obtaining any government approvals regarding the importation or sale of the Products.
- Taxes:** All taxes, duties and other governmental charges (other than general real property and income taxes), including any interest or penalties thereon, imposed directly or indirectly on Seller or required to be collected directly or indirectly by Seller for the manufacture, production, sale, delivery, importation, consumption or use of the Products sold hereunder (including customs duties and sales, excise, use, turnover and license taxes) shall be charged to and remitted by Buyer to Seller.
- Financial:** If the financial position of Buyer at any time becomes unsatisfactory to Seller, Seller reserves the right to stop shipments or require satisfactory security or payment in advance. If Buyer fails to make payment or otherwise comply with these Terms or any related agreement, Seller may (without liability and in addition to other remedies) cancel any unshipped portion of Products sold hereunder and stop any Products in transit until Buyer pays all amounts, including amounts payable hereunder, whether or not then due, which are owing to it by Buyer. Buyer shall in any event remain liable for all unpaid accounts.
- Cancellation/Etc:** Orders are not subject to rescheduling or cancellation unless Buyer indemnifies Seller fully against all costs or expenses arising in connection therewith.
- Force Majeure:** Seller shall not be liable for any delay or failure in delivery resulting from causes beyond its control, including earthquakes, fires, floods, strikes or other labor disputes, shortage of labor or materials, accidents to machinery, acts of sabotage, riots, delay in or lack of transportation or the requirements of any government authority.
- Shipping/Delivery:** Unless otherwise expressly agreed in writing by Seller:
 - All sales and shipments of Products shall be FOB shipping point (unless otherwise stated in writing by Seller), at which point title to and all risk of loss of the Products shall pass from Seller to Buyer, provided that Seller shall retain a security interest in the Products until the full purchase price is paid by Buyer;
 - Delivery and shipping dates are estimates only; and
 - Seller will package Products as it deems proper for protection against normal handling and extra charges apply to special conditions.
- Claims:** Any claim by Buyer against Seller for shortage or damage to the Products occurring before delivery to the carrier or any claim related to pricing or other charges must be presented in detail in writing to Seller within 30 days of receipt of shipment.

III. PRECAUTIONS

- Suitability:** IT IS THE BUYER'S SOLE RESPONSIBILITY TO ENSURE THAT ANY OMRON PRODUCT IS FIT AND SUFFICIENT FOR USE IN A MOTORIZED VEHICLE APPLICATION. BUYER SHALL BE SOLELY RESPONSIBLE FOR DETERMINING APPROPRIATENESS OF THE PARTICULAR PRODUCT WITH RESPECT TO THE BUYER'S APPLICATION INCLUDING (A) ELECTRICAL OR ELECTRONIC COMPONENTS, (B) CIRCUITS, (C) SYSTEM ASSEMBLIES, (D) END PRODUCT, (E) SYSTEM, (F) MATERIALS OR SUBSTANCES OR (G) OPERATING ENVIRONMENT. Buyer acknowledges that it alone has determined that the Products will meet their requirements of the intended use in all cases. Buyer must know and observe all prohibitions of use applicable to the Product/s.
- Use with Attention:** The followings are some examples of applications for which particular attention must be given. This is not intended to be an exhaustive list of all possible use of any Product, nor to imply that any use listed may be suitable for any Product:
 - Outdoor use, use involving potential chemical contamination or electrical interference.
 - Use in consumer Products or any use in significant quantities.

- Energy control systems, combustion systems, railroad systems, aviation systems, medical equipment, amusement machines, vehicles, safety equipment, and installations subject to separate industry or government regulations.
 - Systems, machines, and equipment that could present a risk to life or property.
- Prohibited Use:** NEVER USE THE PRODUCT FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE PRODUCT IS PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.
 - Motorized Vehicle Application:** USE OF ANY PRODUCT/S FOR A MOTORIZED VEHICLE APPLICATION MUST BE EXPRESSLY STATED IN THE SPECIFICATION BY SELLER.
 - Programmable Products:** Seller shall not be responsible for the Buyer's programming of a programmable Product.

IV. WARRANTY AND LIMITATION

- Warranty:** Seller's exclusive warranty is that the Products will be free from defects in materials and workmanship for a period of twelve months from the date of sale by Seller (or such other period expressed in writing by Seller). SELLER MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, ABOUT ALL OTHER WARRANTIES, NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OF THE PRODUCTS.
- Buyer Remedy:** Seller's sole obligation hereunder shall be to replace (in the form originally shipped with Buyer responsible for labor charges for removal or replacement thereof) the non-complying Product or, at Seller's election, to repay or credit Buyer an amount equal to the purchase price of the Product; provided that there shall be no liability for Seller or its affiliates unless Seller's analysis confirms that the Products were correctly handled, stored, installed and maintained and not subject to contamination, abuse, misuse or inappropriate modification. Return of any Products by Buyer must be approved in writing by Seller before shipment.
- Limitation on Liability:** SELLER AND ITS AFFILIATES SHALL NOT BE LIABLE FOR SPECIAL, INDIRECT, INCIDENTAL OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR PRODUCTION OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED IN CONTRACT, WARRANTY, NEGLIGENCE OR STRICT LIABILITY. FURTHER, IN NO EVENT SHALL LIABILITY OF SELLER OR ITS AFFILIATES EXCEED THE INDIVIDUAL PRICE OF THE PRODUCT ON WHICH LIABILITY IS ASSERTED.
- Indemnities:** Buyer shall indemnify and hold harmless Seller, its affiliates and its employees from and against all liabilities, losses, claims, costs and expenses (including attorney's fees and expenses) related to any claim, investigation, litigation or proceeding (whether or not Seller is a party) which arises or is alleged to arise from Buyer's acts or omissions under these Terms or in any way with respect to the Products.

V. INFORMATION; ETC.

- Intellectual Property:** The intellectual property embodied in the Products is the exclusive property of Seller and its affiliates and Buyer shall not attempt to duplicate it in any way without the written permission of Seller. Buyer (at its own expense) shall indemnify and hold harmless Seller and defend or settle any action brought against Seller to the extent that it is based on a claim that any Product made to Buyer specifications infringed intellectual property rights of another party.
- Property/Confidentiality:** Notwithstanding any charges to Buyer for engineering or tooling, all engineering and tooling shall remain the exclusive property of Seller. All information and materials supplied by Seller to Buyer relating to the Products are confidential and proprietary, and Buyer shall limit distribution thereof to its trusted employees and strictly prevent disclosure to any third party.
- Performance Data:** Performance data is provided as a guide in determining suitability and does not constitute a warranty. It may represent the result of Seller's test conditions, and the users must correlate it to actual application requirements.
- Change In Specifications:** Product specifications and descriptions may be changed at any time based on improvements or other reasons. It is Seller's practice to change part numbers when published ratings or features are changed, or when significant engineering changes are made. However, some specifications of the Product may be changed without any notice.
- Errors And Omissions:** The information on Seller's website or in other documentation has been carefully checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical or proofreading errors or omissions.
- Export Controls:** Buyer shall comply with all applicable laws, regulations and licenses regarding (a) export of the Products or information provided by Seller; (b) sale of Products to forbidden or other proscribed persons or organizations; (c) disclosure to non-citizens of regulated technology or information.

VI. MISCELLANEOUS

- Waiver:** No failure or delay by Seller in exercising any right and no course of dealing between Buyer and Seller shall operate as a waiver of rights by Seller.
- Assignment:** Buyer may not assign its rights hereunder without Seller's written consent.
- Law:** These Terms are governed by Illinois law (without regard to conflict of laws). Federal and state courts in Cook County, Illinois have exclusive jurisdiction for any dispute hereunder.
- Amendment:** These Terms constitute the entire agreement between Buyer and Seller relating to the Products, and no provision may be changed or waived unless in writing signed by the parties.
- Severability:** If any provision hereof is rendered ineffective or invalid, such provision shall not invalidate any other provision.