

NON-ISOLATED DC/DC CONVERTERS

4.5V-14V Input

0.75V-3.63V/16A Output



S7BC-16E2AX Series PRELIMINARY

- Non-Isolated
- High Efficiency
- High Power Density
- Excellent Thermal Performance
- Low Cost
- Flexible Output Voltage Sequencing (option)
- Able to Sink & Source Current
- Industrial Temperature Range
- Under-voltage Lockout (UVLO)
- Over Temperature Protection
- OCP/SCP
- Wide Input
- Wide Trim
- Remote On/Off
- Active Low/High (option)
- Remote Sense

Description

The Bel S7BC-16E2AX is part of the non-isolated dc to dc converter Power Module series. The modules use a SMT package. These converters are available in a range of output voltages from 0.75V to 3.63V over a wide range of input voltage ($V_{in} = 4.5V-14V$). The Bel S7BC-16E2AX has a sequencing feature that enables designers to implement various types of output voltage sequencing when powering. The efficiency is typically 92% at 3.3V output at full load.

Part Selection

Output Voltage	Input Voltage	Max. Output Current	Max. Output Power	Typical Efficiency	Model Number Active Low	Model Number Active High
0.75 – 3.63V	4.5V – 14V	16A	58W	92%	S7BC-16E2AL	S7BC-16E2A0

Note: Add “G” suffix at the end of the model number to indicate Tray Packaging.

Absolute Maximum Ratings

Parameter	Min	Typ	Max	Notes
Input Voltage (continuous)	-0.3V	-	15V	
Output Enable Terminal Voltage	-0.3V	-	15V	
Sequencing Voltage ¹	-0.3V	-	V_{in}	
Ambient Temperature	-40°C	-	85°C	
Storage Temperature	-55°C	-	125°C	

Notes: All specifications are typical at 25°C unless otherwise stated.

1. S7BC-16E2AX series of modules include a sequencing feature that enables users to implement various types of output voltage sequencing in their applications. This is accomplished via an additional sequencing pin. When not using the sequencing feature, either, tie the SEQ pin to V_{in} or leave it unconnected.

NON-ISOLATED DC/DC CONVERTERS

4.5V-14V Input

0.75V-3.63V/16A Output



Input Specifications

Parameter	Min	Typ	Max	Notes
Input Voltage	4.5V	-	14V	
Input Current (full load)	-	-	15A	
Input Current (no load)	-	100mA	-	
Remote Off Input Current	-	2mA	-	
Input Reflected Ripple Current (pk-pk)	-	-	400mA	Tested with one 1000uF/25V AL input capacitor with ESR=0.03 ohm max and 6 × 47uF/16V tan capacitors with ESR=0.013 ohm max at 100KHz, & simulated source impedance of 1000nH, 5Hz to 20MHz.
Input Reflected Ripple Current (RMS)	-	-	150mA	
I^2t Inrush Current Transient	-	0.2A ² s	0.4A ² s	
Turn-on Voltage Threshold	-	4.2V	-	
Turn-off Voltage Threshold	3.7V	-	4.2V	

Output Specifications

Parameter	Min	Typ	Max	Notes	
Output Voltage Set Point	-2%Vo,set	-	2%Vo,set	Vin=12V, full load	
Load Regulation	-	0.1%Vo,set	-	Io=Io, min to Io, max	
Line Regulation	-	0.1%Vo,set	-	Vin=Vin, min to Vin, max	
Regulation Over Temperature (-40°C to +85°C)	-	0.3%Vo,set	-	Tref=Ta, min to Ta, max	
Output Current	0A	-	16A		
Current Limit Threshold	-	180% Io,out	-		
Short Circuit Surge Transient	-	1A ² s	3A ² s		
Ripple and Noise (pk-pk)	-	30mV	75mV	Tested with 0-20MHz, 10uF tantalum capacitor & 1uF TDK ceramic capacitor at the output	
Ripple and Noise (RMS)	-	12mV	30mV		
Turn on Time	-	8mS	15mS		
Overshoot at Turn on	0%Vo,set	-	1%Vo,set		
Output Capacitance	0uF	-	5000uF	ESR ≥ 10mohm	
Transient Response					
50% ~ 100% Max Load	All	-	150mV	-	di/dt=2.5A/uS; Vin=12V; and with 2 × 150uF polymer capacitors at the output
Settling Time		-	50uS	-	
100% ~ 50% Max Load		-	150mV	-	
Settling Time		-	50uS	-	

Note: All specifications are typical at nominal input, full load at 25°C unless otherwise stated.

NON-ISOLATED DC/DC CONVERTERS

4.5V-14V Input

0.75V-3.63V/16A Output



General Specifications

Parameter	Min	Typ	Max	Notes	
Efficiency	Vo=3.3V	-	92%	-	Measured at Vin=12V, full load
	Vo=2.5V	-	90%	-	
	Vo=1.8V	-	88%	-	
	Vo=1.5V	-	87%	-	
	Vo=1.2V	-	85%	-	
	Vo=0.75V	-	79%	-	
Efficiency	Vo=3.3V	-	92%	-	Measured at Vin=5V, full load
	Vo=2.5V	-	90%	-	
	Vo=1.8V	-	87%	-	
	Vo=1.5V	-	86%	-	
	Vo=1.2V	-	83%	-	
	Vo=0.75V	-	78%	-	
Switching Frequency	200KHz	230KHz	260KHz		
Over Temperature Shutdown ¹	-	130°C	-		
Output Trim Range (Wide Trim)	0.7525V	-	3.63V		
Remote Sense Compensation	-	-	0.5V		
Dimensions					
Inches (L x W x H)	1.30 x 0.53 x 0.315				
Millimeters (L x W x H)	33.02 x 13.46 x 8.00				
Weight	-	8g	-		

Note: All specifications are typical at 25°C unless otherwise stated.

Control Specifications

Parameter	Min	Typ	Max	Notes
Remote On/Off				
Signal Low (Unit Off)	-0.2V	-	0.3V	S7BC-16E2A0; Remote On/Off pin open, Unit on.
Signal High (Unit On)	-	-	Vin, max	
Signal Low (Unit On)	-0.2V	-	0.3V	S7BC-16E2AL; Remote On/Off pin open, Unit on.
Signal High (Unit Off)	2.5V	-	Vin, max	
Voltage Sequencing				
Sequencing Slew Rate Capability	-	-	2V/mS	
Sequencing Delay Time	-	15mS	25mS	Delay from Vin, min to application of voltage on SEQ pin
Tracking Accuracy	Power-Up	-	100mV	200mV
	Power-Down	-	200mV	400mV

NON-ISOLATED DC/DC CONVERTERS

4.5V-14V Input


0.75V-3.63V/16A Output

bel
POWER PRODUCTS

Output Trim Equations


Equation for calculating the trim resistor (in Ω) given the desired output voltage (V_o) is shown below. The Trim Up resistor should be connected between the Trim pin and Ground.

$$R_{TrimUp} = \frac{10500}{V_o - 0.7525} - 1000$$

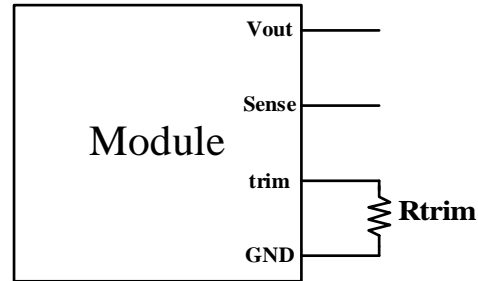

Equation for calculating the trim voltage (in V) given the desired output voltage (V_o) is shown below. The Trim Up voltage should be connected between the Trim pin and Ground.



$$V_{TrimUp} = 0.7 - 0.0667 \times (V_o - 0.7525)$$

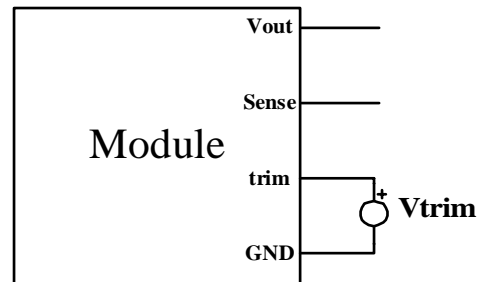

NON-ISOLATED DC/DC CONVERTERS

4.5V-14V Input

0.75V-3.63V/16A Output

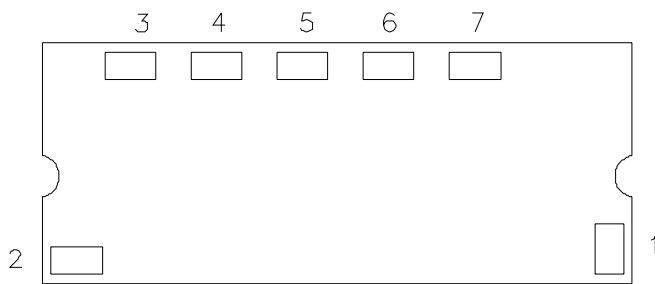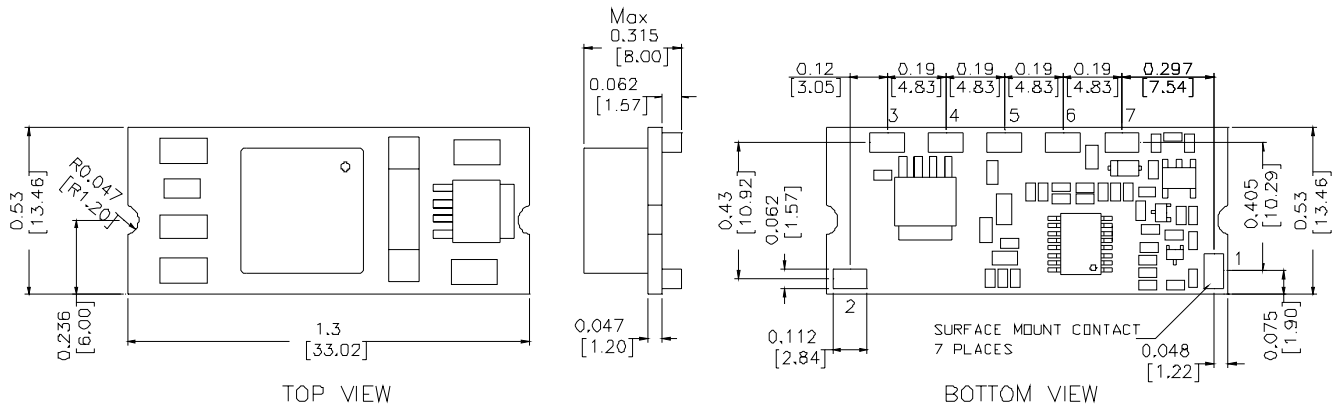

BOTTOM VIEW

Pin Connections

Pin	Function
1	Remote On/Off
2	Vin+
3	SEQ (option)
4	Ground
5	Vout+
6	Trim
7	Remote Sense

©2004 Bel Fuse Inc. Specifications subject to change without notice. 043004

CORPORATE

Bel Fuse Inc.
206 Van Vorst Street
Jersey City, NJ 07302
Tel 201-432-0463
Fax 201-432-9542
www.belfuse.com

FAR EAST

Bel Fuse Ltd.
8F/ 8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel 852-2328-5515
Fax 852-2352-3706
www.belfuse.com

EUROPE

Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Suite G7, Preston
Lancashire, PR1 8UD, U.K.
Tel 44-1772-556601
Fax 44-1772-888366
www.belfuse.com