

D1U4CS-W-2200-12-HxxC Series

AC/DC Front End Power Supply

PRODUCT OVERVIEW

The D1U4CS-W-2200-12-HxxC is a 2200 Watt, power-factor-corrected (PFC) front-end power supply for hot-swapping redundant systems. The main output is 12V with standby output of 5V or 3.3V. Packaged in 1U low profile, it is designed to deliver reliable bulk power to servers, workstations, storage systems or any 12V distributed power architecture systems requiring high power density. The highly efficient electrical and thermal design with internal cooling fans supports reliable operation conditions. The D1U4CS-W-2200-12-HxxC is designed to auto-recover from overtemperature fault. Status information is provided with front panel LEDs, logic signals and I²C management interface. Four units can be packaged into an optional 19" 1U power shelf to provide up to 8.8kW of power.

SELECTION GUIDE					
Model Number	Power Output High Line AC	Power Output Low Line AC	Main Output	Standby Output	Airflow
D1U4CS-W-2200-12-HC4C	2200W	1100W	12.12V	3.3V	Back to front
D1U4CS-W-2200-12-HC3C	2200W	1100W	12.12V	3.3V	Front to back
D1U4CS-W-2200-12-HA4C	2200W	1100W	12.12V	5V	Back to front
D1U4CS-W-2200-12-HA3C	2200W	1100W	12.12V	5V	Front to back

INPUT CHARACTERISTICS								
Parameter	Conditions	Min.	Тур.	Max.	Units			
Input Voltage Operating Penge	Low Line AC	90		140	Vac			
Input Voltage Operating Range	High Line AC	180		264	Vac			
Input Frequency		47	60	63	Hz			
Turn-on Input Voltage	Ramp up	81		89	Vac			
Turn-off Input Voltage	Ramp down	70.5		78	vac			
Maximum Input Current	Low Line AC 90Vac			13	Armo			
Maximum Input Current	High Line AC 180Vac			13	Arms			
Inrush Current	Cold start between 0-1msec			16.5	Apk			
Power Factor	Output load >90%	0.95						
ruwei raului	Output load >50%	0.95						

OUIPUI	VOLTAGE CHARACTERISTIC	55				
Output Voltage	Parameter	Conditions	Min.	Тур.	Max.	Units
	Voltage Set Point Accuracy			12.12		Vdc
	Line and Load Regulation		11.76		12.48	vuc
12V	Ripple Voltage & Noise	20MHz Bandwidth			120	mV p-p
	Output Current		0		180	Α
	Load Capacitance				30000	μF
	Voltage Set Point Accuracy			5		Vdc
	Line and Load Regulation	20MHz Bandwidth	4.85		5.15	Vuc
5Vsb	Ripple Voltage & Noise				50	mV p-ı
	Operating Range		0		5	Α
	Load Capacitance				10000	μF
	Voltage Set Point Accuracy			3.3		Vdc
	Line and Load Regulation	20MHz Bandwidth	3.2		3.4	Vuc
3.3Vsb	Ripple Voltage & Noise				50	mV p-ı
	Operating Range		0		6	Α
	Load Capacitance				10000	μF

1 Ripple and noise are measured with 0.1 uF of ceramic capacitance and 10 uF of tantalum capacitance on each of the power supply outputs. The output noise requirements apply over a 0 Hz to 20 MHz bandwidth. A short coaxial cable with 50ohm scope termination is used.



FEATURES

- 2200W (220Vac), 1100W (110Vac) Output Power
- Certified to Climate Savers Computing InitiativeSM and 80 PLUS® Gold efficiency
- 12V Main Output, 3.3V or 5V Standby Output
- 1U sized; dimensions 14.0" x 4.0" x 1.6"
- 24.5 Watts per cubic inch density
- N+1 redundancy capable, including hot-docking
- Active Current Sharing on main output
- Over-voltage, Over-current, Over-temperature protection
- Internal cooling fans (variable speed)
- I²C Bus Interface, PSMI compliant
- RoHS compliant
- Optional 1U x 19" Power-Shelf











www.murata-ps.com

email: toronto@murata-ps.com



Parameter	Conditions	Min.	Тур.	Max.	Units
Remote Sense			120		mV
Efficiency (00 - management, avaluate for lead)	20% and full load	89.10			%
Efficiency (80+ measurement; excludes fan load)	50% load	93.04			70
Output Rise Monotonicity	Overshoot less than 10% for all outputs, no	o voltage negati	ve between 10%	to 95% during r	amp up
Ctart up Time	AC ramp up		1.5		S
Start-up Time	PS_On activated		150		ms
	12V Ramp 1A/μs			±360	
Transient Response	5Vsb Ramp 1A/μs			±150	mV
	3.3Vsb Ramp 1A/µs			±100	
Current sharing accuracy (up to 3 in parallel)	At 100% load			±7	%
Hot Swap Transients	All outputs within regulation			5	%
Hold-up Time	100% load	12			ms

GENERAL CHARACTERISTICS			_					
Parameter	Conditions	Conditions Min. Typ.		Max.	Units			
Storage Temperature Range	Non-condensing	-40		70				
Operating Tomporeture Penge	D1U4CS-W-2200-12-HC4C and D1U4CS-W-2200-12-HA4C models only	0		50	°C			
Operating Temperature Range	D1U4CS-W-2200-12-HC3C and D1U4CS-W-2200-12-HA3C models only	0		40				
Operating Humidity	Non-condensing	10		90	- %			
Storage Humidity		5		90	70			
Shock	30G non operating							
Sinusoidal Vibration	0.5G, 5 – 500 Hz operating							
MTBF	Calculated per Bellcore at Ta=30°C	400			Khrs			
IVITOF	Demonstrated	400			Khrs			
Acoustic	ISO 7779-1999			60	dB LpAm			
Safety Approvals	c-CSA-us (CSA 60950-1-03/UL 60950-1, S	Second Edition)						
Input Fuse	Power Supply has internal 20A/250V fast b	Power Supply has internal 20A/250V fast blow fuse on the AC line input						
Material Flammability	UL 94V-0	UL 94V-0						
Switching Frequency	TBD	TBD						
Weight	2.1kg							

PROTECT	OTECTION CHARACTERISTICS									
Output Voltage	Parameter	Conditions	Min.	Тур.	Max.	Units				
	Over-temperature	Auto-restart	55		65	°C				
12V	Over Voltage	Latching	13.12		14.12	V				
120	Over Current	Latching	197		225	Α				
5Vsb	Over Voltage	Latching	5.6		6.26	V				
วงอม	Over Current	Brick wall, autorecovery	5.5		6.25	Α				
3.3Vsb	Over Voltage	Latching	3.57		4.02	V				
3.3780	Over Current	Brick wall, autorecovery	6.5		8.0	Α				

www.murata-ps.com email: toronto@murata-ps.com



ISOLATION CHARACTERISTICS							
Parameter	Conditions	Min.	Тур.	Max.	Units		
Insulation Safety Rating / Test Voltage	Input to Output - Reinforced	3000			Vrms		
insulation safety hatting / fest voltage	Input to Chassis - Basic	1500			Vrms		
Isolation	Output to Chassis						
isolation	Output to Output						
Material Flammability	UL 94V-0						
	Main Output Return and Standby Output Re	eturn are connec	ted internally. 10	00kΩ resistor par	allel with 100nF		
Grounding	capacitor is connected between Return and power supply chassis. Main Output Return should be connected to the System Chassis						

CONTROL SIGNALS				
Status	Conditions	Description		
	Off	No AC input to all PS		
LED	Flashing Green	Main Output Absent		
	Green	Power Supply Good		
I ² C Registers	Refer to Application Note #ACAN-33			

EMISSIONS AND IMMUNITY		
Characteristic	Description	Criteria
Harmonics	IEC/EN 61000-3-2	
Voltage Fluctuation and Flicker	IEC/EN 61000-3-3	
Emission Conducted	FCC 47 CFR Parts 15/CISPR 22/EN55022	Class A, 6dB margin
Emission Radiated	FCC 47 CFR Parts 15/CISPR 22/EN55022	Class A, 6dB margin
		4kV contact discharge
ESD	IEC/EN 61000-4-2	8kV operational air discharge
		15kV non-operational air discharge
Electromagnetic Field	IEC/EN 61000-4-3	
Electrical Fast Transients/Burst	IEC/EN 61000-4-4	
Surge	IEC/EN 61000-4-5	1kV/2kV, Performance Criteria A
RF Conducted Immunity	IEC/EN 61000-4-6	3 Vac, 80% AM, 1kHz, Performance Criteria A
Magnetic Immunity	IEC/EN 61000-4-8	3 A/m
Voltage dips, interruptions	IEC/EN 61000-4-11	

www.murata-ps.com email: toronto@murata-ps.com



UTPUT C	CONNECT	OR AN	ID SIGNA	L SPECIF	ICATION												
DC and S	Signal Cor	nector	: FCI Po	werBlade	# 51732	-048LF											
P1	P2	Р3	P4	P5	P6	P7	P8	P9	P10	x1	x2	х3	х4	r - ^{x5}	_ <u>x6</u> _	,	
										AC_OK/H	PW_0K/H	Vsb RETURN	Vsb RETURN	Vsb +OUT	Vsb +OUT	ַ	
			Vout		.,			Vrin Vrin Vrii	.,	SPARE	SMB/ Alert	Vsb RETURN	Vsb RETURN	Vsb +0UT	Vsb +0UT	(
Vouт	Vоит	Vout	VOUT	Vоит	VRTN	VRIN	VRTN VRTN	VRTN	VRTN	VRIN	I_SHARE	I ² C ADR0	I ² C ADR1	I ² C ADR2	PS_KILL	PS_ PRESENT	E
										SENSE +	SENSE -	I ² C DATA	I ² C CLOCK	SPARE	PS_ON/L	A	
					•									mate-l	ast pins	1	
in Assignı	ment		Signal Na	ıme		Description	on					High Level Low Level		I Max			
1 to P5			VOUT			Main outp											
6 to P10		VRTN					Main output voltage, return										
1			Sense +			VOUT rem +ve load		e, positive	node inpu	ut, connected	d to the						
2			Sense -				VOUT remote sense, negative node input, connected to the -ve load point										
5, C6, D5,	D6		Vsb			Standby v	oltage ou	tput									
3, C4, D3,	D4		Vsb Retu	rn		Standby v	oltage, re	turn, tied	internally	to Output Re	eturn						
1			I_Share			Active load sharing bus				0 – 8V		-4 mA /	-4 mA / +5 mA				
1			AC_OK/H			Input AC Voltage "OK" signal output (Internal pull up is $10k\Omega$ to $3.3V$)				p is	>2.1V <0.8V		+4 mA -2 mA				
2			PW_OK/H	PW_0K/H		Internal p	ull up of 1	0K ohm t	o 3.3V			>2.1V <0.8V		+4 mA -2 mA			
2			SMB/Aler	t		SMB/Aler	signal ou	ıtput (ope	n collecto	r)							
5			PS_Kill	PS_Kill			Floating pin will turn off P/S (shorter pin, last-make and first-break contact for hot plugging). This signal overrides PS-0n in disabling the Main Output >2.1V (open) < 0.8V (active, I				N/A						
6			PS_Prese	nt		Internally tied to 3.3V return					0 V						
6			PS_On/L			Internal 3.3K ohm pull-up to 3.3V, (accepts open collector/drain drive), This signal to be pulled low to turn-on power supply			drain drive), This signal to be								
3			I ² C Data			I ² C serial data bus; internal 4.64K ohm pull-up 3.3V											
4			I ² C Clock			I ² C serial clock bus; internal 4.64K ohm pull-up 3.3V			3.3V								
2	I ² C Adr0 Address input 0, internal 10K ohm pull		I ² C Adr0		Address input 0, internal 10K ohm pull-up to 3.3V >2.1V <0.8V				±1 mA								
3			I ² C Adr1			Address i	nput 1, int	ernal 10k	ohm pull	-up to 3.3V		>2.1V <0.8V		±1 mA			
4			I ² C Adr2			Address input 2, internal 10K ohm pull-up to 3.3V				>2.1V <0.8V		±1 mA					


D1U4CS MAT	D1U4CS MATING CONNECTORS									
	12V D1U4 mating connector									
	Pre	ess Fit	Solder 1							
	Straight	Right Angle	Straight	Right Angle						
Murata-PS	N/A	4321-01454-0	N/A	N/A						
FCI	N/A	51762-11002400ABLF	N/A	N/A						

¹ Solder connector recommended for board thickness of <0.090

www.murata-ps.com

email: toronto@murata-ps.com



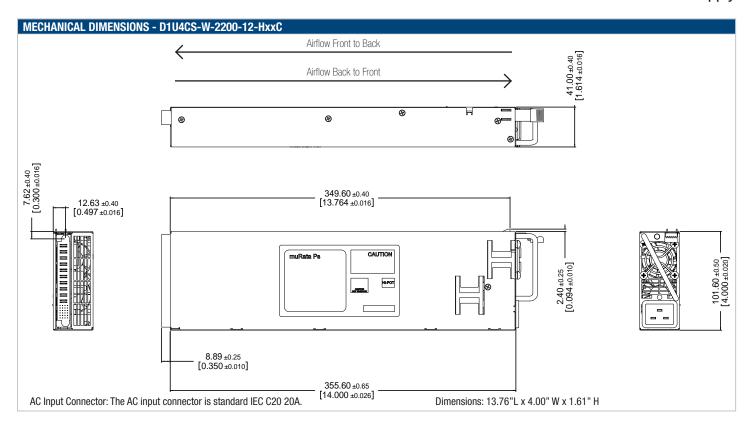

OPTIONAL ACCESSORIES				
Description	Part Number			
12V D1U4CS output connector card	D1U4CS-12-CONC			

APPLICATION NOTES	
Document Number	Description
ACAN-32	Output Connector Card for D1U4CS
ACAN-33	D1U4CS Communication Protocol

Murata Power Solutions, Inc. 11 Cabot Boulevard, Mansfield, MA 02048-1151 U.S.A. ISO 9001 and 14001 REGISTERED

Murata Power Solutions, Inc. makes no representation that the use of its products in the circuits described herein, or the use of other technical information contained herein, will not infringe upon existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications are subject to change without notice.

© 2010 Murata Power Solutions, Inc.

email: toronto@murata-ps.com