# LME Series

### Isolated 250mW Single Output DC/DC Converters

	GUIDE

SELECTION GUI	DE						
Order Code	Nominal Input Voltage	Output Voltage	Output Current	Efficiency	Isolation Capacitance	MTTF <sup>1</sup>	Package Style
	V	V	mA	%	pF	kHrs	
LME0505DC	5	5	50	70	29	2279	
LME0509DC	5	9	28	75	37	1139	DIP
LME0512DC	5	12	21	75	41	624	DIF
LME0515DC	5	15	16	75	40	357	
LME0505SC	5	5	50	70	29	2279	
LME0509SC	5	9	28	75	37	1139	CID
LME0512SC	5	12	21	75	41	624	SIP
LME0515SC	5	15	16	75	40	357	
LME1205DC	12	5	50	70	38	536	
LME1209DC	12	9	28	75	40	434	חוס
LME1212DC	12	12	21	75	43	330	DIP
LME1215DC	12	15	16	75	45	237	
LME1205SC	12	5	50	70	38	536	
LME1209SC	12	9	28	75	40	434	CID
LME1212SC	12	12	21	75	43	330	SIP
LME1215SC	12	15	16	75	45	237	

When operated **with** additional external load capacitance the rise time of the input voltage will determine the maximum external capacitance value for guaranteed start up. The slower the rise time of the input voltage the greater the maximum value of the additional external capacitance for reliable start up.

INPUT CHARACTERISTICS
-----------------------

Parameter	Conditions	Min.	Тур.	Max.	Units
Voltago rango	Continuous operation, 5V input types	4.5	5.0	5.5	v
Voltage range	Continuous operation, 12V input types	10.8	12	13.2	V

OUTPUT CHARACTERISTICS						
Parameter	Conditions	Min.	Тур.	Max.	Units	
Rated Power <sup>2</sup>	T <sub>A</sub> =0°C to 70°C			0.25	W	
Voltage Set Point Accuracy	See tolerance envelope					
Line regulation	High VIN to low VIN		1.0	1.2	%/%	
Lood Dogulation?	10% load to rated load, 5V output types			15	%	
Load Regulation <sup>2</sup>	10% load to rated load, all other types			10		
Ripple and Noise	BW=DC to 20MHz, all output types			100	mV p-p	

ISOLATION CHARACTERISTICS					
Parameter	Conditions	Min.	Тур.	Max.	Units
Isolation test voltage	Flash tested for 1 second	1000			VDC
Resistance	Viso= 500VDC	1			GΩ

GENERAL CHARACTERIS	STICS				
Parameter	Conditions	Min.	Тур.	Max.	Units
Switching frequency	All input types		100		kHz

ABSOLUTE MAXIMUM RATINGS	
Short-circuit protection <sup>3</sup>	1 second
Lead temperature 1.5mm from case for 10 seconds	300°C
Input voltage V <sub>N</sub> , LME05 types	7V
Input voltage V <sub>IN</sub> , LME12 types	15V

1. Calculated using MIL-HDBK-217F with nominal input voltage at full load.

2. See derating curve.

3. Supply voltage must be disconnected at the end of the short circuit duration.

All specifications typical at TA=25°C, nominal input voltage and rated output current unless otherwise specified.

Technical enquiries - email: mk@murata-ps.com, tel: +44 (0)1908 615232



- RoHS compliant
- Single output rail
- 1kVDC isolation
- High efficiency for low power applications

muRata 🚺

**Murata Power Solutions** 

- SIP & DIP package styles
- Power density 0.36W/cm<sup>3</sup>
- UL 94V-0 package material
- Footprint from 0.69cm<sup>2</sup>
- 5V & 12V input
- 5V, 9V, 12V & 15V output
- No heatsink required
- Internal SMD construction
- Fully encapsulated with toroidal magnetics
- No external components required
- MTTF up to 2.2 million hours
- Custom solutions available
- Pin compatible with NKE, NME & NML series
- PCB mounting

#### DESCRIPTION

The LME series of DC/DC converters are optimised for low-power operation. They are ideally suited to generating a negative supply where only a positive rail exists.




www.murata-ps.com

### muRata Ps Murata Power Solutions

# Isolated 250mW Single Output DC/DC Converters

TEMPERATURE CHARACTERISTICS						
Parameter	Conditions		Min.	Тур.	Max.	Units
Specification	All output types		0		70	00
Storage			-55		130	0
Cooling	Free air convection					

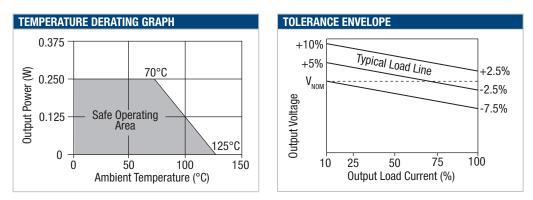

#### **TECHNICAL NOTES**

#### **ISOLATION VOLTAGE**

'Hi Pot Test', 'Flash Tested', 'Withstand Voltage', 'Proof Voltage', 'Dielectric Withstand Voltage' & 'Isolation Test Voltage' are all terms that relate to the same thing, a test voltage, applied for a specified time, across a component designed to provide electrical isolation, to verify the integrity of that isolation.

Murata Power Solutions LME series of DC/DC converters are all 100% production tested at their stated isolation voltage. This is 1kVDC for 1 second.


A question commonly asked is, "What is the continuous voltage that can be applied across the part in normal operation?"

For a part holding no specific agency approvals, such as the LME series, both input and output should normally be maintained within SELV limits i.e. less than 42.4V peak, or 60VDC. The isolation test voltage represents a measure of immunity to transient voltages and the part should never be used as an element of a safety isolation system. The part could be expected to function correctly with several hundred volts offset applied continuously across the isolation barrier; but then the circuitry on both sides of the barrier must be regarded as operating at an unsafe voltage and further isolation/insulation systems must form a barrier between these circuits and any user-accessible circuitry according to safety standard requirements.

#### **REPEATED HIGH-VOLTAGE ISOLATION TESTING**

It is well known that repeated high-voltage isolation testing of a barrier component can actually degrade isolation capability, to a lesser or greater degree depending on materials, construction and environment. The LME series has toroidal isolation transformers, with no additional insulation between primary and secondary windings of enameled wire. While parts can be expected to withstand several times the stated test voltage, the isolation capability does depend on the wire insulation. Any material, including this enamel (typically polyurethane) is susceptible to eventual chemical degradation when subject to very high applied voltages thus implying that the number of tests should be strictly limited. We therefore strongly advise against repeated high voltage isolation testing, but if it is absolutely required, that the voltage be reduced by 20% from specified test voltage.

This consideration equally applies to agency recognized parts rated for better than functional isolation where the wire enamel insulation is always supplemented by a further insulation system of physical spacing or barriers.

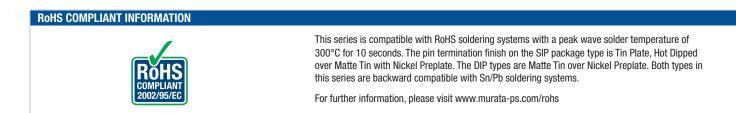


www.murata-ps.com

## muRata Ps Murata Power Solutions

# **LME Series**

Isolated 250mW Single Output DC/DC Converters

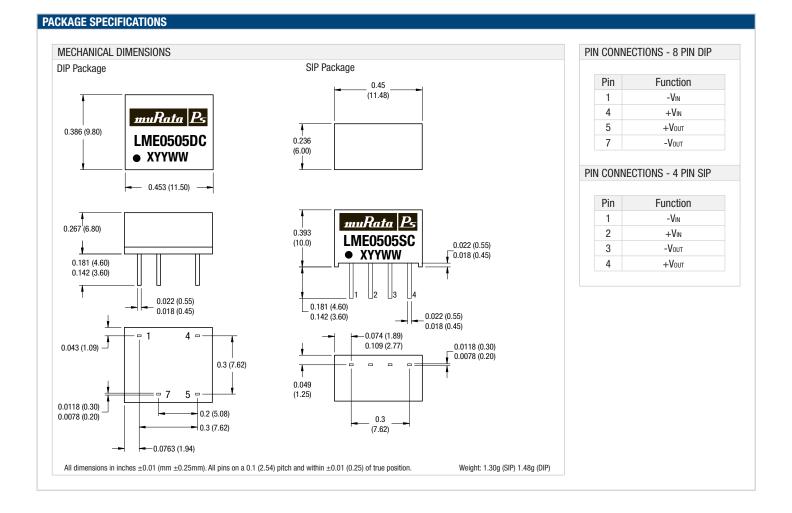




# LME Series

Isolated 250mW Single Output DC/DC Converters

#### PACKAGE SPECIFICATIONS (continued)

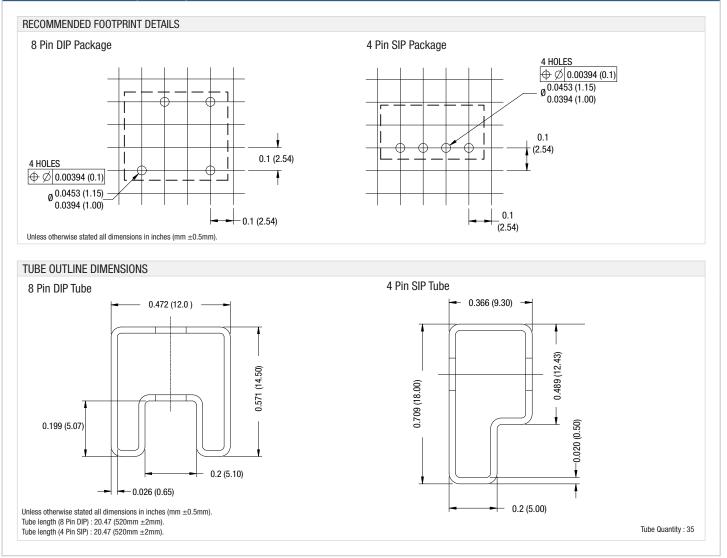

### muRata Ps Murata Power Solutions

Murata Power Solutions, Inc. 11 Cabot Boulevard, Mansfield, MA 02048-1151 U.S.A. Tel: (508) 339-3000 (800) 233-2765 Fax: (508) 339-6356 www.murata-ps.com email: sales@murata-ps.com ISO 9001 & ISO 14001 REGISTERED

Murata Power Solutions, Inc. makes no representation that the use of its products in the circuits described herein, or the use of other technical information contained herein, will not infringe upon existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications are subject to change without notice.

USA:	Mansfield (MA), Tel: (508) 339 3000, email: sales@murata-ps.com
Canada:	Toronto, Tel: (866) 740 1232, email: toronto@murata-ps.com
UK:	Milton Keynes, Tel: +44 (0)1908 615232, email: mk@murata-ps.com
France:	Montigny Le Bretonneux, Tel: +33 (0)1 34 60 01 01, email: france@murata-ps.com
Germany:	München, Tel: +49 (0)89-544334-0, email: ped.munich@murata-ps.com
Japan:	Tokyo, Tel: 3-3779-1031, email: sales_tokyo@murata-ps.com Osaka, Tel: 6-6354-2025, email: sales_osaka@murata-ps.com
China:	Shanghai, Tel: +86 215 027 3678, email: shanghai@murata-ps.com Guangzhou, Tel: +86 208 221 8066, email: guangzhou@murata-ps.com
Singapore:	Parkway Centre, Tel: +65 6348 9096, email: singapore@murata-ps.com

www.murata-ps.com