Rev. 01.30.08 ASA 10W Series

1 of 2

ASA Series 10 Watts

Total Power: # of Outputs: Single

Input Voltage: 24V or 48V

Special Features







Electrical Specifications

Input	
Input range	18 to 36 VDC; 36 to 75 VDC
Efficiency ²	83%@12Vo
Output	
Voltage tolerance	±2.0%
Line regulation	±0.8%
Load regulation	±1.2%
Noise/ripple	100mV for 2.5Vo,
	3.3Vo and 5.0Vo
	120mV for 12Vo
Short circuit protection	Auto-restart
Switching frequency	350KHz
Temperature coefficient	±0.02 /°C
Isolation	
I/O isolation	1500 VDC min.
Insulation resistance	10Mohm
Insulation capacitance	1000pF

Environmental Specifications je

Operating ambient temperature rang
Storage temperature
Humidity
MTBF
RoHS Compliant

-40°C to +60°C (no derating) -55°C to +105°C 5% to 95% (non-condensing) 1 Mhrs demonstrated MTBF






Ordering Information

	Input Voltage	Output 1 Voltage Output 2 Voltage	Maximum Power	Model Number		
	18 - 36 V	2.5 V @ 3 A	7.5 W	ASA03G24-L		
	18 - 36 V	3.3 V @ 3 A	10 W	ASA03F24-L		
	18 - 36 V	5 V @ 2 A	10 W	ASA02A24-L		
	18 - 36 V	12 V @ 0.835 A	10 W	ASA00B24-L		
	36 - 75 V	2.5 V @ 3 A	7.5 W	ASA03G48-L		
	36 - 75 V	3.3 V @ 3 A	10 W	ASA03F48-L		
	36 - 75 V	5 V @ 2 A	10 W	ASA02A48-L		
	36 - 75 V	12 V@ 0.835 A	10 W	ASA00B48-L		
Please contact Astec for information on other output voltages, power ranges and configur						

Available in RoHS 6 version only.

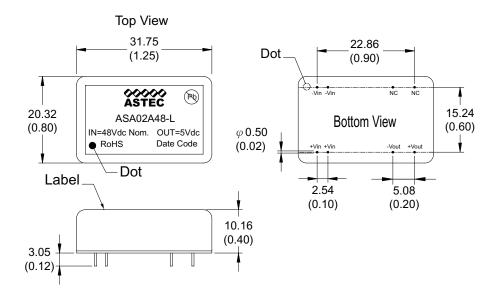

Notes:

1. All specifications subject to change without notice. Mechanical drawings are for reference only.

- 2. Warranty: 1 yr
- 3. Label and logo appearance may vary from what is shown on mechanical drawings.

Americas

5810 Van Allen Way Carlsbad, CA 92008 USA Telephone: +1 (760) 930 4600 Facsimile: +1 (760) 930 0698 Rev. 01.30.08

2 of 2

ASA 10W Series

Europe (UK)

Waterfront Business Park Merry Hill, Dudley West Midlands, DY5 1LX United Kingdom Telephone: +44 (0) 1384 842 211 Facsimile: +44 (0) 1384 843 355

Asia (HK)

14/F, Lu Plaza 2 Wing Yip Street Kwun Tong, Kowloon Hong Kong Telephone: +852 2176 3333 Facsimile: +852 2176 3888

For global contact, visit:


www.powerconversion.com

techsupport.embeddedpower @emerson.com

While every precaution has been taken to ensure accuracy and completeness in this literature, Emerson Network Power assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions.

Emerson Network Power.

The global leader in enabling business-critical continuity.



EmersonNetworkPower.com

Emerson Network Power and the Emerson Network Power logo are trademarks and service marks of Emerson Electric Co. ©2008 Emerson Electric Co.