

DIN-Rail Receptacle

- DRAC DP 15
- DRAC GF 15
- DRAC DP 20
- DRAC GF 20

NEW



DIN-Rail receptacles are enclosed 15A and 20A power outlets that provide a convenient power source for portable computers or test devices for in-the-panel troubleshooting.

- Easily snaps onto 35mm DIN-rail
- Panel mountable
- 15A or 20A versions
- Easy to wire
- Available with ground fault current interrupt (GFCI) or standard duplex outlets
- Option for visual indication of power included with GFCI
- NEMA rated enclosure with UL94 VO flammability rating
- UL508A and cULus approved

Canada

Weidmuller, Canada
10 Spy Court
Markham, Ontario L3R 5H6
Telephone: (800) 268-4080
Facsimile: (905) 475-2798
Email: info1@weidmuller.ca
Website: www.weidmuller.ca

Mexico

Weidmuller, Mexico
Blvd. Hermanos Serdán 698
Col. San Rafael Oriente
Puebla, Puebla, Mexico
C.P. 72029
Telephone: 01 222 2686267
Facsimile: 01 222 2686219
Email: clientes@weidmuller.com.mx
Website: www.weidmuller.com.mx


United States

Weidmuller
821 Southlake Blvd.
Richmond, Virginia 23236
Telephone: (800) 849-9343
Facsimile: (804) 379-2593
Email: info@weidmuller.com
Website: www.weidmuller.com

Weidmüller 

DIN-Rail Receptacle

Dimensional Drawing

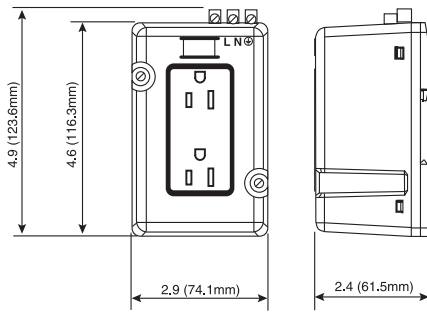

15 Amp Duplex



15 Amp GFCI



Technical data

	15 Amp Duplex	15 Amp GFCI
Voltage	125 VAC	125 VAC
Current	15A	15A
Operating Frequency	50 - 60 Hz	50 - 60 Hz
Dielectric Voltage	Withstands 2000V per UL498	Withstands 1500V per UL498
Current Interrupting	Full rated current	10 kA
Trip Level	N/A	5±1 mA
Termination Wire Size	#20 - #10 AWG solid or stranded	#20 - #10 AWG solid or stranded
Terminal Torque	7 lb.-in. (.79 Nm)	7 lb.-in. (.79 Nm)
Temperature:		
Operating	-35°C to 60°C	-35°C to 60°C
Storage	-25°C to 80°C	-25°C to 80°C
Material Listing		
Enclosure Cover, Flammibility	PBT/polycarbonate blend, UL94 rating V0 @ .63mm	PBT/polycarbonate blend, UL94 rating V0 @ .63mm
Enclosure Base, Flammibility	Polyamide 6/6 30% GF, UL94 rating V0 @ .63mm	Polyamide 6/6 30% GF, UL94 rating V0 @ .63mm
Spring	Stainless Steel	Stainless Steel

Approvals/Certifications


	Description	Description
	TUL 508A (file # E223801)	TUL 508A (file # E223801)
	cULus	cULus
	UL498	UL 943
	NEMA WD-6	NEMA WD-6
	NEMA 5-15R	NEMA 5-15R

Ordering data

	Type	Part No.	Type	Part No.
	DRAC DP 15	6720005421	DRAC GF 15	6720005422

DIN-Rail Receptacle

Dimensional Drawing

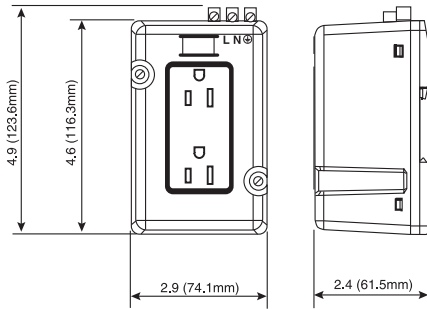

20 Amp Duplex



20 Amp GFCI



Technical data

	20 Amp Duplex	20 Amp GFCI
Voltage	125 VAC	125 VAC
Current	20A	20A
Operating Frequency	50 - 60 Hz	50 - 60 Hz
Dielectric Voltage	Withstands 2000V per UL498	Withstands 1500V per UL498
Current Interrupting	Full rated current	10 kA
Trip Level	N/A	5±1 mA
Termination Wire Size	#20 - #10 AWG solid or stranded	#20 - #10 AWG solid or stranded
Terminal Torque	7 lb.-in. (.79 Nm)	7 lb.-in. (.79 Nm)
Temperature:		
Operating	-35°C to 60°C	-35°C to 60°C
Storage	-25°C to 80°C	-25°C to 80°C
Material Listing		
Enclosure Cover, Flammibility	PBT/polycarbonate blend, UL94 rating V0 @ .63mm	PBT/polycarbonate blend, UL94 rating V0 @ .63mm
Enclosure Base, Flammibility	Polyamide 6/6 30% GF, UL94 rating V0 @ .63mm	Polyamide 6/6 30% GF, UL94 rating V0 @ .63mm
Spring	Stainless Steel	Stainless Steel

Approvals/Certifications

	20 Amp Duplex	20 Amp GFCI
Description	TUL 508A (file # E223801) cULus UL498 NEMA WD-6 NEMA 5-15R	TUL 508A (file # E223801) cULus UL 943 NEMA WD-6 NEMA 5-15R

Ordering data

Type	Part No.	Type	Part No.
DRAC DP 20	6720005420	DRAC GF 20	6720005423

