782482 Series





FEATURES

- RoHS compliant
- Analog Devices ADM2482E/ADM2487E compatible
- 4.0kVpc isolation
- Industry-standard pinout
- UL 94 V-0 package materials
- Low profile
- Toroidal construction
- Fully encapsulated
- Industrial temperature range
- Surface mount versions available soon
- Recommended by Analog Devices, Inc.
- Backward compatible with Sn/Pb soldering systems

DESCRIPTION

The 782482 series of converter transformers are specifically designed for use with Analog Devices chipsets to provide isolated RS-485 and RS-422 interfaces. Carefully controlled turns ratios ensure consistent performance whilst a toroidal construction minimises EMI.



www.murata-ps.com

ADM2482E/ADM2487E Compatible Converter Transformers

SELECTION GUIDE					
Order Code	Nominal Input Voltage	Nominal Output Voltage	Isolation Voltage	Turns Ratio	Package Style
	V	V	VDC	Tituto	
782482/33VC	3.3	3.3	4000	1CT:1.33CT	DIL
782482/53VC	5.0	3.3	4000	1.14CT:1CT	DIL

CHARACTERISTICS						
arameter	Conditions	78248	782482/33VC		782482/53VC	
	CONULIONS	Min.	Max.	Min.	Max.	Units
Primary Inductance, L _P ¹	100kHz, 20mV	190	310	150	260	μH
Leakage Inductance, L ¹	100kHz, 250mV		8		8	μH
Interwinding Capacitance, Cww	100kHz, 250mV		8		8	pF
Primary DC Resistance, R _{DC} ¹	<0.1VDC		600		600	mΩ
Volt-time Product, Et ²	5kHz, 5V	13		13		Vµs

ABSOLUTE MAXIMUM RATINGS				
Operating free air temperature range	-40°C to 85°C			
Storage temperature range	-50°C to 125°C			
Isolation voltage (flash tested for 1 second)	4.0kVpc			

SOLDERING INFORMATION³

Peak wave solder temperature	260°C for 10 seconds		
Pin finish	Matte tin		
Specifications typical at $T_A = 25^{\circ}C$			

1 L_P, L_L and R_{DC} measured between pins 1-3.

2 Where pulse applied across pins 1 and 2.

3 For further information, please visit www.murata-ps.com/rohs

TECHNICAL NOTES

ISOLATION VOLTAGE

'Hi Pot Test', 'Flash Tested', 'Withstand Voltage', 'Proof Voltage', 'Dielectric Withstand Voltage' & 'Isolation Test Voltage' are all terms that relate to the same thing, a test voltage, applied for a specified time, across a component designed to provide electrical isolation, to verify the integrity of that isolation.

All products in this series are 100% production tested at their stated isolation voltage.

A question commonly asked is, "What is the continuous voltage that can be applied across the part in normal operation?"

For a part holding no specific agency approvals both input and output should normally be maintained within SELV limits i.e. less than 42.4V peak, or 60VDC. The isolation test voltage represents a measure of immunity to transient voltages and the part should never be used as an element of a safety isolation system. The part could be expected to function correctly with several hundred volts offset applied continuously across the isolation barrier; but then the circuitry on both sides of the barrier must be regarded as operating at an unsafe voltage and further isolation/insulation systems must form a barrier between these circuits and any user-accessible circuitry according to safety standard requirements.

REPEATED HIGH-VOLTAGE ISOLATION TESTING

It is well known that repeated high-voltage isolation testing of a barrier component can actually degrade isolation capability, to a lesser or greater degree depending on materials, construction and environment. This series has toroidal isolation transformers, with no additional insulation between primary and secondary windings of enameled wire. While parts can be expected to withstand several times the stated test voltage, the isolation capability does depend on the wire insulation. Any material, including this enamel (typically polyurethane) is susceptible to eventual chemical degradation when subject to very high applied voltages thus implying that the number of tests should be strictly limited. We therefore strongly advise against repeated high voltage isolation testing, but if it is absolutely required, that the voltage be reduced by 20% from specified test voltage.


This consideration equally applies to agency recognized parts rated for better than functional isolation where the wire enamel insulation is always supplemented by a further insulation system of physical spacing or barriers.

muRata Ps Murata Power Solutions


782482 Series

ADM2482E/ADM2487E Compatible Converter Transformers

PACKAGE SPECIFICATIONS

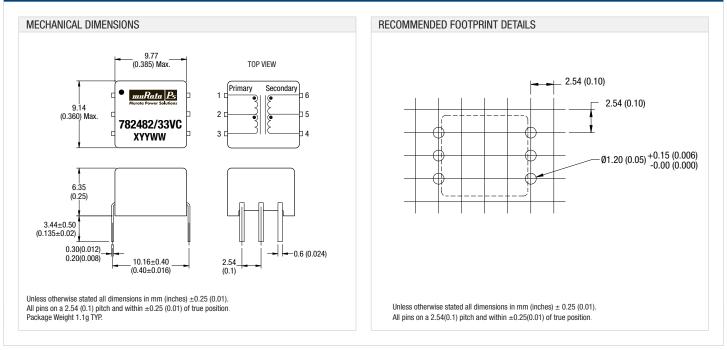

USA:

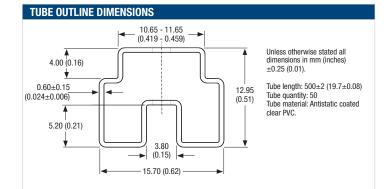

muRata Ps Murata Power Solutions

Murata Power Solutions, Inc. 11 Cabot Boulevard, Mansfield, MA 02048-1151 U.S.A.

Tel: (508) 339-3000 (800) 233-2765 Fax: (508) 339-6356

161. (300) 333-3000 (000) 233-2703 1 dx. (300) 333-0330

www.murata-ps.com email: sales@murata-ps.com ISO 9001 REGISTERED

Murata Power Solutions, Inc. makes no representation that the use of its products in the circuits described herein, or the use of other technical information contained herein, will not infringe upon existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications are subject to change without notice.

Canada: Toronto, Tel: (866) 740 1232, email: toronto@murata-ps.com UK: Milton Keynes, Tel: +44 (0)1908 615232, email: mk@murata-ps.com France: Montigny Le Bretonneux, Tel: +33 (0)1 34 60 01 01, email: france@murata-ps.com Germany: München, Tel: +49 (0)89-544334-0, email: ped.munich@murata-ps.com Japan: Tokyo, Tel: 3-3779-1031, email: sales_tokyo@murata-ps.com Osaka, Tel: 6-6354-2025, email: sales_osaka@murata-ps.com Website: www.murata-ps.jp China: Shanghai, Tel: +86 215 027 3678, email: shanghai@murata-ps.com Guangzhou, Tel: +86 208 221 8066, email: guangzhou@murata-ps.com			
France: Montigny Le Bretonneux, Tel: +33 (0)1 34 60 01 01, email: france@murata-ps.com Germany: München, Tel: +49 (0)89-544334-0, email: ped.munich@murata-ps.com Japan: Tokyo, Tel: 3-3779-1031, email: sales_tokyo@murata-ps.com Osaka, Tel: 6-6354-2025, email: sales_osaka@murata-ps.com Website: www.murata-ps.jp China: Shanghai, Tel: +86 215 027 3678, email: shanghai@murata-ps.com	l	Canada:	Toronto, Tel: (866) 740 1232, email: toronto@murata-ps.com
Germany: München, Tel: +49 (0)89-544334-0, email: ped.munich@murata-ps.com Japan: Tokyo, Tel: 3-3779-1031, email: sales_tokyo@murata-ps.com Osaka, Tel: 6-6354-2025, email: sales_osaka@murata-ps.com Website: www.murata-ps.jp China: Shanghai, Tel: +86 215 027 3678, email: shanghai@murata-ps.com	l	UK:	Milton Keynes, Tel: +44 (0)1908 615232, email: mk@murata-ps.com
Japan:Tokyo, Tel: 3-3779-1031, email: sales_tokyo@murata-ps.com Osaka, Tel: 6-6354-2025, email: sales_osaka@murata-ps.com Website: www.murata-ps.jpChina:Shanghai, Tel: +86 215 027 3678, email: shanghai@murata-ps.com	l	France:	Montigny Le Bretonneux, Tel: +33 (0)1 34 60 01 01, email: france@murata-ps.com
Osaka, Tel: 6-6354-2025, email: sales_osaka@murata-ps.com Website: www.murata-ps.jp China: Shanghai, Tel: +86 215 027 3678, email: shanghai@murata-ps.com	l	Germany:	München, Tel: +49 (0)89-544334-0, email: ped.munich@murata-ps.com
		Japan:	Osaka, Tel: 6-6354-2025, email: sales_osaka@murata-ps.com
		China:	6 / F

Mansfield (MA), Tel: (800) 233 2765, email: sales@murata-ps.com

www.murata-ps.com

Technical enquiries - email: mk@murata-ps.com, tel: +44 (0)1908 615232