Taping is the standard packaging method.

■ Minimum Quantity Guide


		Dimensions (mm)			Quantity (pcs.)	
	Part Number					
		L	W	Т	· · ·	Embossed Tape
	GRM18	1.6	0.8	0.8	4,000	-
Medium	GRJ21/GRM21/GR321/ GR721	2.0	1.25	1.0	4,000	-
				1.25	-	3,000
	GRJ31/GRM31/GR331/ GR731	3.2	1.6	1.0	4,000	-
				1.25	-	3,000
				1.6	-	2,000
	GRJ32/GRM32/GR332	3.2	2.5	1.0	4,000	-
				1.25	-	3,000
				1.5	-	2,000
Voltage				2.0	-	1,000
	00040/00440	4.5	0.0	1.0	-	3,000
	GRM42/GR442		2.0	1.5	-	2,000
	GRJ43/GRM43/GR343/ GR443	4.5	3.2	1.5	-	1,000
				2.0	-	1,000
				2.5	-	500
	GRJ55/GRM55/GR355/ GR455	5.7	5.0	1.5	-	1,000
				2.0	-	1,000
				2.7	-	500
	GA242	4.5	2.0	1.5	-	500 2,000
	GA243	4.5	3.2	1.5	-	1,000
AC250V				2.0	-	1,000
	GA255	5.7	5.0	2.0	-	1,000
				1.0	-	3,000
	GA342	4.5	2.0	1.5	ø180m Paper Tape 4,000 4,000 4,000 4,000 4,000	2,000
				2.0	-	2,000
Safety Std. Certification GA352 5.7		1.5	-	1,000		
	GA343	4.5	3.2	2.0	-	1,000
	GA352	5.7	2.8	1.5	-	1,000
			5.0	1.5	-	1,000
				2.0	-	1,000
				2.5	-	500
				2.7	-	500
				2.9	-	500

Continued on the following page.

Continued from the preceding page.


Tape Carrier Packaging

(1) Appearance of Taping




(2) Dimensions of Tape


① Embossed Tape




2 Paper Tape

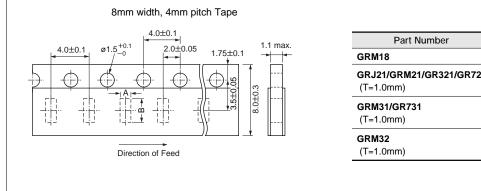

2 Paper Tape





(in mm)

GRM18	1.05	1.85			
GRJ21/GRM21/GR321/GR721 (T=1.0mm)	1.45	2.25			
GRM31/GR731 (T=1.0mm)	2.0	3.6			
GRM32 (T=1.0mm)	2.9	3.6			
*Nominal Value					
(in mm					


A*

B*



Continued from the preceding page.

(3) Dimensions of Reel



- (4) Taping Method
 - Tapes for capacitors are wound clockwise. The sprocket holes are to the right as the tape is pulled toward the user.
 - ② Part of the leader and part of the empty tape should be attached to the end of the tape as shown at right.
 - ③ The top tape or cover tape and base tape are not attached at the end of the tape for a minimum of 5 pitches.
 - ④ Missing capacitors number within 0.1% of the number per reel or 1 pc, whichever is greater, and are not continuous.
 - (5) The top tape or cover tape and bottom tape should not protrude beyond the edges of the tape and should not cover sprocket holes.
 - ⑥ Cumulative tolerance of sprocket holes, 10 pitches: ±0.3mm.
 - $\ensuremath{\overline{\mathcal{O}}}$ Peeling off force: 0.1 to 0.6N in the direction shown at right.

