
# 高周波巻線チップインダクタ **WOUND CHIP INDUCTORS** FOR HIGH FREQUENCY LB SERIES H TYPE

OPERATING TEMP. -25~+85°C





#### 特長 **FEATURES**

- ・実装上の特性を重視した形状。
- ・巻線タイプのため、High Qで自己共振周波数が高い。
- · Dimention attaches much importance to characteristics of mount case.
- The product has excellent Q and SRF because, wound chip inductor.

### 用途 APPLICATIONS

・携帯電話や無線LAN等の高周波機器

· Portable telephones and wireless LAN.

# 形名表記法 ORDERING CODE



形式 LBH 高周波巻線巻線チップインダクタ



包装	
В	単品
Т	テーピング

4

<u>公称インダクタンス〔μ H〕</u>										
例										
3N9 0.0039										
10N	0.01									
R10 0.1										
-	※N= 小数点									

インダ	クタンス許容差
J	±5%
D	±0.5nH



外径寸法 (mm) 1608(0603)

当社管理記号 標準品 △= スペース

6 0 8 T 1 0 N J  $\triangle$ 



Type Wound chip inductors LBH for high frequency

Packaging Bulk Tape & Reel

Nominal Inductance (  $\mu$  H) example 3N9 0.0039 10N 0.01 R10

Inductance Tolerances ±5% ±0.5nH D


External Dimensions (mm) 1608(0603)

\*N=decimal point

Internal code △△△ Standard Products

△=Blank space

#### 外形寸法 **EXTERNAL DIMENSIONS**



Туре	L	W	Т
LBH1608	1.6±0.1	0.8±0.1	0.8±0.1
LBITTOOS	(0.063±0.004)	(0.031±0.004)	$(0.031\pm0.004)$

Unit: mm(inch)

# 概略バリエーション AVAILABLE INDUCTANCE RANGE

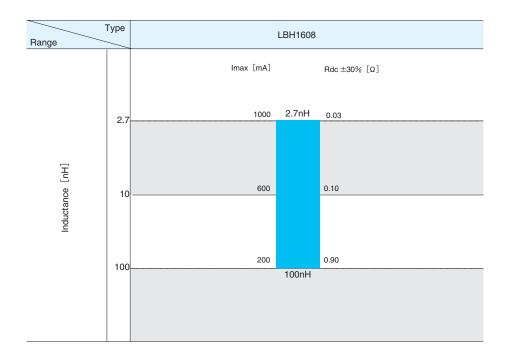


表 值 mples	Inductance	Imax [mA]	Rdc ±30% [Ω]
# dug	2.7nH	1000	0.03
ि ₃ Exar	10nH	600	0.10
	100nH	200	0.90













# アイテム一覧 PART NUMBERS


### LBH1608 TYPE-

形名	公称 インダクタンス Inductance	インダクタンス 許容差	Q min.	測定	Q typ. 周波数(G	GHz)	自己共振 周 波 数 Self-resonant frequency	直流抵抗 DC Resistance	定格電流 Rated current	測 周波数 Measuring
Ordering code	(nH)	Inductance Tolerance	(at 100MHz)	0.8	1.5	2.0	(GHz) min.	(Ω) ±30%	(mA) max.	frequency (MHz)
LBH1608□2N7D	2.7		13	37	61	68	8.0	0.030	1000	
LBH1608□3N3D	3.3			38	61	68	8.0	0.035	850	
LBH1608□3N9D	3.9		14	51	62	67	8.0	0.040	800	
LBH1608□4N7D	4.7	±0.5nH	14	52	73	71	7.0	0.045	800	
LBH1608□5N6D	5.6			50	75	72	6.5	0.050	750	
LBH1608□6N8D	6.8			51	71	70	6.4	0.055	700	
LBH1608□8N2D	8.2			52	72	70	5.5	0.080	700	
LBH1608□10NJ	10			47	70	68	5.0	0.100	600	
LBH1608□12NJ	12			48	69	66	4.5	0.110	600	
LBH1608□15NJ	15		15	48	68	65	4.0	0.130	550	100
LBH1608□18NJ	18		15	54	72	64	3.6	0.140	500	
LBH1608□22NJ	22			52	70	55	3.3	0.170	450	
LBH1608□27NJ	27			51	62	46	3.0	0.250	400	
LBH1608□33NJ	33	±5%		52	61	44	2.7	0.300	400	
LBH1608□39NJ	39			50	62	40	2.5	0.400	350	
LBH1608□47NJ	47			52	60	38	2.3	0.600	350	
LBH1608□56NJ	 56			53	60	30	2.2	0.650	300	
LBH1608□68NJ	 68		14	38	38	21	1.8	0.750	300	
LBH1608□82NJ	82			41	30	_	1.7	0.800	250	
LBH1608□R10J	100			32	18	_	1.7	0.900	200	


<sup>・</sup>注:形名の□には包装記号が入ります。 ・□ Please specify the packaging code.(T:Tape&Reel, B:Bulk)

#### 特性図 **ELECTRICAL CHARACTERISTICS**


Q-周波数特性 Q-Characteristics (Measured by HP8720B)



インピーダンス周波数特性 Impedance-vs-Frequency characteristics (Measured by HP8720B)



インダクタンス周波数特性 Inductance-vs-Frequency characteristics (Measured by HP8720B) ・




5

### ①標準数量 Standard Quantity

形式	標準数量 Standard Quantity <sup>[pcs]</sup>						
Туре	袋づめ	テーピング					
	Bulk / Bag	Tape&Reel					
LB2518 / LBC2518	2000	2000					
LB2016	2000	2000					
LB2012	3000	3000					
LBH1608 / LB1608	4000	4000					


#### ②テーピング材質 Tape material

エンボステープ Embossed tape 紙テープ(LBH1608) Card board carrier tape(LBH1608)

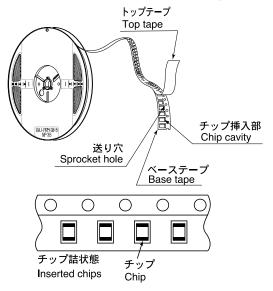

# ③テーピング寸法 Taping Dimensions


エンボステープ(8mm幅) Embossed Tape (0.315 inches wide) 紙テープ(8mm幅) Paper tape (0.315 inches wide)

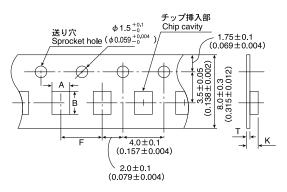


#### チップ挿入部 テープ厚み 挿入ピッチ 形 式 Tape Thickness Chip Cavity Insertion Pitch Type В F Т Α Κ LB2518 2.15±0.1 2.7±0.1 4.0±0.1 2.1 0.3 LBC2518 (0.107±0.004) (0.085±0.004) (0.157±0.004) (0.083)(0.012) $2.2 \pm 0.1$ 4.0±0.1 0.3 $1.9 \pm 0.1$ 2.15 LB2016 $(0.075\pm0.004)$ (0.085) (0.012) (0.087±0.004) (0.157±0.004) 0.3 1.5±0.2 $2.3 \pm 0.2$ $4.0\pm0.1$ 20 I B2012 $(0.059\pm0.008)$ (0.091±0.008) (0.157±0.004) (0.079) (0.012) LBH1608 $1.0\pm0.2$ $1.8 \pm 0.2$ $4.0 \pm 0.1$ 1.1max | 1.1max LB1608 $(0.059\pm0.008)$ $(0.091\pm0.008)$ (0.157±0.004) (0.079) (0.012)

Unit: mm (inch)

### ④リーダ部/空部 Leader and Blank Portion

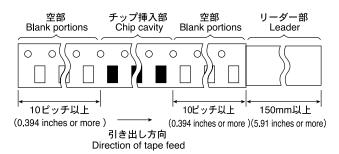


#### ⑤リール寸法 Reel Size

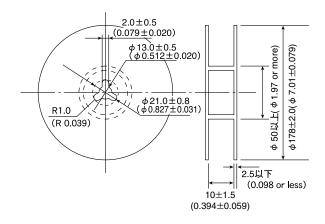

### ⑥トップテープ強度 Top Tape Strength

トップテープのはがし力は、下図矢印方向に $70.2\sim0.7$ Nと50 ます。 The top tape requires a peel-off force of 0.2 to 0.7N in the direction of the arrow as illustrated below.



						Specifie	ed Value						
Item	LER012 LER015	LEM2520	LEMC2520	LEMF2520	LEMC3225	LEMF3225	LB2518	LB2016	LB2012	LB1608	LBC2518	LBH1608	Test Methods and Remarks
1.Operating tem-	-25~+85°C	-40~+85°C			•		-25~+85°C						
perature Range	10 100												
2.Storage	-40~+85°C -25~+85°C												
3.Rated Voltage	Within the	e specified	tolerance										The maximum DC value having inductance decrease within 10% and temperature increas within 20°C by the application of DC bias.  LBH1608 • LEM Series 5N6~R10: The maximum DC value having temperature increas within 20°C by the application of DC
													bias.
4.Inductance		e specified											LER · LEM Series 5N6~R10:  Measuring equipment: Impedance analyzer (HP4291A or its equivalent)  Measuring frequency: Specified frequency  LER · LEM Series R12~221:  Measuring equipment: LCR Meter (HP4285A+42851A or its equivalent)  Measuring frequency: Specified frequency  LB · LBC Series:  Measuring equipment: LCR Mater (HP4285A or its equivalent)  LBH1608 Series:  Measuring equipment: Impedance analyzer (HP4291A or its equivalent)
5.Q		e specified										12~18 (at 100MHz)	LER · LEM Series 5N6~R10:  Measuring equipment: Impedance analyzer (HP4291A or its equivalent)  Measuring frequency: Specified frequency LER · LEM Series R12~221:  Measuring equipment: LCR Meter (HP4285A+42851A or its equivalent)  Measuring frequency: Specified frequency  LB · LBC Series:  Measuring equipment: LCR Mater (HP4285A or its equivalent)  LBH1608 Series:  Measuring equipment: Impedance analyzer (HP4291A or its equivalent)
6.DC Resisitance	Within the	e specified	tolerance										LER · LEM · LB · LBC · LBH Series : Measuring equipment : low ohmmeter (A&D AD5812 or its equivalent)

Item    LER012   LEM2520   LEM2520   LEM2520   LEM2520   LEM2520   LEM2520   LEM3225   LEM3225   LEM3225   LEM2518   LB2016   LB2012   LB1608   LBC2518   LBH1608     Test Methods and Remarks
T. Self-Resonant Frequency  Within the specified tolerance  Within the specified tolerance  Within the specified tolerance  Within the specified tolerance  Uniform the specified tolerance  Within the specified tolerance  Uniform the spe
Frequency  5N6~R10:  Measuring equipment: Network analy  (HP8720B or its equival)  LER · LEM Series (Exclude LEM2520)  R12~:  Measuring equipment: Impeadnce nanl  (HP4291A or its equival)  LEM2520:  Measuring equipment: Network analy:  (Anritsu MS620J or its equival)  LB · LBC Series:  Measuring equipment: Impedance anal  (HP4291A or its equival)
Measuring equipment: Network analy  (HP8720B or its equival  LER · LEM Series (Exclude LEM2520)  R12~:  Measuring equipment: Impeadnce nanl  (HP4291A or its equival  LEM2520:  Measuring equipment: Network analy:  (Anritsu MS620J or its equival  LB · LBC Series:  Measuring equipment: Impedance anal  (HP4291A or its equival)
LER · LEM Series (Exclude LEM2520) R12~: Measuring equipment : Impeadnce nanl (HP4291A or its equival LEM2520 : Measuring equipment : Network analy: (Anritsu MS620J or its equival LB · LBC Series : Measuring equipment : Impedance anal (HP4291A or its equival)
R12~:  Measuring equipment: Impeadnce nanl  (HP4291A or its equival  LEM2520:  Measuring equipment: Network analy:  (Anritsu MS620J or its equival  LB · LBC Series:  Measuring equipment: Impedance anal  (HP4291A or its equival)
Measuring equipment: Impeadnce nanl (HP4291A or its equival LEM2520: Measuring equipment: Network analy: (Anritsu MS620J or its equival LB • LBC Series: Measuring equipment: Impedance anal (HP4291A or its equival)
LEM2520:  Measuring equipment: Network analy:  (Anritsu MS620J or its equival)  LB · LBC Series:  Measuring equipment: Impedance anal  (HP4291A or its equival)
Measuring equipment: Network analyst (Anritsu MS620J or its equival LB · LBC Series: Measuring equipment: Impedance anal (HP4291A or its equival
(Anritsu MS620J or its equival  LB · LBC Series:  Measuring equipment: Impedance anal  (HP4291A or its equival
Measuring equipment: Impedance anal (HP4291A or its equival
(HP4291A or its equival
Measuring equipment: Network analy:
(HP8720B or its equival
8.Temperature Char- $\triangle$ L/L $\rightarrow$ Within $\pm$ 5% $\triangle$ L/L $\rightarrow$ $\triangle$ L/L $\rightarrow$ Within $\pm$ 15% $\triangle$ L/L $\rightarrow$ Within $\pm$ 15% $\triangle$ L/L $\rightarrow$ Change of maximum inductance deviation of the contract of the contr
acteristic Within Within Within Within Within $\pm 10\%$ $\pm 5\%$ Within $\pm 5\%$ in step 1—5
Within±0.5nH *Exclude CM03MS series
under 8.2nH Step Temperture (°C)
1 20 2 -25
3 20 (Reference temperature)
4 +85 (Maximum operating tempera
5 20
9.Rasistance to Flex- No breakdown or damage Warp: 2mm (LER012, LER015, LBC, L
ure of Substrate : 3mm (LEM2520, LEMC2520, LE
2520, LEMC3225, LEMF3225)
Test substrate: Printed board  Accoding to JIS C0051
Pressig jig
Thickness Land Land Land Land Land Land Land Land
Board   R5   P1   P2   P3   P3   P3   P4   P4   P4   P4   P4
45±2mm   45±2mm   45±2mm
10.Body Stregght No breakdown or damage LER012 • LER015
Applide forde : 15N  Duration : 5sec.
LB·LBC·LBH
LEM2520 · LEMC2520 · LEMF2520 ·
LEMC3225 · LEMF3225 Applide forde: 10N
Duration: 10sec.
LB1608
Applide forde: 5N  Duration: 10sec.
11. Self Resonant △L/L→Within—10% Measure inductance with application of n
Freguency current using LCR metre to cpmpare it
the initial value. (* Excluding 5N6~R10

			1			Specifie	ed Value					1	
Item	LER012 LER015	LEM2520	LEMC2520	LEMF2520	LEMC3225	LEMF3225	LB2518	LB2016	LB2012	LB1608	LBC2518	LBH1608	Test Methods and Remarks
12.Adhesion of terminal	Shall not		No detach	ment of el	ectrode		Shall not	come off P	C board.				LER012 · LER015
electrode	PC board												Applied force: 15N
													Duration: 5 sec.
													Test substrate : Printed board
													LB·LBC·LBH
													LEM2520 · LEMC2520 · LEMF2520 ·
													LEMC3225 · LEMF3225
													Applied force: 10N to X and Y directions
													Duration: 5 sec.
													Test substrate: Printed board
13.Resistance to vibra-	∆L/L→		Vithin±5%				ithin±10%						LER · LEM · LB · LBC :
tion	Within±5%	No signif	icant abnor	mality in a	ppearance	No signific	ant abnom	nality in appe	earance.				According to JIS C5102 clause 8.2.
	Q→ R12~1R0:												Vibration type: A Directions: 2 hrs each in X, Y and Z direc-
	25min.												tions. Total: 6 hrs
	1R2~3R3:												Frequency range: 10 to 55 to 10 Hz (1min.)
	20min.												Amplitude: 1.5mm
													Mounting method: Soldering onto printed board
	∆L/L→												(* Excluding 5N6-R10 LE
	Within±5%												Series)
	Q→ R12~100:												Recovery: At least 1 hr of recovery under the standard condition after the
	30min.												test, followed by the measure-
	120~220:												ment within 2 hrs.
	20min.												

						Specifie	ed Value						
Item	LER012 LER015	LEM2520	LEMC2520	LEMF2520	LEMC3225	LEMF3225	LB2518	LB2016	LB2012	LB1608	LBC2518	LBH1608	Test Methods and Remarks
14.Drop test	No significant	△L/L→Wi	ithin±5%			∆L/L→							LER·LEM:
	abnormality	No signific	cant abnor	mality in ap	)-	Within±10%							LER012 · LER015
	in appear-	pearance.				No significant							Drop test
	ance.					abnormality							Impact material: concreta or vinyl tile
						in appear-							Height: 1m
						ance.							Total number of drops: 10 times
													LEM2520 · LEMC2520 · LEMF2520 ·
													LEMC3225 · LEMF3225
													Acceleration: 980m/sec <sup>2</sup>
													Duration: 6msec
													Number of times: 6 sides × 3 times
													Mounting method: Soldering onto printed board
													(* Excluding 10N~R10)
													Recovery: At least 1 hr of recovery under
													the standard condition after the
15.Solderability	At least 9	0% of elec	trode										test, followed by the measure-
													ment within 2 hrs.
													LER·LEM:
													Solder temperature : 230±5℃
													Duration: 2±0.5sec. (LER012 · LER015)
													5±0.5sec. (LEM2520 •
													LEMC2520 · LEMF2520 ·
													LEMC3225 • LEMF3225)
													Fiux: Methanol solution with 25% of
													colophony
													LB·LBH:
													Solder temperature : 230±5℃
													Duration: 5±0.5sec
													Fiux: Methanol solution with 25% of
													colophony

						Specifie	ed Value						
Item	LER012 LER015	LEM2520	LEMC2520	LEMF2520	LEMC3225	LEMF3225	LB2518	LB2016	LB2012	LB1608	LBC2518	LBH1608	Test Methods and Remarks
16.Resisitance to soldering heat	No signif	icant abnor	mality in ag	opearance									Conduct following wave soldering twice. (LER012)  280 280 280 280 280 280 280 280 280 28
													10±1sec. Once (LEM2520 · LEMC2520 · LEMF2520 · LEMC3225 · LEMF3225)  LB·LBH: 3 times of reflow oven at 220 ± 5°c for 40sec.with peak temperature at 235± 5°c for 5sec.
17.Resisitance to soolvent	No signifi	icant abnor	mality in ap	ppearance.									Solvent temperature: Room temperature Type of solvent: Chlorocarbon type (LEM2520 · LEMC2520 · LEMC3225) Isopropyl alcohol (LEMF3250 · LEMF3225 · LB · LBC) Cleaning conditions: Output: 20mW/cm³ Frequency: 28kHz Duration: 1 min Conduct ultrasonic cleaning. (LEM2520 · LEMC 2520 · LEMF 3225 · LEMF 3225 · LEMF

						0 "	11/1									
						Specifie	d Value			1	1					
Item	LER012 LER015	LEM2520	LEMC2520	LEMF2520	LEMC3225	LEMF3225	LB2518	LB2016	LB2012	LB1608	LBC2518	LBH1608		Test Metho	ds and Rema	rks
18.Resisitance to	∆L/L→	∆L/L→	△L/L→W	ithin±10%						-		∆L/L→	Cond	ditions for 1cyc	ele	
solvent	Within±10%	Within±10%										Within±5%	Step	Temperature('C)1)	Temperature(°C)2	Duration(min)
	Q→	Q→										%∆L/L→	1	-25	-40	30
	5N6~18N:	10N:10min.										within±0.5nH	2	+85	+85	30
	10min.	12N~33N:										under				
	22N~R10:	15min.										8.2 n H	Tem	perature ① for	: LER012 · LE	R015
	15min.	39N~R10:										∆Q/Q→	1	perature ② for		
	R12~1R0:	20min.										within±20%		12520 · LEMC2		520 •
	25min.	R12~4R7:										%△Q/Q		IC3225 · LEMF		
	1R2~3R3:	30min.										→within		ber of cycle:		
	20min.	5R6~330:										±5 under	Reco	overy: At least		
		25min.										8.2 n H			ndition after th	
	△L/L→	390~820:													st chamber, fo	
	Within±10%	20min.												measur	ement within	2 hrs.
	Q→	101:15min.														
	10N~18N:													LBC·LBH:		
	10min.													~+85°C, mianta		
	22N~R10:												Reco	overy: At leas		
	15min. R12~100:														ndard conditio	
															llowed by the	measure-
	30min. 120~220:													ment w	ithin 2 hrs.	
	20min.															
19.Damp heat	ZUITIIITI. △L/L→	∆L/L→	△L/L→W	ithin+10%								∆L/L→	Tom	perature: 60±	-2°C	
13.Damp neat	Within±10%	Within±10%										Within±5%		idity: 90~959		
	Q→	0→										%△L/L→		ation: 1000 hr		
	5R6~18N:	10N : 10min.										within±0.5nH		overy: At least		v the stan-
	10min.	12N~33N:										under	11000	-	ndition after th	-
	22N~R10:	15min.										8.2 n H			st chamber, fo	
	15min.	39N~R10:										△Q/Q→			ement within	
	R12~1R0:	20min.										Within±20%				
	25min.	R12~4R7:										%△Q/Q				
	1R2~3R3:	30min.										→within				
	20min.	5R6~330:										±5 under				
		25min.										8.2 n H				
	∆L/L→	390~820:														
	Within±10%	20min.														
	Q→	101:15min.														
	10N~18N:															
	10min.															
	22N~R10:															
	15min.															
	R12~100:															
	30min.															
	120~220:															

						Specifie	ed Value						
ltem	LER012 LER015	LEM2520	LEMC2520	LEMF2520	LEMC3225	LEMF3225	LB2518	LB2016	LB2012	LB1608	LBC2518	LBH1608	Test Methods and Remarks
20.Loading under damp heat	△L/L→ Within±10% Q→ R12~1R0: 25min. 1R2~3R3: 20min.  △L/L→ Within±10% Q→ R12~100: 30min. 120~220: 20min.	△L/L→ Within±10% Q→ R12~4R7: 30min. 5R6~330: 25min. 390~820: 20min. 101:15min.	△L/L→Wi	thin±10%								$\triangle L/L \rightarrow$ Within±5% $\% \triangle L/L \rightarrow$ within $\pm 0.5 nH$ under $8.2 nH$ $\triangle Q/Q \rightarrow$ within±20% $\% \triangle Q/Q \rightarrow$ within±5 under $8.2 nH$	LER · LEM · LB · LBC: Temperature: 60±2°C (Excluding nH range) Humidity: 90~95%RH Duration: 1000 hrs Applied current: Rated current Recovery: At least 1 hr of recovery the standard condition after the removal from test chamber, followed by measurement within 2 hrs.
21.Hirh temperaturte life test	△L/L→ Within±10% Q→ 5R6~18N: 10min. 22N~R10: 15min. R12~1R0: 25min. 1R2~3R3: 20min.  △L/L→ Within±10% Q→ 10N~18N: 10min. 22N~R10: 15min. R12~100: 30min.	△L/L→ Within±10% Q→ 10N:10min. 12N~33N:15min. 39N~R10: 20min. R12~4R7: 30min. 5R6~330: 25min. 390~820: 20min. 101:15min.	ΔL/L→Wi	ithin±10%									LER · LEM : Temperature: 85±2°C Duration: 1000 hrs Recovery: At least 1 hr of recovery the standard condition after the removal from test chamber, followed by measurement within 2 hrs.
22.Loading at high temperature	20min.  △L/L→  Within±10% Q→  R12~1R0: 25min.  1R2~3R3: 20min.  △L/L→  Within±10% Q→  R12~100: 30min.  120~220: 20min.						△L/L→W	ithin±10%				△L/L→ Within±5%  ※△L/L→ within±0.5nH under 8.2 n H △Q/Q→ Within±20%  ※△Q/Q →within ±0.5 under 8.2 n H	LER · LB · LBC: Temperature: 85±2°C (Excluding nH range) Duration: 1000 hrs Applied current: Rated current Recovery: At least 1 hr of recovery the standard condition after the removal from test chamber, followed by measurement within 2 hrs.

						Specifie	ed Value						
Item	LER012 LER015	LEM2520	LEMC2520	LEMF2520	LEMC3225	LEMF3225	LB2518	LB2016	LB2012	LB1608	LBC2518	LBH1608	Test Methods and Remarks
23.Low temperature	∆L/L→	∆L/L→	△L/L→V	Vithin±10%	ś							∆L/L→	LER · LEM · LB · LBC · LBH
life test	Within±10%	Within±10%										Within±5%	Temperature: -40±2℃
	Q→	Q→										%∆L/L→	Duration: 1000 hrs
	5R6~18N:	10N: 10min.										within±0.5nH	Recovery: At least 1 hr of recovery the stan-
	10min.	12N~33N:										under	dard condition after the removal
	22N~R10:	15min.										8.2 n H	from test chamber, followed by
	15min.	39N~R10:										∆Q/Q→	measurement within 2 hrs.
	R12~1R0:	20min.										Within±20%	
	25min.	R12~4R7:										%△Q/Q	
	1R2~3R3:	30min.										→within	
	20min.	5R6~330:										±5 under	
		25min.										8.2 n H	
	∆L/L→	390~820:											
	±10%以内	20min.											
	Q→	101:15min.											
	10N~18N:												
	10min.												
	22N~R10:												
	15min.												
	R12~100:												
	30min.												
	120~220:												
04.04	20min.		-	4- 1	-6	-11	04						
24.Standard condition				to herein d				d test co					
				5% relative there are q				I,Tempera of relative h					
				to provide		-		g measurem	-				
				ondition of			1	ate, the test					
				air pressur		•		e, 65±5% re			2022 0 01		
				cted under				e is in acco			red value.		
	tion"												

## LER Type, LEM Type, LB Type

Stages	Precautions	Technical considerations
.Circuit Design	Operating environment,	
	1. The products described in this specification are intended for	
	use in general electronic equipment,(office supply	
	equipment, telecommunications systems, measuring	
	equipment, and household equipment). They are not	
	intended for use in mission-critical equipment or systems	
	requiring special quality and high reliability (traffic systems,	
	safety equipment, aerospace systems, nuclear control	
	systems and medical equipment including life-support	
	systems,) where product failure might result in loss of life,	
	injury or damage. For such uses, contact TAIYO YUDEN	
	Sales Department in advance.	
P.PCB Design	Land pattern design	
· ·	1.Please contact any of our offices for a land pattern, and refer	
	to a recommended land pattern of specifications.	
.Considerations for	Adjustment of mounting machine	
automatic placement	1.Excessive impact load should not be imposed on the	When installing products, care should be taken not to apply distortion stress as it n
automatic placement		
	products when mounting onto the PC boards.	deform the products.
	2.Mounting and soldering conditions should be checked	
	beforehand.	
.Soldering	Wave soldering	
	1.Please refer to the specifications in the catalog for a wave	
	soldering.	
	Reflow soldering	
	1.Please contact any of our offices for a reflow soldering, and	1.If products are used beyond the range of the recommended conditions, heat stress
	refer to the recommended condition specified.	may deform the products, and consequently degrade the reliability of the products.
	2.LER012 Type,LB Type	
	Reflow solderring only.	
	Lead free soldering	
	1.When using products with lead free soldering, we request to	
	use them after confirming of adhesion, temperature of	
	resistance to soldering heat, etc. sufficiently.	
	Recommended conditions for using a soldering iron	
	Put the soldering iron on the land-pattern.	
	Soldering iron's temperature - Below 350 °C	
	Duration - 3 seconds or less	
Cleaning	The soldering iron should not directly touch the inductor.	
.Cleaning	Cleaning conditions	LD Time
	LB Type	LB Type
	Nashing by supersonic waves shall be avoided.	1.If washing by supersonic waves, supersonic waves may cause broken products.
.Handling		
	Handling	
	Handling  1.Keep the inductors away from all magnets and magnetic	1.There is a case that a characteristic varies with magnetic influence.
		1.There is a case that a characteristic varies with magnetic influence.
	1.Keep the inductors away from all magnets and magnetic	There is a case that a characteristic varies with magnetic influence.
	Keep the inductors away from all magnets and magnetic objects.	, and the second
	1.Keep the inductors away from all magnets and magnetic objects.  Breakaway PC boards (splitting along perforations)	, and the second
	1.Keep the inductors away from all magnets and magnetic objects.  Breakaway PC boards (splitting along perforations)  1.When splitting the PC board after mounting inductors, care	1.Planning pattern configurations and the position of products should be caref.
	1.Keep the inductors away from all magnets and magnetic objects.  Breakaway PC boards (splitting along perforations)  1.When splitting the PC board after mounting inductors, care should be taken not to give any stresses of deflection or	1.Planning pattern configurations and the position of products should be careful.
	1.Keep the inductors away from all magnets and magnetic objects.  Breakaway PC boards (splitting along perforations)  1.When splitting the PC board after mounting inductors, care should be taken not to give any stresses of deflection or twisting to the board.	1.Planning pattern configurations and the position of products should be caref.
	1.Keep the inductors away from all magnets and magnetic objects.  Breakaway PC boards (splitting along perforations)  1.When splitting the PC board after mounting inductors, care should be taken not to give any stresses of deflection or twisting to the board.  2.Board separation should not be done manually, but by using	1.Planning pattern configurations and the position of products should be careful.
	1.Keep the inductors away from all magnets and magnetic objects.  Breakaway PC boards (splitting along perforations)  1.When splitting the PC board after mounting inductors, care should be taken not to give any stresses of deflection or twisting to the board.  2.Board separation should not be done manually, but by using the appropriate devices.  Mechanical considerations	1.Planning pattern configurations and the position of products should be caref performed to minimize stress.
	1.Keep the inductors away from all magnets and magnetic objects.  Breakaway PC boards (splitting along perforations)  1.When splitting the PC board after mounting inductors, care should be taken not to give any stresses of deflection or twisting to the board.  2.Board separation should not be done manually, but by using the appropriate devices.  Mechanical considerations  1.Please do not give the inductors any excessive mechanical	1.Planning pattern configurations and the position of products should be caref.
Storage conditions	1.Keep the inductors away from all magnets and magnetic objects.  Breakaway PC boards (splitting along perforations)  1.When splitting the PC board after mounting inductors, care should be taken not to give any stresses of deflection or twisting to the board.  2.Board separation should not be done manually, but by using the appropriate devices.  Mechanical considerations  1.Please do not give the inductors any excessive mechanical shocks.	1.Planning pattern configurations and the position of products should be caref performed to minimize stress.
.Storage conditions	1.Keep the inductors away from all magnets and magnetic objects.  Breakaway PC boards (splitting along perforations)  1.When splitting the PC board after mounting inductors, care should be taken not to give any stresses of deflection or twisting to the board.  2.Board separation should not be done manually, but by using the appropriate devices.  Mechanical considerations  1.Please do not give the inductors any excessive mechanical shocks.	1.Planning pattern configurations and the position of products should be caref performed to minimize stress.  1.There is a case to be damaged by a mechanical shock.
.Storage conditions	1.Keep the inductors away from all magnets and magnetic objects.  Breakaway PC boards (splitting along perforations)  1.When splitting the PC board after mounting inductors, care should be taken not to give any stresses of deflection or twisting to the board.  2.Board separation should not be done manually, but by using the appropriate devices.  Mechanical considerations  1.Please do not give the inductors any excessive mechanical shocks.  Storage  1.To maintain the solderability of terminal electrodes and to	1.Planning pattern configurations and the position of products should be carefi performed to minimize stress.  1.There is a case to be damaged by a mechanical shock.  1. Under a high temperature and humidity environment, problems such as reduced.
.Storage conditions	1.Keep the inductors away from all magnets and magnetic objects.  Breakaway PC boards (splitting along perforations)  1.When splitting the PC board after mounting inductors, care should be taken not to give any stresses of deflection or twisting to the board.  2.Board separation should not be done manually, but by using the appropriate devices.  Mechanical considerations  1.Please do not give the inductors any excessive mechanical shocks.  Storage  1.To maintain the solderability of terminal electrodes and to keep the packing material in good condition, temperature	1.Planning pattern configurations and the position of products should be carefy performed to minimize stress.  1.There is a case to be damaged by a mechanical shock.  1. Under a high temperature and humidity environment, problems such as reduce solderability caused by oxidation of terminal electrodes and deteriorat
.Storage conditions	1.Keep the inductors away from all magnets and magnetic objects.  Breakaway PC boards (splitting along perforations)  1.When splitting the PC board after mounting inductors, care should be taken not to give any stresses of deflection or twisting to the board.  2.Board separation should not be done manually, but by using the appropriate devices.  Mechanical considerations  1.Please do not give the inductors any excessive mechanical shocks.  Storage  1.To maintain the solderability of terminal electrodes and to keep the packing material in good condition, temperature and humidity in the storage area should be controlled.	1.Planning pattern configurations and the position of products should be carefi performed to minimize stress.  1.There is a case to be damaged by a mechanical shock.  1. Under a high temperature and humidity environment, problems such as reduced.
.Storage conditions	1.Keep the inductors away from all magnets and magnetic objects.  Breakaway PC boards (splitting along perforations)  1.When splitting the PC board after mounting inductors, care should be taken not to give any stresses of deflection or twisting to the board.  2.Board separation should not be done manually, but by using the appropriate devices.  Mechanical considerations  1.Please do not give the inductors any excessive mechanical shocks.  Storage  1.To maintain the solderability of terminal electrodes and to keep the packing material in good condition, temperature and humidity in the storage area should be controlled.  • Recommended conditions	1.Planning pattern configurations and the position of products should be careful performed to minimize stress.  1.There is a case to be damaged by a mechanical shock.  1. Under a high temperature and humidity environment, problems such as reduce solderability caused by oxidation of terminal electrodes and deteriorate.
.Storage conditions	1.Keep the inductors away from all magnets and magnetic objects.  Breakaway PC boards (splitting along perforations)  1.When splitting the PC board after mounting inductors, care should be taken not to give any stresses of deflection or twisting to the board.  2.Board separation should not be done manually, but by using the appropriate devices.  Mechanical considerations  1.Please do not give the inductors any excessive mechanical shocks.  Storage  1.To maintain the solderability of terminal electrodes and to keep the packing material in good condition, temperature and humidity in the storage area should be controlled.  Recommended conditions  Ambient temperature  0~40°C	1.Planning pattern configurations and the position of products should be careful performed to minimize stress.  1.There is a case to be damaged by a mechanical shock.  1. Under a high temperature and humidity environment, problems such as reduce solderability caused by oxidation of terminal electrodes and deteriorate.
.Storage conditions	1.Keep the inductors away from all magnets and magnetic objects.  Breakaway PC boards (splitting along perforations)  1.When splitting the PC board after mounting inductors, care should be taken not to give any stresses of deflection or twisting to the board.  2.Board separation should not be done manually, but by using the appropriate devices.  Mechanical considerations  1.Please do not give the inductors any excessive mechanical shocks.  Storage  1.To maintain the solderability of terminal electrodes and to keep the packing material in good condition, temperature and humidity in the storage area should be controlled.  Recommended conditions  Ambient temperature  0~40°C  Humidity  Below 70% RH	1.Planning pattern configurations and the position of products should be careful performed to minimize stress.  1.There is a case to be damaged by a mechanical shock.  1. Under a high temperature and humidity environment, problems such as reduce solderability caused by oxidation of terminal electrodes and deteriorate.
.Storage conditions	1.Keep the inductors away from all magnets and magnetic objects.  Breakaway PC boards (splitting along perforations)  1.When splitting the PC board after mounting inductors, care should be taken not to give any stresses of deflection or twisting to the board.  2.Board separation should not be done manually, but by using the appropriate devices.  Mechanical considerations  1.Please do not give the inductors any excessive mechanical shocks.  Storage  1.To maintain the solderability of terminal electrodes and to keep the packing material in good condition, temperature and humidity in the storage area should be controlled.  Recommended conditions  Ambient temperature  0~40°C	1.Planning pattern configurations and the position of products should be careful performed to minimize stress.  1.There is a case to be damaged by a mechanical shock.  1. Under a high temperature and humidity environment, problems such as reduce solderability caused by oxidation of terminal electrodes and deteriorate.
.Storage conditions	1.Keep the inductors away from all magnets and magnetic objects.  Breakaway PC boards (splitting along perforations)  1.When splitting the PC board after mounting inductors, care should be taken not to give any stresses of deflection or twisting to the board.  2.Board separation should not be done manually, but by using the appropriate devices.  Mechanical considerations  1.Please do not give the inductors any excessive mechanical shocks.  Storage  1.To maintain the solderability of terminal electrodes and to keep the packing material in good condition, temperature and humidity in the storage area should be controlled.  Recommended conditions  Ambient temperature  0~40°C  Humidity  Below 70% RH	1.Planning pattern configurations and the position of products should be careful performed to minimize stress.  1.There is a case to be damaged by a mechanical shock.  1. Under a high temperature and humidity environment, problems such as reduce solderability caused by oxidation of terminal electrodes and deteriorate.
.Storage conditions	1.Keep the inductors away from all magnets and magnetic objects.  Breakaway PC boards (splitting along perforations)  1.When splitting the PC board after mounting inductors, care should be taken not to give any stresses of deflection or twisting to the board.  2.Board separation should not be done manually, but by using the appropriate devices.  Mechanical considerations  1.Please do not give the inductors any excessive mechanical shocks.  Storage  1.To maintain the solderability of terminal electrodes and to keep the packing material in good condition, temperature and humidity in the storage area should be controlled.  Recommended conditions  Ambient temperature  0~40°C  Humidity  Below 70% RH  The ambient temperature must be kept below 30°C Even under	1.Planning pattern configurations and the position of products should be careful performed to minimize stress.  1.There is a case to be damaged by a mechanical shock.  1. Under a high temperature and humidity environment, problems such as reduce solderability caused by oxidation of terminal electrodes and deteriorate.
. Storage conditions	1.Keep the inductors away from all magnets and magnetic objects.  Breakaway PC boards (splitting along perforations)  1.When splitting the PC board after mounting inductors, care should be taken not to give any stresses of deflection or twisting to the board.  2.Board separation should not be done manually, but by using the appropriate devices.  Mechanical considerations  1.Please do not give the inductors any excessive mechanical shocks.  Storage  1.To maintain the solderability of terminal electrodes and to keep the packing material in good condition, temperature and humidity in the storage area should be controlled.  Recommended conditions  Ambient temperature  0~40°C  Humidity  Below 70% RH  The ambient temperature must be kept below 30°C Even under ideal storage conditions, solderability of products electrodes may	1.Planning pattern configurations and the position of products should be careful performed to minimize stress.  1.There is a case to be damaged by a mechanical shock.  1. Under a high temperature and humidity environment, problems such as reduce solderability caused by oxidation of terminal electrodes and deteriorate.
.Storage conditions	1.Keep the inductors away from all magnets and magnetic objects.  Breakaway PC boards (splitting along perforations)  1.When splitting the PC board after mounting inductors, care should be taken not to give any stresses of deflection or twisting to the board.  2.Board separation should not be done manually, but by using the appropriate devices.  Mechanical considerations  1.Please do not give the inductors any excessive mechanical shocks.  Storage  1.To maintain the solderability of terminal electrodes and to keep the packing material in good condition, temperature and humidity in the storage area should be controlled.  Recommended conditions  Ambient temperature  0~40°C  Humidity  Below 70% RH  The ambient temperature must be kept below 30°C Even under ideal storage conditions, solderability of products electrodes may decrease as time passes. For this reason, LE type inductors	1.Planning pattern configurations and the position of products should be careful performed to minimize stress.  1.There is a case to be damaged by a mechanical shock.  1. Under a high temperature and humidity environment, problems such as reduce solderability caused by oxidation of terminal electrodes and deteriorate.
.Storage conditions	1.Keep the inductors away from all magnets and magnetic objects.  Breakaway PC boards (splitting along perforations)  1.When splitting the PC board after mounting inductors, care should be taken not to give any stresses of deflection or twisting to the board.  2.Board separation should not be done manually, but by using the appropriate devices.  Mechanical considerations  1.Please do not give the inductors any excessive mechanical shocks.  Storage  1.To maintain the solderability of terminal electrodes and to keep the packing material in good condition, temperature and humidity in the storage area should be controlled.  Recommended conditions  Ambient temperature  0~40°C  Humidity  Below 70% RH  The ambient temperature must be kept below 30°C Even under ideal storage conditions, solderability of products electrodes may decrease as time passes. For this reason, LE type inductors should be used within one year from the time of delivery.  LER type, LB type	1.Planning pattern configurations and the position of products should be careful performed to minimize stress.  1.There is a case to be damaged by a mechanical shock.  1. Under a high temperature and humidity environment, problems such as reduce solderability caused by oxidation of terminal electrodes and deteriorate.
.Storage conditions	1.Keep the inductors away from all magnets and magnetic objects.  Breakaway PC boards (splitting along perforations)  1.When splitting the PC board after mounting inductors, care should be taken not to give any stresses of deflection or twisting to the board.  2.Board separation should not be done manually, but by using the appropriate devices.  Mechanical considerations  1.Please do not give the inductors any excessive mechanical shocks.  Storage  1.To maintain the solderability of terminal electrodes and to keep the packing material in good condition, temperature and humidity in the storage area should be controlled.  Recommended conditions  Ambient temperature  0~40°C  Humidity  Below 70% RH  The ambient temperature must be kept below 30°C Even under ideal storage conditions, solderability of products electrodes may decrease as time passes. For this reason, LE type inductors should be used within one year from the time of delivery.  LER type, LB type  Please should be used within 6 months from the time of delivery.	1.Planning pattern configurations and the position of products should be careful performed to minimize stress.  1.There is a case to be damaged by a mechanical shock.  1. Under a high temperature and humidity environment, problems such as reduce solderability caused by oxidation of terminal electrodes and deteriorate.
*.Storage conditions	1.Keep the inductors away from all magnets and magnetic objects.  Breakaway PC boards (splitting along perforations)  1.When splitting the PC board after mounting inductors, care should be taken not to give any stresses of deflection or twisting to the board.  2.Board separation should not be done manually, but by using the appropriate devices.  Mechanical considerations  1.Please do not give the inductors any excessive mechanical shocks.  Storage  1.To maintain the solderability of terminal electrodes and to keep the packing material in good condition, temperature and humidity in the storage area should be controlled.  Recommended conditions  Ambient temperature  0~40°C  Humidity  Below 70% RH  The ambient temperature must be kept below 30°C Even under ideal storage conditions, solderability of products electrodes may decrease as time passes. For this reason, LE type inductors should be used within one year from the time of delivery.  LER type, LB type	1.Planning pattern configurations and the position of products should be careful performed to minimize stress.  1.There is a case to be damaged by a mechanical shock.  1. Under a high temperature and humidity environment, problems such as reduce solderability caused by oxidation of terminal electrodes and deteriorate.